

(12) United States Patent Zinanti et al.

(10) Patent No.:

US 7,432,859 B2

(45) Date of Patent:

Oct. 7, 2008

(54) MULTI-BAND OMNI DIRECTIONAL ANTENNA

(75) Inventors: Michael Zinanti, Wheat Ridge, CO (US); Shanmuganthan Suganthan,

Watford (GB)

Assignee: Centurion Wireless Technologies, Inc., (73)

Lincoln, NE (US)

Subject to any disclaimer, the term of this Notice: patent is extended or adjusted under 35

U.S.C. 154(b) by 58 days.

(21) Appl. No.: 11/217,760

Filed: Sep. 1, 2005 (22)

Prior Publication Data (65)

> US 2006/0017622 A1 Jan. 26, 2006

(51) Int. Cl.

H01Q 1/38 (2006.01)

(58) Field of Classification Search 343/700 MS, 343/702, 795, 790-793, 803, 804, 891 See application file for complete search history.

(56)**References Cited**

U.S. PATENT DOCUMENTS

5,559,523 5,945,383 6,337,667 6,404,394 6,529,171 6,624,793 6,639,564 6,765,539	A * B1 * B1 * B1 * B1 * B2 * B1	8/1999 1/2002 6/2002 3/2003 9/2003 10/2003 7/2004	Smith et al. 343/795 Hunt 505/329 Ayala et al. 343/795 Hill 343/702 Le Balier et al. 343/795 Johnson 343/702 Wang et al. 343/702
6,765,539 6,847,329			Wang et al. Ikegaya et al.

6,961,028	B2	11/2005	Joy et al.
7,027,005	B1	4/2006	Chien
7,034,769	B2 *	4/2006	Surducan et al 343/793
2002/0190912	A1*	12/2002	Lebaric et al 343/795
2003/0231139	A1	12/2003	Tai et al.
2004/0183728	A1	9/2004	Zinanti et al.
2004/0196191	A1	10/2004	Hung et al.
2004/0263391	A1	12/2004	He et al.
2006/0033666	A1	2/2006	Su et al.
2006/0055615	A1	3/2006	Zhou
2006/0061514	A1	3/2006	Chien
2006/0208956	A1*	9/2006	Surducan et al 343/795

FOREIGN PATENT DOCUMENTS

EP	1 414 109 A2	10/2003
JP	2002280817 A	9/2002
TW	519309	1/2003
TW	523963	3/2003
WO	WO 02/095875 A1	11/2002

OTHER PUBLICATIONS

International Bureau "Notification Concerning Transmittal of Copy of International Preliminary Report on Patentability (Chapter I of the Patent Cooperation Treaty)" dated Oct. 6, 2005 and "Written Opinion of the International Searching Authority" dated Nov. 4, 2004. Search Report for Patent Application ROC (Taiwan) Patent Application No. 093107565; Nov. 22, 2007.


* cited by examiner

Primary Examiner—Huedung Mancuso (74) Attorney, Agent, or Firm—Holland & Hart LLP

ABSTRACT

The present invention provides a printed circuit board omni directional antenna. The omni directional antenna includes power dissipation elements. The power dissipation elements reduces the impact the power feed to the radiating elements has on the omni directional antenna's radiation pattern.

6 Claims, 2 Drawing Sheets





US007432860B2

(12) United States Patent Huynh

(10) Patent No.: US 7,432,860 B2 (45) Date of Patent: Oct. 7, 2008

(54) MULTI-BAND ANTENNA FOR GSM, UMTS, AND WIFI APPLICATIONS

(75) Inventor: Minh-Chau Huynh, Morrisville, NC

(US)

(73) Assignee: **Sony Ericsson Mobile Communications AB** (SE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 56 days.

(21) Appl. No.: 11/435,535

(22) Filed: May 17, 2006

(65) **Prior Publication Data**US 2007/0268190 A1 Nov. 22, 2007

(51) **Int. Cl.** *H01Q 1/38* (2006.01)

(56) References Cited

U.S. PATENT DOCUMENTS

6,650,294	B2	11/2003	Ying et al.	
6,727,855	B1	4/2004	Nalbandian	
6,795,028	B2	9/2004	Stutzman et al.	
2001/0043161	A1	11/2001	Tseng et al.	
2003/0058169	A1*	3/2003	Heyde	343/700 MS

FOREIGN PATENT DOCUMENTS

WO WO0235652 5/2002

OTHER PUBLICATIONS

Invitation to Pay Additional Fees, International Application No. PCT/US2007/060304, Mailing Date: Nov. 22, 2007.


* cited by examiner

Primary Examiner—Tan Ho (74) Attorney, Agent, or Firm—Coats & Bennett, P.L.L.C.

(57) ABSTRACT

The multi-band antenna described herein includes multiple antenna elements that collectively resonate in multiple different frequency bands. One exemplary antenna includes first and second vertically spaced antenna elements that connect to a ground plane. A feed antenna element positioned between the first and second antenna elements connects to an antenna feed. The electromagnetic coupling produced by the arrangement of these antenna elements produces multiple resonant frequencies, and therefore, defines multiple operating frequency bands of the multi-band antenna.

29 Claims, 8 Drawing Sheets

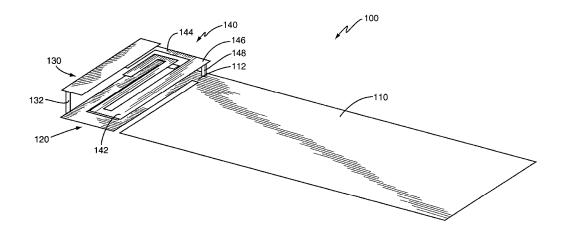



(12) United States Patent

(10) Patent No.: US 7,432,861 B2 (45) Date of Patent: Oct. 7, 2008

(75) Inventor: Yen-Yi Shih, Taipei Hsien (TW)

Assignee: Hon Hai Precision Industry Co., Ltd.,

Tu-Cheng, Taipei Hsien (TW)

Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/560,859

Filed: Nov. 17, 2006 (22)

(65)**Prior Publication Data**

> Oct. 25, 2007 US 2007/0247369 A1

(30)Foreign Application Priority Data

(TW) 95114366 A

(51) Int. Cl.

(2006.01)

H01Q 1/38

343/767; 343/770

(58) Field of Classification Search 343/700 MS,

343/846, 767, 770

See application file for complete search history.

(56)**References Cited**

U.S. PATENT DOCUMENTS

6,140,966 A * 10/2000 Pankinaho 343/700 MS 3/2005 Gabriel et al. 6,906,678 B2*


* cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm-Wei Te Chung

ABSTRACT

A dual-band antenna (10) is provided. The dual-band antenna printed on a substrate (30) includes a transmission portion (120), a first radiator (140), a second radiator (160), a first grounded portion (180), and a second grounded portion (190). The transmission portion is used for feeding electromagnetic signals. The first radiator is electronically connected to the transmission portion for transceiving electromagnetic signals with a first frequency. The second radiator is electronically connected to the transmission portion for transceiving electromagnetic signals with a second frequency. The first grounded portion is disposed on a first surface of the substrate. The second grounded portion is disposed on a second surface of the substrate. A length of the second grounded portion is greater than that of the first grounded portion. An antenna assembly is also provided in the present invention.

20 Claims, 13 Drawing Sheets

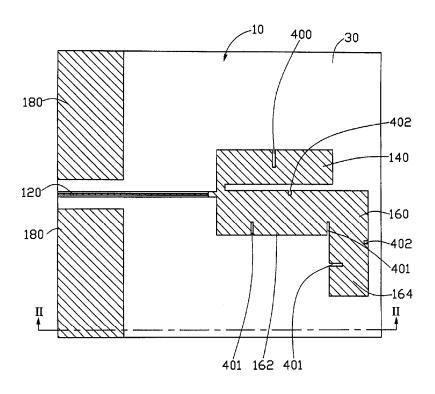



US007432862B2

(12) United States Patent Heyde

(10) Patent No.: US 7,432,862 B2 (45) Date of Patent: Oct. 7, 2008

(54) BROADBAND PATCH ANTENNA

(75) Inventor: Wolfgang Heyde, Herisau (CH)

(73) Assignee: **Huber + Suhner AG**, Herisau (CH)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/566,265

(22) Filed: Dec. 4, 2006

(65) Prior Publication Data

US 2007/0229359 A1 Oct. 4, 2007

Related U.S. Application Data

(63) Continuation of application No. PCT/CH2005/000319, filed on Jun. 7, 2005.

(30) Foreign Application Priority Data

(51) **Int. Cl.**

H01Q 1/38 (2006.01)

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

FOREIGN PATENT DOCUMENTS

FR 2 842 025 A1 1/2004

SE WO 01/41256 A1 6/200

OTHER PUBLICATIONS

G.Z. Rafi, et al., "Radar Cross Section of Cross-Shaped Microstrip Patch Antennas," EMC—A Global Concern. IEEE 1995 International Symposium on Electromagnetic Compatibility. Atlanta, Aug. 14-18, 1995, International Symposium on Electromagnetic Compatibility, New York, IEEE, US, Aug. 14, 1995 pp. 303-307, XP000595996.

Jui-Ching Cheng, et al., "Theoretical Modeling of Cavity-Backed Patch Antennas Using a Hybridtechnique," IEEE Transactions on Antennas and Propagation, IEEE Inc. New York, US, vol. 43, No. 9, Sep. 1, 1995, pp. 1003-1013, XP000522593.

F. Abboud, et al., "Accurate Model for the Input Impedance of Coax-Fed Rectangular Microstrip Antenna with and without Airgaps," Universite De Nice, France, 1989, pp. 102-106, XP 006517741.


* cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Burr & Brown

(57) ABSTRACT

A broadband patch antenna including a planar metallic patch sheet that is provided with right-angled edges and is disposed at a predetermined first height above and parallel to the planar base area of an electrically conducting reflector, and a device for feeding an RF signal into the metallic patch sheet. The feeding device encompasses a conductor which is guided in a vertical direction and is insulated through the base area of the reflector and terminates at a feeding point on the metallic patch sheet. To significantly improve the broadband range while keeping the structure of the antenna simple, the metallic patch sheet has the shape of a cross and the conductor of the feeding device is an inner conductor of a coaxial conductor that is positioned between the base area of the reflector and the metallic patch sheet.

19 Claims, 3 Drawing Sheets





US007432863B2

(12) United States Patent Kim et al.

(10) Patent No.: US 7,432,863 B2 (45) Date of Patent: Oct. 7, 2008

(54) PATCH ANTENNA FOR LOCAL AREA COMMUNICATIONS

(75) Inventors: **Yong-jin Kim**, Seongnam-si (KR); **Young-eil Kim**, Suwon-si (KR);

Kang-wook Kim, Mokpo-si (KR)

(73) Assignee: Samsung Electronics Co., Ltd.,

Suwon-si (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/604,773

(22) Filed: Nov. 28, 2006

(65) **Prior Publication Data**

US 2007/0273588 A1 Nov. 29, 2007

(30) Foreign Application Priority Data

May 24, 2006 (KR) 10-2006-0046366

(51) **Int. Cl. H01Q 1/38** (2006.01)

(58) **Field of Classification Search** 343/700 MS, 343/846

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

FOREIGN PATENT DOCUMENTS

KR 2003-0017214 A 3/2003 KR 10-2004-0052561 A 6/2004


* cited by examiner

Primary Examiner—Tan Ho (74) Attorney, Agent, or Firm—Sughrue Mion, PLLC

(57) ABSTRACT

A patch antenna includes a radiator part which includes at least one first radiator attached to an area of one surface of a dielectric, and at least one second radiator disposed within the dielectric and electrically connected to the first radiator; and a ground part which comprises at least one first ground disposed on other surface of the dielectric and at least one second ground disposed on the one surface of the dielectric, the first ground and the second ground electrically connected to each other. Accordingly, the size of the patch antenna is drastically reduced, and a wide bandwidth, high gain, and directionality are obtained.

17 Claims, 4 Drawing Sheets

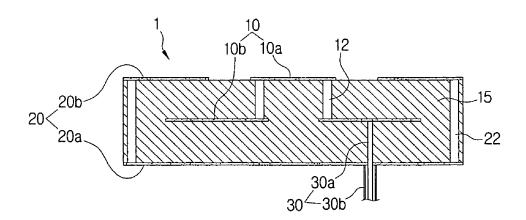



US007432864B1

(12) United States Patent Yang et al.

(10) Patent No.: US 7,432,864 B1 (45) Date of Patent: Oct. 7, 2008

(54) MODULARIZED PLANAR ANTENNA STRUCTURE

(75) Inventors: Tsai-Yi Yang, Tainan Hsien (TW); Te-Yi

Chu, Tainan Hsien (TW)

(73) Assignee: Cirocomm Technology Corp., Tainan

(TW)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/688,905

(22) Filed: Mar. 21, 2007

(51) Int. Cl.

H01Q 1/38 (2006.01) *H01Q 1/12* (2006.01)

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

5,410,749 A * 4/1995 Siwiak et al. 455/280

6,298,243	B1 *	10/2001	Basile 455/552.1
6,683,570	B2 *	1/2004	Skladany et al 343/700 MS
005/0068236	A1*	3/2005	Noro 343/713

* cited by examiner


20

Primary Examiner—Shih-Chao Chen

(57) ABSTRACT

A modularized planar antenna structure includes an antenna unit, a connection unit, a circuit board and a cover. The modularized planar antenna structure connects the antenna unit and circuit board. The antenna unit includes a signal feeder electrically connected the circuit board at end thereof such that the antenna unit is vertical to the circuit board. The cover is assembled to the circuit to protect the circuit board from electromagnetic interference or strike of external article. When the antenna structure is assembled to a main circuit board of an electronic device, the circuit board can be directly assembled to the main circuit board of an electronic device and the circular-polarized antenna unit points toward zenith direction to receive satellite signal.

19 Claims, 8 Drawing Sheets

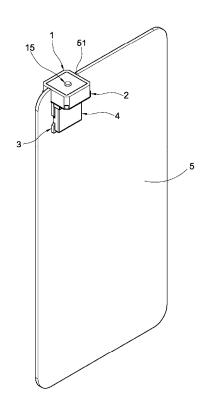



US007432865B2

(12) United States Patent Tsai et al.

(10) Patent No.: US 7,432,865 B2 (45) Date of Patent: Oct. 7, 2008

(54) ANTENNA AND PORTABLE DEVICE USING THE SAME

- (75) Inventors: **Feng-Ghi Eddie Tsai**, Taipei Hsien (TW); **Chia-Tien Li**, Taipei Hsien (TW)
- (73) Assignee: Wistron Neweb Corp., Sijhih (TW)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 127 days.
- (21) Appl. No.: 11/242,802
- (22) Filed: Oct. 5, 2005
- (65) Prior Publication Data
 US 2006/0290574 A1 Dec. 28, 2006

(30) Foreign Application Priority Data

Jun. 28, 2005 (TW) 94210868 U

(51) Int. Cl. *H01Q 1/24 H01Q 1/38*

(2006.01) (2006.01)

- (52) **U.S. Cl.** 343/702; 343/846

(56) References Cited

U.S. PATENT DOCUMENTS

4,460,894 A *	7/1984	Robin et al 343/700 MS
5,521,606 A *	5/1996	Iijima et al 343/713
6,087,988 A *	7/2000	Pozgay 343/700 MS
6,133,881 A *	10/2000	Kushihi et al 343/700 MS
6,307,524 B1*	10/2001	Britain 343/795
6,337,666 B1*	1/2002	Bishop 343/795


^{*} cited by examiner

Primary Examiner—Michael C Wimer (74) Attorney, Agent, or Firm—Bacon & Thomas, PLLC

(57) ABSTRACT

An antenna with an adjustable grounding element and a related portable device is disclosed. The grounding element of the antenna according to the present invention includes a first section, a second section and a third section, wherein the first section is separately connected to the second section and the third section, such that a shape of the grounding element is substantially hollowed, such as an upside-down U shape. Alternatively, the grounding element further comprises a fourth section having an opening. By adjusting the grounding element or positions or sizes of the opening of the fourth section can obtain different radiation patterns.

14 Claims, 12 Drawing Sheets

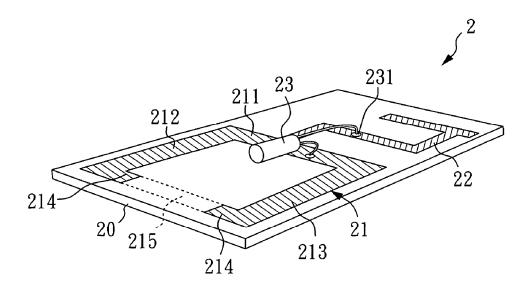



(12) United States Patent Wang et al.

(54) ELECTRONIC DEVICE HAVING DIPOLE

(75) Inventors: **Hung-Chih Wang**, Kao-Hsiung (TW);

Saou-Wen Su, Taipei (TW)

Assignee: Lite-On Technology Corp., Neihu,

Taipei (TW)

Subject to any disclaimer, the term of this (*) Notice:

patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/609,310

(22)Filed: Dec. 11, 2006

Prior Publication Data (65)

US 2008/0106479 A1 May 8, 2008

(30)Foreign Application Priority Data

Nov. 7, 2006 (TW) 95219631 U

(51) **Int. Cl.**

(2006.01) (2006.01) H01Q 1/24 H01Q 9/16 H01Q 1/40 (2006.01)

(10) Patent No.: US 7,432,867 B2

(45) Date of Patent: Oct. 7, 2008

(52)

(58)

See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

6 650 201 D1*	11/2002	Zimmerman 343/803
7,126,540 B2 *	10/2006	Hsu et al 343/700 MS
2005/0239519 A1*	10/2005	Saitou et al 455/575.1
2007/0143806 A1*	6/2007	Pan 725/111
2007/0273600 A1*	11/2007	Tsujimura et al 343/787


* cited by examiner

Primary Examiner—Shih-Chao Chen (74) Attorney, Agent, or Firm—Winston Hsu

ABSTRACT

The present invention provides an electronic device. The electronic device comprises a circuit board; and a dipole antenna, having a first conducting portion and a second conducting portion that are electrically coupled to the circuit board respectively and disposed substantially along an outline of the circuit board.

13 Claims, 4 Drawing Sheets

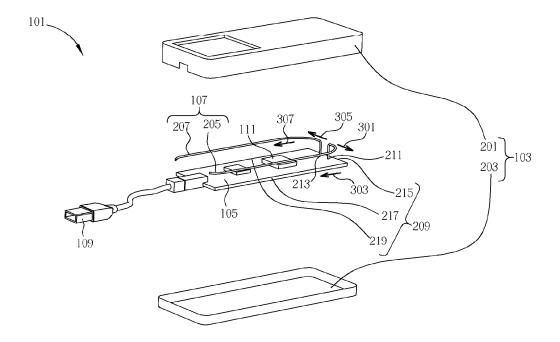



US007432870B2

(12) United States Patent Teshima et al.

(10) Patent No.: US 7,432,870 B2 (45) Date of Patent: Oct. 7, 2008

(54) PLANAR ANTENNA

(75) Inventors: Masao Teshima, Kunitachi (JP); Hiroshi

Shimasaki, Hamura (JP)

(73) Assignee: Kabushiki Kaisha Toshiba, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 224 days.

(21) Appl. No.: 11/470,919

(22) Filed: Sep. 7, 2006

(65) Prior Publication Data

US 2007/0268185 A1 Nov. 22, 2007

(30) Foreign Application Priority Data

May 16, 2006 (JP) 2006-136977

(51) Int. Cl.

H01Q 13/10 (2006.01)

H01Q 9/28 (2006.01)

(52) **U.S. Cl.** **343/767**; 343/770; 343/795

(58) Field of Classification Search 343/767, 343/770, 795, 700 MS

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

FOREIGN PATENT DOCUMENTS

JP 2006-33069 2/2006


* cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Oblon, Spivak, McClelland, Maier & Neustadt, P.C.

(57) ABSTRACT

A planar antenna includes first and second radiation elements. A first partial periphery of the first radiation element and a second partial periphery of the second radiation element face each other at a uniform gap equal to or less than a tenth of the length of the first partial periphery. The first radiation element includes a third partial periphery parallel to a straight line for connecting the both ends of the first partial periphery, a feeding point at a central portion of the first partial periphery, and a slit having an opened end and a closed end. A distance from the feeding point to the opened end along the slit through the closed end is longer than a sum of a half of the first partial periphery and a longer one of the other two partial peripheries

5 Claims, 12 Drawing Sheets

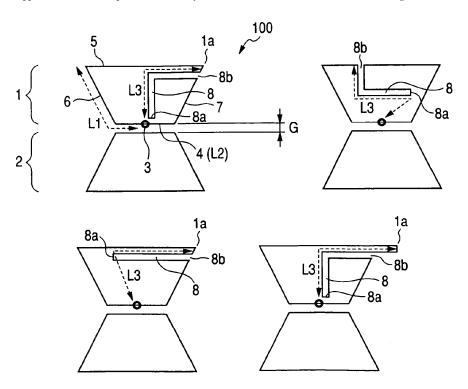



US007432873B2

(12) United States Patent Brachat et al.

(10) Patent No.: US 7,432,873 B2 (45) Date of Patent: Oct. 7, 2008

(54) MULTI-BAND PRINTED DIPOLE ANTENNA

(75) Inventors: Patrice Brachat, Nice (FR); Philippe

Ratajczak, Nice (FR); Frédéric

Devillers, Nice (FR)

(73) Assignee: France Telecom, Paris (FR)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

0.5.C. 154(b) by 0 days

(21) Appl. No.: 11/888,756

(22) Filed: Aug. 2, 2007

(65) Prior Publication Data

US 2008/0030418 A1 Feb. 7, 2008

Related U.S. Application Data

(63) Continuation of application No. PCT/FR2006/ 050099, filed on Feb. 3, 2006.

(51) Int. Cl.

H01Q 9/28 (2006.01)

(56) References Cited

U.S. PATENT DOCUMENTS

6,094,176 A	7/2000	Van Hoozen	
6,281,849 B1*	8/2001	Brachat	343/700 MS

6,310,584	B1 *	10/2001	Reece et al	343/816
6,529,172	B2 *	3/2003	Zimmerman	343/797
6,621,464	B1	9/2003	Fang	
7,095,382	B2 *	8/2006	Surducan et al	343/793

FOREIGN PATENT DOCUMENTS

FR 2713020 2/1996 WO WO 2004/019445 A2 3/2004

OTHER PUBLICATIONS

"T-Dipole Arrays for Mobile Applications" by Christian Sabatier, IEEE Antennas and Propagation Magazine, vol. 45, No. 6, Dec. 2003, pp. 9-24.


* cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Lawrence E Laubscher, Sr; Lawrence E Laubscher, Jr

(57) ABSTRACT

The invention relates to a printed antenna comprising a dielectric substrate (CS1, CS2) supporting feeder lines (LA1, LA2) and first and second T-shaped dipoles (D1, D2) of different sizes for dual-band operation. Each dipole includes a stem (J1, J2) and two radiating arms (B1, B2) separated by a coupling slot (FC1, FC2) made in the stem. For compactness of the antenna, the stems are partly superimposed, the coupling slots are aligned and a decoupling cut-out (ED) is made in the second dipole so as to uncover the coupling slot of the first dipole, by virtue of their superposition. The substrate can comprise one, two or three layers. Plural antennas can constitute an antenna network used as a base element in one-dimensional or two-dimensional network.

9 Claims, 6 Drawing Sheets

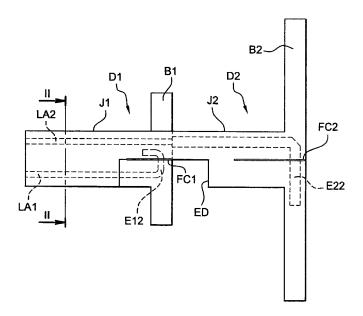



(12) United States Patent Chen et al.

US 7,436,360 B2 (10) Patent No.:

(45) Date of Patent: Oct. 14, 2008

(54) ULTRA-WIDE BAND MONOPOLE ANTENNA

- Inventors: Li Chen, Melbourne, FL (US); Paul A. Tornatta, Jr., Melbourne, FL (US): Frank M. Caimi, Vero Beach, FL (US)
- Assignee: SkyCross, Inc., Melbourne, FL (US)
- Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 27 days.
- (21) Appl. No.: 11/157,154
- (22)Filed: Jun. 20, 2005

(65)Prior Publication Data

US 2006/0017620 A1 Jan. 26, 2006

Related U.S. Application Data

- (63)Continuation-in-part of application No. 10/418,947. filed on Apr. 18, 2003, now Pat. No. 6,917,334.
- Provisional application No. 60/373,865, filed on Apr. (60)19, 2002.
- (51) Int. Cl.
 - H01Q 1/38 (2006.01)
- U.S. Cl.
- (58) Field of Classification Search 343/700 MS, 343/829, 846, 895, 702, 795 See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

4,291,311 A * 9/1981 Kaloi 343/700 MS

4.736,454	\mathbf{A}^{-1}	4/1988	Hirsch 455/129
4.827,266	\mathbf{A}^{-1}	5/1989	Sato et al 343/700 MS
4.860,019	\mathbf{A}^{-1}	8/1989	Jiang et al 343/795
5.497,164	A	3/1996	Croq
5.680,144	A	10/1997	Sanad
5.757,333	A	5/1998	Kitchener
5.790,080	A	8/1998	Apostolos
5.926,137	Λ	7/1999	Nealy
6.057,802	Λ	5/2000	Nealy et al.
6.320,544	В1	11/2001	Korisch et al.
6.323,814	В1	11/2001	Apostolos
6.917,334	B2	7/2005	Chen

OTHER PUBLICATIONS

Harvey, A. F.; "Periodic and Guding Structures at Microwave Frequencies"; IRE Transactions on Microwave Theory Techniques; Jan. 1960; pp. 30-61.


* cited by examiner


Primary Examiner-Michael C Wimer (74) Attorney, Agent, or Firm-John L. DeAngelis; Beusse Wolter Sanks Mora & Maire, P.A.

ABSTRACT

 Λ wide band antenna. The antenna comprises a radiating element in a corner region of a substrate, spaced apart from a ground plane occupying a substantial portion of a remaining area of the substrate. Series and shunt impedance matching elements are connected to the radiating element to control the antenna operating parameters. The radiating element is connected to a signal feed.

14 Claims, 15 Drawing Sheets







(12) United States Patent Tan et al.

US 7,436,365 B1

(10) Patent No.: (45) Date of Patent:

Oct. 14, 2008

(54) COMMUNICATIONS ASSEMBLY AND ANTENNA RADIATOR ASSEMBLY

(75) Inventors: Yu Chee Tan, Singapore (SG): Xi Lin

(Vick) Chen, Singapore (SG): Yew Siow (Roger) Tay, Singapore (SG)

(73) Assignee: Motorola, Inc., Schaumburg, IL (US)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/743,180

(22) Filed: May 2, 2007

(51) Int. Cl.

(2006.01)

H01Q 1/24 (52)

Field of Classification Search 343/702, (58)343/700 MS, 846, 848, 850-853

See application file for complete search history. (56)References Cited

U.S. PATENT DOCUMENTS

U.S.	FAILINI	DOC OMENTS	

6,011,524	A *	1/2000	Jervis	343/895
6,856,285	B2 *	2/2005	Bettin et al	343/700 MS
6,856,290	B1 *	2/2005	Ryken et al	343/700 MS
6,876,329	B2 *	4/2005	Milosavljevic	343/700 MS
6,943,640	B2	9/2005	Arlow	
6,943,737	B2 *	9/2005	Ryken et al	343/700 MS
6,943,738	B1	9/2005	Mattsson et al.	

7.009,564	B2 *	3/2006	Ryken et al 343/700 MS
7.369,094	B2*	5/2008	Song et al 343/816
2003/0160728	Al*	8/2003	Fukushima et al 343/702
2004/0227678	ΛI^*	11/2004	Sievenpiper 343/702
2007/0069956	Al*	3/2007	Ozkar 343/700 MS


^{*} cited by examiner

Primary Examiner Huedung Mancuso (74) Attorney, Agent, or Firm—Randall S. Vaas

ABSTRACT

A radio communications assembly (200) and an antenna radiator assembly (201). The antenna radiator assembly (201) forms part of the radio communications assembly (200) and is housed in a housing (202, 203). The antenna radiator assembly (201) has a circuit board (210) supporting electrical conductors (225) one of which is coupled to a feed point (130). There is also a ground plane (140) and an antenna radiator element (107) is coupled to the feed point (130). The antenna radiator element (107) is spaced from the ground plane (140) and a tertiary antenna radiator arm (155) spaced from the antenna radiator element (107). There is also a first band stop filter (150) disposed in a space (212) between the tertiary antenna radiator arm (155) and the antenna radiator element (107). The first band stop filter (150) provides electrical coupling of the antenna radiator element (1070 to the tertiary antenna radiator arm (155) at its band pass frequencies. Further, the first band stop filter (150) provides for electrically de-coupling of the antenna radiator element (107) from the tertiary antenna radiator arm (155) at its first band stop bandwidth.

22 Claims, 6 Drawing Sheets

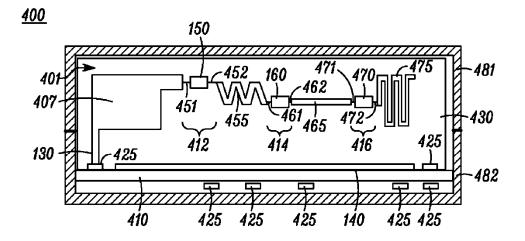



US007439910B2

(12) United States Patent Lee

(10) Patent No.: US 7,439,910 B2 (45) Date of Patent: Oct. 21, 2008

(54) THREE-DIMENSIONAL ANTENNA STRUCTURE

(75) Inventor: Gwo-Yun Lee, Taipei (TW)

(73) Assignee: Compal Electronics, Inc., Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/309,198

(22) Filed: Jul. 13, 2006

(65) **Prior Publication Data**

US 2007/0126639 A1 Jun. 7, 2007

(30) Foreign Application Priority Data

Dec. 7, 2005 (TW) 94143092 A

(51) Int. Cl. *H01Q 1/38* (2006.01) *H01Q 1/24* (2006.01)

(56) References Cited

U.S. PATENT DOCUMENTS

2004/0090375 A1* 5/2004 Dai et al. 343/700 MS


* cited by examiner

Primary Examiner—Hoang V Nguyen Assistant Examiner—Robert Karacsony (74) Attorney, Agent, or Firm—Jianq Chyun IP Office

(57) ABSTRACT

A three-dimensional antenna structure suitable for being built in an electronic device includes a vertical patch, an annular patch and a ground patch. The vertical patch is suitable for generating a vertical current. One end of the annular patch is connected to the vertical patch, and the annular patch surrounds one side of the vertical patch for generating an annular current. An omni-directional radiation field is generated by the annular current and the vertical current. The annular patch has a feed point for electrically connecting to a signal source. One end of the ground patch is connected to the vertical patch. A distance exists between the end of the annular patch and the end of the ground patch. The other end of the ground patch has a shorting point next to the feed point and is suitable for electrically connecting to a ground.

13 Claims, 3 Drawing Sheets

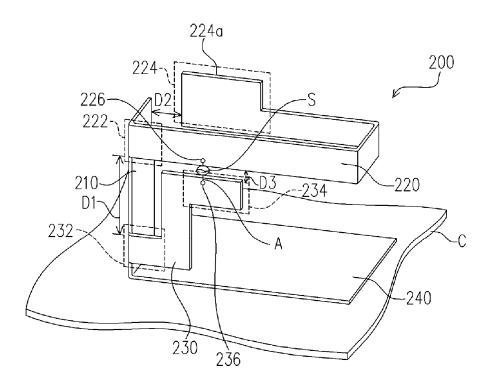



US007439911B2

(12) United States Patent Wang

(10) Patent No.: US 7,439,911 B2 (45) Date of Patent: Oct. 21, 2008

(54)	WIDEBA	SLOT AND MULTI-INVERTED-F COUPLING WIDEBAND ANTENNA AND ELECTRONIC DEVICE THEREOF					
(75)	Inventor:	Chih-Ming Wang, Hsinchu (TW)					
(73)	Assignee:	Wistron NeWeb Corp., Taipei Hsien (TW)					
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 145 days.					
(21)	Appl. No.:	11/340,144					
(22)	Filed:	Jan. 25, 2006					
(65)		Prior Publication Data					
	US 2007/0	103367 A1 May 10, 2007					
(30)	F	oreign Application Priority Data					
No	ov. 9, 2005	(TW) 94139234 A					
(51)		8 (2006.01) 4 (2006.01)					
(58)	Field of C	lassification Search					
	See application file for complete search history.						
(56)		References Cited					
	U.	S. PATENT DOCUMENTS					
	6,812,892 B2	2 11/2004 Tai et al 343/700 MS					

7,050,010	B2 *	5/2006	Wang et al 343/702
7,119,747	B2*	10/2006	Lin et al 343/702
7,148,849	B2 *	12/2006	Lin 343/700 MS
7,161,543	B2 *	1/2007	Cheng et al 343/702
7,212,161	B2*	5/2007	Chen et al 343/700 MS
7,218,282	B2*	5/2007	Humpfer et al 343/700 MS
2005/0190110	A1*	9/2005	Taromaru et al 343/702
2006/0181464	A1*	8/2006	Erkocevic 343/702


* cited by examiner

Primary Examiner—HoangAnh T Le (74) Attorney, Agent, or Firm—J.C. Patents

(57) ABSTRACT

A slot and multi-inverted-F coupling wideband antenna and an electronic device using the aforementioned wideband antenna are disclosed. The antenna includes at least a ground portion, a first radiation portion, a second radiation portion, a third radiation portion, a fine truning metal portion, and transmission cable. The first radiation portion is electrically coupled to the ground portion. The fine tuning metal portion is electrically coupled to the first radiation portion. The second radiation portion is electrically coupled to the fine tuning metal portion and forms a first inverted-F antenna with the first radiation portion. The third radiation portion is electrically coupled to the fine tuning metal portion and forms a second inverted-F antenna with the first radiation portion. The transmission cable is electrically coupled to one of the first radiation portion and the fine tuning metal portion.

24 Claims, 14 Drawing Sheets

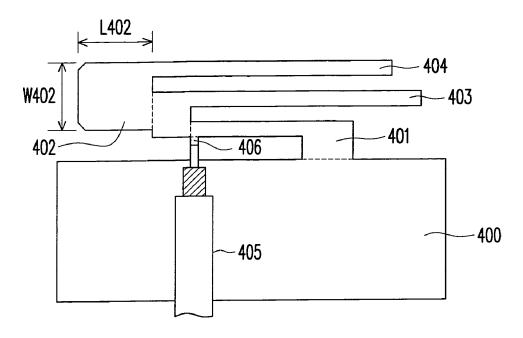



(12) United States Patent Shih

US 7,439,912 B2 (10) Patent No.: Oct. 21, 2008 (45) Date of Patent:

(54) ULTRA-WIDEBAND ANTENNA

Inventor: Yen-Yi Shih, Taipei Hsien (TW)

Assignee: Hon Hai Precision Industry Co., Ltd.,

Tu-Cheng, Taipei Hsien (TW)

Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/565,660

Dec. 1, 2006 (22)Filed:

(65)**Prior Publication Data**

> US 2007/0279290 A1 Dec. 6, 2007

(30) Foreign Application Priority Data

Jun. 2, 2006 (TW) 95119630

(51) Int. Cl.

H01Q 1/38 (2006.01)

(52)

Field of Classification Search 343/700 MS, 343/702, 795, 846

See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

6,864,842 6,906,678 2005/0156787 2006/0145929	B2 * A1 * A1	6/2005 7/2005 7/2006	Hung et al. 343/700 MS Chen 343/795 Myoung et al. 343/700 MS Teng et al.
2007/0120741	A1*	5/2007	Tseng 343/700 MS


* cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm-Wei Te Chung

(57)ABSTRACT

An ultra-wideband (UWB) antenna (10), disposed on a substrate (30), includes a body (100), a feeding part (160), and at least one first ground plane (120). The body, for receiving and transmitting electromagnetic signals, includes a first radiating part (102) and a second radiating part (104) connected to the first radiating part. The body defines a gap (106) between the first radiating part and the second radiating part. The feeding line, electrically connected to the body, feeds electromagnetic signals to the body. The at least one first ground plane is disposed on a side of the feeding part, and is grounded.

17 Claims, 13 Drawing Sheets

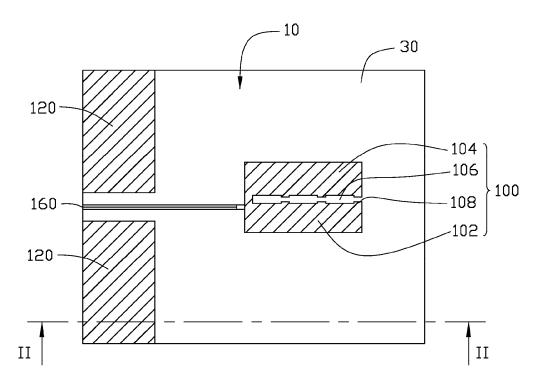



US007439914B1

(12) United States Patent Lin et al.

(10) Patent No.: US 7,439,914 B1 (45) Date of Patent: Oct. 21, 2008

(54)	ANTENN	ANTENNA UNIT			
(75)	Inventors:	Ching-chi Lin, Tu-Cheng (TW); Jia-hung Su, Tu-Cheng (TW); Kai Shih, Tu-Cheng (TW); Yu-yuan Wu, Tu-Cheng (TW)			
(73)	Assignee:	Cheng Uei Precision Industry Co., Ltd., Taipei Hsien (TW)			
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.			
(21)	Appl. No.:	11/790,706			
(22)	Filed:	Apr. 27, 2007			
(51)	Int. Cl. <i>H01Q 1/3</i>	8 (2006.01)			
(52)	U.S. Cl	343/700 MS ; 343/749			
(58)	Field of C	Field of Classification Search 343/700 MS, 343/749, 702, 795, 803, 819, 722			
	See applic	See application file for complete search history.			
(56)		References Cited			
	U.	S. PATENT DOCUMENTS			
		* 1/1961 Haughawout			

6,734,828 B2 * 6,759,990 B2 *	5/2004 7/2004	Johnson 343/702 Shor 343/795 Rossman 343/700 MS Posluszny et al. 343/803			
:					

* cited by examiner


Primary Examiner—Tho G Phan (74) Attorney, Agent, or Firm—Rosenberg, Klein & Lee

(57) ABSTRACT

An antenna unit has a first antenna operating at wireless telecommunication bands and a second antenna operating at wireless local area network bands. The first antenna has a first radiating conductor with a first feeding point defining opposite sides, a second, a third and a fourth radiating conductors extending from both sides of the first radiating conductor. A parasitic element defines opposite ends. One end of the parasitic element confronts the free end of the third radiating conductor. A trap circuit connects the fourth radiating conductor and the parasitic element. A second antenna has a third side, a fourth side and a stair-shape side. The connection of the sides of the second antenna forms a first protrusion with a second feeding point and a second protrusion confronting the first antenna. A slot is opened on the second antenna. A ground portion is spaced from the first radiating conductor and the first protrusion.

19 Claims, 5 Drawing Sheets



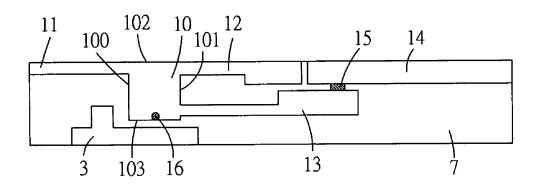



(12) United States Patent

Noro et al.

US 7,439,915 B2 (10) Patent No.: Oct. 21, 2008 (45) **Date of Patent:**

(54) ANTENNA UNIT AND FEEDING COMPONENT

(75) Inventors: Junichi Noro, Akita (JP); Kyuichi Sato, Akita (JP); Nobuaki Monma, Akita (JP); Shozo Miyamoto, Akita (JP); Takumi

Suzuki, Akita (JP)

(73) Assignee: Mitsumi Electric Co., Ltd., Tokyo (JP)

Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/960,362

(22)Filed: Dec. 19, 2007

(65)Prior Publication Data

US 2008/0129633 A1

Related U.S. Application Data

Jun. 5, 2008

Division of application No. 11/320,081, filed on Dec. 28, 2005, now Pat. No. 7,348,925.

(30)Foreign Application Priority Data

...... 2005-091304 Mar. 28, 2005 (JP)

(51) Int. Cl.

H01Q 1/38 (2006.01)

- (52) **U.S. Cl.** **343/700 MS**; 343/846
- (58) Field of Classification Search 343/700 MS, 343/846, 850, 829, 848, 702 See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

2/1989 Knochel et al. 343/700 MS 1/1993 Matsumoto et al.

	5,912,647	A	6/1999	Tsuru et al.
	6,469,673	B2	10/2002	Kaiponen
	6,542,128	B1*	4/2003	Johnson et al 343/742
	6,567,047	B2	5/2003	Kuck
	6,762,723	B2*	7/2004	Nallo et al 343/700 MS
	6,879,288	B2	4/2005	Byrne et al.
	6,982,673	B2	1/2006	Yuanzhu
	6,985,108	B2 *	1/2006	Mikkola et al 343/700 MS
	7,050,003	B2 *	5/2006	Sievenpiper 343/700 MS
	7,123,197	B2	10/2006	Suzuki
200	3/0193438	A1*	10/2003	Yoon 343/702

FOREIGN PATENT DOCUMENTS

JР 2005-020644 A 1/2005


* cited by examiner

Primary Examiner—Tho G Phan (74) Attorney, Agent, or Firm-Frishauf, Holtz, Goodman & Chick, P.C.

(57)ABSTRACT

An antenna unit includes a feeding component 40 and a metal plate 50 on which the feeding component 40 is mounted. The feeding component 40 has an attaching member 43 made of resin to support a feeding line against the metal plate. The metal plate 50 has a pair of cut and raised parts 51 at both ends thereof while the attaching member 43 has a pair of locking hooks 432 at both ends thereof. The locking hooks are partly inserted into the cut and raised parts and thereby the feeding component is attached to the metal plate without projecting any parts of the attaching member from a rear surface of the metal plate.

4 Claims, 7 Drawing Sheets





US007439916B2

(12) United States Patent Wang et al.

(10) Patent No.: US 7,439,916 B2 (45) Date of Patent: *Oct. 21, 2008

(54) ANTENNA FOR MOBILE COMMUNICATION TERMINALS

(75) Inventors: **Hanyang Wang**, Witney (GB); **Stuart Williams**, Fleet (GB)

(73) Assignee: Nokia Corporation, Espoo (FI)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-

claimer.

(21) Appl. No.: 12/004,991

(22) Filed: Dec. 21, 2007

(65) Prior Publication Data

US 2008/0129612 A1 Jun. 5, 2008

Related U.S. Application Data

(63) Continuation of application No. 11/019,412, filed on Dec. 21, 2004, now Pat. No. 7,339,528.

(30) Foreign Application Priority Data

Dec. 24, 2003 (GB) 0330052.2

(51) **Int. Cl. H01Q 1/38** (2006.01) **H01Q 1/48** (2006.01) **H01Q 1/48** (2006.01)

H01Q 1/48 (2006.01) (52) **U.S. Cl.** **343/700 MS**; 343/833;

(56) References Cited

U.S. PATENT DOCUMENTS

6,552,686 6,714,162			Ollikainen et al 343/700 MS Kadambi et al 343/700 MS
6,795,028	B2	9/2004	Stutzman et al 343/702
6,831,307	B2	12/2004	Fujii 257/180
6,903,687	B1*	6/2005	Fink et al 343/700 MS
6,909,402	B2	6/2005	Vance 343/702
2002/0171595	A1	11/2002	Schultze et al 343/770

FOREIGN PATENT DOCUMENTS

GB 2 147 744 A 5/1985 WO WO 2004/025776 A2 3/2004


* cited by examiner

Primary Examiner—Shih-Chao Chen (74) Attorney, Agent, or Firm—Harrington & Smith, PC

(57) ABSTRACT

An antenna comprising: a first substantially planar ground plate; a first substantially planar resonator positioned in a plane substantially parallel to the first ground plate; a second substantially planar ground plate positioned in a plane substantially parallel to the first ground plate; two or more connectors for electrically connecting the second ground plate to ground; and one or more connectors for electrically connecting the first resonator to the second ground plate; wherein the first resonator and the second ground plate are connected to at least one of receiver means and transmitter means by antenna feeding means.

31 Claims, 5 Drawing Sheets

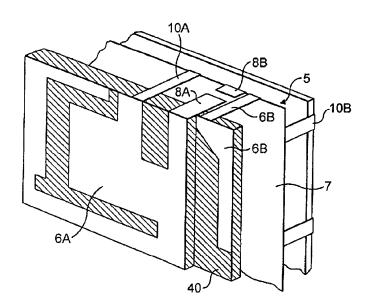



(12) United States Patent Jansen

(10) **Patent No.:**

US 7,439,919 B2

(45) **Date of Patent:**

Oct. 21, 2008

(54)	MULTIL	AYER PCB ANTENNA				
(75)	Inventor:	Stefan Jansen , København SV (DK)				
(73)	Assignee:	Nokia Corporation, Espoo (FI)				
(*)	Notice:	Subject to any disclaimer, the term of thi patent is extended or adjusted under 3: U.S.C. 154(b) by 0 days.				
(21)	Appl. No.:	11/428,081				
(22)	Filed:	Jun. 30, 2006				
(65)		Prior Publication Data				
	US 2006/0	238420 A1 Oct. 26, 2006				
	DIALIGA PARA					

Related U.S. Application Data

Continuation of application No. 10/084,981, filed on Mar. 1, 2002.

(30)	For	reign A _l	pplication Priority D	ata
Mar. 2, 2 Mar. 5, 2				
(51) Int. (Cl. <i>O 1/38</i>		(2006.01)	
	~		343/702	343/700 MS

343/700 MS, (58)Field of Classification Search 343/702, 741, 742

See application file for complete search history.

(56)**References Cited**

U.S. PATENT DOCUMENTS

2,501,430 A	* 3/1950	Alford 343/	741
4,860,019 A	8/1989	Jiang	
4,873,529 A	10/1989	Gibson	
4.994.820 A	2/1991	Suzuki et al.	

5,319,378	Α	6/1994	Nalbandian
5,668,559	A	9/1997	Baro
5,828,340	\mathbf{A}	10/1998	Johnson
5,859,614	A	1/1999	Paolella
5,870,065	\mathbf{A}	2/1999	Kanba et al.
5,898,404	Α	4/1999	Jou
6,052,093	A	4/2000	Yao et al.
6,057,803	A^*	5/2000	Kane et al 343/713

FOREIGN PATENT DOCUMENTS

29701589 U1 4/1997 DE

(Continued)

(Continued)

OTHER PUBLICATIONS

L.B. Cebik, "Modeling and Understanding Small Beams", Pat 5: The ZL Special, pp. 1-15, Mar. 31, 2004 (http://www.cebik.com/mu/mu5a.html).


(Continued)

Primary Examiner—Michael C. Wimer (74) Attorney, Agent, or Firm-Scott E. Kamholz; Foley Hoag LLP

(57) ABSTRACT

An inverted F-antenna may include an element formed from conductor patterns on a plurality of layers including at least one buried layer of a multilayer PCB, wherein (a) the conductor patterns are in stacked relation and interconnected through the PCB, (b) the conductor patterns comprise an F-shaped conductor pattern on one layer of the PCB and an I-, L- or F-shaped conductor pattern on the or each other layer, and (c) the or each I-, L- or F-shaped conductor pattern comprises an upright substantially coextensive with an upright of the F-shaped conductor pattern. A mobile phone may include such an antenna.

35 Claims, 3 Drawing Sheets





US007439921B2

(12) United States Patent Hu et al.

(54) CHIP ANTENNA APPARATUS FOR RECEIVING GLOBAL POSITIONING SYSTEM SIGNALS

(75) Inventors: Chuan-Lin Hu, Sijhih (TW); Yu-Wei Chen, Sijhih (TW); Chang-Lun Liao, Sijhih (TW); Shun-Tian Lin, Taipei (TW); Chang-Fa Yang, Taipei (TW);

(1 W); Chang-Fa Yang, Taipei (1 Yen-Ming Chen, Taipei (TW); Chao-Wei Wang, Taipei (TW)

(73) Assignee: Chant Sincere Co., Ltd., Hsi Chih,

Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/564,067

(22) Filed: Nov. 28, 2006

(65) Prior Publication Data

US 2007/0247370 A1 Oct. 25, 2007

(30) Foreign Application Priority Data

Apr. 20, 2006 (TW) 95114172 A

(51) Int. Cl. *H01Q 1/24* (2006.01) *H01Q 1/38* (2006.01) (10) Patent No.: US 7,439,921 B2

(45) **Date of Patent:** Oct. 21, 2008

(58) **Field of Classification Search** 343/700 MS, 343/702, 846

See application file for complete search history.

U.S. PATENT DOCUMENTS

(56) References Cited

6,140,968 A *	10/2000	Kawahata et al 343/700 MS
6,700,543 B2*	3/2004	Konishi et al 343/700 MS
6,759,990 B2*	7/2004	Rossman
6,903,692 B2*	6/2005	Kivekas et al 343/702
7,061,434 B2*	6/2006	Aoyama et al 343/702
2006/0290570 A1*	12/2006	Hilgers 343/700 MS

* cited by examiner


Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Thomas, Kayden, Horstemeyer & Risley

(57) ABSTRACT

A chip antenna apparatus for receiving global positioning system signals, includes a L-shaped ground area and an omnidirectional chip antenna. The L-shaped ground area is disposed on a circuit board. The omni-directional chip antenna is disposed in a gap of the L-shaped ground area on the circuit board and electrically connected to the L-shaped ground area.

3 Claims, 14 Drawing Sheets

100

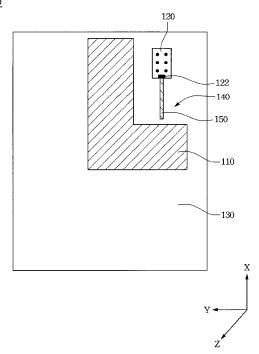



JS007439922B2

(12) United States Patent Autti

(10) Patent No.: US 7,439,922 B2 (45) Date of Patent: Oct. 21, 2008

(54)	ANTENN	A FOR A PORTABLE DEVICE
(75)	Inventor:	Marko Autti, Oulu (FI)
(73)	Assignee:	Nokia Corporation, Espoo (FI)
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 2 days.
(21)	Appl. No.:	11/641,561
(22)	Filed:	Dec. 19, 2006
(65)		Prior Publication Data
	US 2008/0	143631 A1 Jun. 19, 2008
(51)		8 (2006.01)
(52)		343/702 ; 343/700 MS; 343/846
(58)		lassification Search 343/702, 343/700 MS, 846
	See applica	ation file for complete search history.
(56)		References Cited
	U.	S. PATENT DOCUMENTS
	6,980,155 B2	1 8/2003 Hayward et al

7,317,421	B2*	1/2008	Liu 343/700 MS
2005/0128162	A1	6/2005	Takagi et al 343/895
2007/0115200	A1*	5/2007	Ishimiya 343/803

FOREIGN PATENT DOCUMENTS

EP	0538485 A1	5/1992
EP	1182727 A2	1/2001
EP	1280232 A1	7/2002
EP	1403964	9/2003
EP	1439605	1/2004
GB	2301485	12/1996


^{*} cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Ware, Fressola, Van Der Sluys & Adolphson, LLP

(57) ABSTRACT

A GPS antenna has two electrically connected L-sections disposed on opposite sides of a circuit board. The L-sections lie on two separate planes parallel to the circuit board surface. One L-section is connected to a feeding point located at one edge area of the circuit board and the other L-section is connected to a grounding point located at an opposite edge area of the circuit board. Optionally, a second grounding point is connected to the antenna element adjacent to the feeding point for impedance matching purposes. The antenna is configured for use in an electronic device such as a mobile phone.

19 Claims, 4 Drawing Sheets

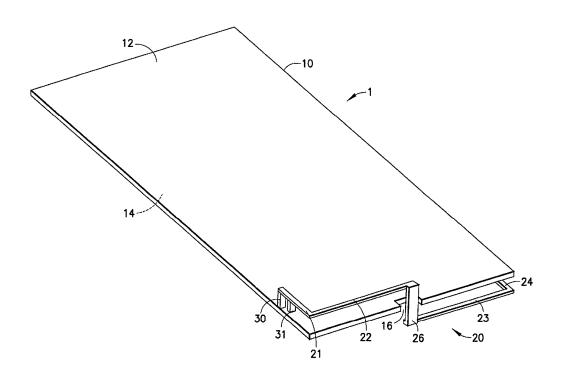



US007439923B2

(12) United States Patent Quintero Illera et al.

(10) Patent No.: US 7,439,923 B2 (45) Date of Patent: Oct. 21, 2008

(54) MULTIBAND ANTENNA

(75) Inventors: Ramiro Quintero Illera, Barcelona

(ES); Carles Puente Ballarda,

Barcelona (ES)

(73) Assignee: Fractus, S.A., Barcelona (ES)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/702,791

(22) Filed: Feb. 6, 2007

(65) Prior Publication Data

US 2007/0132658 A1 Jun. 14, 2007

Related U.S. Application Data

- (63) Continuation of application No. 10/823,257, filed on Apr. 13, 2004, now Pat. No. 7,215,287, which is a continuation of application No. PCT/EP01/011912, filed on Oct. 16, 2001.
- (51) **Int. Cl. H01Q 1/24** (2006.01)
- (52) **U.S. Cl.** **343/702**; 343/700 MS; 343/895

(56) References Cited

U.S. PATENT DOCUMENTS

3,521,284 A	7/1970	Shelton, Jr. et al
3,599,214 A	8/1971	Altmayer
3,622,890 A	11/1971	Fujimoto et al.
3,683,376 A	8/1972	Pronovost
3,818,490 A	6/1974	Leahy
3,967,276 A	6/1976	Goubau
3,969,730 A	7/1976	Fuchser
4,024,542 A	5/1977	Ikawa et al.

4,131,893 A	12/1978	Munson et al
4,141,016 A	2/1979	Nelson
4,471,358 A	9/1984	Glasser
4,471,493 A	9/1984	Schober
4,504,834 A	3/1985	Garay et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CA 2416437 A1 1/2002

(Continued)

OTHER PUBLICATIONS

Jani Ollikaninen et al., "Internal Dual-Band Patch Antenna for Mobile Phones", European Space Agency, Millennium Conference on Antennas & Propagation, Apr. 9-14, 2000.


(Continued)

Primary Examiner—Tho G Phan (74) Attorney, Agent, or Firm—Winstead PC

(57) ABSTRACT

The present invention relates generally to a new family of antennas with a multiband behavior, so that the frequency bands of the antenna can be tuned simultaneously to the main existing wireless services. In particular, the invention consists of shaping at least one of the gaps between some of the polygons of the multilevel structure in the form of a nonstraight curve, shaped in such a way that the whole gap length is increased yet keeping its size and the same overall antenna size. Such a configuration allows an effective tuning of the frequency bands of the antenna, such that with the same overall antenna size, said antenna can be effectively tuned simultaneously to some specific services, such as for instance the five frequency bands that cover the services AMPS, GSM900, GSM1800, PCS1900, UMTS, Bluetooth™, IEEE802.11b, or HyperLAN.

50 Claims, 7 Drawing Sheets





(12) United States Patent

Mikami et al.

US 7,439,926 B2 (10) Patent No.:

Oct. 21, 2008 (45) **Date of Patent:**

(54) PLANAR ANTENNA FITTED WITH A REFLECTOR

- (75) Inventors: Koichi Mikami, Warabi (JP); Noboru Matsuoka, Warabi (JP)
- (73) Assignee: Nippon Antena Kabushiki Kaisha, Tokyo (JP)
- (*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 97 days.

(21) Appl. No.: 10/530,13	5
---------------------------	---

- (22) PCT Filed: Jun. 22, 2004
- (86) PCT No.: PCT/JP2004/008749

§ 371 (c)(1),

(2), (4) Date: Apr. 4, 2005

(87) PCT Pub. No.: WO2005/013422

PCT Pub. Date: Feb. 10, 2005

(65) **Prior Publication Data**

US 2006/0238432 A1 Oct. 26, 2006

(30)Foreign Application Priority Data

Aug. 5, 2003	(JP)	 2003-286502
May 21, 2004	(JP)	 2004-151456

(51) Int. Cl. H01Q 1/42 (2006.01) $H01\bar{Q}$ 21/00 (2006.01)

See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

3,568,206 A	3/1971	Sisson	
5,583,523 A	12/1996	Wallace	
5,714,937 A	2/1998	Campana	
5,969,687 A	* 10/1999	Podger 343/742	2
6,281,856 B	8/2001	Tang et al.	
6,281,858 B	8/2001	Jennetti	
6,525,694 B	2/2003	Jiang et al 343/742	,
6,606,067 B	2 * 8/2003	Oh et al 343/741	
002/0050954 A	1 5/2002	Oh	

FOREIGN PATENT DOCUMENTS

EP	0751581 A1	1/1997
EP	1 102 349	5/2001
JР	63-138803	6/1988
JP	04-048282	2/1992
JP	06-053735	2/1994
JP	06268432	9/1994
JP	10-022721	1/1998
JP	2001-196838	7/2001
JP	2002-135031	5/2002


^{*} cited by examiner

Primary Examiner—Shih-Chao Chen (74) Attorney, Agent, or Firm—Kirk Hahn

ABSTRACT

A planar antenna fitted with a reflector of small shape and small depth. A reflector 21 of planar shape is provided at the rear face of a radiator 20 of planar shape made of a triangular loop element. The side sections 21b on both sides of the reflector 21 are bent towards the radiator 20 and the separation .alpha.2 between the leading edges of the side sections 21b and the side edges of the radiator 20 is thereby reduced. In this way, an excellent electrical characteristic of the planar antenna 2 fitted with a reflector and can be achieved by reducing the separation D2 of the radiator 20 and reflector 21.

12 Claims, 16 Drawing Sheets





US007439929B2

(12) United States Patent Ozkar

(10) Patent No.: US 7,439,929 B2 (45) Date of Patent: Oct. 21, 2008

(54)	TUNING ANTENNAS WITH FINITE GROUND
	PLANE

- (75) Inventor: Mete Ozkar, Raleigh, NC (US)
- (73) Assignee: Sony Ericsson Mobile
- Communications AB, Lund (SE)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35
 - U.S.C. 154(b) by 419 days.
- (21) Appl. No.: 11/297,337
- (22) Filed: Dec. 9, 2005

(65) **Prior Publication Data**

US 2007/0132654 A1 Jun. 14, 2007

- (51) **Int. Cl. H01Q 1/48** (2006.01)

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

6,624,789 B1*	9/2003	Kangasvieri et al.	343/702
6,636,179 B1*	10/2003	Woo et al	343/700 MS

7,158,089	B2 *	1/2007	Mohammadian et al 343/795
7,324,049	B2*	1/2008	Myoung et al 343/700 MS
2003/0080904	A1*	5/2003	Chen 343/700 MS
2003/0193437	A1	10/2003	Kangasvieri et al.
2006/0001590	A1*	1/2006	Hung et al 343/846
2006/0250310	A1*	11/2006	Yeh et al 343/702
2007/0109194	A1*	5/2007	Biddulph 343/700 MS

FOREIGN PATENT DOCUMENTS

EP	0 892 459 A1	1/1999
EP	1 401 050 A1	3/2004

OTHER PUBLICATIONS

International Search Report for PCT/US2006/032713 Mailed Dec. 6, 2006.


* cited by examiner

Primary Examiner—Tan Ho (74) Attorney, Agent, or Firm—Harrity & Harrity LLP

(57) ABSTRACT

A method of changing a resonant frequency of an antenna includes coupling the antenna to a ground plane of a circuit board, where the ground plane includes conductive material. The method further includes removing a section of conductive material from a first location of the ground plane, where the shape of the removed section and the first location determine the resonant frequency of the antenna.

22 Claims, 7 Drawing Sheets

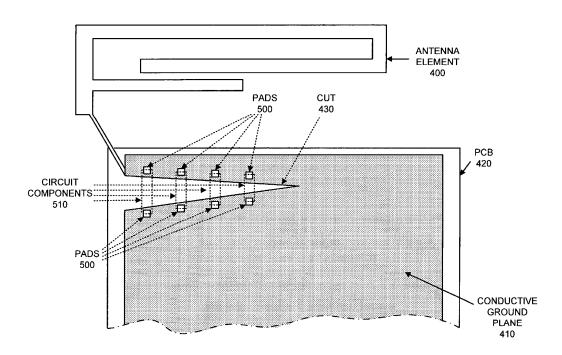



(12) United States Patent Rodenbeck

(10) Patent No.: (45)

US 7,439,935 B1

Date of Patent:	Oct. 21, 2008
-----------------	---------------

ANTENNA STRUCTURE WITH DISTRIBUTED STRIP

(75) Inventor: Christopher T. Rodenbeck,

Albuquerque, NM (US)

Assignee: Sandia Corporation, Albuquerque, NM

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

- (21) Appl. No.: 11/754,724
- (22) Filed: May 29, 2007

Related U.S. Application Data

- (62) Division of application No. 11/243,860, filed on Oct. 5, 2005, now Pat. No. 7,345,647.
- (51) Int. Cl. H01Q 1/36

(2006.01)

- (58) Field of Classification Search 343/895, 343/700 MS, 702, 846, 767 See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

6,518,937 B2 * 6,670,922 B1 * 6,897,812 B2 * 2002/0149521 A1 * 2005/0270243 A1 *	2/2003 12/2003 5/2005 10/2002 12/2005	Harrell et al. 343/700 MS Fang 343/895 Huang et al. 343/700 MS Huang 343/700 MS Huang 343/700 MS Hendler et al. 343/700 MS Caimi et al. 343/702 Graggs et al. 343/895
* cited by examiner		


Primary Examiner—Huedung Mancuso (74) Attorney, Agent, or Firm-William R. Conley

ABSTRACT

An antenna comprises electrical conductors arranged to form a radiating element including a folded line configuration and a distributed strip configuration, where the radiating element is in proximity to a ground conductor. The folded line and the distributed strip can be electrically interconnected and substantially coplanar. The ground conductor can be spaced from, and coplanar to, the radiating element, or can alternatively lie in a plane set at an angle to the radiating element. Embodiments of the antenna include conductor patterns formed on a printed wiring board, having a ground plane, spacedly adjacent to and coplanar with the radiating element. Other embodiments of the antenna comprise a ground plane and radiating element on opposed sides of a printed wiring board. Other embodiments of the antenna comprise conductors that can be arranged as free standing "foils". Other embodiments include antennas that are encapsulated into a package containing the antenna.

20 Claims, 7 Drawing Sheets



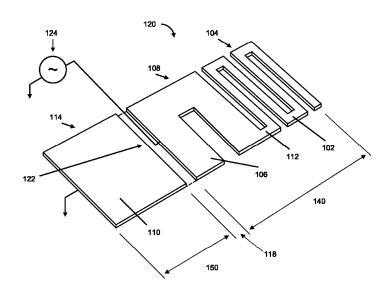



(12) United States Patent **Boyle**

(54) ANTENNA ARRANGEMENT AND A MODULE AND A RADIO COMMUNICATIONS APPARATUS HAVING SUCH AN ARRANGEMENT

(75) Inventor: **Kevin R. Boyle**, Horsham (GB)

(73) Assignee: NXP B.V., Eindhoven (NL)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

10/568,010 (21) Appl. No.:

(22) PCT Filed: Aug. 4, 2004

(86) PCT No.: PCT/IB2004/002628

§ 371 (c)(1),

Feb. 10, 2006 (2), (4) Date:

(87) PCT Pub. No.: WO2005/018045

PCT Pub. Date: Feb. 24, 2005

(65)**Prior Publication Data**

> US 2006/0290569 A1 Dec. 28, 2006

(30) Foreign Application Priority Data

(51) Int. Cl.

H01Q 1/38 (2006.01)H010 1/24 (2006.01)

H01Q 13/10 (2006.01)

(52) U.S. Cl. 343/700 MS; 343/702;

US 7,443,344 B2 (10) **Patent No.:**

(45) **Date of Patent:** Oct. 28, 2008

(58) Field of Classification Search 343/700 MS, 343/702, 770, 848

See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

6,624,788 B2* 9/2003 Boyle 343/702 6,759,991 B2* 7/2004 Boyle 343/702

FOREIGN PATENT DOCUMENTS

EP 1304765 A2 * 4/2003

* cited by examiner


FI

Primary Examiner—Shih-Chao Chen

(57)ABSTRACT

An antenna arrangement for a radio communications apparatus such as a mobile phone, comprises a substantially planar patch conductor having a first feed connection point for connection to radio circuitry and a second feed connection point for connection to a ground plane, a first, differential slot in the patch conductor between the first and second connection points and a second, dual band slot located in the patch conductor outside the area between the first and second connection points. The length of the first slot is greater than a quarter wavelength, and provides a third resonant frequency increasing the bandwidth of the antenna. The width of the patch conductor between the first and the second slots is selected to obtain a low impedance transformation and thereby a low antenna resistance causing detuning the antenna. A user holding the phone increases the antenna resistance thereby tuning the antenna.

7 Claims, 4 Drawing Sheets

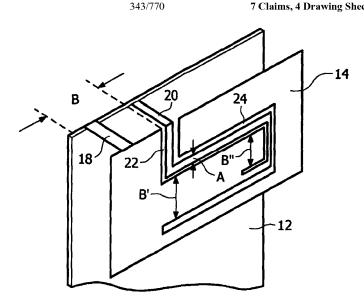



(12) United States Patent Zhang

(10) Patent No.: US 7,443,345 B2 (45) Date of Patent: Oct. 28, 2008

(54)	ANTENN.	A DEVICE	JP
(75)	Inventor:	Xin Zhang, Hitachi (JP)	JP JP
(73)	Assignee:	Hitachi Cable, Ltd., Tokyo (JP)	JP JP JP
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.	JP JP JP JP
(21)	Appl. No.:	11/131,186	JP JP
(22)	Filed:	May 18, 2005	JP WO
(65)		Prior Publication Data	
	US 2006/0	262027 A1 Nov. 23, 2006	Japai Japai
(51)	Int Cl		Japai

- - H01Q 1/38 (2006.01)
- U.S. Cl. 343/700 MS; 343/817; 343/818; 343/700 MS
- Field of Classification Search 343/700 MS, 343/817-818, 836-837, 853 See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

5,274,391 A	* 12/	1993	Connolly 343/820
6,008,773 A	* 12/	1999 1	Matsuoka et al 343/818
6,106,256 A	* 8/	/2000 [Talaski 418/171
6,542,125 B		/2003 I	Hoffmeister et al.
6,759,988 B2	2 * 7/	2004 1	Purr et al 343/700 MS
6,885,352 B2	2 * 4/	2005 I	Lee et al 343/836
6,917,332 B2	2 * 7/	2005 Z	Aikawa et al 343/700 MS
6,992,635 B2	2 * 1/	2006 1	Nishiyama et al 343/700 MS

FOREIGN PATENT DOCUMENTS

4/1987
7/1988
2/1990
2/1990

JP	7-142927	6/1995
JP	7-183717	7/1995
JP	8-125435	5/1996
JP	8-181538	7/1996
JP	9-252216	9/1997
JP	11-31915	2/1999
JP	11-215040	8/1999
JP	2000-244241	9/2000
JP	2002-508900	3/2002
JP	2002-325016	11/2002
JP	2005-45450	* 2/2005
JP	P2005-39415	* 2/2005
JP	P2005-229284	* 8/2005
WO	WO 98/56065	12/1998

OTHER PUBLICATIONS

nese Office Action dated May 15, 2007, with English translation. anese Office Action dated Oct. 17, 2006 with English translation.

anese Office Action dated Sep. 18, 2007, with English translation. Notification of Reasons(s) for Refusal dated Jan. 22, 2008, with English translation.


Japanese Office Action dated May 20, 2008, with English translation.

Primary Examiner—Trinh V Dinh (74) Attorney, Agent, or Firm—McGinn IP Law Group, PLLC

ABSTRACT (57)

An antenna device has: a dielectric substrate; an electric supply line that has a microstrip line and is formed on the dielectric substrate; an antenna element that has a microstrip line and is formed on the dielectric substrate; and a reflector plate disposed on the dielectric substrate at a predetermined angle of inclination. The electric supply line and the antenna element deviate from a dimensional factor that allows the electric supply line and the antenna element to have an omnidirectivity, and the electric supply line and the antenna element has a dimensional factor that allows the electric supply line and the antenna element to have an elliptical directivity.

7 Claims, 30 Drawing Sheets

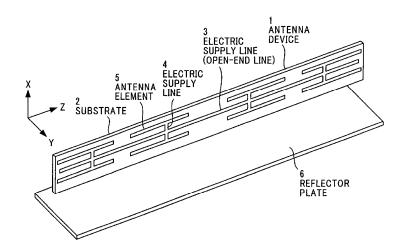

^{*} cited by examiner



US007443346B2

(12) United States Patent Shih

(10) Patent No.: US 7,443,346 B2 (45) Date of Patent: Oct. 28, 2008

(54) PRINTED ANTENNA

(75) Inventor: Yen-Yi Shih, Taipei Hsien (TW)

(73) Assignee: Hon Hai Precsion Industry Co., Ltd., Tu-Cheng, Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/614,999

(22) Filed: Dec. 22, 2006

(65) Prior Publication Data

US 2007/0279292 A1 Dec. 6, 2007

(30) Foreign Application Priority Data

(51) Int. Cl.

H01Q 1/38 (2006.01) *H01Q 13/10* (2006.01)

(52) **U.S. Cl.** **343/700 MS**; 343/767; 343/770

(58) Field of Classification Search 343/700 MS, 343/767, 770

See application file for complete search history.

(56) References Cited


U.S. PATENT DOCUMENTS

Primary Examiner—Robert Karacsony (74) Attorney, Agent, or Firm—Wei Te Chung

(57) ABSTRACT

A printed antenna disposed on a substrate, includes a radiation part, a feed line, and at least one first ground part. The radiation part is for radiating and receiving electromagnetic signals, and includes a hollow portion and a pair of openings. The hollow portion is defined in the radiation part, and comprises a first slot connected to a second slot, which is connected to a third slot, wherein the second slot extends between the first slot and the third slot forming a substantially h-shaped pattern. The openings are formed at two edges of the radiation part. The feed line for feeding the electromagnetic signals to the radiation part is electrically connected to the radiation part. The at least one first ground part for grounding is disposed at one side of the feed line.

15 Claims, 6 Drawing Sheets

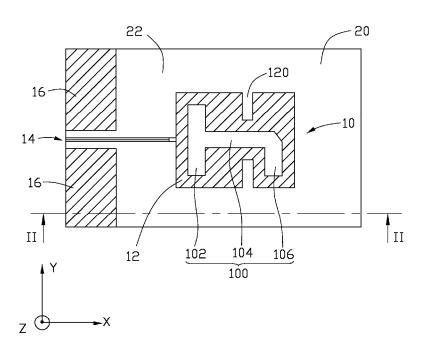



(12) United States Patent Mei

(10) Patent No.: US 7,443,347 B2 (45) Date of Patent: Oct. 28, 2008

(54) ANTENNA WITH COUPLING FEEDING

(75) Inventor: Chia-Hao Mei, Taipei Hsien (TW)

Assignee: Hon Hai Precision Industry Co., Ltd.,

Tu-Cheng, Taipei Hsien (TW)

Subject to any disclaimer, the term of this (*) Notice:

patent is extended or adjusted under 35 U.S.C. 154(b) by 19 days.

(21) Appl. No.: 11/617,768

Dec. 29, 2006 (22)Filed:

(65)**Prior Publication Data**

US 2008/0094284 A1 Apr. 24, 2008

(30)Foreign Application Priority Data

Oct. 18, 2006 (CN) 2006 1 0063154

(51) Int. Cl.

H01Q 1/38 (2006.01)

(58) Field of Classification Search 343/700 MS, 343/702, 846, 895

See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

5,861,854 A * 1/1999 Kawahata et al. 343/702 5,903,240 A * 5/1999~ Kawahata et al. $343/700~\mathrm{MS}$ 6,861,988 B2 3/2005 Gabriel et al.


* cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Wei Te Chung

ABSTRACT

An antenna (10) is provided. The antenna (10) with coupling feeding, printed on a substrate (30) for transceiving electromagnetic signals. The antenna includes a radiator (12), a feeding portion (14), and a grounded portion (16). The radiator is for the transceiving electromagnetic signals. The feeding portion defines a gap with the radiator for coupling feeding the electromagnetic signals to the radiator via the gap. The grounded portion is disposed adjacent to the feeding portion.

10 Claims, 15 Drawing Sheets

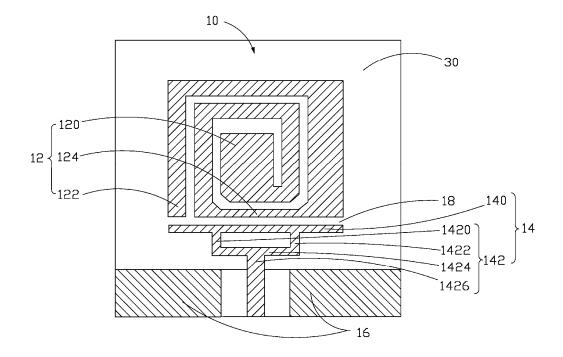



US007443348B2

(12) United States Patent Fortson et al.

ortson et al. (45) Date of Pate

(10) Patent No.: US 7,443,348 B2 (45) Date of Patent: Oct. 28, 2008

(54)	OMNI-DI	RECTIONAL ANTENNA
(75)	Inventors:	Frederick O. Fortson, Whitmore Lake, MI (US); Richard Hansen, Ann Arbor, MI (US); Greg Soosik, Canton, MI (US)
(73)	Assignee:	Solidica, Inc., Ann Arbor, MI (US)
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
(21)	Appl. No.:	11/755,265
(22)	Filed:	May 30, 2007
(65)		Prior Publication Data
	US 2008/0	030406 A1 Feb. 7, 2008
	Re	lated U.S. Application Data
(60)	Provisiona 30, 2006.	l application No. 60/809,257, filed on May
(51)	Int. Cl. <i>H01Q_1/3</i>	8 (2006.01)
(52)	~	
(58)	Field of C	lassification Search 343/700 MS 343/702, 846, 815, 833, 834, 829
	See application	ation file for complete search history.
(56)		References Cited
	U.	S. PATENT DOCUMENTS
	3,144,646 A	* 8/1964 Breithaupt 342/105

		Weston et al
5,745,079 A	* 4/1998	Wang et al 343/700 MS
		Phillips et al


* cited by examiner

Primary Examiner—Tho G Phan (74) Attorney, Agent, or Firm—Gifford, Krass, Sprinkle, Anderson & Citkowski, PC

(57) ABSTRACT

An omni-directional antenna includes an electrically conductive ground plane, an electrically conductive parasitic disc spaced upwardly apart from the ground plane and parallel thereto, and an electrically conductive vertical antenna element extending up through the center of the ground plane and parasitic disc, The vertical element terminates in a tip defining a length above the parasitic disc that is matched to a frequency of interest. The parasitic disc and ground plane are preferably both circular. To prevent electrical connection, the vertical element preferably extends through separate insulators in the parasitic disc and ground plane. The length of the vertical element is matched to a microwave frequency; in particular, the length of the vertical element is proportioned to one-quarter wavelength of the frequency of interest. The invention is particularly suited to microwave frequencies.

10 Claims, 1 Drawing Sheet

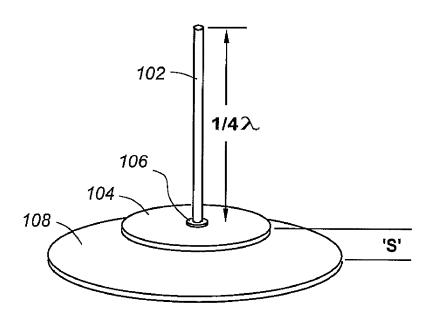



(12) United States Patent Gaucher et al.

(10) Patent No.: US 7,443,350 B2 (45) Date of Patent: Oct. 28, 2008

(54) EMBEDDED MULTI-MODE ANTENNA ARCHITECTURES FOR WIRELESS DEVICES

(75) Inventors: **Brian P. Gaucher**, Brookfield, CT (US);

Duixian Liu, Scarsdale, NY (US); Thomas R. Hildner, Cary, NC (US)

Assignee: International Business Machines

- (73)Corporation, Armonk, NY (US)
- Subject to any disclaimer, the term of this Notice: patent is extended or adjusted under 35 U.S.C. 154(b) by 195 days.
- (21) Appl. No.: 11/482,571
- Jul. 7, 2006 (22)Filed:
- (65) **Prior Publication Data**

US 2008/0007465 A1 Jan. 10, 2008

- (51) **Int. Cl.** H01Q 1/24 (2006.01)
- **U.S. Cl.** 343/702; 343/700 MS; (52)343/773: 343/846
- Field of Classification Search 343/700 MS, 343/702, 829, 846, 795, 773 See application file for complete search history.
- (56)References Cited

U.S. PATENT DOCUMENTS

5,926,150 A	7/1999	McLean et al 343/846
6,018,324 A	1/2000	Kitchener 343/795
6,661,380 B1*	12/2003	Bancroft et al 343/700 MS

6,781,546	B2*	8/2004	Wang et al 343/700 MS
7,015,868	B2	3/2006	Puente Baliarde et al 343/800
7,095,374	B2 *	8/2006	Chen et al 343/702
7,176,837	B2 *	2/2007	Sonoda et al 343/700 MS
7,187,331	B2 *	3/2007	Chen et al 343/702
7,330,158	B2 *	2/2008	Harihara 343/795
2005/0140553	A1	6/2005	Kuramoto 343/702
2005/0156804	A1	7/2005	Ratni et al 343/773
2005/0233786	A1	10/2005	Hatch
2006/0164305	A1	7/2006	Chen

FOREIGN PATENT DOCUMENTS

WO WO03088417 10/2003

OTHER PUBLICATIONS

Notification of Transmittal of the International Search Report and the Written Opinion of the International Searching Authority, or the Declaration. International Application No. PCT/EP2007/056051; International Filing Date: Jun. 19, 2007.


* cited by examiner

Primary Examiner—Tho G Phan (74) Attorney, Agent, or Firm-F. Chau & Associates, LLC

ABSTRACT

Low-profile, compact embedded multi-mode antenna designs are provided for use with computing devices, such as laptop computers, which enable ease of integration within computing devices with limited space, while providing suitable antenna characteristics (e.g., impedance matching and radiation efficiency) over an operating bandwidth of about 0.8 GHz to about 11 GHz.

35 Claims, 9 Drawing Sheets





(12) United States Patent Lin et al.

(10) Patent No.: US 7,443,352 B1 (45) Date of Patent: Oct. 28, 2008

(54) MULTI-BAND ANTENNA

(75) Inventors: Ching-Chi Lin, Taipei Hsien (TW);

Jia-Hung Su, Taipei Hsien (TW); Kai Shih, Taipei Hsien (TW); Yu-Yuan Wu,

Taipei Hsien (TW)

Assignee: Cheng Uei Precision Industry Co.,

Ltd., Taipei Hsien (TW)

Subject to any disclaimer, the term of this Notice:

patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/833,800

(22)Filed: Aug. 3, 2007

(51) Int. Cl. H01Q 1/24

(2006.01)

.... 343/702, (58) Field of Classification Search 343/700 MS

See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS 2004/0090377 A1* 5/2004 Dai et al. 343/700 MS

2004/0227665	A1*	11/2004	Tai et al	343/700 MS
2006/0050007	A1*	3/2006	Min	343/876


* cited by examiner

Primary Examiner—Douglas W. Owens Assistant Examiner—Dieu Hien T Duong (74) Attorney, Agent, or Firm—WPAT, P.C.; Anthony King

(57)ABSTRACT

The present invention discloses a multi-band antenna, the multi-band antenna has an antenna base, a power feed portion and a grounding point. The antenna base includes a first rectangular portion, a second rectangular portion and a third rectangular portion. A first connection portion connects the first rectangular portion with the second rectangular portion, a second connection portion connects the first extending portion with the second extending portion. The power feed portion is arranged below the antenna base, and the power feed portion connects to the first rectangular portion and the second rectangular portion. The grounding point is arranged below the first rectangular portion and near the power feed portion. The first and second connection portions control the size of the electric current through the antenna base. By the above-mention unique design, the multi-band antenna can receive and transmit the signals of the different frequency bands and has a smaller volume.

5 Claims, 2 Drawing Sheets

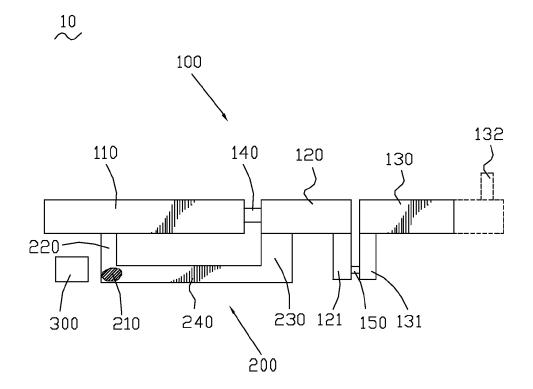



US007443353B2

(12) United States Patent Fujimoto et al.

(10) Patent No.: US 7,443,353 B2 (45) Date of Patent: Oct. 28, 2008

(54)	VEHICLE	VEHICLE-MOUNTED ANTENNA			
(75)	Inventors:	Hiroshi Fujimoto, Zama (JP); Yoshinosuke Mukou, Tokyo (JP)			
(73)	Assignee:	Nissan Motor Co., Ltd., Yokohama-shi (JP)			
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 30 days.			
(21)	Appl. No.:	11/389,155			
(22)	Filed:	Mar. 27, 2006			
(65)		Prior Publication Data			
	US 2006/0	214863 A1 Sep. 28, 2006			
(30)	Fo	oreign Application Priority Data			
Ma	ar. 28, 2005	(JP) 2005-090947			
(51)	H01Q 1/32	? (2006.01)			
(58)	Field of C	lassification Search 343/711–714, 343/702; 455/445, 436, 905			
	See application file for complete search history.				
(56)		References Cited			
	U.	S. PATENT DOCUMENTS			
	6,104,815 A	* 8/2000 Alcorn et al 380/251			

6,271,798	B1*	8/2001	Endo et al 343/713
6,766,172	B1*	7/2004	Tokuda et al 455/445
2001/0033249	A1*	10/2001	Endo et al 343/713
2004/0104855	A1*	6/2004	Nomiyama et al 343/702
2004/0196179	A1*	10/2004	Turnbull 342/357.06
2005/0052334	A1*	3/2005	Ogino et al 343/866
2006/0004486	A1*	1/2006	Yoshikawa et al 700/245
2006/0220971	A1*	10/2006	Sato et al 343/718

FOREIGN PATENT DOCUMENTS

JP 2002-187489 A 7/2002


* cited by examiner

Primary Examiner—Huedung Cao Mancuso (74) Attorney, Agent, or Firm—Foley & Lardner LLP

(57) ABSTRACT

A vehicle-mounted antenna for a vehicle-mounted information processing device performs wireless communication within a vehicle between the vehicle-mounted information processing device located at a rear side of a veneer plate and another electronic circuit within the vehicle. The vehicle-mounted information processing device reads data from a medium inserted via a media insertion opening formed in the veneer plate and executes various processing based on the read-in data. The vehicle-mounted antenna is arranged deeper than the media insertion opening, within a region set if the media insertion opening is extended in a direction substantially orthogonal with the veneer plate.

12 Claims, 3 Drawing Sheets

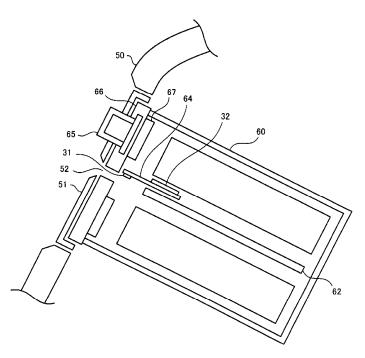



US007443355B2

(12) United States Patent Griffiths

(54) ANTENNA FEED-TUBE-TO-AMPLIFIER COUPLING

(75) Inventor: Gary D. Griffiths, Cranston, RI (US)

(73) Assignee: **KVH Industries, Inc.**, Middletown, RI

(US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/558,220

(22) Filed: Nov. 9, 2006

(65) **Prior Publication Data**

US 2008/0111758 A1 May 15, 2008

(51) **Int. Cl. H01Q 13/00** (2006.01) **H01Q 19/12** (2006.01) **H01Q 21/00** (2006.01) **H01Q 19/10** (2006.01)

(10) Patent No.: US 7,443,355 B2

(45) **Date of Patent:** Oct. 28, 2008

(56) References Cited

U.S. PATENT DOCUMENTS

FOREIGN PATENT DOCUMENTS

JP 61133701 A * 6/1986


* cited by examiner

Primary Examiner—Douglas W. Owens Assistant Examiner—Jennifer F Chang (74) Attorney, Agent, or Firm—Foley Hoag LLP

(57) ABSTRACT

A first set of screws secures a Cassegrain-configuration microwave antenna's primary reflector to its low-noise block down-converter without additionally securing that reflector or the low-noise block down-converter to the antenna's feed tube, which a second set of screws separately secures to the low-noise block down-converter.

14 Claims, 5 Drawing Sheets

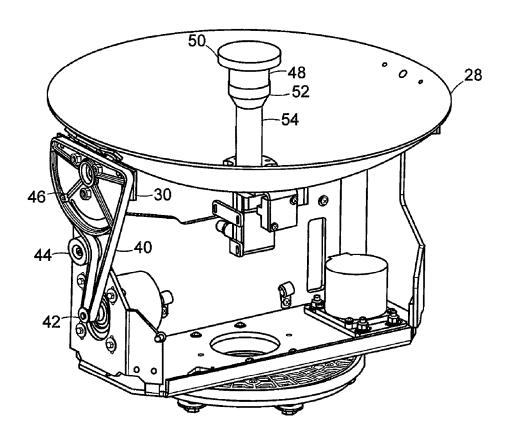



US007443356B2

(12) United States Patent Roberts et al.

(10) Patent No.: US 7,443,356 B2 (45) Date of Patent: Oct. 28, 2008

(54)	ANTENNA MODULE		
(75)	Inventors:	Arthur Roberts, Pukerua Bay (NZ); Coskun Nalbant, Balwyn North (AU); Noel McDonald, Croydon (AU)	
(73)	Assignee:	ALCATEL, Paris (FR)	
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.	
(21)	Appl. No.:	11/029,457	
(22)	Filed:	Jan. 6, 2005	
(65)		Prior Publication Data	
	US 2005/0	184921 A1 Aug. 25, 2005	
	Re	lated U.S. Application Data	
(60)	Provisiona 20, 2004.	l application No. 60/545,896, filed on Feb.	
(51)	H01Q 21/	26 (2006.01) 6 (2006.01)	
(52)			
(58)		lassification Search	
	See applic	ation file for complete search history.	
(56)		References Cited	
	U.	S. PATENT DOCUMENTS	
	6,023,244 A 6,025,812 A	2/2000 Snygg et al. * 2/2000 Gabriel et al	

6,028,563	A	2/2000	Higgins
6,067,053	A *	5/2000	Runyon et al 343/797
6,072,439	A	6/2000	Ippolito et al.
6,515,633	B2*	2/2003	Ippolito 343/797
6,646,611	B2*	11/2003	Plet et al 343/702
6,747,606	B2 *	6/2004	Harel et al 343/808
6,980,167	B2 *	12/2005	Brachat et al 343/772
2002/0140618	A1*	10/2002	Plet et al 343/797
2003/0214452	A1	11/2003	Ippolito
2005/0110699	A1*	5/2005	Timofeev et al 343/797


* cited by examiner

Primary Examiner—Hung T Vy (74) Attorney, Agent, or Firm—Sughrue Mion, PLLC

(57) ABSTRACT

An antenna module, in particular for a base station of a cellular mobile radio network, comprising a group of radiating elements capable of receiving and/or transmitting electromagnetic waves having at least two different, preferably linear orthogonal, polarizations, said antenna module further comprising at least one passive decoupling element. Said decoupling element extends with its longest dimension in a direction which is substantially perpendicular to a direction of propagation of said electromagnetic waves and/or substantially parallel to a ground plane and thus improves a degree of decoupling between said polarizations.

13 Claims, 3 Drawing Sheets

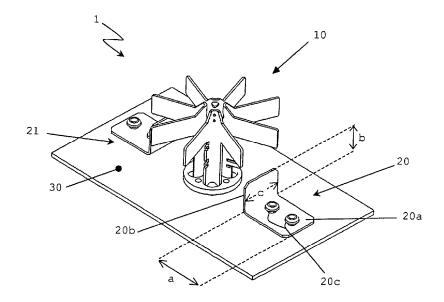



US007443357B2

$\begin{array}{c} \textbf{United States Patent} \\ \textbf{Mei} \end{array}$

(10) Patent No.: US 7,443,357 B2 (45) Date of Patent: Oct. 28, 2008

(54)	PLANAR INVERTED-F ANTENNA				
(75)	Inventor:	Chia-Hao Mei, Tu-Cheng (TW)			
(73)	Assignee:	ignee: Hon Hai Precision Industry Co., Ltd. , Tu-Cheng, Taipei Hsien (TW)			
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 212 days.			
(21)	Appl. No.:	11/237,218			
(22)	Filed:	Sep. 28, 2005			
(65)		Prior Publication Data			
	US 2006/0145925 A1 Jul. 6, 2006				
(30)	Foreign Application Priority Data				
Jan.	6, 2005	(CN) 2005 2 0053550 U			
(51)	Int. Cl. H01Q 21/2	20 (2006.01)			
(52)	U.S. Cl.				
(58)	Field of Classification Search 343/700 MS, 343/702, 895, 795, 745, 800				
	See applica	ation file for complete search history.			
(56)		References Cited			

6,781,547	B2*	8/2004	Lee 343/700 MS
6,995,710	B2 *	2/2006	Sugimoto et al 343/700 MS
7,116,274	B2 *	10/2006	Huang et al 343/700 MS
7,183,976	B2 *	2/2007	Wu et al 343/700 MS
2004/0145527	A1*	7/2004	Mikkola 343/700 MS
2004/0201532	A1*	10/2004	Apostolos et al 343/742
2005/0110684	A1*	5/2005	Liu 343/700 MS
2005/0280579	A1*	12/2005	Liang et al 343/700 MS


* cited by examiner

Primary Examiner—Huedung Mancuso (74) Attorney, Agent, or Firm—Andrew C. Cheng

(57) ABSTRACT

A planar inverted-F antenna includes a body (300), a feed wire (400), a shorting strip (500), and a metallic ground plane (200). The body is used for radiating and receiving radio frequency signals, and includes a radiating end (310) and a shorting end (320). The shorting end is electrically connected to a metallic ground plane by the shorting strip. The feed wire is electrically connected to the body. The body includes bent portions (330, 340) disposed between the shorting end and the radiating end. Due to the bent portions, the planar inverted-F antenna has a compact profile and a smaller size. In addition, the bent portions generate an inductance effect that can regulate the input impedance of the planar inverted-F antenna.

18 Claims, 3 Drawing Sheets

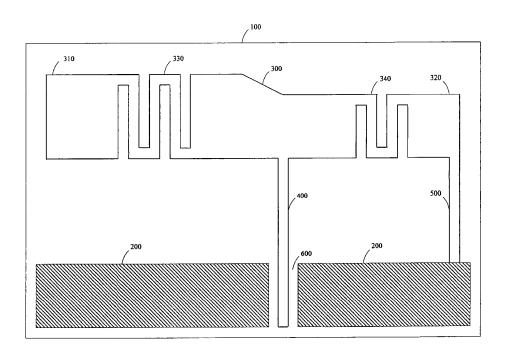



(12) United States Patent Haynes et al.

(10) Patent No.: US 7,443,361 B2 (45) **Date of Patent:** Oct. 28, 2008

(54)	FRANGIBLE ANTENNA MOUNT			
(75)	Inventors:	Clark Haynes, Tulalip, WA (US); Adam Eby, Mechanicsville, IA (US)		
(73)	Assignee:	Intermec IP Corp., Everett, WA (US)		
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.		
(21)	Appl. No.: 11/566,189			
(22)	Filed:	Dec. 1, 2006		
(65)	Prior Publication Data			
	US 2007/0	182661 A1 Aug. 9, 2007		
(51)	Int. Cl. <i>H01Q 1/1.</i>	2 (2006.01)		
(52)	U.S. Cl			
(58)	Field of Classification Search			
	See applic	ation file for complete search history.		
(56)		References Cited		
	U.S. PATENT DOCUMENTS			

1/1914 Stafford

1/1939 Trump

5/1942 Ludwig

4/1947 Walsh

1,085,505 A

2.144.038 A

2,283,607 A

2,419,611 A

2,493,787 A D158,122 S

2,667,317 A

3,254,344	A *	5/1966	Rohrs 343/901
3,626,421	Α	12/1971	Santana et al.
3,760,423	A *	9/1973	Kuecken 343/715
D231,536	\mathbf{S}	4/1974	Finke et al.
4,163,981	A	8/1979	Wilson
4,255,735	Α	3/1981	Liautaud
4,364,051	A *	12/1982	Yamashita 343/715
4,725,395	Α	2/1988	Gasparaitis et al.
4,872,017	Α	10/1989	White
4,914,450	Α	4/1990	Dilley et al.
D320,603	S	10/1991	Jones
5,218,369	A *	6/1993	Jennings 343/702
5,229,784	Α	7/1993	Jones
D357,922	S	5/1995	Nysether et al.
H001588	Н *	9/1996	Arney 343/715
6,015,139	Α	1/2000	Weber
6,237,268	В1	5/2001	Levin
D463,250	S	9/2002	Valentz


^{*} cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Seed IP Law Group PLLC

ABSTRACT

An antenna mount includes a base, a mounting member and a resilient member extending between the mounting member and the base. The resilient member may be removably coupled to the base via a first coupling member and/or coupled to the antenna mount via a second coupling member. The coupling members and the resilient member are configured to release or disengage in response to a force and/or torque exceeding a threshold force and/or torque.

15 Claims, 6 Drawing Sheets

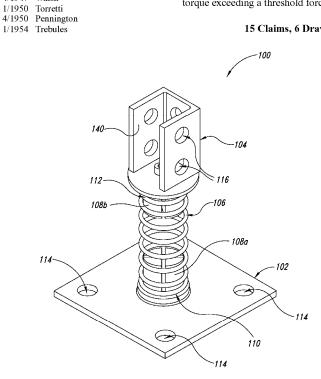



(12) United States Patent Yungers

(54) SOLENOID ANTENNA

Christopher R. Yungers, St. Paul, MN Inventor:

Assignee: 3M Innovative Properties Company,

Saint Paul, MN (US)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 202 days.

(21) Appl. No.: 11/184,633

Jul. 19, 2005 (22)Filed:

(65)**Prior Publication Data**

US 2007/0020969 A1 Jan. 25, 2007

(51) Int. Cl. H01Q 1/36 (2006.01)

(52)

(58) Field of Classification Search 343/702, 343/741, 787, 788, 866, 867, 895; 340/572.7, 340/572.5, 10.1; 235/462.46

See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

5,095,357 A	3/1992	Andoh et al.	
6,107,970 A *	8/2000	Holshouser et al.	343/702
6,268,796 B1*	7/2001	Gnadinger et al.	340/572.5
6.388.628 B1	5/2002	Dettloff et al.	

FOREIGN PATENT DOCUMENTS

DE 196 48 883 A1 5/1998 EP 1484816 A1 * 12/2004 wo WO 00/05675 A1 2/2000

(10) Patent No.: US 7,443,362 B2 (45) Date of Patent: Oct. 28, 2008

WO WO 02/089157 A1 * 11/2002 WO WO 03/098532 A1 11/2003 WO WO 2004/059563 A1 7/2004

OTHER PUBLICATIONS

International Search Report. Jan. 22, 2007.*

Patent Abstracts of Japan. Publication No. 2003-318633, Nov. 2003.

Application No. 2002-124093, filed Apr. 2002.* Chi-Chang lin et al., "Design of a 900/1800 MHz Dual-Band LTCC Chip Antenna for Mobile Communications Applications," Microwave Journal, 5 pages, Jan. 2004.

Brian Davidson et al., "MID Wide Band Helix Antenna for PDC Diversity," 6 pages. B. Davidson et al., "MID Wide Band Helix Antenna for PDC Diver-

sity," Molded Interconnect Devices, MID '98, 6 pgs.

Y. Lee, "Antenna Circuit Design for RFID Applications," Microchip Technology Inc., Application Note AN710, 50 pgs.


(Continued)


Primary Examiner—Michael C Wimer (74) Attorney, Agent, or Firm-John A. Burtis

ABSTRACT (57)

The invention relates to a volumetrically efficient solenoid antenna fabricated on or within a substrate, such as a printed circuit board. The antenna may be used in many applications requiring a short-range wireless communication or sensing link, such as RFID systems, badge readers, contactless connectors, proximity sensors, and short-range data links. The antenna may be, for example, fabricated on or within a printed circuit board of an RFID reader, thereby enabling a perpendicular orientation of the RFID reader with respect to the z-axis of an RFID tag, where the x-y axes are the length and width of the tag. This perpendicular orientation enables the user to point or aim the RFID reader directly at the RFID tag for efficient information transfer between the reader and a single tag in a multiple tag environment.

27 Claims, 6 Drawing Sheets







US007443363B2

(12) United States Patent Ying

(54) COMPACT DIELECTRIC RESONATOR

(75) Inventor: **Zhinong Ying**, Lund (SE)

(73) Assignee: Sony Ericsson Mobile

Communications AB, Lund (SE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 38 days.

(21) Appl. No.: 11/534,480

(22) Filed: Sep. 22, 2006

(65) Prior Publication Data

US 2008/0122703 A1 May 29, 2008

Related U.S. Application Data

(60) Provisional application No. 60/805,536, filed on Jun. 22, 2006.

(51)	Int. Cl.	
	H01Q 15/02	(2006.01)
	H01Q 15/08	(2006.01)
	H01Q 19/06	(2006.01)
	H01Q 1/38	(2006.01)
	H01Q 1/24	(2006.01)
	H01P 1/20	(2006.01)

- (52) **U.S. Cl.** **343/911** R; 343/702; 343/700 MS;

(56) References Cited

U.S. PATENT DOCUMENTS

6,545,642 B1*	4/2003	Doub et al	 343/702
6,762,658 B1*	7/2004	Isomura et al.	 333/202

(10) Patent No.: US 7,443,363 B2 (45) Date of Patent: Oct. 28, 2008

2002/0036596 A	3/2002	Noro
2004/0155817 A	A1 8/2004	Kingsley
2004/0233107 A	11/2004	Popov et al 343/700 MS
2005/0017903 A	1/2005	Ittipiboon et al 343/700 MS
2006/0232474 4	11* 10/2006	Fox 343/700 MS

FOREIGN PATENT DOCUMENTS

EP	1531516 A1	*	5/2005
GB	1 555 754		11/1979
GB	2 355 855		5/2001
WO	0014826		3/2000

OTHER PUBLICATIONS

Ratner, et al., "Neural network simulation of a dielectric ring resonator antenna", Journal of Systems Architecture, vol. 44, No. 8 (Apr. 1998) pp. 569-581.

PCT Search Report and Written Opinion, Mar. 14, 2007, 10 pages.


* cited by examiner

Primary Examiner—Michael C. Wimer Assistant Examiner—Marlon Browne (74) Attorney, Agent, or Firm—Harrity & Harrity, LLP

(57) ABSTRACT

A dielectric radiator antenna arrangement for a communication device having a ground plane is provided. The antenna arrangement may include a dielectric volume having a central axis normal to the ground plane, and mode-exciting elements. The mode-exciting elements may include a first mode-exciting element provided in or attached to the dielectric volume and extending in a plane provided at a first distance from the central axis perpendicular to the ground plane, and a second mode-exciting element provided in or attached to the dielectric volume and extending in a plane provided at a second distance from the central axis and perpendicular to both the ground plane and the plane of the first mode-exciting element. The antenna arrangement can be used for simultaneously transmitting and receiving more than one signal at one frequency with reduced coupling.

16 Claims, 3 Drawing Sheets

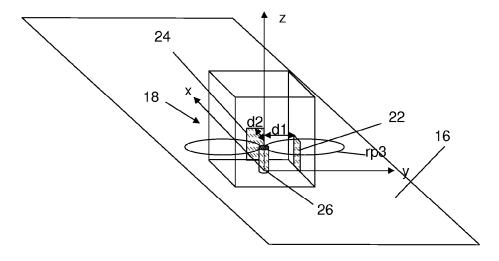



(12) United States Design Patent (10) Patent No.: Imano et al.

(45) **Date of Patent:**

US D579,446 S ** Oct. 28, 2008

(54)	ANTENN.	A
(75)	Inventors:	Yoshiaki Imano, Katagami (JP); Kanenari Kusanagi, Katagami (JP); Akira Miyoshi, Tama (JP)
(73)	Assignee:	Mitsumi Electric Co., Ltd, Tokyo (JP)
(**)	Term:	14 Years
(21)	Appl. No.:	29/269,326
(22)	Filed:	Nov. 29, 2006
(30)	Fo	oreign Application Priority Data
Au	g. 31, 2006	(JP) 2006-023245
(52)	U.S. Cl Field of C D14/230-	ZI
(56)		References Cited
	U.	S. PATENT DOCUMENTS

6,118,411 A	* 9/2000	Hasegawa et al 343/744
6,252,561 B	1 * 6/2001	Wu et al 343/866
6,424,304 B	1 * 7/2002	Jan et al 343/702
2006/0001579 A	.1* 1/2006	Noro et al 343/702
2007/0024503 A	.1* 2/2007	Tsai et al 343/700 MS
2007/0210965 A	1* 9/2007	Takada et al 343/700 MS

^{*} cited by examiner

Primary Examiner—Robert M. Spear Assistant Examiner—John Windmuller

(74) Attorney, Agent, or Firm—Sughrue Mion, PLLC

CLAIM

The ornamental design for an antenna, as shown.

DESCRIPTION

FIG. 1 is a front perspective view of an antenna showing our new design;

FIG. 2 is a rear perspective view thereof;

FIG. 3 is a front elevational view thereof;

FIG. 4 is a rear elevational view thereof;

FIG. 5 is a top plan view thereof;

FIG. 6 is a bottom plan view thereof;

FIG. 7 is a right side elevational view thereof; and,

FIG. 8 is a left side elevational view thereof.

1 Claim, 4 Drawing Sheets

