

(12) United States Patent

Nguyen et al.

(10) Patent No.: US 7,446,708 B1 (45) Date of Patent: Nov. 4, 2008

(54) MULTIBAND MONOPOLE ANTENNA WITH INDEPENDENT RADIATING ELEMENTS

(75) Inventors: Anthony H. Nguyen, San Diego, CA (US); Jatupum Jenwatanavet, San Diego, CA (US); Huan-Sheng Hwang,

San Diego, CA (US)

Assignee: Kyocera Wireless Corp., San Diego,

CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 369 days.

(21) Appl. No.: 11/260,588

(22) Filed: Oct. 27, 2005

Related U.S. Application Data

- Continuation-in-part of application No. 10/818,063, filed on Apr. 5, 2004, now Pat. No. 7,019,696, which is a continuation of application No. 10/228,693, filed on Aug. 26, 2002, now Pat. No. 6,741,213.
- (51) Int. Cl. H01Q 1/38 (2006.01)
- **U.S. Cl.** 343/700 MS; 343/702;
- 343/700 MS, (58) Field of Classification Search ... 343/895, 702, 846 See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

6,198,442 B1* 3/2001 Rutkowski et al. 343/702

6,239,765	B1*	5/2001	Johnson et al 343/795
6,337,667	В1	1/2002	Ayala et al.
6,603,430	B1*	8/2003	Hill et al 343/702
6,741,213	B2	5/2004	Jenwatanavet
6,882,319	B2	4/2005	Jinushi
2001/0052877	A1*	12/2001	Honda et al 343/702
2007/0069954	A1*	3/2007	Kenoun et al 343/700 MS
2007/0152887	A1*	7/2007	Castany et al 343/702


* cited by examiner

Primary Examiner—HoangAnh T Le

ABSTRACT (57)

A single-feedpoint multiband monopole antenna is provided with independent radiator elements. The antenna comprises a microstrip counterpoise coupler having a single-feedpoint interface, a first radiator interface, and a second radiator interface. A first microstrip radiator, i.e. a meander line microstrip, has an end connected to the counterpoise coupler first radiator interface, and an unterminated end. A second microstrip radiator, i.e. a straight-line microstrip, has an end connected to the counterpoise coupler second radiator interface, and an unterminated end. The two radiators are capable of resonating at non-harmonically related frequencies. As with the two microstrip radiators, the microstrip counterpoise coupler is a conductive trace formed overlying a sheet of dielectric material. The counterpoise coupler can come in a variety of shapes, so that the overall antenna may take on a number of form

16 Claims, 7 Drawing Sheets

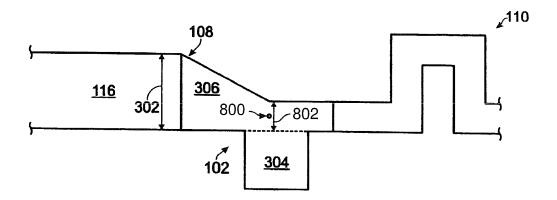



US007446710B2

(12) United States Patent Wu et al.

(45) **Date of Patent:**

(10) Patent No.:

US 7,446,710 B2

Nov. 4, 2008

(54) INTEGRATED LTCC MM-WAVE PLANAR ARRAY ANTENNA WITH LOW LOSS FEEDING NETWORK

 $\begin{array}{ll} (75) & \text{Inventors:} & \textbf{Ke-Li Wu}, \text{Hong Kong SAR (CN); Yong} \\ & \textbf{Huang}, \text{Hong Kong SAR (CN)} \end{array}$

(73) Assignee: The Chinese University of Hong Kong,

Hong Kong Sar (CN)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 306 days.

(21) Appl. No.: 11/384,179

(22) Filed: Mar. 16, 2006

(65) Prior Publication Data

US 2006/0256016 A1 Nov. 16, 2006

Related U.S. Application Data

(60) Provisional application No. 60/663,139, filed on Mar. 17, 2005.

(51) **Int. Cl. H01Q 1/38** (20

(58) Field of Classification Search 343/700 MS, 343/829, 846, 853

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

5,497,164 A 3/1996 Croq

5,708,444	A *	1/1998	Pouwels et al 343/700 MS
5,880,694	A *	3/1999	Wang et al 343/700 MS
6,809,688	B2*	10/2004	Yamada 343/700 MS
7,058,362	B1*	6/2006	Khorrami et al 455/66.1

FOREIGN PATENT DOCUMENTS

EP 1 120 856 A1 1/2001 JP 11-298241 10/1999

OTHER PUBLICATIONS

PCT written opinion of the international searching authority issued on Jun. 29, 2006.


* cited by examiner

Primary Examiner—Tho G Phan (74) Attorney, Agent, or Firm—Knobbe Martens Olson & Bear LLP

(57) ABSTRACT

An array antenna comprises a first substrate comprising a first plurality of ceramic layers; a second substrate comprising a second plurality of ceramic layers; a bottom ground plane stacked on the bottom of the second ceramic substrate; a plurality of quasi-cavity-backed patch antennas mounted on a top surface the first substrate, each of the patch antennas including a radiating element and two grounded grid-like conductor walls; and a mixed feeding network coupled to each of the patch antennas. The array antenna working at mm-wave frequency band can provide high radiation efficiency and low loss from feeding network by using quasi-cavity-backed patch elements and a mixed feeding network configuration.

17 Claims, 5 Drawing Sheets

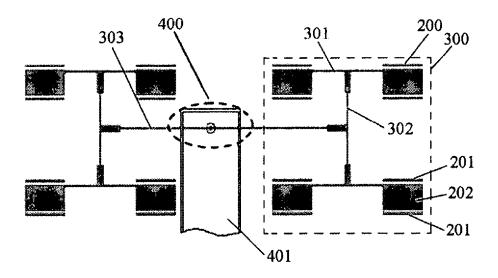



(12) United States Patent Hung et al.

US 7,446,717 B2 (10) Patent No.: (45) Date of Patent: Nov. 4, 2008

(54) MULTI-BAND ANTENNA

(75)Inventors: Chen-Ta Hung, Tu-Cheng (TW); Po-Kang Ku, Tu-Cheng (TW);

Yao-Shien Huang, Tu-Cheng (TW)

Assignee: Hon Hai Precision Inc. Co., Ltd.,

Taipei Hsien (TW)

Subject to any disclaimer, the term of this Notice: patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/638,597

(22)Filed: Dec. 12, 2006

Prior Publication Data (65)

> US 2007/0132646 A1 Jun. 14, 2007

(51) Int. Cl.

H01Q 1/24 (2006.01)

343/846

(58) Field of Classification Search 343/702, 343/700 MS, 846 See application file for complete search history.

(56)**References Cited**

U.S. PATENT DOCUMENTS

6,864,845	B2 *	3/2005	Kuo et al 343/702
7,034,754	B2 *	4/2006	Hung et al 343/700 MS
7,289,071	B2 *	10/2007	Hung et al 343/702
2005/0259024	A1*	11/2005	Hung et al 343/770
2006/0001590	A1*	1/2006	Hung et al 343/846
2007/0013588	A1*	1/2007	Chen et al 343/702
2007/0018896	A1*	1/2007	Chen et al 343/702

* cited by examiner


Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Wei Te Chung

ABSTRACT

A multi-band antenna includes a first antenna operating at wireless wide area network and having a first radiating arm, a second antenna operating at wireless local area network and a grounding portion employed by the first antenna and the second antenna. Wherein the first radiating arm of the first antenna further includes a metallic sheet, an insulative member affixed to the metallic sheet and a metal foil affixed to the insulative member.

20 Claims, 6 Drawing Sheets

1

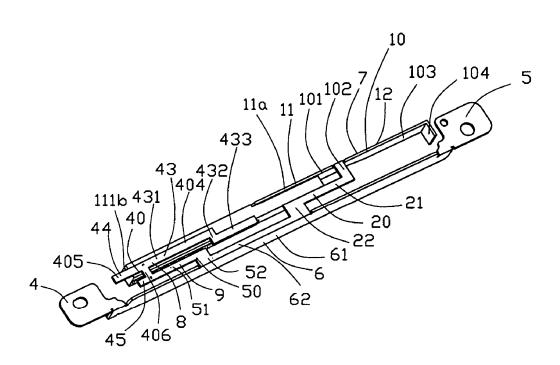



(12) United States Patent

Sugimoto et al.

(54) MOBILE ANTENNA MOUNTED ON A VEHICLE BODY

(75) Inventors: Yuji Sugimoto, Kariya (JP); Toshihiro Hattori, Okazaki (JP); Yoko Ichikawa, Aichi-ken (JP); Syuichi Kono, Okazaki (JP); Koji Numata, Toyokawa (JP);

Masaaki Hisada, Oobu (JP); Toru Yamazaki, Chita (JP)

Assignees: Denso Corporation, Kariya (JP); Nippon Soken, Inc., Nishio (JP)

Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

Appl. No.: 11/604,023 Nov. 24, 2006 (22)Filed:

(21)

(65)

May 3, 2007 US 2007/0097001 A1

Related U.S. Application Data

Prior Publication Data

Continuation-in-part of application No. 11/139,038, (63)filed on May 27, 2005, now abandoned.

(30)Foreign Application Priority Data

May 28, 2004	(JP)	 2004-159255
Mar. 29, 2005	(JP)	 2005-094901
Nov. 25, 2005	(JP)	 2005-340443

(51) Int. Cl. H01Q 1/32

(2006.01)

U.S. Cl. 343/713; 343/711

(58) Field of Classification Search 343/713, 343/711, 867, 742 See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

3,599,214 A * 8/1971 Altmayer 343/713

US 7,446,719 B2 (10) Patent No.: Nov. 4, 2008 (45) Date of Patent:

4,602,260 A 7/1986 Lindenmeier et al.

6,028,557 A *

6,198,447 B1 3/2001 Sauer

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0 124 055 B2 7/1997

(Continued)

OTHER PUBLICATIONS

Notification of Reasons for Rejection dated Oct. 16, 2007 in corresponding Japanese patent application No. 2005-150949 (and English translation)


(Continued)

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm-Posz Law Group, PLC

(57)ABSTRACT

In a mobile antenna, an electrically conductive antenna element has a first portion with one end and the other end extending therefrom. The one end of the first portion is arranged at least adjacent to any one of a first support portion, a second support portion, and a corner portion of a body of a vehicle. The one end of the first portion is electrically connected to a feeding point. The other end of the first portion is arranged along a surface of the window such that polarized surfaces formed by the antenna element are non-orthogonal to a polarized surface of each of a vertically polarized wave and a horizontally polarized wave in radio waves.

30 Claims, 26 Drawing Sheets





US007450070B2

(12) United States Patent Chang et al.

(10) Patent No.: US 7,450,070 B2 (45) Date of Patent: Nov. 11, 2008

(54) ANTENNAS

(75) Inventors: **Yuan-Li Chang**, Taipei (TW); **Chih-Ming Wang**, Taipei (TW)

(73) Assignee: Wistron NeWeb Corp., Taipei Hsien

(TW)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 50 days.

(21) Appl. No.: 11/564,226

(22) Filed: Nov. 28, 2006

(65) Prior Publication Data

US 2007/0096998 A1 May 3, 2007

Related U.S. Application Data

(62) Division of application No. 11/128,817, filed on May 12, 2005, now Pat. No. 7,170,450.

(30) Foreign Application Priority Data

Oct. 28, 2004 (TW) 93132684 A

(51) **Int. Cl.**

H01Q 1/38 (2006.01)

 $\begin{tabular}{ll} \textbf{Field of Classification Search} & & 343/700 \ MS \\ \textbf{See application file for complete search history}. \end{tabular}$

(56) References Cited

U.S. PATENT DOCUMENTS

6,985,114 7,026,999 7,148,849 2002/0190905 2004/0046097 2004/0104853 2004/0108957 2004/0222923	B2 * B2 * A1 A1 * A1 * A1 *	4/2006 12/2006 12/2002 3/2004 6/2004 6/2004	Egashira 343/702 Umehara et al. 343/700 MS Lin 343/700 MS Flint et al. 343/700 MS Chen 343/700 MS Umehara et al. 343/700 MS Frkocevic 343/700 MS
2004/0222923	A1*	11/2004	Erkocevic 343/700 MS


* cited by examiner

Primary Examiner—Trinh V Dinh (74) Attorney, Agent, or Firm—Quintero Law Office

(57) ABSTRACT

An antenna comprises a first metal element, a second metal element, a third metal element, a ground element and a cable. The first metal element and the second metal element are connected to the ground element. The third metal element is disposed on the first metal element. The cable is coupled to the first metal element. The antenna has three different resonant frequencies (a first resonant frequency, a second resonant frequency and a third resonant frequency) for transmitting three signals in different frequency bands.

6 Claims, 6 Drawing Sheets

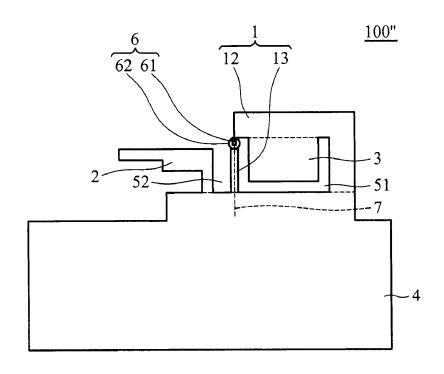



US007450072B2

(12) United States Patent Kim et al.

(54) MODIFIED INVERTED-F ANTENNA FOR WIRELESS COMMUNICATION

(75) Inventors: Je Woo Kim, San Jose, CA (US); Kyung Sup Han, San Ramon, CA (US); Volodymyr Rakytyanskyy, Santa Clara, CA (US); Oleksandr Sulima, Toronto

(CA)

(73) Assignee: **QUALCOMM Incorporated**, San

Diego, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 34 days.

(21) Appl. No.: 11/729,126

(22) Filed: Mar. 27, 2007

(65) Prior Publication Data

US 2007/0229366 A1 Oct. 4, 2007

Related U.S. Application Data

- (60) Provisional application No. 60/786,896, filed on Mar. 28, 2006.
- (51) Int. Cl. *H01Q 1/38* (2006.01) *H01Q 1/48* (2006.01)

(10) Patent No.: US 7,450,072 B2 (45) Date of Patent: Nov. 11, 2008

See application file for complete search history.

U.S. PATENT DOCUMENTS

(56) References Cited

6,268,831	B1 *	7/2001	Sanford 343/702
7,183,980	B2 *	2/2007	Chang et al 343/700 MS
7,265,718	B2 *	9/2007	Tsai 343/700 MS


* cited by examiner

Primary Examiner—Shih-Chao Chen (74) Attorney, Agent, or Firm—Thomas Rouse; Ross L. Franks; Kenneth K. Vu

(57) ABSTRACT

An embodiment of the present invention is a modified inverted-F antenna for wireless communication. The antenna circuit includes a dielectric substrate having a first surface, a radiating stub on the first surface of the dielectric substrate, and a first ground plate on the first surface of the dielectric substrate to couple to ground. The first ground plate includes one or more grounded capacitive stubs spaced apart from the radiating stub. The one or more grounded capacitive stubs tune performance parameters for the antenna circuit.

30 Claims, 18 Drawing Sheets

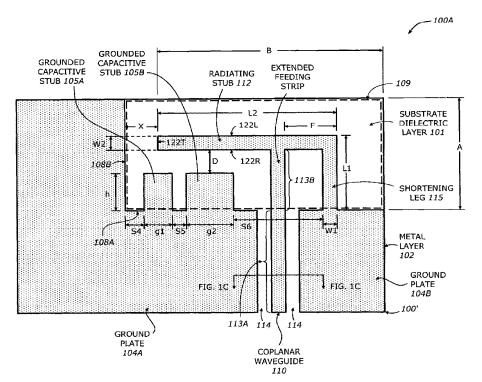



US007450075B2

(12) United States Patent Kim et al.

(54) BROADCASTING RECEIVING ANTENNA SYSTEM MOUNTED IN A WIRELESS TERMINAL

(75) Inventors: Yong-jin Kim, Seongnam-si (KR); Young-eil Kim, Suwon-si (KR); Ick-jae

Yoon, Seoul (KR)

(73) Assignees: Samsung Electronics Co., Ltd.,

Suwon-si (KR); Samsung

Electro-Mechanics Co., Ltd., Suwon-si

(KR)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/637,031

(22) Filed: Dec. 12, 2006

(65) Prior Publication Data

US 2007/0273591 A1 Nov. 29, 2007

(30) Foreign Application Priority Data

May 24, 2006 (KR) 2006-46365

(51) Int. Cl. *H01Q 1/24*

(2006.01)

(10) Patent No.: US 7,450,075 B2

(45) **Date of Patent:** Nov. 11, 2008

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

6,812,897 B2 * 11/2004 Jarmuszewski et al. 343/702 2002/0000941 A1 1/2002 Johnson 2006/0012529 A1 1/2006 Mattsson et al.

FOREIGN PATENT DOCUMENTS

EP	0977367	A2	2/2000
EP	1067624	A1	1/2001
EP	1182727	A2	2/2002
EP	1638227	A2	3/2006
GB	2373638	A	9/2002


^{*} cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Sughrue Mion, PLLC

(57) ABSTRACT

A broadcast receiving antenna system mounted in a wireless terminal. The antenna is bendable, and functions as a PIFA antenna or a monopole whip antenna according to whether it is bent or not. Accordingly, since the length and the type of the antenna are adjustable according to the magnitude of the DMB or DVB-H signal, optimum broadcasting services can be provided and the length of the antenna can be shortened. Ultimately, Intenna-type antenna can be mounted.

16 Claims, 5 Drawing Sheets

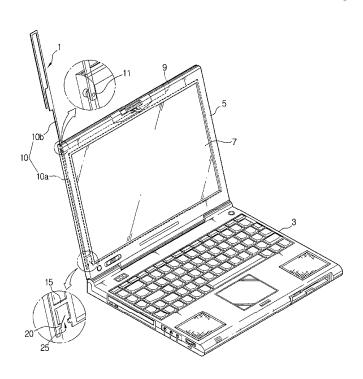



(12) United States Patent Lin et al.

(54) INTEGRATED MULTI-BAND ANTENNA

(75) Inventors: Ching-Chi Lin, Taipei Hsien (TW); Kai Shih, Taipei Hsien (TW); Yu-Yuan Wu, Taipei Hsien (TW); Jia-Hung Su, Taipei

Hsien (TW)

(73) Assignee: Cheng Uei Precision Industry Co.,

Ltd., Taipei Hsien (TW)

Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 1 day.

(21) Appl. No.: 11/770,650

(22) Filed: Jun. 28, 2007

(51) Int. Cl. H01Q 1/24 (2006.01)

(58) Field of Classification Search 343/702, 343/700 MS, 829, 846 See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

6,040,806 A	3/2000	Kushihi et al.	343/853
6,433,745 B1*	8/2002	Nagumo et al.	343/700 MS

(10) Patent No.:	US 7,450,076 B1
(45) Date of Patent:	Nov. 11, 2008

6,693,594	B2 *	2/2004	Pankinaho et al 343/700 MS
7,053,844	B2 *	5/2006	Gaucher et al 343/702
7,091,911	B2 *	8/2006	Qi et al 343/702
2004/0090377	A1*	5/2004	Dai et al 343/700 MS

* cited by examiner

Primary Examiner—Tho G Phan


(74) Attorney, Agent, or Firm-WPAT, P.C.; Anthony King

ABSTRACT

An integrated multi-band antenna has a first radiating element and a second radiating element. The first radiating element has a first radiating conductor defining opposite sides connected to a second radiating conductor and a third radiating conductor respectively. A fourth radiating conductor defines a first end facing the free end of the third radiating conductor. A fifth radiating conductor connects the third radiating conductor and vicinity of the first end of the fourth radiating conductor. A sixth radiating conductor connects the first radiating conductor and close to a ground portion. The second radiating element has a seventh radiating conductor staggered opened plurality of slots at opposite sides thereon. An eighth radiating conductor connects the seventh radiating conductor and the ground portion. The integrated multi-band antenna operates at wireless telecommunication frequency through the first radiating element and operates at wireless local area network frequency through the second radiating element.

23 Claims, 4 Drawing Sheets



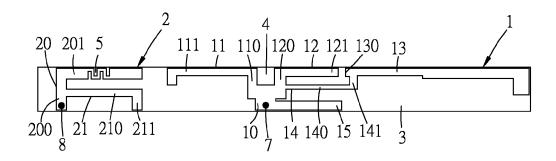



(12) United States Design Patent

Miyoshi

(10) **Patent No.:**

US D580,417 S

(45) **Date of Patent:**

** Nov. 11, 2008

(54)	ANTENN	A				
(75)	Inventor:	Akira Miyoshi, Tokyo (JP)				
(73)	Assignee:	Mitsumi Electric Co., Ltd., Tokyo (JP)				
(**)	Term:	14 Years				
(21)	Appl. No.:	29/299,116				
(22)	Filed:	Dec. 19, 2007				
(30)	Fe	oreign Application Priority Data				
Au	g. 7, 2007	(JP) 2007-021481				
(51)	LOC (8) C	Cl 14-03				
		D14/230				
` /		lassification Search D14/138,				
()	D14/230–238, 299, 358; D12/42, 43; 343/700 MS,					
		343/700 R-705, 711-713, 741, 748, 767,				
	343/795, 819, 840, 846, 866, 871–908; 455/90.2,					
	455/90.3, 91, 128, 269, 344, 347, 562.1					
	See applica	ation file for complete search history.				
(56)		References Cited				

U.S. PATENT DOCUMENTS

D408,808 S *	4/1999	Nowell et al D14/478
6,054,961 A *	4/2000	Gong et al 343/713
D488,817 S *	4/2004	Wadsworth et al D14/478
6,774,850 B2*	8/2004	Chen 343/700 MS

7,339,531	B2 *	3/2008	Desclos et al	343/702
2006/0001579	A1*	1/2006	Noro et al	343/702

^{*} cited by examiner

Primary Examiner—Robert M. Spear Assistant Examiner—John Windmuller

(74) Attorney, Agent, or Firm—Sughrue Mion, PLLC

CLAIM

The ornamental design for an antenna, as shown.

DESCRIPTION

FIG. 1 is a perspective view of the top, front and right side of an antenna showing my new design;

FIG. 2 is a perspective view of the bottom, rear and left side thereof:

FIG. 3 is a front elevational view thereof;

FIG. 4 is a rear elevational view thereof;

FIG. 5 is a right side elevational view thereof;


FIG. 6 is a left side elevational view thereof;

FIG. 7 is a top plan view thereof; and,

FIG. 8 is a bottom plan view thereof.

The antenna is shown broken away in the middle to indicate it has no specific length.

1 Claim, 5 Drawing Sheets

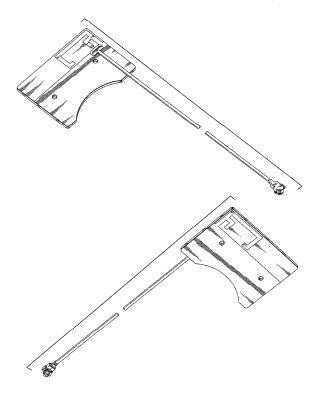



(12) United States Design Patent (10) Patent No.:

Yang et al.

US D580,418 S

(45) **Date of Patent:**

** Nov. 11, 2008


(54)	ANTENN	A	D534,903 S * 1/2007 Hung et al
(75)	Inventors:	Wen Chieh Yang, Tu-Cheng (TW); Yu Yuan Wu, Tu-Cheng (TW); Kai Shih, Tu-Cheng (TW); Hsin Tsung Wu, Tu-Cheng (TW)	D555,154 S * 11/2007 Lin et al. D14/230 D555,155 S * 11/2007 Su et al. D14/230 2008/0030407 A1 * 2/2008 Hung et al. 343/700 MS * cited by examiner
(73)	Assignee:	Cheng Uei Precision Industry Co., Ltd., Taipei Hsien (TW)	Primary Examiner—Robert M. Spear Assistant Examiner—John Windmuller (74) Attorney, Agent, or Firm—Rosenberg, Klein & Lee
(**)	Term:	14 Years	(57) CLAIM
(21)	Appl. No.:	29/300,347	The ornamental design for an antenna, as shown and
(22)	Filed:	Mar. 17, 2008	described.
(51)	LOC (8) (Cl	DESCRIPTION
(52)		D14/230 ; D14/358	FIG. 1 is a perspective view of an antenna showing our new
(58)	Field of Classification Search D14/230–238,		design;
		D14/299, 358; 343/700 R, 840, 841, 908;	FIG. 2 is a front elevational view thereof;
	455/3.02, FOR. 215, 575.2 See application file for complete search history.		FIG. 3 is a rear elevational view thereof;
	see application the for complete search instory.		FIG. 4 is a left side elevational view thereof;
(56)		References Cited	FIG. 5 is a right side elevational view thereof;
	U.	S. PATENT DOCUMENTS	FIG. 6 is a top plan view thereof; and,

6,476,769	В1	*	11/2002	Lehtola	343/702
D531,622	\mathbf{S}	*	11/2006	Chen et al	D14/230
D534,527	S	*	1/2007	Hung et al	D14/230

SCRIPTION

FIG. 7 is a bottom plan view thereof.

1 Claim, 7 Drawing Sheets

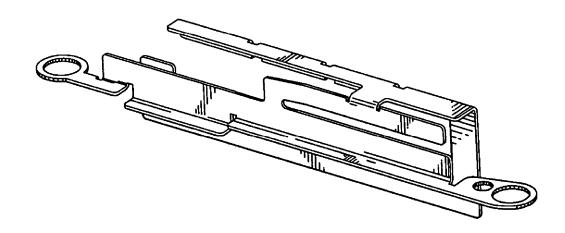



US007453401B2

$\begin{array}{c} \text{(12)} \ United \ States \ Patent \\ \hline \\ \text{Jow} \end{array}$

(10) Patent No.: US 7,453,401 B2 (45) Date of Patent: Nov. 18, 2008

(54) VERTICAL COMPLEMENTARY FRACTAL ANTENNA

- (75) Inventor: **Uei-Ming Jow**, Hsinchu (TW)
- (73) Assignee: Industrial Technology Rersearch

Institute, Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 169 days.

- (21) Appl. No.: 11/261,568
- (22) Filed: Oct. 31, 2005
- (65) Prior Publication Data

US 2006/0267842 A1 Nov. 30, 2006

(30) Foreign Application Priority Data

May 27, 2005 (TW) 94117602 A

(51) **Int. Cl.**

H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**; 343/792.5; 343/846

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

6,140,975 A	A * 10. B1 11.	2000 Cohen 2000 Cohen 2002 Cohen 2003 Eason	 343/846
- , ,			 343/700 MS

OTHER PUBLICATIONS

Ban-Leong Ooi, et al., "A Modified Contour Integral Analysis for Sierpinski Fractal Carpet Antennas With and Without Electromagnetic Band Gap Ground Plane." IEEE Transactions on Antennas and Propagation, vol. 52, No. 5, May 2004.


* cited by examiner

Primary Examiner—Tho G Phan (74) Attorney, Agent, or Firm—Harness, Dickey & Pierce P.L.C.

(57) ABSTRACT

A vertical complementary fractal antenna is provided, which includes a first fractal structure and a second fractal structure. The first fractal structure is defined as a superposition over at least one iteration of a motif, while the second fractal structure has a pattern complementary to that of the first fractal structure. Thus, the antenna may effectively increase bandwidth.

25 Claims, 7 Drawing Sheets

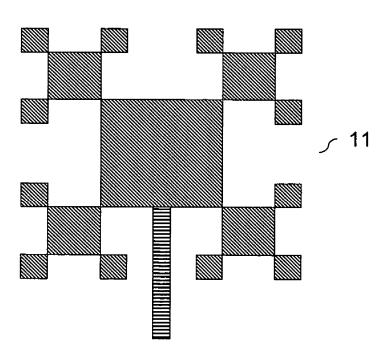



US007453402B2

(12) United States Patent Rowell et al.

(10) Patent No.: US 7,453,402 B2

(45) **Date of Patent:**

Nov. 18, 2008

(54)	MINIATURE BALANCED ANTENNA WITH
	DIFFERENTIAL FEED

(75) Inventors: Corbett Rowell, Shatin (HK); Chi Lun

Mak, Shatin (HK)

(73) Assignee: Hong Kong Applied Science and

Research Institute Co., Ltd., Hong

Kong (CN)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 26 days.

0.8.0. 15 1(0) 09 20 0

(21) Appl. No.: 11/455,526

(22) Filed: Jun. 19, 2006

(65) Prior Publication Data

US 2007/0290927 A1 Dec. 20, 2007

(51) Int. Cl.

H01Q 19/10 (2006.01)

(52) U.S. Cl. 343/700 MS; 343/834

(56) References Cited

U.S. PATENT DOCUMENTS

5,323,169	A	6/1994	Koslover	
5,471,223	Λ	11/1995	McCorkle	
6,650,294	B2	11/2003	Ying et al.	
6,999,030	B1	2/2006	Mateychuk	
7,053,844	B2 *	5/2006	Gaucher et al.	 343/702

7,126,545 B2	* 10/2006	Nagano et al 343/702
7,202,818 B2	* 4/2007	Anguera Pros
		et al 343/700 MS
2002/0053994 A1	5/2002	McCorkle
2002/0122010 A1	9/2002	McCorkle
2003/0078012 A1	* 4/2003	Ito et al 455/82
2003/0231138 A1	* 12/2003	Weinstein 343/795
2005/0156787 A1	7/2005	Myoung et al.
2005/0156788 A1	7/2005	Lin
2005/0184919 A1	8/2005	Yekeh Yazdandoost et al.
2005/0280582 A1	12/2005	Powell et al.

FOREIGN PATENT DOCUMENTS

EP 1 531 516 A1 5/2005

OTHER PUBLICATIONS

International Search Report issued for PCT/CN2007/070107, dated Sep. 20, 2007; 2 pages.


* cited by examiner

Primary Examiner—Trinh V Dinh Assistant Examiner—Dieu Hien T Duong (74) Attorney, Agent, or Firm—Fulbright & Jaworski L.L.P.

(57) ABSTRACT

An example antenna system includes a parasitic element and a symmetrical element fed by a balanced RF signal source. The fed element is operable to couple with the parasitic element, thereby causing the parasitic element to resonate at a first frequency band. Thus, the fed element is operable to act as a balanced capacitive feed for the parasitic element. Also, the parasitic element is symmetrical with respect to a polarity of the fed element.

15 Claims, 4 Drawing Sheets

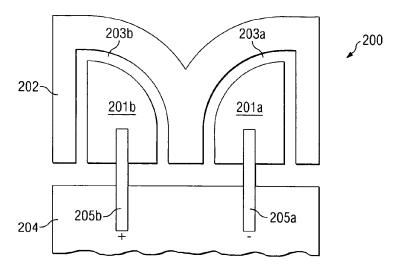



(12) United States Patent

Ying

EQUIPMENT

(54) ANTENNA DEVICE FOR COMMUNICATION

(75) Inventor: **Zhinong Ying**, Lund (SE)

Assignee: Sony Ericsson Mobile

Communications AB, Lund (SE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 42 days.

10/554,016 (21) Appl. No.:

(22) PCT Filed: Mar. 4, 2004

(86) PCT No.: PCT/EP2004/002188

§ 371 (c)(1),

(2), (4) Date: Oct. 2, 2006

(87) PCT Pub. No.: WO2004/097977

PCT Pub. Date: Nov. 11, 2004

(65)**Prior Publication Data**

US 2007/0080871 A1 Apr. 12, 2007

Related U.S. Application Data

(60) Provisional application No. 60/466,309, filed on Apr. 29, 2003.

Foreign Application Priority Data (30)

Apr. 26, 2003 (EP) 03009488

(51)Int. Cl.

H01Q 1/24 (2006.01)

(10) Patent No.: US 7,453,404 B2

(45) Date of Patent: Nov. 18, 2008

(58) Field of Classification Search 343/702, 343/700 MS, 906 See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

5,918,163	A	6/1999	Rossi 455/558
6,166,694	A	12/2000	Ying 343/702
6,259,418	B1	7/2001	Jones et al 343/846
6,456,245	B1	9/2002	Crawford 343/702
6,509,876	B1	1/2003	Jones et al 343/702
6,758,689	B1	7/2004	Bair et al 439/136
6,762,725	B2	7/2004	Beard et al 343/702

FOREIGN PATENT DOCUMENTS

EP	0954054 A1	3/1999
WO	WO 98/27617	6/1998
WO	WO99/17398	4/1999

OTHER PUBLICATIONS

International Search Report dated Aug. 31, 2004, corresponding to PCT Application No. PCT/EP2004/002188.


Primary Examiner—Tan Ho

(74) Attorney, Agent, or Firm-Myers Bigel Sibley & Sajovec

ABSTRACT

An antenna device for a computer card device, such as a PCMCIA type card, includes at least a first antenna including a trace on a support element, antenna output means, and a protruding member extending from a housing of the card. The support element, which may include a flexible dielectric film, has a geometric shape that is conformed to the geometric shape of the protruding member.

17 Claims, 3 Drawing Sheets





US007453406B2

(12) United States Patent Chenoweth

(10) Patent No.: US 7,453,406 B2 (45) Date of Patent: Nov. 18, 2008

(54) LOW INTERFERENCE INTERNAL ANTENNA SYSTEM FOR WIRELESS DEVICES

(75) Inventor: **John P. Chenoweth**, Coral Springs, FL

(US)

(73) Assignee: Motorola, Inc., Schaumburg, IL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/618,126

(22) Filed: Dec. 29, 2006

(65) Prior Publication Data

US 2008/0158070 A1 Jul. 3, 2008

(51) **Int. Cl. H01Q 1/24** (2006.01)

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

6,342,869	B1	1/2002	Edvardsson et al.	
6,507,318	B2 *	1/2003	Ito et al 343/70)2
6,903,686	B2	6/2005	Vance et al.	
6,909,402	B2	6/2005	Vance	

6,924,770	B2	8/2005	Carpenter et al.	
7,015,863	B2	3/2006	Sadler et al.	
7,034,769	B2	4/2006	Surducan et al.	
7,215,289	B2 *	5/2007	Harano	343/702
2006/0099914	A1	5/2006	Andersson	
2006/0111162	A1	5/2006	Seol et al.	
2007/0164913	A1*	7/2007	Sakamoto et al	343/702

^{*} cited by examiner


Primary Examiner—Trinh Vo Dinh
Assistant Examiner—Dieu Hien T Duong

(74) Attorney, Agent, or Firm—Pablo Meles; Akerman Senterfitt

(57) ABSTRACT

A wireless communications antenna system (100) includes a main circuit element (102) having a feed device (104) with an active port (108) and a grounding port (110), where the grounding port is coupled to a grounding device (106) of the main circuit element, a generally planar antenna element (112) having a feeding portion (114) coupled to the active port of the feed device, where the antenna element is electrically ungrounded, and a generally planar secondary circuit element (116) having a grounding portion (118) coupled to the grounding device. The secondary circuit element is positioned in proximity to the antenna element and the antenna element and the secondary circuit element are generally parallel and separated by a gap (X). Further, at least a portion of the secondary circuit element at least a portion of the secondary circuit element at least partially overlaps the antenna element.

20 Claims, 4 Drawing Sheets





US007453407B2

(12) United States Patent Logan et al.

(54) ANTENNA CONSTRUCTIONS FOR ELECTRONIC DEVICES AND METHODS FOR MANUFACTURING SUCH ANTENNA

(75) Inventors: Brian Matthew Logan, Akron, OH

(US); Robert Leon Benedict,

Tallmadge, OH (US)

(73) Assignee: The Goodyear Tire & Rubber

Company, Akron, OH (US)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/618,744

(22) Filed: Dec. 30, 2006

CONSTRUCTIONS

(65) Prior Publication Data

US 2008/0158072 A1 Jul. 3, 2008

(51) Int. Cl.

H010 1/32 (2006.01)

(52) U.S. Cl. 343/711; 343/717; 343/897

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

B2	12/2002	Sullivan
B1	4/2003	Brown et al.
В1	4/2005	Pollack et al.
B2	3/2006	Adamson et al.
B2	9/2006	Myatt
A1	12/2003	Strache et al.
	B1 B1 B2 B2	B1 4/2003 B1 4/2005 B2 3/2006 B2 9/2006

(10) Patent No.: US 7,453,407 B2

(45) **Date of Patent:** Nov. 18, 2008

2005/0170100 A	1 8/2005	Ramsey
2005/0170101 A	1 8/2005	Ramsey
2005/0171227 A	1 8/2005	Ramsey
2005/0196605 A	1 9/2005	Ramsey
2005/0203202 A	1 9/2005	Ramsey
2005/0203205 A	1 9/2005	Ramsey
2005/0234152 A	1 10/2005	Ramsey
2006/0022879 A	1* 2/2006	Kish et al 343/711
2006/0022893 A	1* 2/2006	Kish et al 343/897
2006/0041047 A	1 2/2006	Ramsey
2006/0189113 A	1 8/2006	Vanheusden et al.

FOREIGN PATENT DOCUMENTS

EP	1454770 A1	9/2004
JP	200030023 A	1/2000
WO	9856072	12/1998
WO	03038747	5/2003

OTHER PUBLICATIONS

European Patent Office, European Search Report issued in corresponding European Application serial No. 07123595 dated May 13, 2008 (2 pages).


* cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Wood, Herron & Evans LLP

(57) ABSTRACT

Antenna constructions for electronic devices and methods of manufacturing such antenna constructions. The electronic device comprises a transponder and an antenna electrically coupled with the transponder. The antenna has a core of a first material and a coating of a second material on the core. The second material has a higher electrical conductivity than the first material and/or a lower permeability than the first material. The coating on the core also has a predetermined thickness. The electronic devices may be used in tires.

17 Claims, 2 Drawing Sheets





(12) United States Patent Martin

(10) Patent No.: US 7,453,408 B2 (45) Date of Patent: Nov. 18, 2008

(54) DETECTION OR IDENTIFICATION ANTENNA INSENSITIVE TO THE ENVIRONMENT THEREOF

(75) Inventor: Jean-Marc Martin, Saint Leu la Foret

(FR)

(73) Assignee: Pygmalyon (FR)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 44 days.

(21) Appl. No.: 10/522,202

(22) PCT Filed: Jul. 17, 2003

PCT/FR03/02267 (86) PCT No.:

§ 371 (c)(1),

Jan. 27, 2006 (2), (4) Date:

(87) PCT Pub. No.: WO2005/010811

PCT Pub. Date: Feb. 3, 2005

(65) **Prior Publication Data**

> US 2006/0139232 A1 Jun. 29, 2006

(30) Foreign Application Priority Data

Jul. 17, 2002 (FR) 02 09052

(51) Int. Cl.

(2006.01)

H01Q 11/12 H01Q 21/00 (2006.01) G06K 19/06 (2006.01)

(52) U.S. Cl. 343/742; 343/867; 235/492

(58)	Field of Classification Search	343/742,
	343/867, 895; 340/572, 1, 572.1;	235/492
	See application file for complete search hist	ory.

References Cited (56)

U.S. PATENT DOCUMENTS

4,745,401	A *	5/1988	Montean 340/572.3
6,161,761	A	12/2000	Ghaem et al 235/492
6,164,551	A	12/2000	Altwasser 235/492
6,600,420	B2 *	7/2003	Goff et al 340/572.4
7,066,393	B2 *	6/2006	Stromberg et al 235/492
7.154.449	B2 *	12/2006	Liu et al 343/867

FOREIGN PATENT DOCUMENTS

DE	100 56 148	5/2002
FR	2 803 439	7/2001
JP	EP 0 786 357	7/1997
US	EP 0 704 816	4/1996


^{*} cited by examiner

Primary Examiner—Shih-Chao Chen (74) Attorney, Agent, or Firm—Cantor Colburn LLP

ABSTRACT

A resonant detection or identification antenna having at least one turn the antenna includes at least one electrically conducting wire and is connected to an electronic transponder chip, the operating frequency of the antenna being greater than or equal to 10 MHz and the area defined by the at least one turn being substantially less than or equal to 0.30 m². The total capacitance of the antenna is substantially greater than or equal to 140 pF and the Q-factor of the at least one turn is substantially greater than or equal to 30.

10 Claims, 2 Drawing Sheets

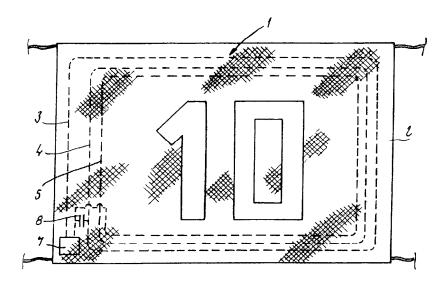



(12) United States Patent Chang

(10) Patent No.: US 7,453,410 B2 (45) Date of Patent: Nov. 18, 2008

(54) WAVEGUIDE ANTENNA USING A CONTINUOUS LOOP WAVEGUIDE FEED AND METHOD OF PROPAGATING ELECTROMAGNETIC WAVES

(75) Inventor: Yu-Wen Chang, Rancho Palos Verdes, CA (US)

Assignee: Chang Indusatry, Inc., La Verne, CA (US)

(*) Subject to any disclaimer, the term of this Notice: patent is extended or adjusted under 35 U.S.C. 154(b) by 193 days.

(21) Appl. No.: 11/401,513

(22) Filed: Apr. 11, 2006

(65) **Prior Publication Data**

US 2007/0236402 A1 Oct. 11, 2007

(51) Int. Cl. (2006.01)H01Q 13/06 H01P 5/22 (2006.01)

U.S. Cl. 343/776; 333/120; 333/137 (52)

333/125, 137; 343/776, 852 See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

2,784,381	Α	*	3/1957	Budenbom	333/120
3,189,848	Α	*	6/1965	Miyagi	333/120
4,093,928	Α		6/1978	Proctor	
4,316,160	Α	*	2/1982	Dydyk	333/120
4,419,635	Α		12/1983	Reindel	
4,420,839	Α		12/1983	Hogerheiden, Jr.	
4,839,659	Α		6/1989	Stern et al.	

4,904,966 6,621,468		2/1990	Rubin Kanamaluru 343/853
6,803,838			Hoyland
6,943,744			Vezmar
2003/0060182		3/2003	
2004/0108903	A1	6/2004	Channabasappa et al.

OTHER PUBLICATIONS

Franz X. Sinnesbichler; Hybrid Millimeter-Wave Push-Push Oscillators Using Silicon-Germanium HBTs; IEEE Translations on Microwave Theory and Technologies; Feb. 2003; pp. 422-430; vol. 51, No. 2; IEEE 2003.

Maurico Sanchez Barbetty; Design and Implementation of a Transceiver and a Microstrip Corporate Feed for Solid State X-Band Radar; 2005; 58 pages (29 condensed pages).


* cited by examiner

Primary Examiner—Benny Lee (74) Attorney, Agent, or Firm—Alston & Bird LLP

ABSTRACT

An antenna includes first, second and third waveguides in direct communication with a base waveguide at first, second and third positions, respectively, the base waveguide forming a continuous loop. The second position, at which the second waveguide is in direct communication with the base waveguide, is spaced apart from the first position by about one-sixth the circumference of the loop. The third position, at which the third waveguide is in direct communication with the base waveguide, is spaced apart from the first position by about one-sixth the circumference of the loop, and is uninterruptedly spaced apart from the second position, without extending through the first position, by about two-thirds the circumference of the loop. The first, second and third waveguides comprise closed-channel waveguides, and the second and third waveguides have an open end and are configured to radiate electromagnetic waves and/or focus radiating electromagnetic waves.

18 Claims, 6 Drawing Sheets

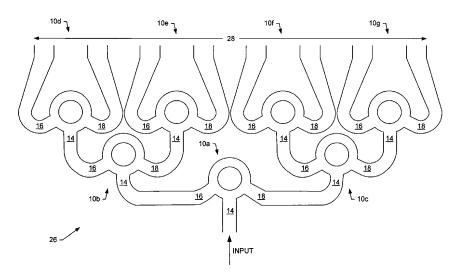



(12) United States Patent

Nagai

(10) Patent No.: US 7,453,411 B2

(45) Date of Patent: Nov. 18, 2008

(54) ANTENNA DEVICE AND RADAR APPARATUS INCLUDING THE SAME

(75) Inventor: Tomohiro Nagai, Nagaokakyo (JP)

(73) Assignee: Murata Manufacturing Co., Ltd (JP)

Subject to any disclaimer, the term of this (*) Notice: patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 11/583,024

Oct. 19, 2006 (22)Filed:

(65)**Prior Publication Data**

US 2007/0035461 A1 Feb. 15, 2007

Related U.S. Application Data

Continuation of application No. PCT/JP2005/006238, (63)filed on Mar. 31, 2005.

Foreign Application Priority Data (30)

..... 2004-151597 May 21, 2004 (JP)

- (51) Int. Cl. H01Q 13/00 (2006.01)
- Field of Classification Search 343/757, 343/761, 763, 772, 781 R, 781 P See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

4,305,075 A *	12/1981	Salvat et al 342/78
4,312,002 A *	1/1982	Stewart 343/725
6,061,033 A *	5/2000	Hulderman et al 343/781 CA
6,396,448 B1*	5/2002	Zimmerman et al 343/753
6,870,512 B2*	3/2005	Yoneda et al 343/781 CA

7,091,922 B2 * 8/2006 Parsons et al. 343/781 P

FOREIGN PATENT DOCUMENTS

JP.	6 291541	10/1994
JP	8-321710	12/1996
JP .IP	2693497	9/1997
JP .JP	11-88029	3/1999
JF .IP	11-303146	11/1999
JP JP	2004-112660	4/2004
JF	2004-112000	4/2004

OTHER PUBLICATIONS

Written Opinion dated May 31, 2005 (with English translation). International Search Report dated May 31, 2005.


* cited by examiner

Primary Examiner—Trinh V Dinh Assistant Examiner—Dieu Hien T Duong (74) Attorney, Agent, or Firm—Dickstein, Shapiro, LLP.

ABSTRACT

An antenna device having a primary radiator that includes a transmitting section formed of a cylindrical waveguide extending parallel to a direction in which the front of the antenna device faces (front direction), and a rectangular hornshaped radiant section extending perpendicular to the front direction. A waveguide whose central axis in the extending direction corresponds to that of the transmitting section of the primary radiator is connected to an end of the transmitting section via a rotary joint so as to be rotatable. A first reflector is of an offset parabolic type, and is disposed above the primary radiator in a predetermined position with respect to the primary radiator such that a predetermined directivity is obtained. A second reflector is parabolic in the vertical direction, and is toric in the horizontal direction. The second reflector is disposed below the primary radiator in a predetermined position with respect to the primary radiator such that a predetermined directivity is obtained.

10 Claims, 11 Drawing Sheets





US 7,453,414 B2

(12) United States Patent Parsche

Nov. 18, 2008 (45) Date of Patent:

(10) **Patent No.:**

(54)	BROADBAND OMNIDIRECTIONAL LOOP ANTENNA AND ASSOCIATED METHODS		
(75)	Inventor:	Francis Eugene Parsche, Palm Bay, FL (US)	
(73)	Assignee:	Harris Corporation, Melbourne, FL (US)	
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 429 days.	
(21)	Appl. No.:	11/330,642	
(22)	Filed:	Jan. 12, 2006	
(65)		Prior Publication Data	
	US 2007/0	159408 A1 Jul. 12, 2007	
(51)	Int. Cl. H01Q 21/	90 (2006.01)	
(52)			
(58)	Field of C	lassification Search	
	See applica	343/774, 866, 867, 741, 742, 807, 795 ation file for complete search history.	
(56)		References Cited	

U.S. PATENT DOCUMENTS

4,143,377	A *	3/1979	Salvat et al 343/755
5,134,420	A^*	7/1992	Rosen et al 343/756
6,154,182	A *	11/2000	McLean 343/773
6,414,647	B1	7/2002	Lee 343/793
2003/0107524	A1*	6/2003	Hart 343/860
2006/0012535	A1*	1/2006	McLcan 343/742
2006/0238432	A1*	10/2006	Mikami et al 343/795


* cited by examiner

Primary Examiner—HoangAnh T Le (74) Attorney, Agent, or Firm-Allen, Dyer, Doppelt, Milbrath & Gilchrist, P.A.

(57) ABSTRACT

The biconical loop antenna is the dual and compliment to the biconical dipole antenna, and has broadband omnidirectional horizontally polarized radiation. The antenna includes a conductive antenna body having first and second opposing ends with a medial portion therebetween. The antenna body has a slot extending from at least adjacent the first end to at least adjacent the second end, and the medial portion of the antenna body is wider than the opposing ends. First and second body portions may be conical antenna elements connected together at their respective bases. Antenna feed points are at the medial and chine portion of the antenna body adjacent the slot.

20 Claims, 8 Drawing Sheets

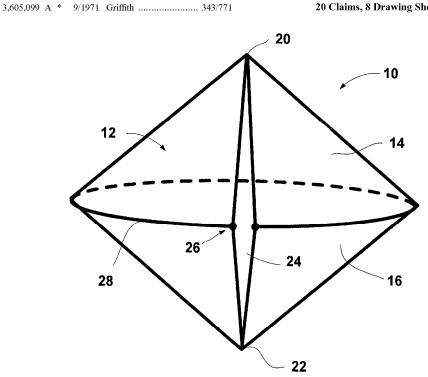



US007453415B2

(12) United States Patent Shigihara et al.

(10) Patent No.: US 7,453,415 B2 (45) Date of Patent: Nov. 18, 2008

(54)	ANTENN	A APPARATUS FOR TRANSPONDER
(75)	Inventors:	Makoto Shigihara, Fukushima-ken (JP); Yasuhiro Konno, Fukushima-ken (JP)
(73)	Assignee:	Alps Electric Co., Ltd., Tokyo (JP)
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 2 days.
(21)	Appl. No.:	11/809,051
(22)	Filed:	May 30, 2007
(65)		Prior Publication Data
	US 2008/0	0001842 A1 Jan. 3, 2008
(30)	F	oreign Application Priority Data
Jun	n. 30, 2006	(JP) 2006-181930
(51)	Int. Cl. <i>H01Q_1/4.</i>	2 (2006.01)
(52)		
(58)	Field of C	lassification Search
	See applica	ation file for complete search history.
(56)		References Cited
		S. PATENT DOCUMENTS
	6,157,302 A	* 12/2000 Kolton et al 340/572.7

7,050,017	B2*	5/2006	King et al 343/873
7,059,178	B2*	6/2006	Fischer et al 73/147
7,196,618	B2*	3/2007	Chen 340/447
2003/0066343	A1	4/2003	Fischer et al.

FOREIGN PATENT DOCUMENTS

JP	10-44726	2/1998
JP	2006-306184	11/2006


^{*} cited by examiner

Primary Examiner—Douglas W. Owens
Assistant Examiner—Chuc Tran
(74) Attorney, Agent, or Firm—Beyer Law Group LLP

(57) ABSTRACT

An antenna apparatus is mounted at a wheel rim as a transponder of a system for monitoring a tire pressure or the like, and attached at an end portion of an air valve. The apparatus includes a circuit board having an electronic circuit portion and a grounding conductor layer, a sheet-metal inverse-F type antenna element, a sheet-metal shield case conducting to the grounding conductor layer to cover the electronic circuit portion, and a resin case for accommodating these components. One side surface extending in a longitudinal direction of a space defined between the circuit board and the radiating conductor of the antenna element faces one of sidewalls of a tire, and the other side surface thereof faces a wall surface of the wheel rim with a distance interposed therebetween, the distance being about one-fourth of a wavelength of a radio wave to be used.

5 Claims, 3 Drawing Sheets

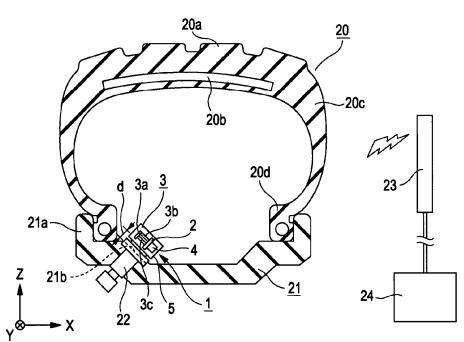



United States Design Patent Hu et al. (10) Patent No.: (45) Date of Patent: ** Nov. 18, 2008


(54)	ANTENN	A APPARATUS	D465,488 S * 11/2002 Hillenmayer
(75)	Inventors:	Shih-Hao Hu, Tu-Cheng (TW); Pei-Fen	2007/0135157 A1* 6/2007 Kuo et al
		Wu, Tu-Cheng (TW); Hung-Jen Chen, Tu-Cheng (TW); Yu-Yuan Wu,	* cited by examiner
		Tu-Cheng (TW)	Primary Examiner—Robert M. Spear
			Assistant Examiner—John Windmuller
(73)	Assignee:	Cheng Uei Precision Industry Co., Ltd., Taipei Hsien (TW)	(74) Attorney, Agent, or Firm—Rosenberg, Klein & Lee
			(57) CLAIM
(**)	Term:	14 Years	
(21)	Appl. No.:	29/300,078	The ornamental design for an antenna apparatus, as shown and described.
(22)	Filed:	Feb. 20, 2008	DESCRIPTION
(51)		Cl	FIG. 1 is a perspective view of an antenna apparatus showing our new design;
(52)		D14/230 ; D14/358	FIG. 2 is a front elevational view thereof;
(58)	Field of Classification Search D14/230–238, D14/299, 358; 343/700 R, 840, 841, 908; 455/3.02, FOR. 215, 575.2		•
			FIG. 3 is a rear elevational view thereof;
			FIG. 4 is a left side elevational view thereof;
	See applic	ation file for complete search history.	FIG. 5 is a right side elevational view thereof;

(56) References Cited

U.S. PATENT DOCUMENTS

1 Claim, 7 Drawing Sheets

FIG. 6 is a top plan view thereof; and, FIG. 7 is a bottom plan view thereof.

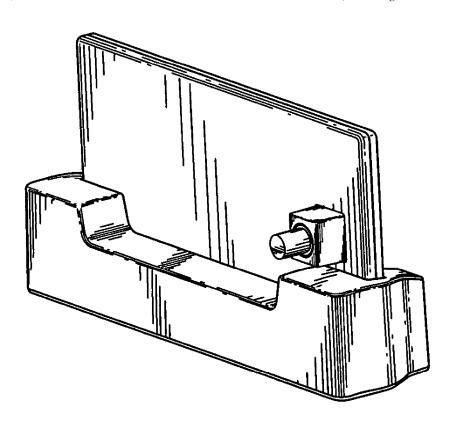



US007456748B2

(12) United States Patent Cheng et al.

(10) Patent No.: US 7,456,748 B2 (45) Date of Patent: Nov. 25, 2008

(54) RFID ANTENNA WITH PRE-APPLIED ADHESIVES

- $\begin{array}{ccc} (75) & Inventors: & \textbf{Chih-Min Cheng}, Westford, MA~(US); \\ & \textbf{Vito Buffa}, \ Hopkinton, MA~(US) \end{array}$
- (73) Assignee: National Starch and Chemical Investment Holding Corporation, New Castle, DE (US)

Castle, DE (CD)

- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 148 days.
- (21) Appl. No.: 11/255,117
- (22) Filed: Oct. 20, 2005
- (65) **Prior Publication Data**US 2007/0089286 A1 Apr. 26, 2007
- (51) **Int. Cl.** *G08B 13/14* (2006.01)

(56) References Cited

U.S. PATENT DOCUMENTS

6,951,596	B2*	10/2005	Green et al	156/264
7,064,011	B2*	6/2006	Ikenaga et al	438/118

7,102,520 B2 * 9/20	06 Liu et al	340/572.1
7,141,451 B2 * 11/20	06 Tsunoda et al	438/113
7,224,280 B2 * 5/20	07 Ferguson et al	340/572.7
7,312,534 B2 * 12/20	07 delos Santos et al	257/783

OTHER PUBLICATIONS

 $Kevin\ Chung, Low\ Cost\ and\ Reliable\ RFID\ Tags\ for\ All\ Frequencies, Avante\ Int'l\ Tech.\ Inc.,\ Nov.\ 14,2004.$

Chih-Min Cheng, et al., Conductive Adhesives for RFID Assembly: Low Temperature Snap Cure Thermosets, Emerson & Cuming Sep. 2, 2003.


* cited by examiner

Primary Examiner—Davetta W Goins (74) Attorney, Agent, or Firm—Sun Hee Lehmann

(57) ABSTRACT

A radio frequency identification ("RFID") system antenna having adhesive pre-applied to one or more of its contact pads to allow for high speed attachment of the antenna to the RFID die or die strap. Also disclosed is a method for attaching an RFID antenna having pre-applied adhesive to a die or die strap.

9 Claims, 1 Drawing Sheet

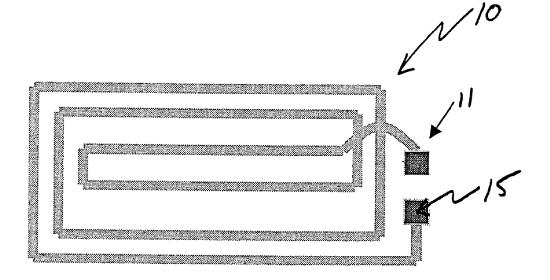



(12) United States Patent Isono et al.

(54) HIGH FREQUENCY ANTENNA DEVICE AND METHOD OF MANUFACTURING THE SAME, HF ANTENNA PRINTED CIRCUIT BOARD FOR HF ANTENNA DEVICE, AND TRANSMITTING AND RECEIVING DEVICE USING HF ANTENNA DEVICE

(75) Inventors: Tadashi Isono, Mito (JP); Kazuo

Matsuura, Hitachinaka (JP)

(73) Assignee: Hitachi, Ltd., Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 317 days.

(21) Appl. No.: 11/206,819

Filed: Aug. 19, 2005 (22)

(65)**Prior Publication Data**

> US 2006/0097912 A1 May 11, 2006

(30)Foreign Application Priority Data

Nov. 5, 2004 (JP) 2004-321690

(51) Int. Cl. H01Q 1/38

(2006.01)(52)

(58) Field of Classification Search 343/700 MS, 343/713, 711, 872, 712; 342/175, 70 See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

6,249,242 B1* 6/2001 Sekine et al. 342/70

(10) Patent No.: US 7,456,790 B2

(45) Date of Patent: Nov. 25, 2008

2002/0025794 A1*	2/2002	Tamaki et al 455/313
2003/0016162 A1*	1/2003	Sasada et al 342/70
2004/0075604 A1	4/2004	Nakazawa et al.
2005/0030231 A1*	2/2005	Nagaishi et al 343/700 MS

FOREIGN PATENT DOCUMENTS

EP	0 978 729 A2	2/2000
EP	1 280 225 A2	1/2003
EP	1 307 078 A2	5/2003
EP	1 462 822 A1	9/2004
FR	2 710 195 A1	3/1995
FR	2 849 927 A1	7/2004
JP	11-163185	6/1999
JP	A-2003-133801	5/2003
JP	2003-280901	10/2003


* cited by examiner

Primary Examiner—HoangAnh T Le (74) Attorney, Agent, or Firm-Crowell & Moring LLP

ABSTRACT

A high frequency antenna device is provided which includes: a high frequency antenna wiring board having a film antenna formed on one surface of a dielectric substrate made up of multiple, laminated ceramic layers and a high frequency circuit formed on the other surface of the dielectric substrate to generate a high frequency signal; a plate-like metal base having a square opening cut therethrough; and a cover to package a surface of the high frequency circuit on the high frequency antenna wiring board after the high frequency antenna wiring board has been fitted in the opening of the metal base; wherein a periphery of the high frequency antenna wiring board is airtightly sealed and joined to the metal base with glass or brazing metal.

7 Claims, 5 Drawing Sheets

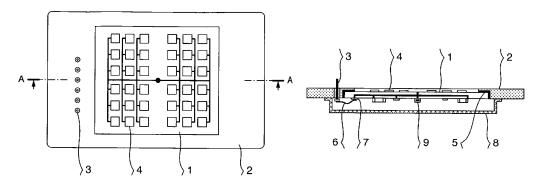



US007456796B2

(12) United States Patent

Nagayama et al.

(10) Patent No.: US 7,456,796 B2 (45) Date of Patent: Nov. 25, 2008

(54)	GLASS A	NTENNA FOR VEHICLE	
(75)	Inventors: Yoji Nagayama, Matsusaka (JP); Yasuo Takaki, Matsusaka (JP)		
(73)	Assignee:	Central Glass Company, Limited, Ube-shi (JP)	
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.	
(21)	Appl. No.:	11/667,734	
(22)	PCT Filed:	: Mar. 17, 2006	
(86)	PCT No.:	PCT/JP2006/005371	
	§ 371 (c)(1 (2), (4) Da), te: May 15, 2007	
(87)	PCT Pub. 1	No.: WO2006/103956	
	PCT Pub. l	Date: Oct. 5, 2006	
(65)		Prior Publication Data	
	US 2008/0	106480 A1 May 8, 2008	
(30)	Fe	oreign Application Priority Data	
	ar. 29, 2005 b. 9, 2006		
(51)		2 (2006.01)	
(52)			
		lassification Search	
` ′	See applica	343/704, 711, 712 ation file for complete search history.	
(56)		References Cited	
	U.	S. PATENT DOCUMENTS	
	4,954,797 A	* 9/1990 Shinnai et al 343/704	

5,083,134 A *	1/1992	Saitou et al 343/713
5,101,212 A *	3/1992	Shinnai et al 343/713
5,185,612 A *	2/1993	Tsukada et al 343/713
5,933,119 A *	8/1999	Fujii et al 343/713

FOREIGN PATENT DOCUMENTS

JP	2-13311 U	1/1990
JP	06-224613 A	8/1994
JP	7-22826 A	1/1995
JP	7-297618 A	11/1995
JP	10-242730 A	9/1998
JP	2001-313513 A	11/2001

^{*} cited by examiner

OTHER PUBLICATIONS


International Search Report dated Apr. 18, 2006 with English translation (Five (5) pages).

Primary Examiner—Tho G Phan (74) Attorney, Agent, or Firm—Crowell & Moring LLP

(57) ABSTRACT

There is provided an antenna formed on at least upper blank space of defogging heating strips of a rear window glass of a vehicle. The antenna is a vehicular glass antenna including an AM broadcast wave receiving antenna which has at least two horizontal strips formed to have a space therebetween, and a vertical strip connecting the two horizontal strips in the vicinity of a midpoint of each horizontal strip, and in which an extension line extends in a horizontal direction from the vicinity of a midpoint of the vertical strip to the vicinity of a vertical edge of a flange and connects to a first feed point; and an FM broadcast wave receiving antenna having at least one horizontal strip extending from a second feed point formed in the vicinity of the first feed point, and characterized in that at least one horizontal strip of the FM broadcast wave receiving antenna is adjacent to one end of either horizontal strip of the two horizontal strips of the AM broadcast wave receiving antenna to achieve a capacitive coupling.

7 Claims, 7 Drawing Sheets





(12) United States Patent Wong et al.

(10) Patent No.: US 7,456,798 B2

(45) Date of Patent: Nov. 25, 2008

(54) STACKED LOOP ANTENNA

(75) Inventors: Hang Wong, Kowloon (HK); Kwai Man

Luk, West Kowloon (HK); Chi Hou Chan, Kowloon (HK); Quan Xue,

Kowloon (HK)

(73) Assignee: Freescale Semiconductor, Inc, Austin,

TX (US)

Subject to any disclaimer, the term of this (*) Notice:

patent is extended or adjusted under 35 U.S.C. 154(b) by 226 days.

(21) Appl. No.: 11/476,387

(22)Filed: Jun. 28, 2006

Prior Publication Data

US 2008/0001840 A1 Jan. 3, 2008

(51) Int. Cl. H01Q 7/00 (2006.01)H01Q 21/28 (2006.01)

(52) **U.S. Cl.** 343/742; 343/867

(58) Field of Classification Search 343/806,

343/853, 895, 742, 867

See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

5/2003 Dettloff 343/742 6.570.541 B2* 5/2005 Kyongyop 2005/0113035 A1

FOREIGN PATENT DOCUMENTS

1524723 A1 4/2005 EP 1555717 A1 7/2005


* cited by examiner


Primary Examiner-Michael C Wimer (74) Attorney, Agent, or Firm—Charles Bergere

ABSTRACT

A small transceiver device and antenna system has an insulating layer with first and second surfaces. A transmit loop element having transmit loop segments is formed on the first surface. The transmit loop segments are disposed in a transmit zigzag configuration. A receive loop element having receive loop segments is formed on the second surface. The receive loop segments are disposed in a receive zigzag configuration. Each receive loop segment in the receive zigzag configuration is skewed with respect to a closest transmit loop segment disposed in the transmit zigzag configuration. The transmit loop segments can be grouped in two or more transmit zigzag configurations, and the receive loop segments can be grouped in two or more receive zigzag configurations.

17 Claims, 4 Drawing Sheets

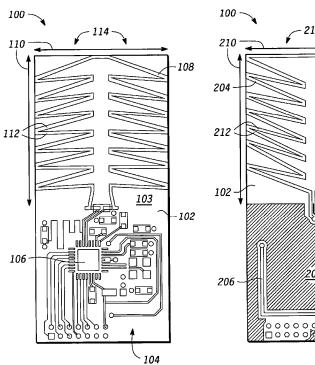





(12) United States Patent Cohen

(10) Patent No.: US 7,456,799 B1 (45) Date of Patent: Nov. 25, 2008

Inventor: Nathan Cohen, Belmont, MA (US)

Assignee: Fractal Antenna Systems, Inc.,

(54) WIDEBAND VEHICULAR ANTENNAS

Waltham, MA (US)

Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 64 days.

(21) Appl. No.: 11/805,472

May 22, 2007 (22) Filed:

Related U.S. Application Data

- (63) Continuation-in-part of application No. 11/716,909, filed on Mar. 12, 2007, which is a continuation of application No. 10/812,276, filed on Mar. 29, 2004, now Pat. No. 7,190,318.
- Provisional application No. 60/458,333, filed on Mar. 29, 2003, provisional application No. 60/802,498, filed on May 22, 2006.
- H01Q 13/00 (2006.01)
- (52)
- Field of Classification Search 343/773, 343/772, 846

See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

3,115,630 A	12/1963	Lanford	
3,656,166 A	4/1972	Klopach et al.	
3,829,863 A	8/1974	Lipsky	
3,987,456 A	10/1976	Gelin	
4,143,377 A	3/1979	Salvat et al.	
D284 965 S	* 8/1986	Nakamura	D14/233

4,851,859	A	7/1989	Rappaport
5,028,928	A	7/1991	Vidmar et al.
5,345,238	A	9/1994	Eldridge et al.
5,523,767	\mathbf{A}	6/1996	McCorkle
5,600,340	A *	2/1997	Ho et al 343/846
6,140,975	A	10/2000	Cohen
6,198,454	B1 *	3/2001	Sharp et al 343/773
6,593,892	B2 *	7/2003	Honda et al 343/773
7,286,095	B2	10/2007	Parsche et al.
7,339,542	B2 *	3/2008	Lalezari 343/773
7,352,334	B2	4/2008	Kuroda et al.

OTHER PUBLICATIONS

Syntony and Spark, H. Aitkin, Princeton (1985), p. 133.


* cited by examiner

Primary Examiner—Tho G Phan (74) Attorney, Agent, or Firm—McDermott Will & Emery LLP

ABSTRACT (57)

Antennas suitable for wideband transmission and reception are disclosed that are useful in environments susceptible to vibration and impact motion such as for example vehicles of various types, e.g., automobiles, trains, etc. The apparatus can include a bicone antenna including two cone-shaped elements. The physical shape of at least one of the two coneshaped elements may be at least partially defined by one or more pleats (e.g., a series) that extend about a portion of the cone. An antenna can further includes a mast for supporting the bicone as well as a second antenna section including a fractalized dipole. The fractalized dipole can be configured as a conformal circuit board conforming to the shape of the mast and can include self-similar portions or extensions. The antenna may also include a counterpoise to balance the electrically conductive conformal portion. The counterpoise may be defined substantially by a repetitive tooth-like pattern.

14 Claims, 7 Drawing Sheets





(12) United States Patent

Steghafner

(10) Patent No.: US 7,456,800 B2

(45) Date of Patent: Nov. 25, 2008

(54) RECEIVING ANTENNA SYSTEM COMPRISING SEVERAL ACTIVE ANTENNAE

- (75) Inventor: **Herbert Steghafner**, Tiefenbach (DE)
- (73) Assignee: Rohde & Schwarz GmbH & Co. KG,

Munich (DE)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21)	Appl. No.:	10/577,411
------	------------	------------

- Jul. 12, 2005 (22) PCT Filed:
- (86) PCT No.: PCT/EP2005/007554

§ 371 (c)(1),

(2), (4) Date: Jun. 20, 2007

(87) PCT Pub. No.: WO2006/018079

PCT Pub. Date: Feb. 23, 2006

(65)**Prior Publication Data**

US 2007/0268196 A1 Nov. 22, 2007

(30) Foreign Application Priority Data

Aug. 13, 2004 (DE) 10 2004 039 439

(51) **Int. Cl.**

H01Q 21/00 (2006.01)

U.S. Cl. **343/844**; 343/850; 343/900; 343/901; 343/711

(58) Field of Classification Search See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

FOREIGN PATENT DOCUMENTS

DE	34 37 727 C2	4/1986
DE	38 22 081 C2	1/1990
EP	1 093 187 A2	4/2001
EP	1 445 832 A2	8/2004
WO	WO 01/71846 A1	9/2001

OTHER PUBLICATIONS

International Search Report in PCT/EP2005/007554 dated Oct. 13,


* cited by examiner

Primary Examiner—Trinh V Dinh (74) Attorney, Agent, or Firm-Marshall, Gerstein & Borun

(57) ABSTRACT

A receiver antenna system of broad bandwidth including a plurality of active, vertical individual antennae, which have an electrically-active antenna height adapted to the respective received frequency range, is minimized with regard to the mutual electromagnetic coupling between the individual antennae, which are positioned at a small spacing distance.

11 Claims, 4 Drawing Sheets





US007456801B2

(12) United States Patent

Kubokawa et al.

(54) ANTENNA COVER AND ANTENNA APPARATUS

(75) Inventors: **Hiroaki Kubokawa**, Sagamihara (JP); **Kazutaka Nakatsuchi**, Hino (JP)

(73) Assignee: Olympus Corporation, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 6 days.

(21) Appl. No.: 11/629,761

(22) PCT Filed: Jun. 15, 2005

(86) PCT No.: **PCT/JP2005/010972**

§ 371 (c)(1),

(2), (4) Date: Dec. 15, 2006

(87) PCT Pub. No.: WO2005/122864

PCT Pub. Date: Dec. 29, 2005

(65) Prior Publication Data

US 2007/0188401 A1 Aug. 16, 2007

(30) Foreign Application Priority Data

Jun. 16, 2004	(JP)	2004-178562
Jun. 23, 2004	(JP)	2004-185554
Jun. 23, 2004	(JP)	2004-185555

(51) Int. Cl.

H01Q 1/42 (2006.01)

(10) Patent No.: US 7,456,801 B2

(45) **Date of Patent:**

Nov. 25, 2008

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

6,012,844	A	1/2000	Huseman et	al.	
2006/0196792	A1*	9/2006	Barth et al.		206/320

FOREIGN PATENT DOCUMENTS

JP	09-098006	4/1997
JP	2003-019111	1/2003
WO	WO 97/18137	5/1997
WO	WO 98/50280	11/1998
WO	WO 2004/039233 A2	5/2004


^{*} cited by examiner

Primary Examiner—Hoang V Nguyen (74) Attorney, Agent, or Firm—Scully, Scott, Murphy & Presser, P.C.

(57) ABSTRACT

After a receiving antenna (A1) is inserted from a slot (B16) into a housing portion (B14) formed between cover members (B11, B12), the slot (B16) is pasted so as to secure the receiving antenna (A1). The receiving antenna (A1) is thus housed. Further, a tab (B17) which extends from one side of a pasted edge portion, holes (B20, B21) that penetrate opposing surfaces of the cover members (B11, B12), and perforated lines (B22, B23) running from the slot (B16) to the holes (B20, B21), respectively, are provided. Therefore, the receiving antenna (A1) can be easily attached to the antenna cover (B1) and to an outer surface of a subject (1), and the receiving antenna (A1) can be easily removed from the antenna cover (B1) and from the outer surface of the subject (1).

8 Claims, 10 Drawing Sheets





US00D581400S

(12) United States Design Patent

Montgomery

(10) **Patent No.:**

US D581,400 S

(45) Date of Patent:

** Nov. 25, 2008

(54) ANTENNA STRUCTURE

(75) Inventor: **Mark T. Montgomery**, Melbourne Beach, FL (US)

(73) Assignee: SkyCross, Inc., Viera, FL (US)

(**) Term: 14 Years

(21) Appl. No.: 29/283,563

(22) Filed: Aug. 17, 2007

(51)	LOC (8) Cl 14-03
(52)	U.S. Cl. D14/230
(58)	Field of Classification Search D14/138,
	D14/230-238, 299, 358; D12/42, 43; 343/700 MS,
	343/700 R-705, 711-713, 741, 748, 767,
	343/795, 819, 840, 846, 866, 871–908; 455/90.2,
	455/90.3, 91, 128, 269, 344, 347, 562.1

(56) References Cited

U.S. PATENT DOCUMENTS

See application file for complete search history.

4,335,385	Α	*	6/1982	Hall 343/700 MS
D275,100	S	*	8/1984	Mann et al D14/236
5,867,126	A	*	2/1999	Kawahata et al 343/702
6,642,893	В1	*	11/2003	Hebron et al 343/702
D555,154	\mathbf{S}	*	11/2007	Lin et al D14/230
2002/0149521	Al	nje	10/2002	Hendler et al 343/700 MS
2003/0006940	Al	aje	1/2003	Washiro et al 343/895
2008/0018537	Al	*	1/2008	Tseng et al 343/700 MS

(74) Attorney, Agent, or Firm—Rajesh Vallabh; Boston IP Law Group

(57) CLAIM

The ornamental design for an antenna structure, as shown and described.

DESCRIPTION

FIG. 2 is an inverted rear elevational view thereof;

FIG. 3 is a left side elevational view thereof;

FIG. 4 is a top plan view thereof;

FIG. 5 is a right side elevational view thereof;

FIG. 6 is a front elevational view thereof;

FIG. 7 is a bottom plan view thereof;

FIG. ${\bf 8}$ is a perspective view of a second embodiment of an antenna structure;

FIG. 9 is an inverted rear elevational view thereof;

FIG. 10 is a left side elevational view thereof;

FIG. 11 is a top plan view thereof;


FIG. 12 is a right side elevational view thereof;


FIG. 13 is a front elevational view thereof; and,

FIG. 14 is a bottom plan view thereof.

The portions shown in broken lines are for illustrative purposes only and do not form any part of the claimed design.







Primary Examiner—Robert M. Spear
Assistant Examiner—John Windmuller
(74) Attorney Agent or Firm Reject Vellebby

^{*} cited by examiner



(12) United States Design Patent Miyoshi

(45) **Date of Patent:**

US D581,401 S (10) Patent No.: ** Nov. 25, 2008

(54)	ANTENN	A			
(75)	Inventor:	Akira Miyoshi, Tokyo (JP)			
(73)	Assignee:	Mitsumi Electric Co., Ltd, Tokyo (JP)			
(**)	Term:	14 Years			
(21)	Appl. No.:	29/299,109			
(22)	Filed:	Dec. 19, 2007			
(30)	F	oreign Application Priority Data			
Au	g. 7, 2007	(JP) 2007-021482			
(51)	LOC (8) (Cl			
` /	` '				
		lassification Search D14/138,			
(50)		-238, 299, 358; D12/42, 43; 343/700 MS,			
	D1 1/230	343/700 R-705, 711-713, 741, 748, 767,			
343/795, 819, 840, 846, 866, 871–908; 455/90.2,					
		455/90.3, 91, 128, 269, 344, 347, 562.1			
	See applic	ation file for complete search history.			
(56)		References Cited			

U.S. PATENT DOCUMENTS

6,054,961 A *

6,774,850 B2 * 7,339,531 B2 * 2006/0001579 A1*

 4/2000
 Gong et al.
 343/713

 8/2004
 Chen
 343/700 MS

 3/2008
 Desclos et al.
 343/702

1/2006 Noro et al. 343/702

2008/0048919	A1*	2/2008	Jung et al	343/702
2008/0084355	A1*	4/2008	Kuraoka et al	343/702

* cited by examiner

Primary Examiner—Robert M. Spear Assistant Examiner-John Windmuller

(74) Attorney, Agent, or Firm—Sughrue Mion, PLLC

CLAIM

The ornamental design for an antenna, as shown.

DESCRIPTION

FIG. 1 is a perspective view of the top, front and right side of an antenna showing my new design;

FIG. 2 is a perspective view of the bottom, rear and left side thereof:

FIG. 3 is a front elevational view thereof;

FIG. 4 is a rear elevational view thereof;

FIG. 5 is a right side elevational view thereof;

FIG. 6 is a left side elevational view thereof;

FIG. 7 is a top plan view thereof; and,

FIG. 8 is a bottom plan view thereof.

The antenna is shown broken away in the middle to indicate it has no specific length.

1 Claim, 5 Drawing Sheets





(12) United States Design Patent

(10) **Patent No.:** (45) **Date of Patent:** **US D581,402 S**

Wu et al.

** Nov. 25, 2008

(54)	DOUBLE	-BAND ANTENNA
(75)	Inventors:	Hsin Tsung Wu, Tu-Cheng (TW); Kai Shih, Tu-Cheng (TW); Yu Yuan Wu, Tu-Cheng (TW)
(73)	Assignee:	Cheng Uei Precision Industry Co., Ltd., Taipei Hsien (TW)
(**)	Term:	14 Years
(21)	Appl. No.:	29/300,801
(22)	Filed:	May 15, 2008
(52)	U.S. Cl Field of C D14/230- 343/79	Cl. 14-03 D14/230 Dassification Search D14/138, -238, 299, 358; D12/42, 43; 343/700 M5, 343/700 R-705, 711-713, 741, 748, 767, 5, 819, 840, 846, 866, 871-908; 455/90.2, 455/90.3, 91, 128, 269, 344, 347, 562.1 ation file for complete search history.
(56)		References Cited

References Cited

U.S. PATENT DOCUMENTS

6,476,769 B	1 *	11/2002	Lehtola	343/702
D531,622 S	*	11/2006	Chen et al	D14/230
D534,527 S	*	1/2007	Hung et al	D14/230

D534,903	\mathbf{S}	*	1/2007	Hung et al D14/230
D535,290	S	*	1/2007	Su et al D14/230
D554,111	S	*	10/2007	Su et al D14/230
D555,155	S	ıķ.	11/2007	Su et al D14/230
2008/0030407	A1	*	2/2008	Hung et al 343/700 MS

^{*} cited by examiner

Primary Examiner—Robert M. Spear Assistant Examiner—John Windmuller

(74) Attorney, Agent, or Firm-Rosenberg, Klein & Lee

CLAIM

The ornamental design for a double-band antenna, as shown and described.

DESCRIPTION

FIG. 1 is a perspective view of a double-band antenna showing our new design;

FIG. 2 is a front elevational view thereof;

FIG. 3 is a rear elevational view thereof;

FIG. 4 is a left side elevational view thereof;

FIG. 5 is a right side elevational view thereof;

FIG. 6 is a top plan view thereof; and,

FIG. 7 is a bottom plan view thereof.

1 Claim, 7 Drawing Sheets

