

US009692107B2

# (12) United States Patent Liu et al.

# (54) ANTENNA STRUCTURE AND WIRELESS COMMUNICATION DEVICE USING THE SAME

- (71) Applicants: SHENZHEN FUTAIHONG
  PRECISION INDUSTRY CO., LTD.,
  Shenzhen (CN); FIH (Hong Kong)
  Limited, Kowloon (HK)
- (72) Inventors: Xiao-Kai Liu, Shenzhen (CN);
  Chang-Hai Gu, Shenzhen (CN);
  Yao-Yao Qin, Shenzhen (CN);
  Jing-Hai Zheng, Shenzhen (CN)
- (73) Assignees: SHENZHEN FUTAIHONG
  PRECISION INDUSTRY CO., LTD.,
  Shenzhen (CN); FIH (HONG KONG)
  LIMITED, Kowloon (HK)
- (\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 325 days.
- (21) Appl. No.: **14/487,394**
- (22) Filed: Sep. 16, 2014
- (65) **Prior Publication Data**

US 2015/0155615 A1 Jun. 4, 2015

(30) Foreign Application Priority Data

Nov. 30, 2013 (CN) ...... 2013 1 0622457

(51) Int. Cl.

#010 1/24 (2006.01)

#010 21/00 (2006.01)

#010 5/378 (2015.01)

(52) U.S. Cl. CPC ...... *H01Q 1/243* (2013.01); *H01Q 5/378* (2015.01); *H01Q 21/00* (2013.01); *H01Q* 

## (10) Patent No.: US 9,692,107 B2

(45) **Date of Patent:** Jun. 27, 2017

#### 

#### (56) References Cited

### U.S. PATENT DOCUMENTS

2013/0307736 A	1* 11/2013	Larsen	H01Q 1/243
2013/0335275 A	.1* 12/2013	Sanford	343/702 H01O 1/243
		Hong	343/702
		Hong	343/702
		C	343/702
2015/0009092 A	.1* 1/2015	Chen	H01Q 1/243 343/893

#### FOREIGN PATENT DOCUMENTS

CN	102856645 A	1/2013
CN	103219585 A	7/2013
TW	200835046 A	8/2008
TW	201218504 A	5/2012
TW	201223407 A	6/2012


<sup>\*</sup> cited by examiner

Primary Examiner — Hoanganh Le (74) Attorney, Agent, or Firm — Steven Reiss

## (57) ABSTRACT

An antenna structure includes a first carrier, a second carrier and an antenna main body. The antenna main body includes a main antenna and a sub antenna. The main antenna is printed on the first carrier, the sub antenna is printed on the second carrier. The present invention also provides a wireless communication device using the antenna structure.

#### 12 Claims, 5 Drawing Sheets



21/30 (2013.01)



# (12) United States Patent Chun et al.

#### (54) ANTENNA APPARATUS FOR PORTABLE TERMINAL

(71) Applicant: Samsung Electronics Co., Ltd., Gyeonggi-do (KR)

(72) Inventors: Jae-Bong Chun, Gyeonggi-do (KR); Sung-Cheol Kim, Gyeonggi-do (KR);

Jae-Ho Lim, Gyeonggi-do (KR); Kyung-Jong Lee, Gyeonggi-do (KR); Austin Kim, Gyeonggi-do (KR); Jae-Ho Lee, Gyeonggi-do (KR)

(73) Assignee: Samsung Electronics Co., Ltd.,

Yeongtong-gu, Suwon-si, Gyeonggi-do

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 38 days.

This patent is subject to a terminal dis-

(21) Appl. No.: 14/725,433

(22) Filed: May 29, 2015

(65)**Prior Publication Data** 

> US 2015/0263414 A1 Sep. 17, 2015

#### Related U.S. Application Data

Continuation of application No. 13/275,701, filed on (63)Oct. 18, 2011, now Pat. No. 9,065,168.

#### Foreign Application Priority Data (30)

Oct. 20, 2010 (KR) ...... 10-2010-0102263

(51) Int. Cl. H01Q 13/10 H01Q 1/24

(2006.01) (2006.01)

(Continued)

US 9,692,108 B2 (10) Patent No.:

(45) Date of Patent:

\*Jun. 27, 2017

(52) U.S. Cl.

... **H01Q 1/243** (2013.01); **H01Q 1/38** CPC .... (2013.01); **H01Q** 1/48 (2013.01); **H01Q** 5/378 (2015.01);

(Continued)

(58) Field of Classification Search

See application file for complete search history.

(56)References Cited

#### U.S. PATENT DOCUMENTS

6,867,736 B2*	3/2005	Faraone H01Q 1/38
7,551,142 B1*	6/2009	Zhang 343/700 MS H01Q 1/243 343/700 MS

(Continued)

#### FOREIGN PATENT DOCUMENTS

1 286 413 A1 2/2003 EP EP 2 109 185 A1 10/2009 (Continued)

#### OTHER PUBLICATIONS


Korean Notice of Patent Grant dated Feb. 26, 2016.

Primary Examiner - Hoang Nguyen Assistant Examiner — Hai Tran (74) Attorney, Agent, or Firm — Cha & Reiter, LLC.

#### (57)ABSTRACT

An antenna apparatus for a portable terminal which is light, thin, compact, and small. The antenna apparatus preferably includes a main board equipped with a power feeding part for feeding power and a ground surface for grounding the main board and at least one sub-board, each sub-board which has a ground surface and electrically communicates with the main board, wherein the ground surface of each sub-board receives power from the power feeding part of the main board and resonates.

## 24 Claims, 13 Drawing Sheets





US009692122B2

# (12) United States Patent Desclos et al.

#### (54) MULTI LEVELED ACTIVE ANTENNA CONFIGURATION FOR MULTIBAND MIMO LTE SYSTEM

(71) Applicant: Ethertronics, Inc., San Diego, CA (US)

(72) Inventors: Laurent Desclos, San Diego, CA (US);
Jeffrey Shamblin, San Marcos, CA
(US); Sung-Su Nam, Seoul (KR); Sung
Hawan, Gyeonggi-do (KR); Ji-Chul
Lee, Gyeonggi-do (KR); Chun-Su
Yoon, Gyeonggi-do (KR)

(73) Assignee: **ETHERTRONICS, INC.**, San Diego, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 684 days.

(21) Appl. No.: 14/094,778

(22) Filed: Dec. 2, 2013

(65) Prior Publication Data

US 2015/0155624 A1 Jun. 4, 2015

#### Related U.S. Application Data

(63) Continuation of application No. 13/612,809, filed on Sep. 12, 2012, now abandoned, which is a (Continued)

(51) Int. Cl.

H01Q 9/06 (2006.01)

H01Q 3/22 (2006.01)

(Continued)

(10) Patent No.: US 9,692,122 B2

(45) **Date of Patent:** 

Jun. 27, 2017

(52) U.S. Cl.

(58) Field of Classification Search

CPC ......... H01Q 3/22; H01Q 1/246; H01Q 1/521; H01Q 21/28; H01Q 5/28; H01Q 9/42

(Continued)

(56) References Cited

U.S. PATENT DOCUMENTS


2,318,516 A 5/1943 Newbold 2,433,804 A 12/1947 Wolff (Continued)

Primary Examiner — Tho G Phan (74) Attorney, Agent, or Firm — Coastal Patent Law Group, P.C.

(57) ABSTRACT

An active antenna system and algorithm is described that provides for dynamic tuning and optimization of antenna system parameters for a MIMO system where correlation and isolation between antennas in the system are dynamically altered to provide for greater throughput. As one or multiple antennas are loaded or de-tuned due to environmental changes, corrections to correlation and/or isolation are made by selecting the optimal antenna radiation pattern and by adjusting electrical length and/or reactive loading of transmission lines connecting the antennas. Multiple Isolated Magnetic Dipole (IMD) antennas are co-located and connected with a feed network that can include switches that adjust phase length for transmission lines connecting the antennas. Filtering is integrated into the feed network to improve rejection of unwanted frequencies. Filtering can also be implemented on the antenna structure.

## 9 Claims, 11 Drawing Sheets

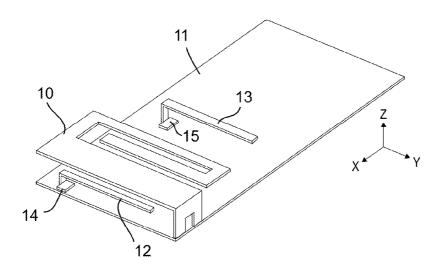



# (12) United States Patent Tani et al.

# US 9,698,480 B2

### (45) Date of Patent:

(10) Patent No.:

Jul. 4, 2017

#### (54) SMALL ANTENNA APPARATUS OPERABLE IN MULTIPLE FREQUENCY BANDS

(71) Applicant: Panasonic Corporation, Kadoma-shi,

Osaka (JP)

(72) Inventors: Kazuya Tani, Osaka (JP); Toshiharu

Ishimura, Osaka (JP); Kenji Nishikawa, Hyogo (JP); Kazuya Nakano, Osaka (JP)

Assignee: PANASONIC INTELLECTUAL PROPERTY MANAGEMENT CO.,

LTD., Osaka (JP)

Subject to any disclaimer, the term of this (\*) Notice:

patent is extended or adjusted under 35

U.S.C. 154(b) by 392 days.

(21) Appl. No.: 13/787,158

(22)Filed: Mar. 6, 2013

**Prior Publication Data** (65)

> US 2014/0071000 A1 Mar. 13, 2014

#### (30)Foreign Application Priority Data

Sep. 13, 2012 (JP) ...... 2012-201477

(51) Int. Cl. H01Q 5/371 (2015.01)H01Q 5/00 (2015.01)(Continued)

(52) U.S. Cl. CPC ..... .... H01Q 5/001 (2013.01); H01Q 1/243 (2013.01); *H01Q 5/371* (2015.01); *H01Q 9/42* 

(58) Field of Classification Search

CPC .. H01Q 9/04; H01Q 5/42; H01Q 1/38; H01Q 1/48; H01Q 5/371; H01Q 5/001; H01Q 9/42; H01Q 1/243

See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

4,860,019 A \* 8,638,261 B2 \* (Continued)

### FOREIGN PATENT DOCUMENTS

2008-177668 7/2008 JP 2010-87752 4/2010 (Continued)

#### OTHER PUBLICATIONS


Office Action issued in corresponding Japanese Patent Application No. 2013-044484 on May 10, 2016.

Primary Examiner — Graham Smith Assistant Examiner - Noel' Maldonado (74) Attorney, Agent, or Firm — Hamre, Schumann, Mueller & Larson, P.C.

#### (57) ABSTRACT

A first base radiation element has a first end connected to the feed point, and a second end. A second base radiation element has a first end connected to the ground point, and a second end. The first and second base radiation elements respectively include portions extending in a first direction and close to each other. The first base radiation element is branched into first and second branch radiation elements at a first branch point located at the second end of the first base radiation element, the first branch radiation element includes a portion extending in the first direction, and the second branch radiation element includes a portion extending in a second direction opposite to the first direction. The end of the second base radiation element is connected to a connecting point different from the first branch point of the first branch radiation element.

## 19 Claims, 30 Drawing Sheets

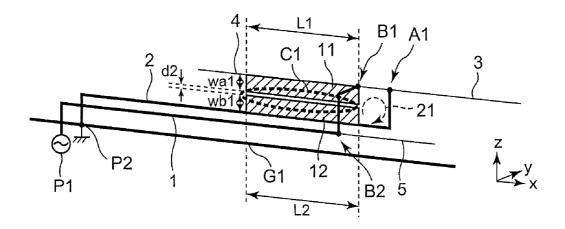



US009698481B2

# (12) United States Patent Mikata

# (10) Patent No.: US 9,698,481 B2

#### (45) **Date of Patent:**

Jul. 4, 2017

#### (54) CHIP ANTENNA AND COMMUNICATION CIRCUIT SUBSTRATE FOR TRANSMISSION AND RECEPTION

(71) Applicant: TAIYO YUDEN CO., LTD., Tokyo

(JP)

(72) Inventor: Jin Mikata, Tokyo (JP)

(73) Assignee: TAIYO YUDEN CO., LTD., Tokyo

(JP)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 244 days.

(21) Appl. No.: 14/486,727

(22) Filed: Sep. 15, 2014

(65) Prior Publication Data

US 2015/0116179 A1 Apr. 30, 2015

(30) Foreign Application Priority Data

Oct. 30, 2013 (JP) ...... 2013-224955

(51)	Int. Cl.	
	H01Q 5/00	(2015.01)
	H01Q 5/371	(2015.01)
	H01Q 1/22	(2006.01)
	H01Q 1/24	(2006.01)
	$H01\widetilde{Q} \ 1/38$	(2006.01)
	H010 0//2	(2006.01)

(52) U.S. Cl.

(58) Field of Classification Search

See application file for complete search history.

## (56) References Cited

#### U.S. PATENT DOCUMENTS

5,760,746 A *	6/1998	Kawahata	
5.861.854 A *	1/1999	Kawahata	343/700 MS H01O 1/243
			343/700 MS
5,867,126 A *	2/1999	Kawahata	H01Q 1/243 343/700 MS
5,959,582 A *	9/1999	Kawahata	
			343/700 MS

#### (Continued)

#### FOREIGN PATENT DOCUMENTS

JP	3114582 B2	12/2000
JP	2001-7639 A	1/2001
	(Cont	inued)

#### OTHER PUBLICATIONS


Japanese Office Action dated Dec. 18, 2014, in a counterpart Japanese patent application No. 2013-244955.

Primary Examiner — Dameon E Levi Assistant Examiner — Ab Salam Alkassim, Jr. (74) Attorney, Agent, or Firm — Chen Yoshimura LLP

## (57) ABSTRACT

A first radiating electrode of a split ring resonator type is formed on a side face of a substrate of a rectangular cuboid antenna device so as to be at a right angle to a ground electrode surface, a second radiating electrode is provided on a top surface of the substrate, the first radiating electrode and the second radiating electrode are capacitively coupled, and the resonance frequency of the first radiating electrode and second radiating electrode are configured to be approximately in symmetry with the central frequency of the used frequency.

## 6 Claims, 18 Drawing Sheets





# (12) United States Patent Sharawi et al.

#### US 9,698,495 B2 (10) Patent No.: Jul. 4, 2017

#### (45) Date of Patent:

#### (54) RECONFIGURABLE MIMO AND SENSING ANTENNA SYSTEM

(71) Applicant: KING FAHD UNIVERSITY OF PETROLEUM AND MINERALS,

Dhahran (SA)

Inventors: Mohammad Said Sharawi, Dhahran (72)(SA); Rifaqat Hussain, Dhahran (SA)

KING FAHD UNIVERSITY OF Assignee: PETROLEUM AND MINERALS, Dhahran (SA)

Subject to any disclaimer, the term of this (\*) Notice: patent is extended or adjusted under 35

U.S.C. 154(b) by 95 days.

Appl. No.: 14/873,171 (21)

(22)Filed: Oct. 1, 2015

**Prior Publication Data** (65)

> US 2017/0098897 A1 Apr. 6, 2017

(51) Int. Cl. H01Q 9/00 (2006.01)H01Q 21/28 (2006.01)H01Q 5/314 (2015.01)H01Q 5/20 (2015.01)

U.S. Cl. CPC ...... H01Q 21/28 (2013.01); H01Q 5/20 (2015.01); **H01Q** 5/314 (2015.01)

Field of Classification Search CPC ....... H01Q 21/12; H01Q 9/42; H01Q 11/02; H01Q 3/26; H01Q 1/243

See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

7,348,928 B2 2006/0262015 A1\* 3/2008 Ma et al. 11/2006 Thornell-Pers ...... H01O 1/243 2013/0273858 A1 10/2013 Sover et al. 2013/0307742 A1 11/2013 Hu et al.

#### FOREIGN PATENT DOCUMENTS

WO WO 2014/110508 A1 7/2014


\* cited by examiner

Primary Examiner — Dameon E Levi Assistant Examiner - Collin Dawkins (74) Attorney, Agent, or Firm - Richard C. Litman

#### (57)ABSTRACT

The reconfigurable MIMO and sensing antenna system combines a 2-element reconfigurable MIMO antenna system with a UWB element. The complete setup is suitable for CR platforms that require sensing UWB band availability. The design is planar in structure and includes a pair of PIFAs disposed on a dielectric substrate top surface. The UWB sensing element is disposed on the dielectric substrate bottom surface. An F-head portion of each PIFA has two arms extending to a longer peripheral edge of the substrate. An F-tail portion of each PIFA extends from the substrate's shorter peripheral edge. The two PIFAs are mirror images of each other. For each PIFA, three diode circuits include a PIN diode in combination with a varactor diode connected to and extending away from the F-tail portion of the PIFA, thereby creating separate radiating branches of the PIFA.

## 9 Claims, 14 Drawing Sheets





US009698854B2

# (12) United States Patent Mow et al.

# (54) ELECTRONIC DEVICE HAVING ANTENNA TUNING INTEGRATED CIRCUITS WITH SENSORS

(71) Applicant: Apple Inc., Cupertino, CA (US)

(72) Inventors: Matthew A. Mow, Los Altos, CA (US);
Liang Han, Sunnyvale, CA (US);
Ming-Ju Tsai, Cupertino, CA (US);
Thomas E. Biedka, San Jose, CA (US);
Victor Lee, Sunnyvale, CA (US);
James G. Judkins, Campbell, CA

(US); Mattia Pascolini, San Francisco,

CA (US)

(73) Assignee: Apple Inc., Cupertino, CA (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days

(21) Appl. No.: 14/980,574

(22) Filed: Dec. 28, 2015

(65) Prior Publication Data

US 2016/0204820 A1 Jul. 14, 2016

### Related U.S. Application Data

(60) Provisional application No. 62/101,901, filed on Jan. 9, 2015.

(51) Int. Cl.

#04M 1/00 (2006.01)

#04B 1/40 (2015.01)

(Continued)

(52) U.S. CI. CPC ...... *H04B 1/40* (2013.01); *H04B 1/0458* (2013.01); *H04B 1/18* (2013.01)

## (10) Patent No.: US 9,698,854 B2

(45) **Date of Patent:** Jul. 4, 2017

(58) Field of Classification Search

USPC ........... 455/550.1, 552.1, 575.7, 63.1, 67.11, 455/67.13, 73

See application file for complete search history.

#### (56) References Cited

#### U.S. PATENT DOCUMENTS

(Continued)


#### FOREIGN PATENT DOCUMENTS

WO 2015094962 6/2015 WO 2015184460 12/2015 Primary Examiner — Fayyaz Alam (74) Attorney, Agent, or Firm — Treyz Law Group, P.C.; G. Victor Treyz; Vineet Dixit

#### (57) ABSTRACT

An electronic device may be provided with wireless circuitry. The wireless circuitry may include one or more antennas. An antenna may have an antenna feed that is coupled to a radio-frequency transceiver with a transmission line. An impedance matching circuit may be coupled to the antenna feed to match the impedance of the transmission line and the antenna. The impedance matching circuit and tunable circuitry in the antenna may be formed using integrated circuits. Each integrated circuit may include switching circuitry that is used in switching components such as inductors and capacitors into use. Sensors such as temperature sensors, current and voltage sensors, power sensors, and impedance sensors may be integrated into the integrated circuits. Each integrated circuit may store settings for the switching circuitry and may include communications and control circuitry for communicating with external circuits and processing sensor data.

## 20 Claims, 11 Drawing Sheets





# (12) United States Patent

US 9,705,179 B2 (10) Patent No.: (45) Date of Patent: Jul. 11, 2017

(54) ANTENNA STRUCTURE AND WIRELESS COMMUNICATION DEVICE USING SAME USPC ...... 343/702, 850, 860 See application file for complete search history.

(71) Applicant: Chiun Mai Communication Systems, Inc., New Taipei (TW)

# (56)

Inventor: Yen-Hui Lin, New Taipei (TW) (72)

Assignee: Chiun Mai Communication Systems,

Inc., New Taipei (TW)

Subject to any disclaimer, the term of this (\*) Notice:

patent is extended or adjusted under 35 U.S.C. 154(b) by 116 days.

(21) Appl. No.: 14/566,948

Dec. 11, 2014 (22)Filed:

(65)**Prior Publication Data** 

> Jun. 25, 2015 US 2015/0180113 A1

(30)Foreign Application Priority Data

Dec. 23, 2013 (CN) ...... 2013 1 0713082

(51)Int. Cl. H01Q 1/24

(2006.01)

H04M 1/02 (2006.01)(52) U.S. Cl.

CPC ...... H01Q 1/243 (2013.01); H04M 1/026 (2013.01)

(58) Field of Classification Search CPC ...... H01Q 1/243

## References Cited

#### U.S. PATENT DOCUMENTS

6,768,472 B2*	7/2004	Alexopoulos H03H 7/40
7.070.070 B2*	7/2006	330/144 Jo H01Q 1/243
		343/700 MS
2009/0153423 A1*	6/2009	Dinallo H01Q 1/243 343/767
2012/0262354 A1*	10/2012	He H01Q 1/243
		343/767


<sup>\*</sup> cited by examiner

Primary Examiner — Dameon E Levi Assistant Examiner — Hasan Islam (74) Attorney, Agent, or Firm — Steven Reiss

#### ABSTRACT (57)

An antenna structure includes a feed portion, a ground portion, a connecting portion, a first metallic sheet, a second metallic sheet, and a coupling portion. The connecting portion is electrically connected to the feed portion. The first metallic sheet is electrically connected to the ground portion. The second metallic sheet is spaced apart from the first metallic sheet and is electrically connected to the connecting portion. The coupling portion is coupled to the connecting portion and spaced apart from the first metallic sheet.

#### 12 Claims, 5 Drawing Sheets

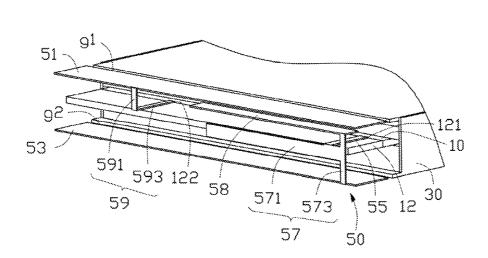



# (12) United States Patent Darnell et al.

## (54) ANTENNA HAVING FLEXIBLE FEED STRUCTURE WITH COMPONENTS

(71) Applicant: Apple Inc., Cupertino, CA (US)

(72) Inventors: Dean F. Darnell, San Jose, CA (US); William J. Noellert, Sunnyvale, CA (US); Mattia Pascolini, San Francisco,

CA (US)

(73) Assignee: Apple Inc., Cupertino, CA (US)

Subject to any disclaimer, the term of this (\*) Notice:

patent is extended or adjusted under 35

U.S.C. 154(b) by 99 days.

(21) Appl. No.: 14/825,011

(22)Aug. 12, 2015 Filed:

**Prior Publication Data** (65)

> US 2015/0364813 A1 Dec. 17, 2015

### Related U.S. Application Data

Continuation of application No. 14/486,602, filed on Sep. 15, 2014, now Pat. No. 9,502,752, which is a (Continued)

(51) Int. Cl. H01Q 1/24 (2006.01)H01Q 1/48 (2006.01)(Continued)

(52) U.S. Cl. .... **H01Q 1/243** (2013.01); **H01Q 1/48** CPC (2013.01); H01Q 1/50 (2013.01); H01Q 9/045 (2013.01);

(Continued)

#### US 9,705,180 B2 (10) Patent No.:

(45) Date of Patent: Jul. 11, 2017

#### (58)Field of Classification Search

CPC H01Q 1/24; H01Q 1/243; H01Q 1/48; H01Q 1/50; H01Q 9/045

See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

5,173,055 A 12/1992 Grabbe 12/1996 Wallace 5,583,523 A (Continued)

#### FOREIGN PATENT DOCUMENTS


101682119 3/2010 7/2010 201533015

(Continued)

Primary Examiner — Hoang Nguyen (74) Attorney, Agent, or Firm — Treyz Law Group, P.C.; G. Victor Treyz; Michael H. Lyons

Electronic devices may include antenna structures. The antenna structures may form an antenna having first and second feeds at different locations. Transceiver circuitry for transmitting and receiving radio-frequency antenna signals may be mounted on one end of a printed circuit board. Transmission line structures may be used to convey signals between an opposing end of the printed circuit board and the transceiver circuitry. The printed circuit board may be coupled to an antenna feed structure formed from a flexible printed circuit using solder connections. The flexible printed circuit may have a bend and may be screwed to conductive electronic device housing structures using one or more screws at one or more respective antenna feed terminals. Electrical components such as an amplifier circuit and filter circuitry may be mounted on the flexible printed circuit.

#### 19 Claims, 12 Drawing Sheets





# (12) United States Patent Sung et al.

#### (54) ANTENNA PATTERN FRAME AND METHOD AND MOLD FOR MANUFACTURING THE SAME

(71) Applicant: SAMSUNG

ELECTRO-MECHANICS CO., LTD.,

Suwon-Si, Gyeonggi-Do (KR)

(72) Inventors: Jae Suk Sung, Gyunggi-Do (KR); Ha Ryong Hong, Gyunggi-Do (KR); Yong

Shik Na, Gyunggi-Do (KR); Dae Seong Jeon, Gyunggi-Do (KR); Duk Woo Lee, Gyunggi-Do (KR); Dae Kyu Lee, Gyunggi-Do (KR); Sang Woo Bae, Gyunggi-Do (KR); Dae Ki Lim, Gyunggi-Do (KR); Sung Eun Cho, Gyunggi-Do (KR); Nam Il Seo, Seoul

Samsung Electro-Mechanics Co., Ltd., (73) Assignee:

Suwon-si (KR)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 96 days.

(21)Appl. No.: 14/321,451

(22) Filed: Jul. 1, 2014

(65)**Prior Publication Data** 

US 2014/0313085 A1 Oct. 23, 2014

### Related U.S. Application Data

Continuation of application No. 12/649,912, filed on Dec. 30, 2009, now abandoned.

#### Foreign Application Priority Data

Apr. 23, 2009 (KR) ...... 10-2009-0035633

(51) Int. Cl. H01Q 1/40 H01Q 1/24

(2006.01)(2006.01)

(Continued)

US 9,705,188 B2 (10) Patent No.:

(45) Date of Patent:

Jul. 11, 2017

(52) U.S. Cl. CPC ....... H01Q 1/40 (2013.01); B29C 45/14065

(2013.01); **B29C** 45/14639 (2013.01);

(Continued)

Field of Classification Search

... H01Q 1/40 CPCSee application file for complete search history.

References Cited (56)

U.S. PATENT DOCUMENTS

6,396,444 B1 5/2002 Goward et al.

6,642,907 B2 \* 11/2003 Hamada .... H01Q 1/243

343/700 MS

(Continued)

FOREIGN PATENT DOCUMENTS

1336020 A 2/2002 10-2004-001354 A1

(Continued)

OTHER PUBLICATIONS

Decision of Rejection dated Mar. 7, 2013 issued in the corresponding Chinese Patent Application No. 200910215103.9.

(Continued)


Primary Examiner - Robert Karacsony

(74) Attorney, Agent, or Firm - NSIP Law

(57)ABSTRACT

An antenna pattern frame according to an aspect of the invention may include: a radiator having an antenna pattern portion transmitting and receiving a signal and a connection terminal portion allowing the signal to be transmitted to and received from a circuit board of an electronic device; a connection portion partially forming the radiator and connecting the antenna pattern portion and the connection terminal portion to be arranged in different planes; and a radiator frame manufactured by injection molding on the radiator so that the antenna pattern portion is provided on one side of the radiator frame and the connection terminal (Continued)





100



LIS009705206B2

# (12) United States Patent Yosui

# (10) Patent No.: US 9,705,206 B2

### (45) **Date of Patent:** Jul. 11, 2017

# (54) ANTENNA DEVICE AND ELECTRONIC APPARATUS

## (71) Applicant: Murata Manufacturing Co., Ltd.,

Nagaokakyo-shi, Kyoto-fu (JP)

(72) Inventor: Kuniaki Yosui, Nagaokakyo (JP)

## (73) Assignee: Murata Manufacturing Co., Ltd.,

Kyoto (JP)

(\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 129 days.

(21) Appl. No.: 14/591,038

(22) Filed: Jan. 7, 2015

### (65) Prior Publication Data

US 2015/0116168 A1 Apr. 30, 2015

### Related U.S. Application Data

(63) Continuation of application No PCT/JP2013/083601, filed on Dec. 16, 2013.

#### (30) Foreign Application Priority Data

Dec. 21, 2012 (JP) ...... 2012-280243

(51) **Int. Cl. H01Q 1/00** (2006.01) **H01Q 21/28** (2006.01)

(Continued)

(52) U.S. CI. CPC ............. H01Q 21/28 (2013.01); H01Q 1/2208 (2013.01); H01Q 1/2216 (2013.01); H01Q 1/243 (2013.01);

(Continued)

(Continued)

### (56) References Cited

#### U.S. PATENT DOCUMENTS

(Continued)

#### FOREIGN PATENT DOCUMENTS

EP	2 182 577 A1	5/2010
EP	2 528 165 A1	11/2012
JP	3889423 B2	3/2007
JP	2007-194995 A	8/2007
JP	2008-028734 A	2/2008
JP	2011-109190 A	6/2011
WO	2004/047223 A1	6/2004
WO	2010/137061 A1	12/2010
WO	2011/158844 A1	12/2011

#### OTHER PUBLICATIONS


Official Communication issued in International Patent Application No. PCT/JP2013/083601, mailed on Mar. 18, 2014.

Primary Examiner — Graham Smith
Assistant Examiner — Jae Kim
(74) Attorney, Agent, or Firm — Keating & Bennett, LLP

#### (57) ABSTRACT

A square bracket-shaped radiation element is in a nonground region of a board. A first reactance element that equivalently enters a short-circuited state in a second frequency band is connected between a second end of the radiation element and a ground conductor. A second reactance element that equivalently enters a short-circuited state in a first frequency band s connected between a first end of the radiation element and the ground conductor. In the UHF band, the radiation element and the ground conductor function as an inverted F antenna that contributes to field emission. In the HF band, a loop including the radiation element and the ground conductor functions as a loop antenna that contributes to magnetic field emission.

#### 18 Claims, 12 Drawing Sheets





# (12) United States Patent

#### Erentok et al.

#### US 9,705,549 B1 (10) Patent No.: Jul. 11, 2017

### (45) Date of Patent:

#### (54) ANTENNA FOR WEARABLE ELECTRONIC DEVICES

- (71) Applicant: Intel Corporation, Santa Clara, CA
- (72) Inventors: Aycan Erentok, Sunnyvale, CA (US); Huan-Sheng Hwang, San Diego, CA (US); John Groff, San Francisco, CA (US); Thomas H. Liu, Fremont, CA
- (73) Assignee: INTEL CORPORATION, Santa Clara, CA (US)
- Subject to any disclaimer, the term of this (\*) Notice: patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
- (21) Appl. No.: 15/193,356
- (22) Filed: Jun. 27, 2016
- (51) Int. Cl. H04B 1/38 (2015.01)H04B 1/3827 (2015.01)H04W 4/00 (2009.01)H04W 4/20 (2009.01)
- (52) U.S. Cl. H04B 1/385 (2013.01); H04W 4/008 CPC (2013.01); **H04W 4/203** (2013.01); H04B 2001/3861 (2013.01)
- (58) Field of Classification Search CPC H04B 1/385; H04B 2001/3861; H04W 4/008 See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

5,699,319	A *	12/1997	Skrivervik	
				343/718
2005/0219955	A1*	10/2005	Xu	G04G 21/04
				368/88
2007/0109208	A1*	5/2007	Turner	H01O 1/273
				343/718
2000/0024272	A 1 *	2/2000	Fujisawa	
2009/0034372	AI	2/2009	rujisawa	
				368/14
2016/0020506	A1*	1/2016	Mahanfar	H01Q 1/273
				343/718

#### FOREIGN PATENT DOCUMENTS

CN	203932307 U	11/2014
CN	204009393 U	12/2014
CN	204481128 U	7/2015
WO	2015-117647 A	8/2015


<sup>\*</sup> cited by examiner

Primary Examiner - Nguyen Vo (74) Attorney, Agent, or Firm — Grossman, Tucker, Perreault & Pfleger, PLLC

#### ABSTRACT

A wearable electronic device includes a first member and a second member. The second member includes a first, RFattenuating, portion and a second, electrically conductive portion. A gap exists between the first member and at least the second portion of the second member. One or more transmitter/receivers, such as one or more BLUETOOTH®, BLUETOOTH® low energy, and/or IEEE 802.11 transceivers may be mounted in the first member. The one or more transmitter/receivers are conductively coupled to the second portion of the second member. RF signals generated by the one or more transceivers are emitted from the second portion of the second member.

## 25 Claims, 8 Drawing Sheets

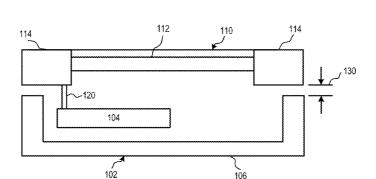

- 100



# (12) United States Patent Yong

## (54) APPARATUS FOR TUNING MULTI-BAND FRAME ANTENNA

(71) Applicant: Sony Corporation, Tokyo (JP)

(72) Inventor: Check Chin Yong, Tokyo (JP)

Assignees: Sony Corporation, Tokyo (JP); Sony Mobile Communications Inc., Tokyo

Subject to any disclaimer, the term of this (\*) Notice: patent is extended or adjusted under 35

U.S.C. 154(b) by 297 days.

(21) Appl. No.: 14/476,048

(22) Filed: Sep. 3, 2014

**Prior Publication Data** (65)

> US 2015/0084817 A1 Mar. 26, 2015

#### Related U.S. Application Data

Provisional application No. 61/880,635, filed on Sep. 20, 2013.

(51) Int. Cl. H01Q 1/24 (2006.01)H01Q 1/50 (2006.01)H01Q 5/378 (2015.01)H01Q 5/335 (2015.01)H01Q 3/24 (2006.01)

(Continued)

(52) U.S. Cl.

....... *H01Q 1/243* (2013.01); *H01Q 1/50* (2013.01); *H01Q 5/335* (2015.01); *H01Q* CPC ...... 5/378 (2015.01); H01Q 3/247 (2013.01); H01Q 5/328 (2015.01); H01Q 5/35 (2015.01); H01Q 9/0464 (2013.01); H01Q 9/145 (2013.01)

Field of Classification Search CPC ....... H01Q 1/243; H01Q 1/50; H01Q 5/0041; H01Q 5/0062

US 9,711,841 B2 (10) Patent No.:

(45) Date of Patent:

Jul. 18, 2017

See application file for complete search history.

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

11/2009 Hill et al. 9/2012 Pascolini et al. 7.612.725 B2 8,270,914 B2 (Continued)

#### FOREIGN PATENT DOCUMENTS

EP	2 081 257 A1	7/2009
EP	2 275 884 A2	1/2011
WO	WO 2014/151558 A1	9/2014

#### OTHER PUBLICATIONS

Extended European Search Report issued Mar. 11, 2015 in Patent Application No. 14185306.9.


(Continued)

Primary Examiner — Dameon E Levi Assistant Examiner — Andrea Lindgren Baltzell (74) Attorney, Agent, or Firm - Oblon, McClelland, Maier & Neustadt, L.L.P.

#### **ABSTRACT** (57)

A multi-band frame antenna is used for LTE, MIMO, and other frequency bands. The frame antenna includes a conductive block and a metallic frame with no gaps or discontinuities. The conductive block functions as a system ground and has at least one electronic component mounted on the surface. The outer perimeter of the metallic frame surrounds the conductive block, and there is a gap between the metallic frame and the conductive block. One or more antenna feeds are routed across the gap, between the metallic frame and the conductive block. One or more connections can be made across the gap, and at least one electronic element connects the conductive block to the metallic frame.

## 20 Claims, 22 Drawing Sheets







US009711855B2

# (12) United States Patent

Sonoda et al.

# (54) MULTIBAND ANTENNA AND WIRELESS DEVICE

- (71) Applicant: **Asahi Glass Company, Limited**, Tokyo
- (72) Inventors: **Ryuta Sonoda**, Tokyo (JP); **Koji Ikawa**, Tokyo (JP); **Toshiki Sayama**,
  Tokyo (JP)
- (73) Assignee: **Asahi Glass Company, Limited**, Tokyo
- (\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
- (21) Appl. No.: 14/747,178
- (22) Filed: Jun. 23, 2015
- (65) **Prior Publication Data**US 2015/0288066 A1 Oct. 8, 2015

## Related U.S. Application Data

- (63) Continuation of application No PCT/JP2013/084964, filed on Dec. 26, 2013.
- (30) Foreign Application Priority Data

Dec. 28, 2012 (JP) ...... 2012-289053

(51) Int. Cl. #01Q 5/50 (2015.01) #01Q 9/42 (2006.01) (Continued)

(Continued)

## (10) Patent No.: US 9,711,855 B2

(45) **Date of Patent:** Jul. 18, 2017

## (58) Field of Classification Search

None

See application file for complete search history.

### (56) References Cited

#### U.S. PATENT DOCUMENTS

#### FOREIGN PATENT DOCUMENTS

CN 1496595 A 5/2004 CN 101095262 A 12/2007 (Continued)

#### OTHER PUBLICATIONS


U.S. Appl. No. 14/790,472, filed Jul. 2, 2015, Sonoda, et al. (Continued)

Primary Examiner — Howard Williams (74) Attorney, Agent, or Firm — Oblon, McClelland, Maier & Neustadt, L.L.P.

#### (57) ABSTRACT

A multiband antenna includes a feeding element connected to a feeding point, a radiating element functioning as a radiating conductor, the radiating element being positioned apart from the feeding element and fed with electric power by electromagnetically coupling to the feeding element, a ground plane, and a non-feeding element being positioned close to the radiating element and connected to the ground plane via a reactance element. The reactance element has a reactance that causes the multiband antenna to match with a frequency other than a resonance frequency of a resonance mode of the radiating element.

#### 20 Claims, 5 Drawing Sheets

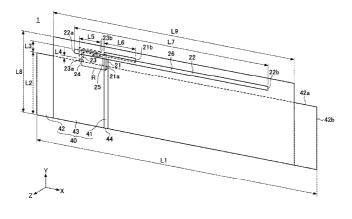



# (12) United States Patent Roberts et al.

## (54) RADIO FREQUENCY PROPERTIES OF A CASE FOR A COMMUNICATIONS DEVICE

(71) Applicant: Tech 21 Licensing Limited,

Twickenham (GB)

Inventors: Jason Lloyd Roberts, Twickenham

(GB); Wilhelm Marschall, London (GB); Benjamin Richard Thorpe,

Uxbridge (GB)

TECH 21 LICENSING LIMITED, Assignee:

Twickenham (GB)

Subject to any disclaimer, the term of this Notice:

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 15/240,481

(22)Filed: Aug. 18, 2016

**Prior Publication Data** (65)

> US 2016/0359517 A1 Dec. 8, 2016

#### Related U.S. Application Data

Continuation-in-part of application No. 15/050,973, (63)filed on Feb. 23, 2016, which is a continuation of (Continued)

#### (30)Foreign Application Priority Data

May 29, 2015 (GB) ...... 1509317.2

(51) Int. Cl.

H01Q 1/42 H01Q 1/24

(2006.01)(2006.01)

(Continued)

(52) U.S. Cl.

H04B 1/3888 (2013.01); H01Q 1/241 CPC ...  $(2013.01); \textit{H01Q 1/242} \ (2013.01); \textit{H01Q}$ 1/243 (2013.01); H01Q 1/422 (2013.01); H04M 1/0202 (2013.01)

(10) **Patent No.:** (45) Date of Patent:

Jul. 18, 2017

US 9,712,203 B2

#### (58)Field of Classification Search

CPC ......... H01Q 1/24; H01Q 1/241; H01Q 1/242; H01Q 1/243; H01Q 1/42; H01Q 1/422; H04B 1/3888; H04M 1/0202

(Continued)

#### (56)References Cited

#### U.S. PATENT DOCUMENTS

7,158,376 B2\* 1/2007 Richardson ......... G06F 1/1626 8.623.494 B2\* 1/2014 Richardson ..... A45C 11/00

(Continued)

#### OTHER PUBLICATIONS

Extended European Search Report, Application No. 16170092.7-1811, dated Oct. 21, 2016, 7 pages.

Primary Examiner — Hoang Nguyen (74) Attorney, Agent, or Firm — Stephen J. Weyer, Esq.; Stites & Harbison, PLLC.

#### ABSTRACT

A case is provided for a portable Radio Frequency (RF) communications device in which the portable RF communications device has an RF antenna arrangement internal to or integrated with an outer housing, the outer housing having an outer surface having a first portion, dielectric characteristics adjacent to which having a relatively low effect on a frequency characteristic of the RF antenna arrangement; and a second portion, dielectric characteristics adjacent to which having a relatively high effect on the frequency characteristic of the RF antenna arrangement. The case has a base, dimensioned to fit a back of the RF communications device; and a plurality of walls, extending from the base and dimensioned to fit corresponding walls of the RF communications device. The case is configured to cover part of the first portion so as to cause a dielectric parameter adjacent a part of the first portion to be relatively high. The case being further adapted such that a dielectric parameter adjacent the (Continued)

