

US010566678B2

(12) United States Patent Wu et al.

(54) ANTENNA STRUCTURE AND ELECTRONIC DEVICE

(71) Applicant: **PEGATRON CORPORATION**, Taipei

(72) Inventors: Chien-Yi Wu, Taipei (TW); Chao-Hsu Wu, Taipei (TW); Ching-Hsiang Ko, Taipei (TW); Cheng-Hsiung Wu, Taipei (TW); Shih-Keng Huang, Taipei

(TW)

(73) Assignee: **PEGATRON CORPORATION**, Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 15 days.

(21) Appl. No.: 16/107,811

(22) Filed: Aug. 21, 2018

(65) **Prior Publication Data**

US 2019/0123423 A1 Apr. 25, 2019

(30) Foreign Application Priority Data

Oct. 24, 2017 (TW) 106136586 A

(51) Int. Cl. H01Q 1/24 (2006.01) H01Q 1/22 (2006.01) (Continued)

(52) **U.S. CI.**CPC *H01Q 1/2266* (2013.01); *H01Q 1/243* (2013.01); *H01Q 1/38* (2013.01); *H01Q 1/38* (2013.01);

(Continued)

(10) Patent No.: US 10,566,678 B2

(45) **Date of Patent:** Feb. 18, 2020

(58) Field of Classification Search

CPC H01Q 5/371; H01Q 1/243; H01Q 1/38; H01Q 1/48; H01Q 7/00; H01Q 21/30 See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

9,136,590 B2 9/2015 Hotta et al. 2013/0113671 A1 5/2013 Su et al. (Continued)

FOREIGN PATENT DOCUMENTS


CN 205811047 12/2016 TW 201320468 5/2013 (Continued)

Primary Examiner — Dieu Hien T Duong (74) Attorney, Agent, or Firm — J.C. Patents

(57) ABSTRACT

An antenna structure including a metal outer cover and an antenna assembly is provided. The metal outer cover has a bent slit. The antenna assembly is stacked on the metal outer cover and covers a portion of the bent slit. The antenna assembly includes a substrate and an antenna pattern disposed on the substrate. The antenna pattern includes a feed end, a first ground end and a second ground end. In the antenna pattern, a first loop and a second loop are formed from the feed end to the first ground end in two respective paths. A third loop is formed from the feed end to the second ground end. The first loop and the third loop resonate with the bent slit to generate a low frequency band and a portion of a high frequency band. The second loop and the third loop resonate with the bent slit to generate another portion of the high frequency band. An electronic device having the antenna structure is further provided.

19 Claims, 12 Drawing Sheets

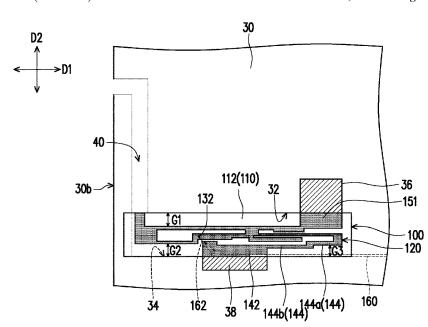



US010566681B2

(12) United States Patent Lin et al.

(54) ANTENNA STRUCTURE AND WIRELESS COMMUNICATION DEVICE USING SAME

(71) Applicant: Chiun Mai Communication Systems, Inc., New Taipei (TW)

(72) Inventors: **Yen-Hui Lin**, New Taipei (TW); **Yun-Jian Chang**, New Taipei (TW); **Jung-Chin Lin**, New Taipei (TW)

(73) Assignee: Chiun Mai Communication Systems, Inc., New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35 U.S.C. 154(b) by 214 days.

(21) Appl. No.: 15/655,906

(22) Filed: Jul. 21, 2017

(65) Prior Publication Data

US 2018/0026338 A1 Jan. 25, 2018

Related U.S. Application Data

(60) Provisional application No. 62/364,880, filed on Jul. 21, 2016.

(30) Foreign Application Priority Data

Jul. 7, 2017 (CN) 2017 1 0553028

(51) **Int. Cl. H01Q 1/24** (2006.01) **H01Q 1/48** (2006.01)

(Continued)

(Continued)

(10) Patent No.: US 10,566,681 B2

(45) **Date of Patent:** Feb. 18, 2020

(58) Field of Classification Search

CPC H01Q 1/242; H01Q 1/48; H01Q 1/243; H01Q 1/521; H01Q 5/50; H01Q 5/10; (Continued)

(56) References Cited

U.S. PATENT DOCUMENTS

FOREIGN PATENT DOCUMENTS


CN 102255134 A 11/2011 CN 104064866 A 9/2014 (Continued)

Primary Examiner — Hoang V Nguyen Assistant Examiner — Awat M Salih (74) Attorney, Agent, or Firm — ScienBiziP, P.C.

(57) ABSTRACT

An antenna structure includes a metal housing, a first resonance portion, a second resonance portion, an extending portion, and a signal feed source. The metal housing includes a front frame, a backboard, and a side frame. The side frame defines a slot and the front frame defines a groove and a gap. The metal housing is divided into at least an antenna section by the slot, the groove, and the gap. The first and second resonance portions and the extending portion are spaced apart from each other. The first resonance portion and the extending portion are both directly and electrically connected to the antenna section or are spaced apart and electrically coupled to the antenna section. The second resonance portion is electrically connected to the antenna section. One resonance portion is electrically connected to the signal feed source and the other resonance portion is grounded.

24 Claims, 58 Drawing Sheets

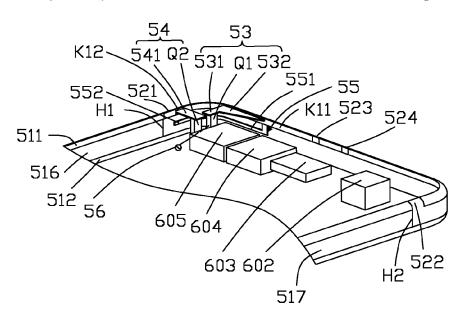



US010566694B2

(12) United States Patent Liou et al.

(10) Patent No.: US 10,566,694 B2

(45) **Date of Patent:** Feb. 18, 2020

(54) ANTENNA STRUCTURE AND WIRELESS COMMUNICATION DEVICE USING SAME

(71) Applicant: Chiun Mai Communication Systems, Inc., New Taipei (TW)

- 72) Inventors: **Geng-Hong Liou**, New Taipei (TW); **Yun-Jian Chang**, New Taipei (TW)
- (73) Assignee: Chiun Mai Communication Systems,
- (/3) Assignee: Chiun Mai Communication Systems, Inc., New Taipei (TW)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 161 days.
- (21) Appl. No.: 15/810,246
- (22) Filed: Nov. 13, 2017

(65) **Prior Publication Data**US 2018/0159221 A1 Jun. 7, 2018

(30) Foreign Application Priority Data

Dec. 7, 2016 (CN) 2016 1 1114590

(51)	Int. Cl.	
	H01Q 5/371	(2015.01)
	H01Q 1/24	(2006.01)
	H01Q 5/50	(2015.01)
	H01Q 9/42	(2006.01)
	H01Q 5/378	(2015.01)

(52) U.S. Cl.

(58) Field of Classification Search

CPC H01Q 5/371; H01Q 5/378; H01Q 5/50; H01Q 1/243; H01Q 9/42

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

2007/0200771	A1	8/2007	Schack et al.	
2010/0134358	A1	6/2010	Su et al.	
2014/0118195	A1	5/2014	Chen et al.	
2014/0354506	A1	12/2014	Lai et al.	
2014/0375522	A1*	12/2014	Lin	H01Q 1/243
				343/853
2016/0156101	Al	6/2016	Tsai et al.	

FOREIGN PATENT DOCUMENTS

JP	20100258544 A	11/2010
JP	20120227579 A	11/2012
JP	20140087050 A	5/2014
JP	20140236517 A	12/2014
TW	200905987 A	2/2009
TW	201244252 A	11/2012

^{*} cited by examiner


Primary Examiner — Dameon E Levi Assistant Examiner — David E Lotter (74) Attorney, Agent, or Firm — ScienBiziP, P.C.

(57) ABSTRACT

A multi-frequency antenna structure includes a feed portion, a first ground portion, a first radiating portion, a second radiating portion, and a third radiating portion. The feed portion supplies current to the antenna structure. The first ground portion is spaced apart from the feed portion and grounds the antenna structure. The first radiating portion is electrically connected to the feed portion. The second radiating portion is spaced apart from the first radiating portion and is electrically connected to the first ground portion. The third radiating portion is spaced apart from the second radiating portion and is electrically connected to the feed portion and the first radiating portion.

20 Claims, 16 Drawing Sheets

200

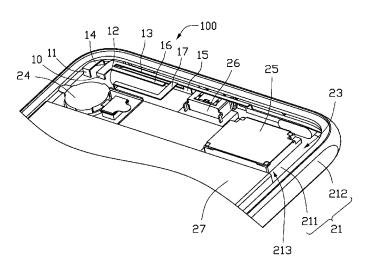



US010567025B2

(12) United States Patent

Youn et al.

(54) MOBILE TERMINAL

(71) Applicant: LG ELECTRONICS INC., Seoul

(KR)

(72) Inventors: Yeomin Youn, Seoul (KR); Jaehyun

Choi, Seoul (KR); Jungsun Ahn, Seoul (KR); Changil Kim, Seoul (KR); Kangjae Jung, Seoul (KR)

(73) Assignee: LG ELECTRONICS INC., Seoul

(KR)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 16/562,738

(22) Filed: Sep. 6, 2019

(65) Prior Publication Data

US 2019/0393919 A1 Dec. 26, 2019

Related U.S. Application Data

(63) Continuation of application No. 16/122,600, filed on Sep. 5, 2018, which is a continuation of application (Continued)

(30) Foreign Application Priority Data

Dec. 3, 2013 (KR) 10-2013-0149413

(51) **Int. Cl.**

H04M 1/00 (2006.01)

H04B 1/3888 (2015.01)

(Continued)

(52) U.S. Cl. CPC *H04B 1/3888* (2013.01); *G06F 1/1626* (2013.01); *G06F 1/1656* (2013.01);

(Continued)

(10) Patent No.: US 10,567,025 B2

(45) **Date of Patent:** Feb. 18, 2020

(58) Field of Classification Search

CPC H04B 1/3888; H04B 2001/3894; H04M 1/0202; H04M 1/0249; H04M 1/18;

(Continued)

(56) References Cited

U.S. PATENT DOCUMENTS

6,097,934 A * 8/2000 Spall H01Q 11/08

455/575.7

7,053,848 B2 5/2006 Shoji et al.

(Continued)

FOREIGN PATENT DOCUMENTS

JP 02262724 10/1990 KR 1020070112391 11/2007

(Continued)

OTHER PUBLICATIONS

Japan Patent Office Application No. 2014-228723, Office Action dated Sep. 7, 2018, 2 pages.


(Continued)

Primary Examiner — April G Gonzales (74) Attorney, Agent, or Firm — Lee, Hong, Degerman, Kang & Waimey PC

(57) ABSTRACT

A mobile terminal includes a metal frame including a base portion and an edge portion formed along the outer edge of the base portion, first and second cases bonded to the front and back sides of the metal frame so as to expose the edge portion to the outside, first and second waterproof layers formed between the cases and the metal frame, conductive members that operate a radiator for antennas, together with the edge portion, and are formed on one side of the second case, and feeding portions for feeding the conductive members, the feeding portions being disposed in an enclosed space formed by the waterproof layers.

13 Claims, 15 Drawing Sheets





US010573956B2

(12) United States Patent Ma et al.

(54) MOBILE DEVICE

(71) Applicant: Acer Incorporated, New Taipei (TW)

(72) Inventors: **Pei-Chi Ma**, New Taipei (TW); **Hsien-Chang Lin**, New Taipei (TW); **Hsin-Wu Chiang**, New Taipei (TW); **Wan-Chu Wei**, New Taipei (TW)

(73) Assignee: Acer Incorporated, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 15/986,826

(22) Filed: May 23, 2018

(65) Prior Publication Data

US 2019/0140341 A1 May 9, 2019

(30) Foreign Application Priority Data

Nov. 9, 2017 (TW) 106138763 A

(51) Int. Cl.

H01Q 1/24 (2006.01)

H01Q 1/52 (2006.01)

H04B 1/40 (2015.01)

H01Q 1/22 (2006.01)

H01Q 1/38 (2006.01)

(Continued)

(52) U.S. Cl.

CPC H01Q 1/243 (2013.01); H01Q 1/2291 (2013.01); H01Q 1/38 (2013.01); H01Q 1/521 (2013.01); H01Q 9/42 (2013.01); H01Q 21/28 (2013.01); H04B 1/40 (2013.01)

(10) Patent No.: US 10,573,956 B2

(45) **Date of Patent:** Feb. 25, 2020

(58) Field of Classification Search

CPC H01Q 1/243; H01Q 1/521; H01Q 9/42; H01Q 21/28; H01Q 1/38; H01Q 1/2291; H04B 1/40

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS


FOREIGN PATENT DOCUMENTS

CN 102934283 2/2013 TW 201001800 1/2010 (Continued) Primary Examiner — Hai V Tran Assistant Examiner — Michael M Bouizza (74) Attorney, Agent, or Firm — JCIPRNET

(57) ABSTRACT

A mobile device includes a carrying element, a first antenna, a second antenna, a connection element, and an extension element. The first antenna and the second antenna are disposed on the carrying element. The first antenna operates in a first frequency band through a first resonance path. The second antenna operates in the first frequency band through a second resonance path. The connection element is electrically connected to the first antenna and the second antenna. The connection element, the first antenna and the second antenna form a connection path, and the connection path, the first resonance path and the second resonance path do not overlap one another. The extension element is electrically connected to the connection element. The extension element, the connection element and the first antenna form a third resonance path, and the first antenna operates in a second frequency band through the third resonance path.

9 Claims, 5 Drawing Sheets





US010573957B2

(12) United States Patent Kang et al.

(54) MOBILE TERMINAL

(71) Applicant: LG ELECTRONICS INC., Seoul

(KR)

(72) Inventors: Yunmo Kang, Seoul (KR); Kangjae Jung, Seoul (KR); Sungjoon Hong,

Jung, Seoul (KR); Sungjoon Hong, Seoul (KR); Byungwoon Jung, Seoul (KR); Sungjung Rho, Seoul (KR)

(73) Assignee: LG ELECTRONICS INC., Seoul

(KR)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 16/033,083

(22) Filed: Jul. 11, 2018

(65) Prior Publication Data

US 2018/0323497 A1 Nov. 8, 2018

Related U.S. Application Data

(63) Continuation of application No. 15/860,427, filed on Jan. 2, 2018, now Pat. No. 10,056,680, which is a (Continued)

(30) Foreign Application Priority Data

Sep. 19, 2012 (KR) 10-2012-0104152

(51) **Int. Cl.** *H01Q 1/24 H01Q 1/38*(2006.01)

(Continued)

(Continued)

(10) Patent No.: US 10,573,957 B2

(45) **Date of Patent:** F

Feb. 25, 2020

(58) Field of Classification Search

CPC H01Q 1/242–245 See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

9,160,058 B2 10/2015 Tsou et al. 9,287,612 B2 * 3/2016 Bolin H01Q 9/06 (Continued)

FOREIGN PATENT DOCUMENTS

KR	1020090033596	4/2009
KR	1020100032681	3/2010
KR	1020120097877	9/2012

OTHER PUBLICATIONS

Korean Intellectual Property Office Application No. 10-2012-0104152, Notice of Allowance dated May 20, 2019, 2 pages. U.S. Appl. No. 15/860,427, Notice of Allowance dated Apr. 10, 2018, 22 pages.


(Continued)

Primary Examiner — Jessica Han
Assistant Examiner — Amal Patel
(74) Attorney, Agent, or Firm — Lee, Hong, Degerman,
Kang & Waimey PC

(57) ABSTRACT

A mobile terminal comprises: a terminal body; and a first antenna device and a second antenna device disposed at one side of the terminal body in an adjacent manner, and formed to operate at different frequency bands, wherein the first antenna device and the second antenna device are provided with conductive members each having a slit at one side thereof, and wherein the conductive members form part of an appearance of the terminal body.

7 Claims, 13 Drawing Sheets

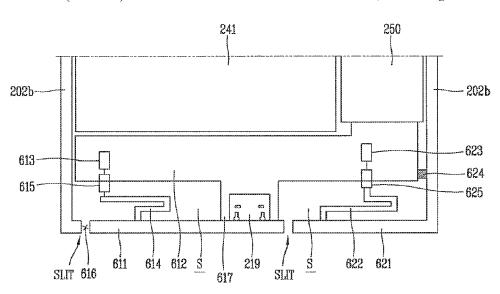



US010573968B1

(12) United States Patent Lin

(54) MULTI-BAND ANTENNA WITH MULTIPLE FEED POINTS

(71) Applicants: INVENTEC (PUDONG)

TECHNOLOGY CORPORATION,
Shanghai (CN); INVENTEC
CORPORATION, Taipei (TW)

(72) Inventor: Yuan Sheng Lin, Taipei (TW)

(73) Assignees: INVENTEC (PUDONG)

TECHNOLOGY CORPORATION,
Shanghai (CN); INVENTEC
CORPORATION, Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 16/212,371

(22) Filed: Dec. 6, 2018

(30) Foreign Application Priority Data

Nov. 27, 2018 (CN) 2018 1 1424731

(51) Int. Cl.

H01Q 5/35 (2015.01)

H01Q 5/371 (2015.01)

H01Q 21/06 (2006.01)

H01Q 9/30 (2006.01)

H01Q 1/22 (2006.01)

(10) Patent No.: US 10,573,968 B1

(45) **Date of Patent:** Feb. 25, 2020

(58) Field of Classification Search

CPC H01Q 5/35; H01Q 1/38; H01Q 5/371; H01Q 1/2291; H01Q 9/30; H01Q 21/067 See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

8,629,813	B2*	1/2014	Milosavljevic	H01Q 1/243
				343/850
9,123,990		9/2015	Ramachandran	H01Q 1/243
2006/0022890	A1*	2/2006	Chiang	H01Q 1/242
				343/833
2016/0365622	A1*	12/2016	Na	H01Q 11/50
				-

* cited by examiner

Primary Examiner — Graham P Smith Assistant Examiner — Noel Maldonado (74) Attorney, Agent, or Firm — Maschoff Brennan


(14) miorney, mgeni, or i irm indischon

(57) ABSTRACT

A multi-band antenna with multiple feed points includes a substrate, a main body, a branch body, a first and a second coaxial cable. The main body and the branch body are disposed on the substrate and respectively have a first and a second signal feed point. The first coaxial cable has a first outer conductor connected to a grounding layer and a first core conductor connected to the first signal feed point for feeding the first signal feed point with a first signal, so that the main body generates a RF signal of a first frequency band. The second coaxial cable has a second outer conductor connected to the main body and a second core conductor connected to the second signal feed point for feeding the second signal feed point with a second signal, so that the branch body generates a RF signal of a second frequency band.

11 Claims, 5 Drawing Sheets

1

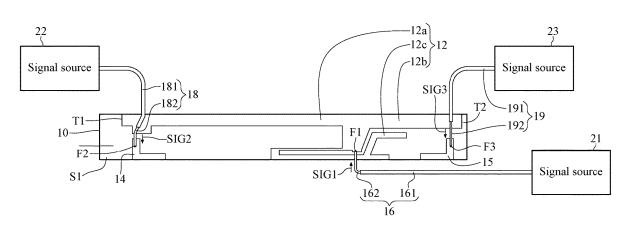



US010573970B2

(12) United States Patent

Ying et al.

(10) Patent No.: US 10,573,970 B2

(45) **Date of Patent:** Feb. 25, 2020

(54) ANTENNA ARRANGEMENT ON A CIRCUIT BOARD

(71) Applicant: SONY MOBILE

COMMUNICATIONS INC., Tokyo

(JP)

(72) Inventors: Zhinong Ying, Lund (SE); Thomas

Bolin, Lund (SE)

(73) Assignee: Sony Corporation, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 15/780,596

(22) PCT Filed: Jan. 28, 2016

(86) PCT No.: PCT/IB2016/050431

§ 371 (c)(1),

(2) Date: May 31, 2018

(87) PCT Pub. No.: WO2017/130027

PCT Pub. Date: Aug. 3, 2017

(65) Prior Publication Data

US 2018/0366832 A1 Dec. 20, 2018

(51) Int. Cl. H01Q 13/16 (2006.01) H01Q 1/48 (2006.01) H04Q 1/38 (2006.01)

(52) U.S. Cl.

(58) Field of Classification Search

CPC H01Q 13/16; H01Q 13/10; H01Q 1/243; H01Q 5/307; H01Q 9/04; H01Q 21/28; H01Q 21/30

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

8,350,772	B2*	1/2013	Seo	H01Q 1/243
				343/702
2005/0259013	A1*	11/2005	Gala Gala	H01Q 1/243
				343/702

(Continued)

FOREIGN PATENT DOCUMENTS

EP	1670093 A1	6/2006
EP	2712025 A1	3/2014
GB	2476132 A	6/2011

OTHER PUBLICATIONS


International Search Report and Written Opinion from corresponding International Patent Application No. PCT/IB2016/050431, dated Oct. 26, 2016.

Primary Examiner — Hoang V Nguyen (74) Attorney, Agent, or Firm — Tucker Ellis LLP

(57) ABSTRACT

The present invention relates to an antenna arrangement on a circuit board (10) extending along a length direction, L, and a width direction, W, the width direction being orthogonal to the length direction. The antenna arrangement comprising: a cell-band antenna (20); a ground plane (30) associated with the cell-band antenna; and a slit antenna (40) arranged in a slit antenna portion (32) of the ground plane, the slit antenna comprising a slit (42) in the ground plane, the slit having in the width direction a slit extension extending from an in the length direction extending edge (34) of the ground plane, the slit extension being 50-95% of an in the width direction extending total width of the slit antenna portion.

15 Claims, 4 Drawing Sheets





US010567561B2

(12) United States Patent Kang et al.

(54) MOBILE TERMINAL

(71) Applicant: LG Electronics Inc., Seoul (KR)

(72) Inventors: Jaehyuk Kang, Seoul (KR); Jinho

Jang, Seoul (KR); Hyunseok Kim,

Seoul (KR)

(73) Assignee: LG ELECTRONICS INC., Seoul

(KR)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-

claimer.

(21) Appl. No.: 16/260,800

(22) Filed: Jan. 29, 2019

(65) Prior Publication Data

US 2019/0173984 A1 Jun. 6, 2019

Related U.S. Application Data

(63) Continuation of application No. 16/046,661, filed on Jul. 26, 2018, now Pat. No. 10,230,415, which is a (Continued)

(30) Foreign Application Priority Data

Oct. 17, 2013 (KR) 10-2013-0124166

(51) Int. Cl. *H04M 1/00* (2006.01) *H04Q 1/24* (2006.01)

(Continued)

(52) U.S. Cl.

(Continued)

(10) Patent No.: US 10,567,561 B2

(45) **Date of Patent:** *Feb. 18, 2020

(58) Field of Classification Search

CPC G06F 1/1626; G06F 1/1656; G06F 1/203; H04M 1/18; H04M 1/01; H04M 1/02; (Continued)

(56) References Cited

U.S. PATENT DOCUMENTS

6,532,152 B1 3/2003 White et al. 6,785,566 B1 8/2004 Irizarry (Continued)


FOREIGN PATENT DOCUMENTS

CN 101207230 A 6/2008 EP 2 552 086 A2 1/2013 (Continued)

Primary Examiner — Quochien B Vuong (74) Attorney, Agent, or Firm — Birch, Stewart, Kolasch & Birch, LLP

(57) ABSTRACT

A bar-type mobile terminal can include a wireless communication unit including one or more components which permit wireless communications between the bar type mobile terminal and a wireless communication system; a plurality of antennas configured to transmit or receive radio signals; a metallic frame having a front side and a rear side, the metallic frame including a base portion, an edge portion forming an appearance of the bar-type mobile terminal, an upper through hole disposed in an upper portion of the metallic frame, and a lower through hole disposed in a lower portion of the metallic frame; an upper non-metallic coupling disposed in the upper through hole of the metallic frame; a lower non-metallic coupling disposed in the lower through hole of the metallic frame; a window disposed on the front side of the metallic frame; a display module disposed between the window and the front side of the metallic frame; a first waterproof layer disposed between the window and a front side of the edge portion of the metallic frame; a cover disposed on the rear side of the metallic frame; a first printed circuit board (PCB) disposed between the cover and the rear side of the metallic frame, wherein the (Continued)





(12) United States Patent Ryu et al.

(54) ELECTRONIC DEVICE

(71) Applicant: LG ELECTRONICS INC., Seoul

(KR)

(72) Inventors: Seungwoo Ryu, Seoul (KR); Joohee

Lee, Seoul (KR); Wonwoo Lee, Seoul (KR); Junyoung Jung, Seoul (KR);

Ansun Hyun, Seoul (KR)

(73) Assignee: LG ELECTRONICS INC., Seoul

Subject to any disclaimer, the term of this Notice:

patent is extended or adjusted under 35

U.S.C. 154(b) by 109 days.

(21) Appl. No.: 15/878,270

Jan. 23, 2018 (22)Filed:

(65)**Prior Publication Data**

> US 2019/0013584 A1 Jan. 10, 2019

(30)Foreign Application Priority Data

Jul. 5, 2017 (KR) 10-2017-0085553

(51) Int. Cl. H01Q 5/35 (2015.01)H01Q 3/26 (2006.01)H01Q 1/24 (2006.01)H01Q 25/00 (2006.01)H01Q 9/04 (2006.01)H01Q 21/08 (2006.01)H01Q 1/22 (2006.01)H01Q 21/00 (2006.01)

(52) U.S. Cl.

(2013.01); H01Q 1/243 (2013.01); H01Q 3/26 (2013.01); H01Q 9/0485 (2013.01); H01Q 21/0006 (2013.01); H01Q 21/08 (2013.01); H010 25/00 (2013.01)

US 10,581,167 B2 (10) Patent No.:

(45) Date of Patent:

Mar. 3, 2020

(58) Field of Classification Search

CPC H01Q 5/35; H01Q 21/0006; H01Q 1/2283; H01Q 1/243; H01Q 21/08; H01Q 3/26; H01Q 9/0485; H01Q 25/00; H01Q 1/24 See application file for complete search history.

(56)References Cited

U.S. PATENT DOCUMENTS

7,119,745	B2*	10/2006	Gaucher H01Q 9/26	
2004/0227660	A 1 &	11/2004	343/700 MS	
2004/022/669	Al*	11/2004	Okado H01Q 1/22 343/700 MS	
2014/0085163	A1*	3/2014	Gregg H01Q 1/12	
			343/872	
(Continued)				

OTHER PUBLICATIONS

European Patent Office Application Serial No. 18168514.0, Search Report dated Oct. 12, 2018, 11 pages.


(Continued)

Primary Examiner — Hai V Tran (74) Attorney, Agent, or Firm — Lee, Hong, Degerman, Kang & Waimey PC

(57)**ABSTRACT**

An electronic device includes: a body; a circuit board disposed in the body; and an antenna device mounted to one region of the body, and having first and second antenna units spaced apart from each other by a specific interval, in order to transceive a radio signal at a specific frequency band, wherein each of the first and second antenna units includes: a dielectric substance disposed to form a gap with the circuit board; an antenna chip disposed at the circuit board; and a pair of feeding portions for connecting the antenna chip with the dielectric substance.

14 Claims, 9 Drawing Sheets





US010581169B2

(12) United States Patent Kim et al.

(54) ANTENNA DEVICE AND ELECTRONIC

DEVICE INCLUDING THE SAME

(71) Applicants: Samsung Electronics Co., Ltd.,

Gyeonggi-do (KR); Industry-Academic Cooperation Foundation, Yonsei University, Seoul (KR)

(72) Inventors: **Sung-Soo Kim**, Gyeonggi-do (KR); **Young-Joong Yoon**, Seoul (KR);

Seon-Ho Lim, Seoul (KR)

(73) Assignees: Samsung Electronics Co., Ltd (KR);

Industry-Academic Cooperation foundation, Yonsei University (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 16/020,387

(22) Filed: Jun. 27, 2018

(65) Prior Publication Data

US 2019/0067821 A1 Feb. 28, 2019

(30) Foreign Application Priority Data

Aug. 25, 2017 (KR) 10-2017-0107845

(51) Int. Cl.

H01Q 1/24 (2006.01)

H01Q 9/04 (2006.01)

H01Q 5/371 (2015.01)

H01Q 3/24 (2006.01)

H01Q 21/00 (2006.01)

H01Q 5/50 (2015.01)

(52) **U.S. CI.** CPC *H01Q 9/0421* (2013.01); *H01Q 1/243* (2013.01); *H01Q 3/247* (2013.01); *H01Q*

(10) Patent No.: US 10,581,169 B2

(45) **Date of Patent:** Mar. 3, 2020

5/371 (2015.01); **H01Q** 7/**00** (2013.01); **H01Q** 3/24 (2013.01); **H01Q** 5/50 (2015.01); **H01Q** 21/00 (2013.01)

(58) Field of Classification Search

(56) References Cited

U.S. PATENT DOCUMENTS

6,204,819	B1*	3/2001	Hayes	H01Q 1/243
2002/0190907	A1*	12/2002	Konishi	343/700 MS H01Q 1/243 343/702


^{*} cited by examiner

Primary Examiner — Joseph J Lauture (74) Attorney, Agent, or Firm — The Farrell Law Firm, P.C.

(57) ABSTRACT

An antenna device is provided. The antenna device includes a first radiating conductor including a feeding portion and a radiating portion extending from the feeding portion, the feeding portion including a feeding terminal and a shorting pin, a ground electrically connected with the first radiating conductor via the shorting pin and configured to provide a reference potential for the first radiating conductor, and a first switch circuit provided on a side of the radiating portion and configured to selectively connect the radiating portion with the ground. The first radiating conductor is configured to form at least part of an inverted-F antenna structure when the first switch circuit is open and to form at least part of a loop antenna structure when the first switch circuit is closed.

19 Claims, 5 Drawing Sheets





US010582031B2

(12) United States Patent

(10) Patent No.: US 10,582,031 B2

(45) **Date of Patent:**

Mar. 3, 2020

(54) ELECTRONIC DEVICE AND CONTROL METHOD THEREOF

(71) Applicant: **GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP.,**

LTD., Dongguan, Guangdong (CN)

(72) Inventor: Jianghua Hu, Dongguan (CN)

(73) Assignee: GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP.,

LTD, Dongguan, Guangdong (CN)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 16/206,068

(22) Filed: Nov. 30, 2018

(65) **Prior Publication Data**

US 2019/0306292 A1 Oct. 3, 2019

(30) Foreign Application Priority Data

Mar. 30, 2018 (CN) 2018 1 0298360

(51) Int. Cl. H01Q 1/24 H04M 1/02

(2006.01) (2006.01)

(52) **U.S. Cl.**

CPC *H04M 1/0235* (2013.01); *H01Q 1/244* (2013.01); *H04M 1/0264* (2013.01); *H04M*

1/0266 (2013.01)

(58) Field of Classification Search

None

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

6,219,527 B1 * 4/2001 Ogawa H01Q 1/103 455/13.1 6,545,643 B1 * 4/2003 Sward H01Q 1/10 343/702

(Continued)

FOREIGN PATENT DOCUMENTS

CN 1433202 A 7/2003 CN 201830251 U 5/2011 (Continued)

OTHER PUBLICATIONS

Written Opinion of the International Searching Authority and International Search Report issued in corresponding International application No. 2018115275, dated Feb. 1, 2019 (10 pages).

(Continued)


Primary Examiner — Tuan A Tran

(74) Attorney, Agent, or Firm — Ladas & Parry, LLP

(57) ABSTRACT

An electronic device is provided. The electronic device includes a first electronic component, a second electronic component, a holder, and an antenna assembly. The second electronic component is slidably coupled to the first electronic component. The holder is coupled to the second electronic component and inserted into the first electronic component. The antenna assembly includes a radio frequency (RF) module, an antenna radiator, and an RF cable. The RF module is disposed in the first electronic component. The antenna radiator is disposed in the second electronic component. An end of the RF cable is coupled to the antenna radiator and the holder, and another end of the RF cable is coupled to the radio frequency module. The RF cable is retracted and stretched when the holder is driven to slide by sliding the second electronic component. A control method of the electronic device is also provided.

20 Claims, 15 Drawing Sheets





US010587032B2

(12) United States Patent Lee et al.

(54) ELECTRONIC DEVICE AND ANTENNA DEVICE THEREOF

(71) Applicant: Samsung Electronics Co., Ltd., Gyeonggi-do (KR)

(72) Inventors: Woosup Lee, Gyeonggi-do (KR);
Yeonwoo Kim, Gyeonggi-do (KR);
Jungsik Park, Gyeonggi-do (KR);
Seunggil Jeon, Gyeonggi-do (KR);
Juseok Noh, Gyeonggi-do (KR);

Jaebong Chun, Gyeonggi-do (KR); Hyunju Hong, Gyeonggi-do (KR)

(73) Assignee: Samsung Electronics Co., Ltd.,

Yeongtong-gu, Suwon-si, Gyeonggi-do

(KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 11 days.

(21) Appl. No.: 15/846,544

(22) Filed: Dec. 19, 2017

(65) **Prior Publication Data**

US 2018/0108977 A1 Apr. 19, 2018

Related U.S. Application Data

(63) Continuation of application No. 14/873,595, filed on Oct. 2, 2015, now Pat. No. 9,853,348.

(30) Foreign Application Priority Data

Oct. 8, 2014 (KR) 10-2014-0135898

(51) Int. Cl. H01Q 1/24 (2006.01) H01Q 1/40 (2006.01) (Continued)

(Continued)

(10) Patent No.: US 10,587,032 B2

(45) **Date of Patent:** Mar. 10, 2020

(58) Field of Classification Search

CPCH01Q 1/243; H01Q 1/40; H01Q 1/42; H01Q 9/26; H01Q 9/42; H01Q 21/2821; H01Q 21/29

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

5,048,118 A 9/1991 Brooks et al. 6,005,700 A * 12/1999 Pressler G02B 6/0008 235/492

(Continued)

FOREIGN PATENT DOCUMENTS

CN 101814649 A 8/2010 CN 202353552 U 7/2012 (Continued)

OTHER PUBLICATIONS


Chinese Search Report dated Oct. 8, 2019.

Primary Examiner — Hoang V Nguyen (74) Attorney, Agent, or Firm — Cha & Reiter, LLC.

(57) ABSTRACT

An electronic device having a housing formed of a conductive material, and an antenna device thereof. The electronic device includes a housing provided with a plurality of housing modules, and a printed circuit board positioned inside the housing, and having an antenna power feeding unit electrically connected to the printed circuited board. The plurality of housing modules may be at least partially formed of a conductive material. At least one of the conductive materials of the plurality of housing modules may be electrically connected to the antenna power feeding unit of the printed circuit board so as to function as an antenna of the electronic device. Various embodiments may be made based on the technical idea of the present disclosure.

21 Claims, 12 Drawing Sheets





US010587045B2

(12) United States Patent

Yamagajo et al.

(54) ANTENNA DEVICE

(71) Applicant: FUJITSU LIMITED, Kawasaki-shi,

Kanagawa (JP)

(72) Inventors: **Takashi Yamagajo**, Yokosuka (JP);

Yohei Koga, Kawasaki (JP); Manabu Kai, Yokohama (JP); Tabito Tonooka, Kawasaki (JP); Minoru Sakurai, Kawasaki (JP); Mitsuharu Hoshino,

Kawasaki (JP)

(73) Assignee: FUJITSU LIMITED, Kawasaki (JP)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 35 days.

(21) Appl. No.: 16/046,771

(22) Filed: Jul. 26, 2018

(65) Prior Publication Data

US 2018/0358700 A1 Dec. 13, 2018

Related U.S. Application Data

- (63) Continuation of application No. PCT/JP2016/052484, filed on Jan. 28, 2016.
- (51) Int. Cl. H01Q 1/38 (2006.01) H01Q 5/371 (2015.01) (Continued)

(Continued)

(58) Field of Classification Search

CPC H01Q 13/10; H01Q 1/24; H01Q 1/243; H01Q 1/38; H01Q 1/44; H01Q 1/48; (Continued)

(10) Patent No.: US 10,587,045 B2

(45) **Date of Patent:** Mar. 10, 2020

(56) References Cited

U.S. PATENT DOCUMENTS

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1 376 756 A2 1/2004 JP 2002-330025 A 11/2002 (Continued)

OTHER PUBLICATIONS

Sugimoto, S. et al., "A Study of Broadband Monopole Antenna with Parasitic Elements", Heisei 20 Nedo The Institute of Electronics, Information and Communication Engineers Tokyo Branch Gakuseikai Kenkyu Happyokai Tonbunshu, The Institute of Electronics, Information and Communication Engineers Tokyo Branch Gakuseikai, lecture No. 63. Feb. 28, 2009.

(Continued)

Primary Examiner — Tho G Phan (74) Attorney, Agent, or Firm — Arent Fox LLP

(57) ABSTRACT

An antenna device includes: a ground plane having an edge; a matching circuit; and a T-shaped antenna element including a first element and a second element extending from a feed point to a first and second end parts. The first element has a resonance frequency that is higher than a first frequency. The second element has a resonance frequency between a second frequency and a third frequency. A first value obtained by dividing a length from a corresponding point to a first bend part by the first wavelength is less than or equal to a second value obtained by dividing a length from the corresponding point to a second bend part by the second wavelength. An imaginary component of an impedance of the matching circuit takes a positive value at the first (Continued)

