



US007460069B2

(12) **United States Patent**
Park et al.

(10) **Patent No.:** **US 7,460,069 B2**

(45) **Date of Patent:** **Dec. 2, 2008**

(54) **MONOPOLE ANTENNA APPLICABLE TO MIMO SYSTEM**

(75) Inventors: **Se-hyun Park**, Suwon-si (KR);
Byung-tae Yoon, Suwon-si (KR);
Young-eil Kim, Suwon-si (KR);
Young-min Moon, Seoul (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/489,457**

(22) Filed: **Jul. 20, 2006**

(65) **Prior Publication Data**

US 2007/0115181 A1 May 24, 2007

(30) **Foreign Application Priority Data**

Nov. 23, 2005 (KR) 10-2005-0112272

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/846**

(58) **Field of Classification Search** **343/700 MS, 343/702, 846**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,573,866 B2 6/2003 Chen

6,781,546 B2 * 8/2004 Wang et al. 343/700 MS

2004/0201528 A1 * 10/2004 Lee et al. 343/702

2005/0062654 A1 3/2005 Chen et al.

2007/0069956 A1 * 3/2007 Ozkar 343/700 MS

2007/0069958 A1 * 3/2007 Ozkar 343/700 MS

* cited by examiner


Primary Examiner—Hoang V Nguyen

(74) *Attorney, Agent, or Firm*—Sughrue Mion, PLLC

(57) **ABSTRACT**

A monopole antenna capable of implementing an MIMO system, which includes a ground part formed of plate metal, a monopole antenna element connected to one side of the ground part and formed of strips bent multiple times, an auxiliary antenna element connected to one side of the ground part and disposed adjacent to the monopole antenna element to electrically connect to the monopole antenna element, and a short-circuit part interconnecting the monopole antenna element and the auxiliary antenna element. Accordingly, the monopole antenna element is bent multiple times so that the antenna can become compact in less than half a width compared to the conventional antenna, and when the MIMO system is constructed, the interference between the respective antennas can be reduced so that the array antenna can become compact in size.

25 Claims, 8 Drawing Sheets

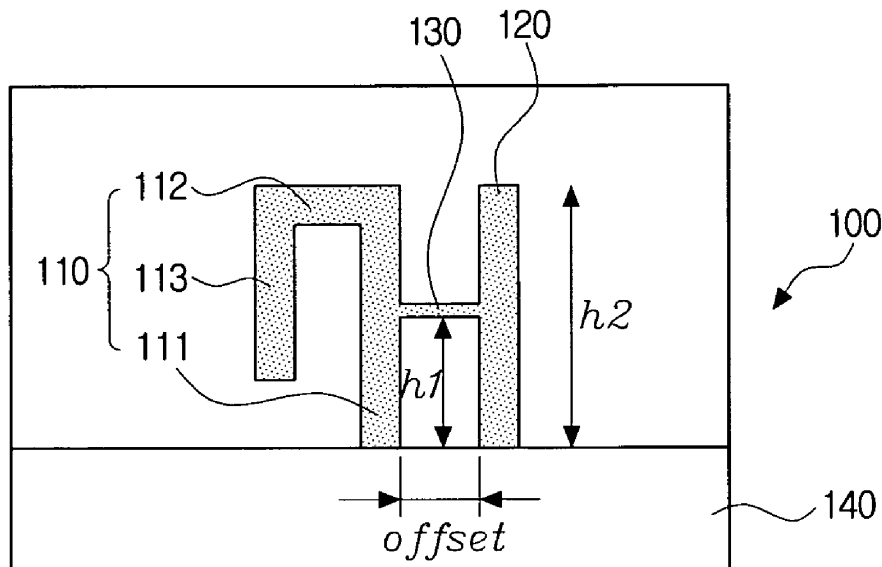

Acrobat 文件



US007460070B2

(12) **United States Patent**
Chen et al.

(10) **Patent No.:** **US 7,460,070 B2**
(45) **Date of Patent:** **Dec. 2, 2008**

(54) **CHIP ANTENNA**

(75) Inventors: **Yen-Ming Chen**, Taipei (TW);
Chao-Wei Wang, Taipei (TW);
Chang-Fa Yang, Taipei (TW);
Shun-Iian Lin, Taipei (TW);
Chuan-Lin Hu, Sijhih (TW);
Chang-Lun Liao, Sijhih (TW); **Yu-Wei Chen**, Sijhih (TW)

(73) Assignee: **Chant Sincere Co., Ltd.**, Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 86 days.

(21) Appl. No.: **11/598,019**

(22) Filed: **Nov. 13, 2006**

(65) **Prior Publication Data**
US 2007/0115182 A1 May 24, 2007

(30) **Foreign Application Priority Data**
Nov. 14, 2005 (TW) 94139939 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/895**

(58) **Field of Classification Search** **343/700 MS, 343/702, 895**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,653,986 B2 * 11/2003 Watada et al. 343/895
6,894,646 B2 * 5/2005 Washiro et al. 343/700 MS

FOREIGN PATENT DOCUMENTS

TW	M253070	3/1993
TW	491417	12/2000
TW	480773	3/2002
TW	241052 B	10/2005

* cited by examiner


Primary Examiner—Tho G Phan

(74) *Attorney, Agent, or Firm*—Muncy, Geissler, Olds & Lowe, PLLC

(57) **ABSTRACT**

A chip antenna has a dielectric material layer, a first meandered strip, a second meandered strip and several bended strips. The first meandered strip is meandered in one direction and disposed on the dielectric material layer. The second meandered strip is meandered in another direction and disposed on the dielectric material layer. The first meandered strip is connected to the second meandered strip. The bended strips are connected to the turns of the meandered strips.

18 Claims, 15 Drawing Sheets

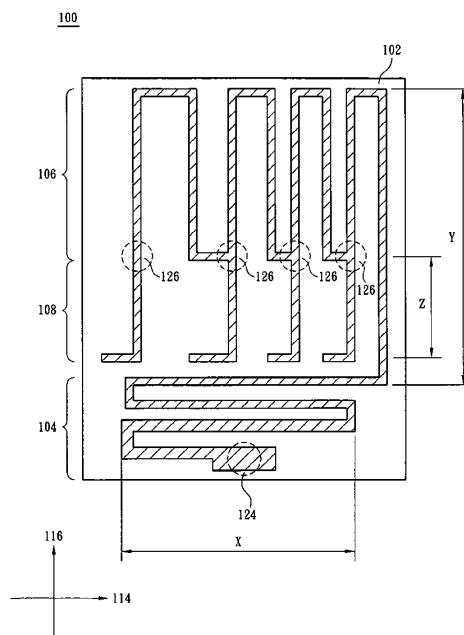

Acrobat 文件



US007460072B1

(12) **United States Patent**
Goldberger

(10) **Patent No.:** **US 7,460,072 B1**
(45) **Date of Patent:** **Dec. 2, 2008**

(54) **MINIATURE PATCH ANTENNA WITH INCREASED GAIN**

(75) Inventor: **Haim Goldberger**, Modi'in (IL)

(73) Assignee: **Origin GPS Ltd.**, Jerusalem (IL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 18 days.

(21) Appl. No.: **11/773,448**

(22) Filed: **Jul. 5, 2007**

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/829**

(58) **Field of Classification Search** **343/700 MS, 343/829, 846, 848**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,903,033	A	2/1990	Tsao et al.	
4,914,445	A *	4/1990	Shoemaker	343/700 MS
5,043,738	A	8/1991	Shapiro et al.	
5,266,961	A *	11/1993	Milroy	343/772
5,450,090	A *	9/1995	Gels et al.	343/700 MS
5,627,550	A	5/1997	Sanad	
5,818,391	A	10/1998	Lee	
5,844,523	A *	12/1998	Brennan et al.	343/700 MS
6,018,320	A	1/2000	Jidhage et al.	

6,121,930	A *	9/2000	Grangeat et al.	343/700 MS
6,567,048	B2	5/2003	McKinzie, III et al.	
6,822,616	B2	11/2004	Durham et al.	
6,937,192	B2	8/2005	Mendolia et al.	
6,943,731	B2 *	9/2005	Killen et al.	343/700 MS
7,071,877	B2	7/2006	Okado	
7,099,686	B2	8/2006	Ro et al.	
7,123,208	B2	10/2006	Baliarda et al.	
2004/0080455	A1	4/2004	Lee	
2006/0103576	A1	5/2006	Mahmoud et al.	
2006/0250308	A1	11/2006	Pinel et al.	

* cited by examiner


Primary Examiner—Tho G Phan

(74) *Attorney, Agent, or Firm*—Soroker - Agmon, Advocates & Patent Attorneys

(57) **ABSTRACT**

The present invention, relates to the preparation of a patch antenna with a specific effective dielectric constant; and a reduced dissipation factor. In an exemplary embodiment of the invention, size requirements and the desired resonant signal frequency dictate the permittivity value of the dielectric material to be used between the patch plate and the ground plate. Instead of using a dielectric material with the calculated permittivity value and its given dissipation factors a two layer dielectric of the same size with an effective dielectric constant that is equal to the desired dielectric constant, is used to replace the dielectric material and reduce the dissipation factor.

18 Claims, 5 Drawing Sheets

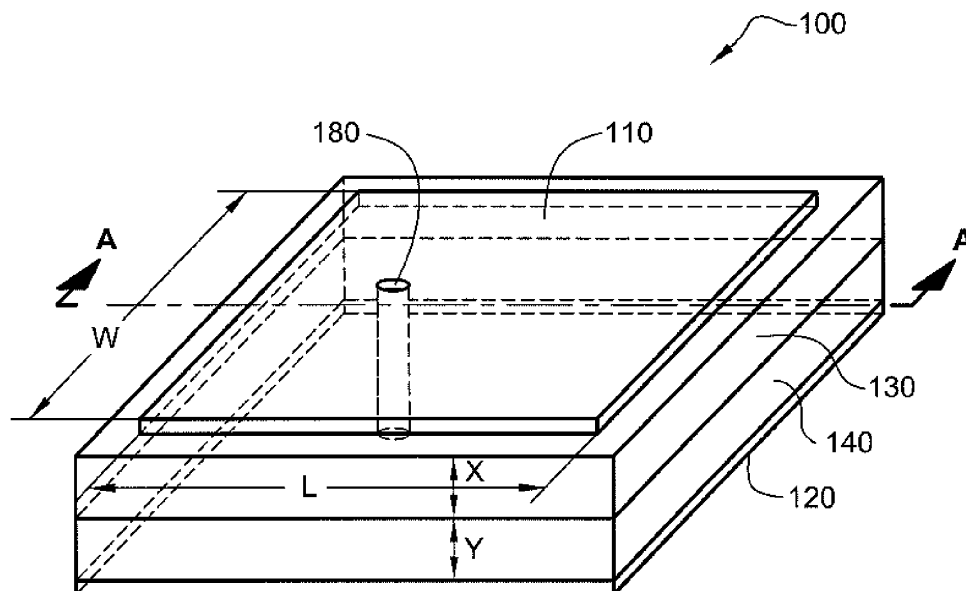

Acrobat 文件



US007460074B2

(12) **United States Patent**
Ying et al.

(10) **Patent No.:** **US 7,460,074 B2**

(45) **Date of Patent:** **Dec. 2, 2008**

(54) **COMMUNICATION TERMINALS HAVING
INTEGRATED ANTENNA AND SPEAKER
ASSEMBLIES**

(75) Inventors: **Zhinong Ying**, Lund (SE); **Wanqing
Shi**, Hjärup (SE)

(73) Assignee: **Sony Ericsson Mobile
Communications AB**, Lund (SE)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 225 days.

(21) Appl. No.: **10/560,792**

(22) PCT Filed: **Jun. 4, 2004**

(86) PCT No.: **PCT/EP2004/051037**

§ 371 (c)(1),
(2), (4) Date: **Dec. 15, 2005**

(87) PCT Pub. No.: **WO2004/114637**

PCT Pub. Date: **Dec. 29, 2004**

(65) **Prior Publication Data**

US 2006/0152417 A1 Jul. 13, 2006

Related U.S. Application Data

(60) Provisional application No. 60/483,549, filed on Jun.
27, 2003.

(30) **Foreign Application Priority Data**

Jun. 20, 2003 (EP) 03013926

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** 343/702; 343/720; 343/829;
343/846

(58) **Field of Classification Search** 343/702,
343/720, 829, 846, 700 MS; 455/575.7
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,367,426 A * 1/1983 Kumada et al. 310/358
4,851,654 A * 7/1989 Nitta 235/492
5,904,654 A * 5/1999 Wohltmann et al. 600/481
6,819,939 B2 * 11/2004 Masamura 455/550.1
6,973,710 B2 * 12/2005 Kiguchi et al. 29/601
7,126,546 B2 * 10/2006 Annamaa et al. 343/702

(Continued)

FOREIGN PATENT DOCUMENTS

JP 2001217633 A 8/2001

(Continued)

OTHER PUBLICATIONS

International Search Report corresponding to PCT/EP2004/051037,
mailed Oct. 13, 2004.

Primary Examiner—Douglas W. Owens


Assistant Examiner—Chuc Tran

(74) *Attorney, Agent, or Firm*—Myers Bigel Sibley &
Sajovec

(57) **ABSTRACT**

Communications devices having a combined antenna and
speaker for a radio receiving apparatus is provided. The com-
bined antenna and speaker includes a speaker and a low
profile built-in radio antenna element. The antenna element
includes a flat sheet carrying a conductive antenna trace. An
exciter is connected to the sheet and devised to induce vibra-
tions therein for generating sound. This integrates a flat panel
speaker with the antenna element, which saves components
and may increase performance.

14 Claims, 3 Drawing Sheets

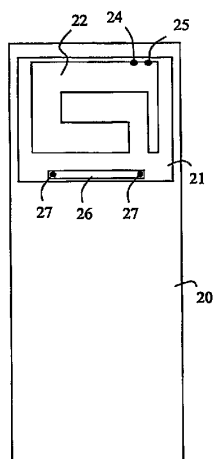

Acrobat 文件



US007463196B2

(12) **United States Patent**
Hilgers

(10) **Patent No.:** **US 7,463,196 B2**

(45) **Date of Patent:** **Dec. 9, 2008**

(54) **ANTENNA**

(75) Inventor: **Achim Hilgers**, Alsdorf (DE)

(73) Assignee: **NXP B.V.**, Eindhoven (NL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 5 days.

(21) Appl. No.: **10/589,838**

(22) PCT Filed: **Feb. 15, 2005**

(86) PCT No.: **PCT/IB2005/050577**

§ 371 (c)(1),
(2), (4) Date: **Apr. 24, 2007**

(87) PCT Pub. No.: **WO2005/083835**

PCT Pub. Date: **Sep. 9, 2005**

(65) **Prior Publication Data**

US 2007/0279285 A1 Dec. 6, 2007

(30) **Foreign Application Priority Data**

Feb. 18, 2004 (EP) 04100635

(51) **Int. Cl.**
H01Q 1/38

(2006.01)

(52) **U.S. CL.** **343/700 MS; 343/702**

(58) **Field of Classification Search** 343/700 MS,
343/702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,433,745 B1 * 8/2002 Nagumo et al. 343/700 MS
6,784,843 B2 * 8/2004 Onaka et al. 343/700 MS

FOREIGN PATENT DOCUMENTS

EP 1 119 069 7/2001
EP 1 289 053 3/2003

* cited by examiner


Primary Examiner—Trinh Vo Dinh

Assistant Examiner—Dieu Hien T Duong

(57) **ABSTRACT**

The invention relates to a dual-band antenna for preferable operation in the GSM and DCS frequency range. The dual-band antenna at the same time has the functionality of a diplexer. This makes it possible to produce wireless communication devices with one component less, which in turn reduces weight and production cost.

15 Claims, 2 Drawing Sheets

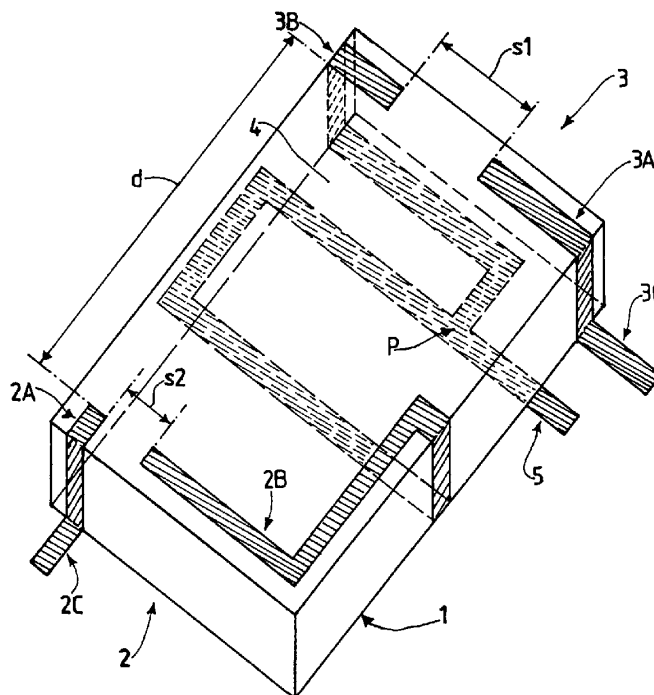

Acrobat 文件



US007463197B2

(12) **United States Patent**
Rafi et al.

(10) **Patent No.:** **US 7,463,197 B2**

(45) **Date of Patent:** **Dec. 9, 2008**

(54) **MULTI-BAND ANTENNA**

(75) Inventors: **Gholamreza Zeinolabedin Rafi**,
Kitchener (CA); **Safieddin**
Safavi-Naeini, Waterloo (CA); **Sujeet K.**
Chaudhuri, Heidelberg (CA);
Wai-Cheung Tang, Mannheim (CA)

(73) Assignee: **Mark IV Industries Corp.**, Ontario
(CA)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 193 days.

(21) Appl. No.: **11/252,162**

(22) Filed: **Oct. 17, 2005**

(65) **Prior Publication Data**

US 2007/0085741 A1 Apr. 19, 2007

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**

(58) **Field of Classification Search** **343/700 MS,**
343/767, 770

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,003,318 A * 3/1991 Berneking et al. 343/700 MS
6,448,932 B1 9/2002 Stojiljkovic et al.
6,507,321 B2 1/2003 Oberschmidt et al.

6,710,748 B2 * 3/2004 Yarasi et al. 343/702
2002/0171592 A1 11/2002 Mikkola et al.
2003/0063031 A1 4/2003 Wong et al.

OTHER PUBLICATIONS

Rafi and Shafai "Broadband Microstrip Patch Antenna with V-Slot",
IEE Proc.-Microw. Antennas Propag., vol. 151, No. 5, Oct. 2004,
435.

Itoh, "High Efficiency Microwave Transmitter Front-End", Final
Report 1998-1999 for MICRO Project 98-063.

* cited by examiner


Primary Examiner—Michael C Wimer

(74) *Attorney, Agent, or Firm*—Eugene M. Cummings, P.C.

(57) **ABSTRACT**

A multi-band antenna for multi-band radio frequency tele-
communications. The multi-band antenna includes a conduc-
tive patch separated from a ground plane by a dielectric mate-
rial. A slot pattern formed in the conductive patch defines a
perimeter substantially surrounding two feed pins and
arranged symmetrically about a center line. The slot pattern
includes one or more inwardly extending arms projected
along axes that pass between the two feed pins. The axes may
be parallel to the center line. The slot pattern may be arranged
using folded slots. In one embodiment, circular polarization
is realized at GPS frequency by using one feed pin and linear
or circular polarization is realized by using one or two feed
pins for other bands. The feed pins may be controlled inde-
pendently without a fixed phase and amplitude arrangement
necessary to achieve a fixed polarization (linear, circular, or
elliptical), which allows for adaptive pattern and polarization
agility.

20 Claims, 9 Drawing Sheets

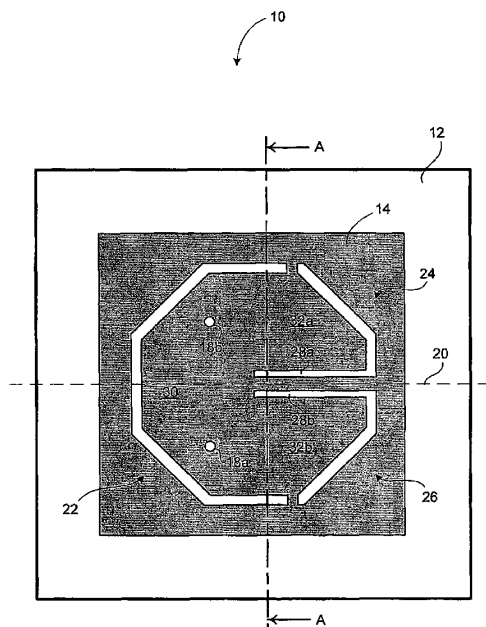

Acrobat 文件



US007463200B2

(12) **United States Patent**
Gainey et al.

(10) **Patent No.:** **US 7,463,200 B2**

(45) **Date of Patent:** **Dec. 9, 2008**

(54) **DIRECTIONAL ANTENNA CONFIGURATION
FOR TDD REPEATER**

(75) Inventors: **Kenneth M. Gainey**, Satellite Beach, FL (US); **James A. Proctor, Jr.**, Melbourne Beach, FL (US); **Christopher A. Snyder**, Melbourne, FL (US); **James C. Otto**, West Melbourne, FL (US)

(73) Assignee: **QUALCOMM Incorporated**, San Diego, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 60 days.

(21) Appl. No.: **11/602,455**

(22) Filed: **Nov. 21, 2006**

(65) **Prior Publication Data**
US 2007/0117514 A1 May 24, 2007

Related U.S. Application Data

(60) Provisional application No. 60/738,579, filed on Nov. 22, 2005.

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/725; 455/25; 455/63.4**

(58) **Field of Classification Search** **343/700 MS; 343/725, 727, 853; 455/25, 63.4, 269**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,922,259 A * 5/1990 Hall et al. 343/700 MS

6,195,051 B1 * 2/2001 McCoy et al. 343/700 MS
6,370,369 B1 4/2002 Kraiem et al.
6,549,567 B1 4/2003 Fullerton
6,781,544 B2 * 8/2004 Saliga et al. 343/700 MS
6,906,669 B2 * 6/2005 Sabet et al. 343/700 MS
7,132,988 B2 * 11/2006 Yegin et al. 343/727
2004/0176050 A1 * 9/2004 Steer et al. 455/101
2006/0098592 A1 5/2006 Procter Jr., et al.
2008/0057862 A1 * 3/2008 Smith 455/11.1

FOREIGN PATENT DOCUMENTS

WO 04062305 7/2004

OTHER PUBLICATIONS

International Search Report and Written Opinion of the International Searching Authority dated Nov. 2, 2007 in corresponding patent application No. PCT/US06/45123.

* cited by examiner


Primary Examiner—Tho G Phan

(74) *Attorney, Agent, or Firm*—Andrea L. Mays; Linda G. Gunderson; Thomas R. Rouse

(57) **ABSTRACT**

A wireless communication node, such as a repeater, including a frequency translating repeater, a physical layer (PHY) repeater, time divisional duplex repeater (TDD) and the like, is configured with a pair of directional patch antennae and an omni-directional antenna. The patch antennae can be selected depending on the orientation of the repeater package to communicate with a station such as an access point or a base station. The omni-directional antenna can be directed toward another station such as a client. The patch antennae and the omni-directional antenna can be orthogonally polarized to increase isolation and reduce electromagnetic coupling. Multiple antennae can be used in multiple-input-multiple-output (MIMO) configurations.

26 Claims, 15 Drawing Sheets

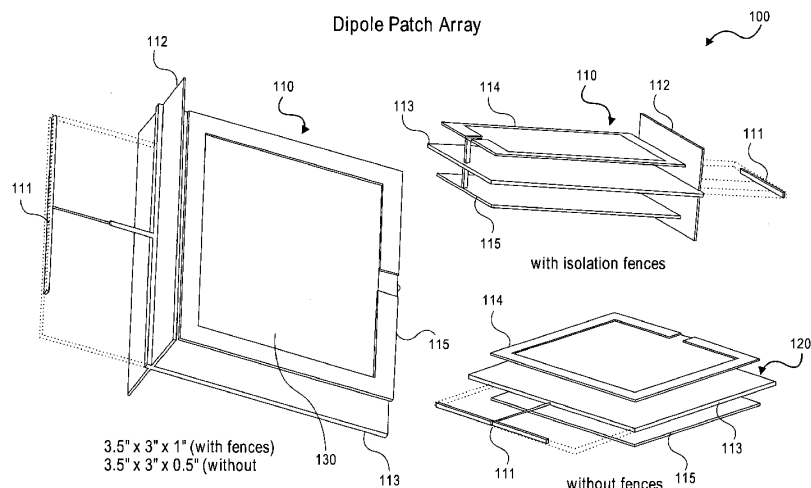

Acrobat 文件



US007463201B2

(12) **United States Patent**
Chiang et al.

(10) **Patent No.:** **US 7,463,201 B2**

(45) **Date of Patent:** **Dec. 9, 2008**

(54) **APERIODIC ARRAY ANTENNA**

(75) Inventors: **Bing Chiang**, Melbourne, FL (US); **Griffin K. Gothard**, Satellite Beach, FL (US); **Christopher A. Snyder**, Melbourne, FL (US); **William R. Palmer**, Melbourne, FL (US); **Michael J. Lynch**, Merritt Island, FL (US); **Thomas E. Gorsuch**, Indialantic, FL (US); **Kenneth M. Gainey**, Satellite Beach, FL (US); **James A. Proctor**, Melbourne Beach, FL (US)

(73) Assignee: **InterDigital Corporation**, Wilmington, DE (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/706,544**

(22) Filed: **Feb. 13, 2007**
(Under 37 CFR 1.47)

(65) **Prior Publication Data**

US 2007/0152893 A1 Jul. 5, 2007

Related U.S. Application Data

(63) Continuation of application No. 11/102,984, filed on Apr. 11, 2005, now Pat. No. 7,176,844, which is a continuation of application No. 10/357,276, filed on Jan. 31, 2003, now Pat. No. 6,888,504.

(60) Provisional application No. 60/419,431, filed on Oct. 17, 2002, provisional application No. 60/353,249, filed on Feb. 1, 2002.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. CL.** **343/702; 343/833; 343/834**

(58) **Field of Classification Search** 343/702, 343/815, 817, 833, 834, 819, 853, 835
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,560,978 A	2/1971	Himmel et al.	
3,750,185 A	7/1973	Evans	
3,846,799 A	11/1974	Gueguen	
3,996,592 A *	12/1976	Kline et al.	343/817
4,631,546 A	12/1986	Dumas et al.	

(Continued)

FOREIGN PATENT DOCUMENTS

DE 1616535 7/1971

(Continued)

OTHER PUBLICATIONS

Ohira et al. "Electronically Steerable Passive Array Radiator Antennas for Low-Cost Analog Adaptive Beamforming." IEEE 0-7803-6345-0/00, 2000.

(Continued)


Primary Examiner—Tho G Phan

(74) *Attorney, Agent, or Firm*—Volpe and Koenig, P.C.

(57) **ABSTRACT**

A wireless handset including an antenna array. The antenna array includes an active antenna element and two passive antenna elements. The active and passive antenna elements are arranged to form a triangle with a vertex. The vertex includes a vertex angle and the active antenna element is disposed at the vertex. The vertex angle is between 90 degrees and 180 degrees.

3 Claims, 19 Drawing Sheets

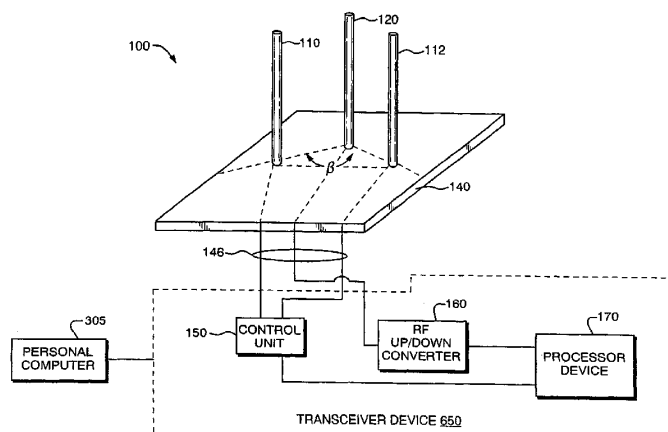

Acrobat 文件



US007463209B2

(12) **United States Patent**
Tang et al.

(10) **Patent No.:** **US 7,463,209 B2**
(45) **Date of Patent:** **Dec. 9, 2008**

(54) **PLANAR DIPOLE ANTENNA**

(75) Inventors: **Chia-Lun Tang**, Miao-Li Hsien (TW);
Shih-Huang Yeh, Tou-Liu (TW);
Kin-Lu Wong, Kao-Hsiung (TW);
Yung-Tao Liu, Kao-Hsiung (TW);
Ting-Chih Tseng, Tai-Nan Hsien (TW)

6,529,170 B1 * 3/2003 Nishizawa et al. 343/795
6,747,605 B2 6/2004 Lebaric et al. 343/795
7,102,586 B2 * 9/2006 Liang et al. 343/795
2003/0020665 A1 1/2003 Shor 343/810

(73) Assignee: **Industrial Technology Research
Institute**, Hsinchu (TW)

FOREIGN PATENT DOCUMENTS

TW 529783 4/2003

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 96 days.

* cited by examiner

(21) Appl. No.: **11/244,592**

Primary Examiner—Michael C Wimer

(22) Filed: **Oct. 6, 2005**

(57) **ABSTRACT**

(65) **Prior Publication Data**

US 2006/0170605 A1 Aug. 3, 2006

(30) **Foreign Application Priority Data**

Feb. 3, 2005 (TW) 94103392 A

(51) **Int. Cl.**

H01Q 1/38 (2006.01)

H01Q 9/28 (2006.01)

(52) **U.S. Cl.** **343/795**

(58) **Field of Classification Search** 343/795,
343/722, 802

See application file for complete search history.


(56) **References Cited**

U.S. PATENT DOCUMENTS

4,860,019 A * 8/1989 Jiang et al. 343/795

A planar dipole antenna comprises a dielectric substrate, two radiation conductors, and a transmission line. The two radiation conductors are formed on the dielectric substrate and separated by a predefined distance. Each radiation conductor includes first and second metal plates, and a meandered metal line. The meandered metal line has two ends and at least three bending points. One end of the meandered metal line is connected to the first metal plate, while the other end is connected to the second metal plate. This antenna increases the receiver's gain up to 6.8 dBi through the use of the current distribution of three equal-phase areas. This overcomes the drawback of a conventional antenna with receiver's gain only about 2.2 dBi. This planar dipole antenna has a simple structure of single-sided circuitry, and is easily formed on the dielectric substrate by a standard printing or etching process.

10 Claims, 9 Drawing Sheets

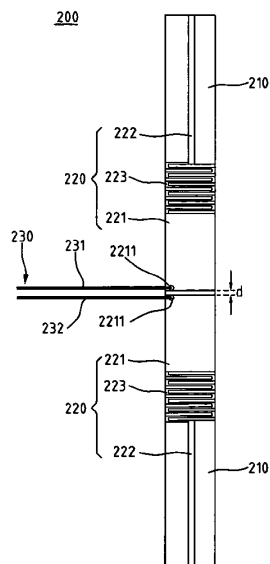

Acrobat 文件



US007466267B2

(12) **United States Patent**
Ishikura

(10) **Patent No.:** **US 7,466,267 B2**
(45) **Date of Patent:** **Dec. 16, 2008**

(54) **ANTENNA DEVICE AND ELECTRONIC APPARATUS**

(75) Inventor: **Hiroshi Ishikura**, Hirakata (JP)

(73) Assignee: **Digital Electronics Corporation**, Osaka (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 299 days.

(21) Appl. No.: **11/392,643**

(22) Filed: **Mar. 30, 2006**

(65) **Prior Publication Data**

US 2006/0227053 A1 Oct. 12, 2006

(30) **Foreign Application Priority Data**

Mar. 31, 2005 (JP) 2005-102759

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS; 343/702**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,356,492 A 10/1982 Kaloi
5,050,295 A * 9/1991 Sullivan et al. 29/830
5,410,322 A * 4/1995 Sonoda 343/700 MS

5,420,596 A * 5/1995 Burrell et al. 343/700 MS
6,157,348 A * 12/2000 Openlander 343/846
6,456,250 B1 * 9/2002 Ying et al. 343/702
2002/0047038 A1 4/2002 Sangawa et al.

FOREIGN PATENT DOCUMENTS

EP 1 168 491 A1 1/2002
JP 08-321718 12/1996

OTHER PUBLICATIONS

European Search Report mailed Jul. 12, 2006 for Corresponding European patent application No. 06006311.2.

* cited by examiner


Primary Examiner—HoangAnh T Le

(74) *Attorney, Agent, or Firm*—Harness, Dickey & Pierce, PLC

(57) **ABSTRACT**

An antenna device includes a dielectric substrate, a ground plane, a pair of antenna elements, a feeding section, and a pair of transmission lines. The ground plane is formed on a surface of the dielectric substrate. The antenna elements are flat, have different resonant frequencies, are formed on another surface of the dielectric substrate, and respectively have ends electrically connected to the ground plane. The feeding section feeds power to each of the antenna elements. The transmission lines carry out impedance conversion such that parts of the transmission lines which are connected to the antenna elements have impedances matching input impedances of the antenna elements, respectively, and such that part of the feeding section which is fed with the power has an impedance matching an impedance of the feeding section.

12 Claims, 15 Drawing Sheets

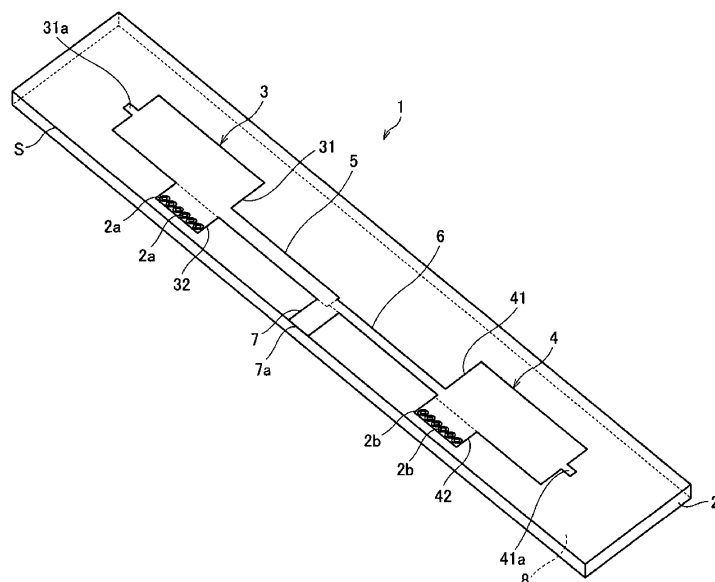

Acrobat 文件



US007466268B2

(12) **United States Patent**
Chen

(10) **Patent No.:** **US 7,466,268 B2**
(45) **Date of Patent:** **Dec. 16, 2008**

(54) **FREQUENCY ADJUSTABLE ANTENNA
APPARATUS AND A MANUFACTURING
METHOD THEREOF**

(75) Inventor: **Chih-Ming Chen**, Hsinchu (TW)

(73) Assignee: **Inpaq Technology Co., Ltd.**, Hsinshu
(TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 371 days.

(21) Appl. No.: **11/480,945**

(22) Filed: **Jul. 6, 2006**

(65) **Prior Publication Data**

US 2008/0007463 A1 Jan. 10, 2008

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702;**
343/895

(58) **Field of Classification Search** 343/700 MS,
343/702, 895, 906, 873
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,480,171 B1 * 11/2002 Huang 343/860

2002/0149538 A1 * 10/2002 Tomomatsu et al. 343/895
2004/0130495 A1 * 7/2004 Hilgers 343/702
2006/0109192 A1 * 5/2006 Weigand 343/795
2006/0256018 A1 * 11/2006 Soler Castany et al. 343/700
MS

* cited by examiner



Primary Examiner—HoangAnh T Le

(74) *Attorney, Agent, or Firm*—Rosenberg, Klein & Lee

(57) **ABSTRACT**

A frequency adjustable antenna apparatus and a manufacturing method thereof are disclosed. The antenna apparatus includes a plurality of antenna paths and the length of the antenna path is changed via the soldering pads. Therefore, the receiving frequency of the antenna can be changed. The frequency adjustable antenna apparatus includes a body, a first path, at least one second path and a printed circuit board. The first path is located on an upper surface of the body and extends to a lower surface. The second path is located on the lower surface. The printed circuit board includes at least one soldering pad. When the lower surface of the body is pasted on the printed circuit board, the first path is connected with the second path via the soldering pads. Thereby, the length of the first path is changed to adjust the frequency of the antenna apparatus.

24 Claims, 4 Drawing Sheets

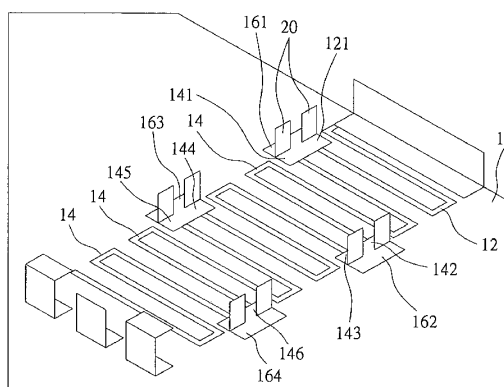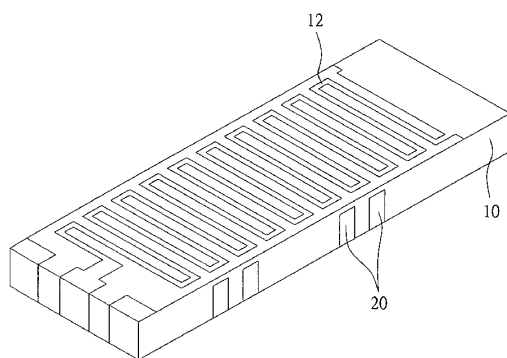

Acrobat 文件



US007466269B2

(12) **United States Patent**
Haziza

(10) **Patent No.:** **US 7,466,269 B2**
(45) **Date of Patent:** **Dec. 16, 2008**

(54) **VARIABLE DIELECTRIC CONSTANT-BASED ANTENNA AND ARRAY**

(75) Inventor: **Dedi David Haziza**, Cupertino, CA (US)

(73) Assignee: **Wavebender, Inc.**, Santa Clara, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/747,148**

(22) Filed: **May 10, 2007**

(65) **Prior Publication Data**

US 2008/0036664 A1 Feb. 14, 2008

Related U.S. Application Data

(63) Continuation of application No. 11/695,913, filed on Apr. 3, 2007.

(60) Provisional application No. 60/890,456, filed on Feb. 16, 2007, provisional application No. 60/859,799, filed on Nov. 17, 2006, provisional application No. 60/859,667, filed on Nov. 17, 2006, provisional application No. 60/808,187, filed on May 24, 2006.

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702; 29/600, 601**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,942,180 A 3/1976 Rannou et al.

5,579,019 A	11/1996	Uematsu et al.
5,793,334 A	8/1998	Anderson et al.
2003/0038745 A1	2/2003	Lalezari et al.
2003/0122724 A1	7/2003	Shelley et al.
2004/0246069 A1	12/2004	Yoneda et al.
2005/0146478 A1	7/2005	Wang et al.
2005/0174290 A1 *	8/2005	Huang 343/700 MS
2006/0055605 A1	3/2006	Peled et al.

OTHER PUBLICATIONS

International Search Report for PCT Application No. PCT/US07/24047 dated May 2, 2008.

International Search Report for PCT Application No. PCT/US07/12004 dated Jul. 7, 2008.

International Search Report for PCT Application No. PCT/US07/24027 dated May 14, 2008.

International Search Report for PCT Application No. PCT/US07/24028 dated May 20, 2008.

International Search Report for PCT Application No. PCT/US07/24029 dated May 14, 2008.

* cited by examiner


Primary Examiner—Hoang V Nguyen

(74) *Attorney, Agent, or Firm*—Nixon Peabody LLP; Joseph Bach, Esq.

(57) **ABSTRACT**

An antenna and antenna array are provided. A radiating elements and corresponding feed lines are provided over a variable dielectric constant material sandwiched between two panels. The sandwich may be in the form of an LCD. The dielectric constant in a selected area under the conductive line can be varied to control the phase of the radiating element. The dielectric constant in a selected area under the radiating element can be varied to control the resonance frequency of the radiating element. The dielectric constant in a selected area under the conductive line can be varied to also control the polarization of the radiating element.

20 Claims, 2 Drawing Sheets

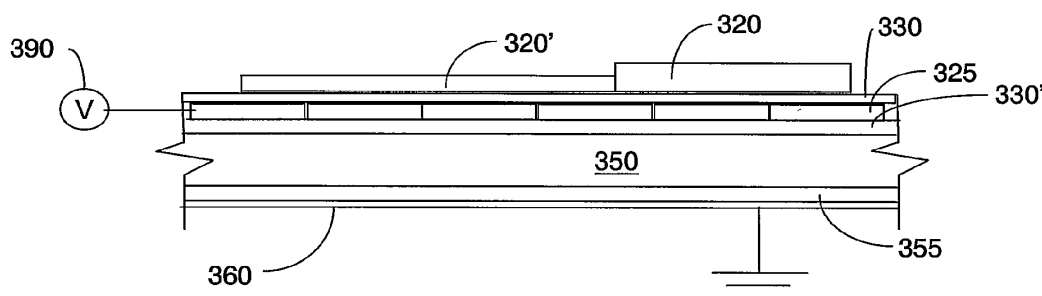

Acrobat 文件



US007466270B2

(12) **United States Patent**
Utagawa et al.

(10) **Patent No.:** **US 7,466,270 B2**
(45) **Date of Patent:** **Dec. 16, 2008**

(54) **PLANAR ANTENNA**

2007/0171132 A1 7/2007 Utagawa et al. 343/700

(75) Inventors: **Naoaki Utagawa**, Gunma (JP); **Takashi Nozaki**, Gunma (JP); **Ichiro Tsuzuku**, Gunma (JP); **Naoki Sotoma**, Gunma (JP)

FOREIGN PATENT DOCUMENTS

EP	1 246 299 A2	10/2002
EP	1 814 193 A1	8/2007
JP	5-136625	6/1993
JP	2002-359515	12/2002
WO	WO 01/18910 A1	3/2001

(73) Assignee: **Yokowo Co., Ltd.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

* cited by examiner

Primary Examiner—Tho G Phan

(74) *Attorney, Agent, or Firm*—Morgan, Lewis & Bockius LLP

(21) Appl. No.: **11/812,093**

(22) Filed: **Jun. 14, 2007**

(57) **ABSTRACT**

(65) **Prior Publication Data**

US 2007/0290931 A1 Dec. 20, 2007

(30) **Foreign Application Priority Data**

Jun. 15, 2006 (JP) 2006-166423

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/846**

(58) **Field of Classification Search** **343/700 MS; 343/846, 829, 830**

See application file for complete search history.


(56) **References Cited**

U.S. PATENT DOCUMENTS

4,069,483 A *	1/1978	Kaloi		343/700 MS
4,386,357 A *	5/1983	Patton		343/700 MS
4,827,271 A *	5/1989	Berneking et al.		343/700 MS
6,806,831 B2 *	10/2004	Johansson et al.		343/700 MS

A plate member is adapted to be electrically grounded. A first radiating electrode opposes the plate member with a gap and extending parallel to the plate member. A second radiating electrode opposes the plate member with a gap and extending parallel to the plate member. A feeding pin is connected to a center part of the first radiating electrode and a center part of the second radiating electrode. The feeding pin is adapted to feed power to the first radiating electrode and the second radiating electrode. A pair of first short-circuiting pins are electrically connecting the plate member and an outer edge of the first radiating electrode at symmetrical positions relative to the feeding pin. A pair of second short-circuiting pins are electrically connecting the plate member and both ends of the second radiating electrode. The first radiating electrode is formed with blank portions which are located at such positions that are on hypothetical straight lines connecting the feeding pin and the short pins. The first radiating electrode and the second radiating electrode are flush with each other.

6 Claims, 7 Drawing Sheets

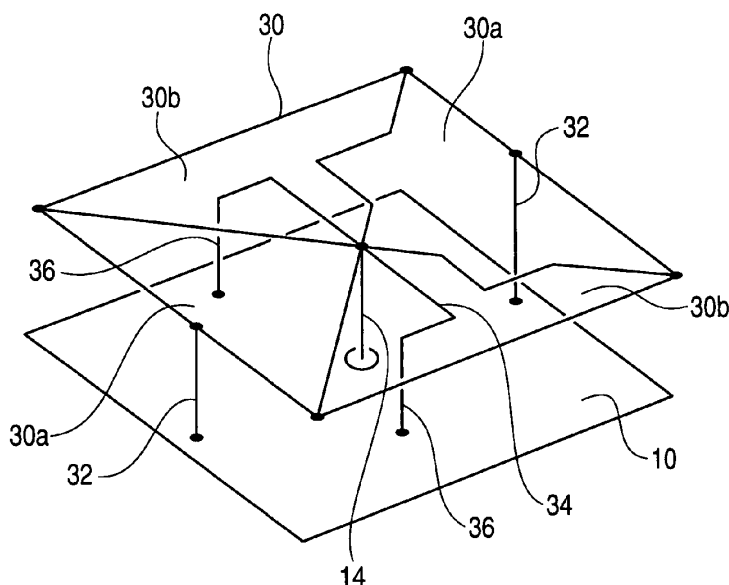

Acrobat 文件



US007466271B2

(12) **United States Patent**
Wen et al.

(10) **Patent No.:** **US 7,466,271 B2**
(45) **Date of Patent:** **Dec. 16, 2008**

(54) **MULTIPLE-BAND ANTENNA WITH PATCH AND SLOT STRUCTURES**

(75) Inventors: **Geyi Wen**, Waterloo (CA); **Perry Jarmuszewski**, Waterloo (CA); **Adam D. Stevenson**, Waterloo (CA)

(73) Assignee: **Research In Motion Limited**, Ontario (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/838,751**

(22) Filed: **Aug. 14, 2007**

(65) **Prior Publication Data**

US 2008/0030411 A1 Feb. 7, 2008

Related U.S. Application Data

(63) Continuation of application No. 11/456,025, filed on Jul. 6, 2006, now Pat. No. 7,283,097, which is a continuation of application No. 10/723,840, filed on Nov. 26, 2003, now Pat. No. 7,224,312.

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702, 725, 745, 770**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,049,314 A 4/2000 Munson et al. 343/846
6,140,966 A 10/2000 Pankinaho 343/700 MS
6,157,348 A 12/2000 Openlander 343/846
6,343,208 B1 1/2002 Ying 455/575.7
6,408,190 B1 6/2002 Ying 455/553
6,466,170 B2 * 10/2002 Zhou 343/700 MS

6,670,923 B1 12/2003 Kadambi et al. 343/700 MS
7,023,387 B2 * 4/2006 Wen et al. 343/700 MS
7,136,024 B2 11/2006 Yuanzhu et al. 343/767
7,145,516 B2 12/2006 Ko et al. 343/767
7,151,493 B2 12/2006 Wen et al. 343/767
7,224,312 B2 * 5/2007 Wen et al. 343/700 MS

(Continued)

FOREIGN PATENT DOCUMENTS

CN 1338796 A 3/2002

(Continued)


Primary Examiner—Tan Ho

(74) *Attorney, Agent, or Firm*—Allen, Dyer, Doppelt, Milbrath & Gilchrist P.A.

(57) **ABSTRACT**

A multiple-band antenna having first and second operating frequency bands is provided. The antenna includes a first patch structure associated primarily with the first operating frequency band, a second patch structure electrically coupled to the first patch structure and associated primarily with the second operating frequency band, a first slot structure disposed between a first portion of the first patch structure and the second patch structure and associated primarily with the first operating frequency band, and a second slot structure disposed between a second portion of the first patch structure and the second patch structure and associated primarily with the second operating frequency band. A mounting structure for the multiple-band antenna is also provided. The mounting structure includes a first surface and a second surface opposite to and overlapping the first surface. The first and second patch structures are mounted to the first surface, and a feeding point and ground point, respectively connected to the first and second patch structures, are mounted to the second surface.

27 Claims, 7 Drawing Sheets

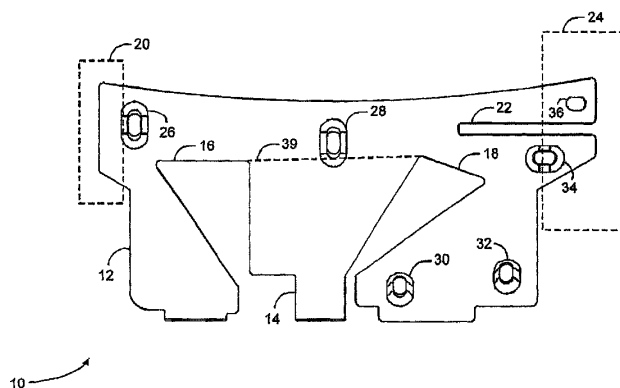

Acrobat 文件



US007466272B1

(12) **United States Patent**
Su et al.

(10) **Patent No.:** **US 7,466,272 B1**
(45) **Date of Patent:** **Dec. 16, 2008**

(54) **DUAL-BAND ANTENNA**

(75) Inventors: **Jia-Hung Su**, Taipei Hsien (TW);
Ching-Chi Lin, Taipei Hsien (TW);
Shih-Hao Hu, Taipei Hsien (TW);
Hung-Jen Chen, Taipei Hsien (TW);
Kai Shih, Taipei Hsien (TW); **Yu-Yuan Wu**, Taipei Hsien (TW)

6,861,986 B2 3/2005 Fang et al.
7,289,071 B2 * 10/2007 Hung et al. 343/702
7,292,194 B2 * 11/2007 Tai et al. 343/702
7,339,536 B2 * 3/2008 Hung et al. 343/702
7,362,277 B2 * 4/2008 Su 343/702
7,429,955 B2 * 9/2008 Tai et al. 343/702

* cited by examiner

(73) Assignee: **Cheng Uei Precision Industry Co., Ltd.**, Taipei Hsien (TW)

Primary Examiner—HoangAnh T Le
(74) *Attorney, Agent, or Firm*—WPAT, P.C.; Anthony King

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(57) **ABSTRACT**

A dual-band antenna has a ground portion, a connection portion with a feeding point separated from the ground portion and a short portion connected to the ground portion and the connection portion. The short portion and the ground portion are formed an acute angle therebetween. The connection portion respectively connect a first radiating portion and a second radiating portion. The first radiating portion and the second radiating portion are parallel to said ground portion. The short portion is arranged between the ground portion and the first radiating portion. When the dual-band antenna operates at wireless operation, the connection portion, the first radiating portion and the second radiating portion resonate to obtain a first frequency range and a second frequency range. The short portion is formed as a function of an inductance.

(21) Appl. No.: **11/871,768**

(22) Filed: **Oct. 12, 2007**

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702, 846, 848**


See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,812,892 B2 11/2004 Tai et al.

13 Claims, 4 Drawing Sheets

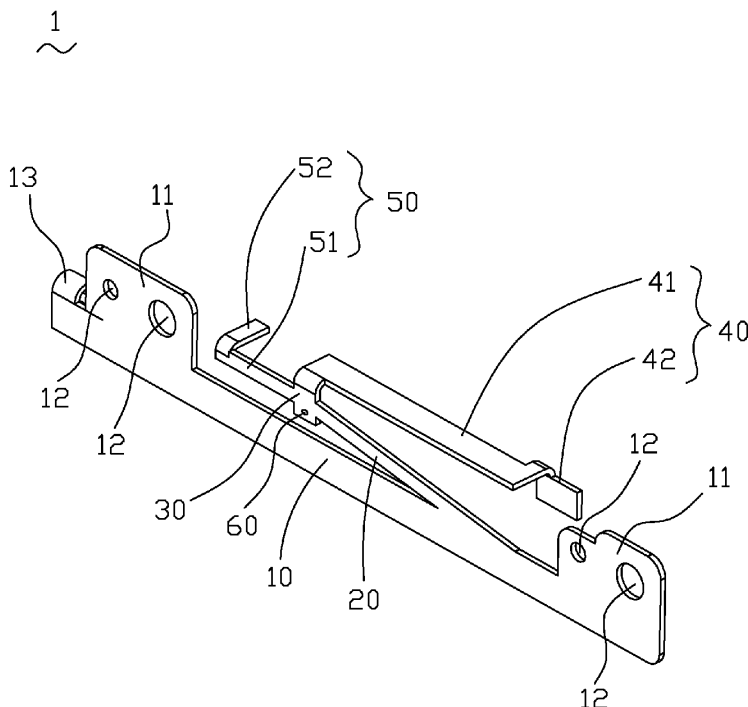

Acrobat 文件



US007466273B2

(12) **United States Patent**
Lee et al.

(10) **Patent No.:** **US 7,466,273 B2**
(45) **Date of Patent:** **Dec. 16, 2008**

(54) **MULTIBAND ANTENNA USING WHIP HAVING INDEPENDENT POWER FEEDING IN WIRELESS TELECOMMUNICATION TERMINAL**

(75) Inventors: **Jin-Woo Lee**, Gyeonggi-do (KR);
Sang-Hyuk Mun, Incheon (KR)

(73) Assignee: **Ace Technology**, Incheon (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/594,928**

(22) PCT Filed: **Mar. 31, 2004**

(86) PCT No.: **PCT/KR2004/000749**

§ 371 (c)(1),
(2), (4) Date: **Sep. 29, 2006**

(87) PCT Pub. No.: **WO2005/101572**

PCT Pub. Date: **Oct. 27, 2005**

(65) **Prior Publication Data**

US 2007/0205948 A1 Sep. 6, 2007

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/893

(58) **Field of Classification Search** 343/702,
343/895, 793, 901, 893; 455/90.3
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,069,592 A * 5/2000 Wass 343/895

6,239,755 B1 * 5/2001 Klemens et al. 343/702
6,295,462 B1 * 9/2001 Kudoh 455/41.3
6,380,903 B1 * 4/2002 Hayes et al. 343/725
6,388,626 B1 5/2002 Gamalielsson et al.
6,882,320 B2 * 4/2005 Park et al. 343/702
7,075,487 B2 * 7/2006 Mattsson et al. 343/702
7,228,112 B2 * 6/2007 Ota et al. 455/90.3
2003/0048227 A1 3/2003 Nakamura
2004/0095283 A1 5/2004 Park et al.

FOREIGN PATENT DOCUMENTS

EP 1 01 603 A 12/2000
EP 1 193 791 A 4/2002
GB 2347560 9/2000
KR 10-2000-0021662 A 4/2000

OTHER PUBLICATIONS

Supplementary European Search Report dated Jun. 10, 2008.

* cited by examiner


Primary Examiner—Tan Ho

(74) *Attorney, Agent, or Firm*—Venable LLP; Michael A. Sartori; Catherine M. Voorhees

(57) **ABSTRACT**

Provided is a multi-band antenna using a whip having independent power feeding in a wireless telecommunication terminal. The multi-band antenna of a wireless telecommunication terminal includes a first feed point for feeding an electric signal provided from an electric signal provider; a second feed point for feeding an electric signal provided from the electric signal provider; a plurality of radiators for radiating the electric signal fed from the first feed point into an electromagnetic wave signal; and a whip radiator for radiating the electric signal fed from the second feed point into an electromagnetic wave signal in order to increase the radiant efficiency of the electromagnetic wave signal radiated from a plurality of radiator and extend a bandwidth.

18 Claims, 6 Drawing Sheets

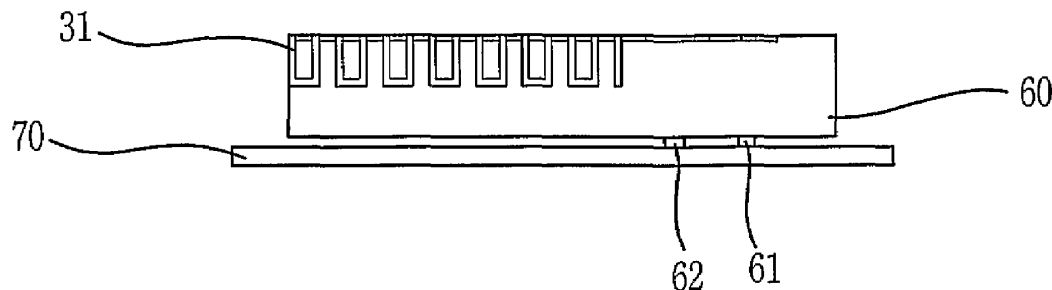

Acrobat 文件



US007466274B2

(12) **United States Patent**
Lin et al.

(10) **Patent No.:** **US 7,466,274 B2**

(45) **Date of Patent:** **Dec. 16, 2008**

(54) **MULTI-BAND ANTENNA**

(75) Inventors: **Ching-Chi Lin**, Taipei Hsien (TW); **Kai Shih**, Taipei Hsien (TW); **Yu-Yuan Wu**, Taipei Hsien (TW)

(73) Assignee: **Cheng Uei Precision Industry Co., Ltd.**, Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/613,248**

(22) Filed: **Dec. 20, 2006**

(65) **Prior Publication Data**

US 2008/0150829 A1 Jun. 26, 2008

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** **343/702, 343/700 MS, 846**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,106,257 B2 * 9/2006 Liu et al. 343/700 MS

7,119,747 B2 * 10/2006 Lin et al. 343/702
2003/0206136 A1 * 11/2003 Chen 343/702
2007/0018892 A1 * 1/2007 Ku et al. 343/700 MS
2007/0103367 A1 * 5/2007 Wang 343/700 MS
2007/0109199 A1 * 5/2007 Hung et al. 343/700 MS

* cited by examiner


Primary Examiner—Hoang V Nguyen

(74) *Attorney, Agent, or Firm*—WPAT, P.C.; Anthony King

(57) **ABSTRACT**

A multi-band antenna adapted to a portable electrical device capable of operating in various wireless communication bands includes a first radiating conductor having opposite elongated sides, a second radiating conductor extending from one end of the first radiating conductor, a third radiating conductor arranging about a central area of the first radiating. Both the second radiating conductor and the third radiating conductor extend from the same elongated side of the first radiating conductor. A feeding body is curved and extended from the third radiating conductor. According to a position that the feeding body connecting to the third radiating conductor and designed the feeding body, operation of the multi-band antenna has a preferred range of a low frequency bandwidth and a high frequency harmonic bandwidth.

19 Claims, 2 Drawing Sheets

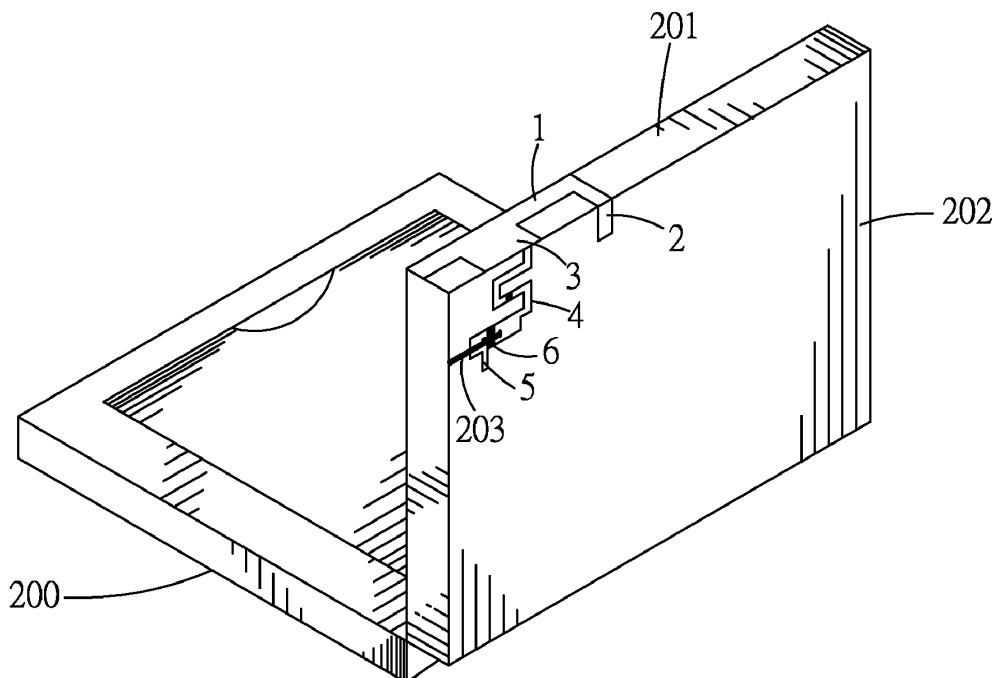

Acrobat 文件



US007466275B2

(12) **United States Patent**
Cheng

(10) **Patent No.:** **US 7,466,275 B2**
(45) **Date of Patent:** **Dec. 16, 2008**

(54) **ANTENNA MODULE FOR MOBILE PHONE**

(75) Inventor: **Keh-Chang Cheng**, Taoyuan (TW)

(73) Assignee: **P-Two Industries Inc.**, Taoyuan (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 90 days.

(21) Appl. No.: **11/783,440**

(22) Filed: **Apr. 10, 2007**

(65) **Prior Publication Data**

US 2008/0081658 A1 Apr. 3, 2008

(30) **Foreign Application Priority Data**

Oct. 2, 2006 (TW) 95217636 U

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** **343/702,**
343/700 MS, 846, 841

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,180,448 B2 * 2/2007 Suganthan et al. 343/700 MS

7,193,569 B2 * 3/2007 Vesterinen 343/702
2006/0066490 A1 * 3/2006 Ku et al. 343/702
2006/0290591 A1 * 12/2006 Nilsson et al. 343/906
2007/0210969 A1 * 9/2007 Vance 343/702

* cited by examiner


Primary Examiner—Hoang V Nguyen

(74) Attorney, Agent, or Firm—Rosenberg, Klein & Lee

(57) **ABSTRACT**

An antenna module of mobile phone has an antenna, a feed-in terminal and a grounding terminal. The antenna includes an antenna body for receiving and radiating electromagnetic waves, a feed-in portion and a grounding portion. The feed-in portion forms a first bump array with adhesive on a surface thereon. The grounding portion forms a second bump array with adhesive on a surface thereon. The first bump array and adhesive of the feed-in portion connect with the feed-in terminal, and the second bump array and adhesive of the grounding portion connect with the grounding terminal. The first bump array and the second bump array respectively pierce oxidation coatings on surfaces of the feed-in terminal and the grounding terminal, producing contact positive pressure, electrically connecting the feed-in portion and the grounding portion with the feed-in terminal and the grounding terminal.

10 Claims, 6 Drawing Sheets

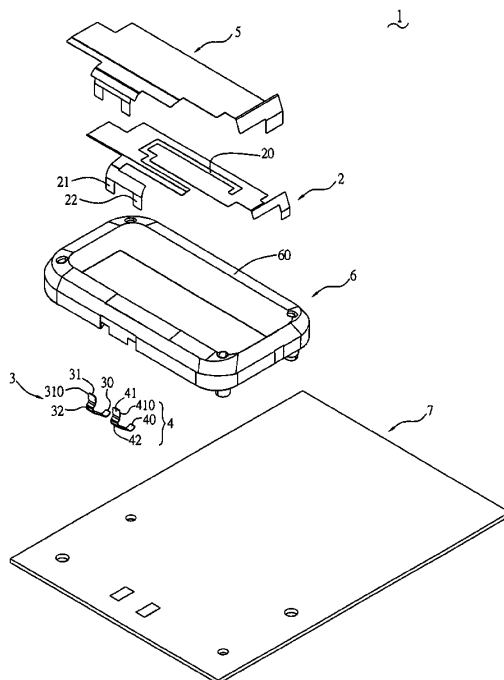

Acrobat 文件



US007466276B1

(12) **United States Patent**
Chen

(10) **Patent No.:** **US 7,466,276 B1**

(45) **Date of Patent:** **Dec. 16, 2008**

(54) **BROADBAND INVERTED-F ANTENNA**

(75) Inventor: **Po-Chuan Chen**, Hsinchu (TW)

(73) Assignee: **Alpha Networks Inc.**, Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 21 days.

(21) Appl. No.: **11/812,285**

(22) Filed: **Jun. 18, 2007**

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/700 MS

(58) **Field of Classification Search** 343/700 MS,
343/702, 829, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,926,150 A * 7/1999 McLean et al. 343/846

6,404,395 B1 * 6/2002 Masuda 343/702

7,345,631 B2 * 3/2008 Kim et al. 343/700 MS
2003/0038749 A1 * 2/2003 Chen 343/700 MS
2003/0210191 A1 * 11/2003 Mohammadian et al. 343/702

* cited by examiner


Primary Examiner—Tho G Phan

(74) *Attorney, Agent, or Firm*—Bacon & Thomas, PLLC

(57) **ABSTRACT**

An antenna body of a broadband inverted-F antenna is printed on a circuit board, wherein an interval is maintained between the antenna body and a grounding plane disposed at a position proximate to an edge of the circuit board. The antenna body is divided into a first, a second and a third portions. An end of the first portion is extended towards the grounding plane to form the short circuit line, and another end of the first portion is extended towards the grounding plane to form the feed line. A first end of the second portion is connected to another end of the first portion, a second end of the second portion is connected to an end of the third portion, and the first portion has a wire width smaller than the third portion, so that no metal is existing between the second and third portions and the grounding plane.

11 Claims, 12 Drawing Sheets

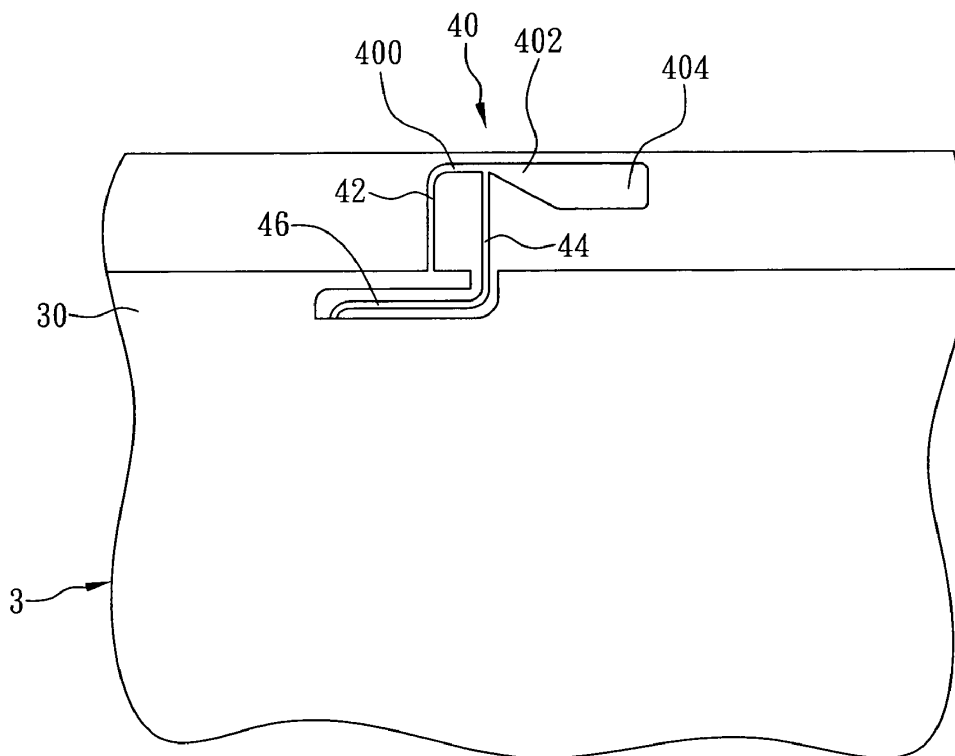

Acrobat 文件



US007466277B2

(12) **United States Patent**
Ishizuka et al.

(10) **Patent No.:** **US 7,466,277 B2**
(45) **Date of Patent:** **Dec. 16, 2008**

(54) **ANTENNA DEVICE AND WIRELESS COMMUNICATION APPARATUS**

(75) Inventors: **Kenichi Ishizuka**, Sagamihara (JP);
Kazunari Kawahata, Machida (JP)

(73) Assignee: **Murata Manufacturing Co., Ltd.**,
Kyoto (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/954,521**

(22) Filed: **Dec. 12, 2007**

(65) **Prior Publication Data**

US 2008/0079642 A1 Apr. 3, 2008

Related U.S. Application Data

(63) Continuation of application No. PCT/JP2006/306701, filed on Mar. 30, 2006.

(30) **Foreign Application Priority Data**

Jun. 17, 2005 (JP) 2005-177764

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** 343/702; 343/700 MS

(58) **Field of Classification Search** 343/702,
343/700 MS, 829, 830, 846
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,177,908 B1 * 1/2001 Kawahata et al. 343/700 MS
6,201,502 B1 3/2001 Kurita et al.

6,707,427 B2 3/2004 Konishi et al.
6,850,195 B2 2/2005 Onaka et al.
6,946,994 B2 9/2005 Imaizumi et al.
6,965,346 B2 * 11/2005 Sung et al. 343/702
7,148,851 B2 12/2006 Takaki et al.
7,196,664 B2 * 3/2007 Asai 343/700 MS
7,319,431 B2 * 1/2008 Jeon et al. 343/700 MS
2005/0078038 A1 * 4/2005 Takaki et al. 343/702

FOREIGN PATENT DOCUMENTS

JP 7-20708 U 4/1995
JP 8-23218 A 1/1996

(Continued)

OTHER PUBLICATIONS

Official communication issued in the International Application No. PCT/JP2006/306701, mailed on May 2, 2006.


Primary Examiner—Tho G Phan

(74) *Attorney, Agent, or Firm*—Keating & Bennett, LLP

(57) **ABSTRACT**

A compact and thin antenna device can be mounted in a small area of a substrate and has a multiband capability adaptable to various applications. The antenna device includes a chip antenna, an antenna element, and a chip antenna. The chip antenna is produced by forming a radiation electrode on the surface of a dielectric base, and mounting a frequency variable circuit on the radiation electrode. Thus, it becomes possible to obtain a resonant frequency f_1 of the chip antenna and further to vary the resonant frequency f_1 . The antenna element is produced by adding an auxiliary element to an additional radiation electrode for the chip antenna. The chip antenna includes a radiation electrode on a dielectric base and a conductive pattern. Thus, a resonant frequency f_2 and a resonant frequency f_3 of the antenna element and the chip antenna, respectively, can be obtained.

12 Claims, 11 Drawing Sheets

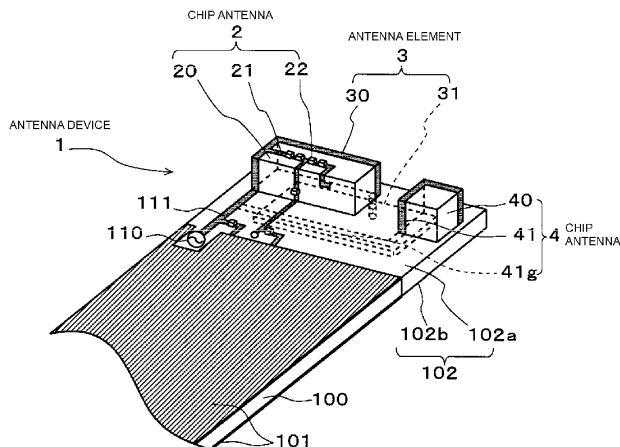

Acrobat 文件



US007466283B2

(12) **United States Patent**
Kamitani et al.

(10) **Patent No.:** **US 7,466,283 B2**
(45) **Date of Patent:** **Dec. 16, 2008**

(54) **COIL ANTENNA STRUCTURE AND
PORTABLE ELECTRONIC APPARATUS**

7,280,076 B2 10/2007 Ninomiya et al.
2004/0130500 A1 7/2004 Takei et al.

(75) Inventors: **Gaku Kamitani**, Kyoto (JP); **Hiroshi Marusawa**, Moriyama (JP); **Takehiro Konoike**, Yasu (JP); **Kazunari Kawahata**, Machida (JP)

(Continued)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Murata Manufacturing Co., Ltd.**,
Kyoto (JP)

JP 08-124749 A 5/1996

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 63 days.

(Continued)

OTHER PUBLICATIONS

(21) Appl. No.: **11/553,029**

(22) Filed: **Oct. 26, 2006**

International Search Report issued in the corresponding International Application No. PCT/JP2006/311831, mailed on Jul. 18, 2006.

(65) **Prior Publication Data**

US 2007/0052600 A1 Mar. 8, 2007

(Continued)

Related U.S. Application Data

(63) Continuation of application No. PCT/JP2006/311831, filed on Jun. 13, 2006.

Primary Examiner—Tan Ho
(74) Attorney, Agent, or Firm—Keating & Bennett, LLP

(57) **ABSTRACT**

(30) **Foreign Application Priority Data**

Jun. 14, 2005 (JP) 2005-174099
Aug. 26, 2005 (JP) 2005-245541
Oct. 12, 2005 (JP) 2005-297223

(51) **Int. Cl.**
H01Q 7/08 (2006.01)

(52) **U.S. Cl.** **343/788**; 343/702

(58) **Field of Classification Search** 343/718,
343/799, 702, 788, 787

See application file for complete search history.


(56) **References Cited**

U.S. PATENT DOCUMENTS


5,005,690 A * 4/1991 Gonser 198/350
7,023,395 B2 * 4/2006 Ohara et al. 343/788
7,061,439 B1 * 6/2006 Minami et al. 343/718

A coil antenna structure includes a first magnetic component extending in the thickness direction of a tabular primary casing. A second magnetic component and a third magnetic component, which are magnetically connected to the first magnetic component, are disposed on the first principal surface side and the second principal surface side of the primary casing, respectively. The first magnetic component is provided with a coil component surrounding it. In this manner, a U-shaped magnetic path is provided at an end portion of the primary casing so as to detour around a substrate defining an internal conductor. Likewise, a U-shaped magnetic path including fourth to sixth magnetic components is provided in a secondary casing defining a clamshell type casing together with the primary casing so as to detour around a substrate defining as an internal conductor.

39 Claims, 13 Drawing Sheets

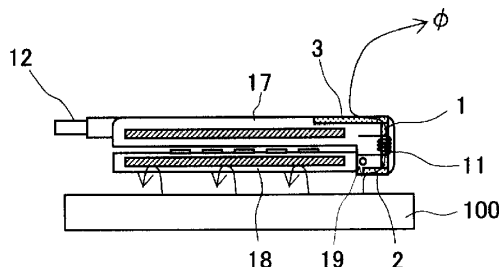

Acrobat 文件



(10) **Patent No.:** US 7,468,698 B2
(45) **Date of Patent:** Dec. 23, 2008

10 Claims, 11 Drawing Sheets



US007468699B2

(12) **United States Patent**
Manholm et al.

(10) **Patent No.:** **US 7,468,699 B2**

(45) **Date of Patent:** **Dec. 23, 2008**

(54) **TRIPLE POLARIZED PATCH ANTENNA**

(75) Inventors: **Lars Manholm**, Gothenburg (SE);
Fredrik Harrysson, Gothenburg (SE)

(73) Assignee: **Telefonaktiebolaget L M Ericsson**
(Publ), Stockholm (SE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 12 days.

(21) Appl. No.: **11/722,910**

(22) PCT Filed: **Dec. 27, 2004**

(86) PCT No.: **PCT/SE2004/002010**

§ 371 (c)(1),
(2), (4) Date: **Jun. 27, 2007**

(87) PCT Pub. No.: **WO2006/071139**

PCT Pub. Date: **Jul. 6, 2006**

(65) **Prior Publication Data**

US 2008/0136734 A1 Jun. 12, 2008

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 9/38 (2006.01)

(52) U.S. Cl. 343/700 MS; 343/830

(58) **Field of Classification Search** 343/700 MS,
343/830, 853, 893

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,835,538 A * 5/1989 McKenna et al. 343/700 MS
5,155,493 A * 10/1992 Thursby et al. 343/700 MS
5,874,919 A * 2/1999 Rawnick et al. 343/700 MS
6,118,406 A * 9/2000 Josypenko 343/700 MS


* cited by examiner

Primary Examiner—Shih-Chao Chen

(57) **ABSTRACT**

An antenna arrangement for a Multiple Input Multiple Output (MIMO) radio system, the antenna arrangement transmitting and receiving in three essentially uncorrelated polarizations. The arrangement includes three parallel, stacked patches separated by first and second slots. A first feeding line feeds the first patch, and at least a second and third feeding line feed the second patch. In a first operating mode, the first feeding line generates a first constant E-field in the first slot between the edges of the first and second patches. In a second operating mode, the second feeding line contributes to a second, sinusoidally varying E-field in the second slot between the edges of the second and third patches. In a third operating mode, the third feeding line contributes to a third, sinusoidally varying E-field in the second slot between the edges of the second and third patches.

10 Claims, 3 Drawing Sheets

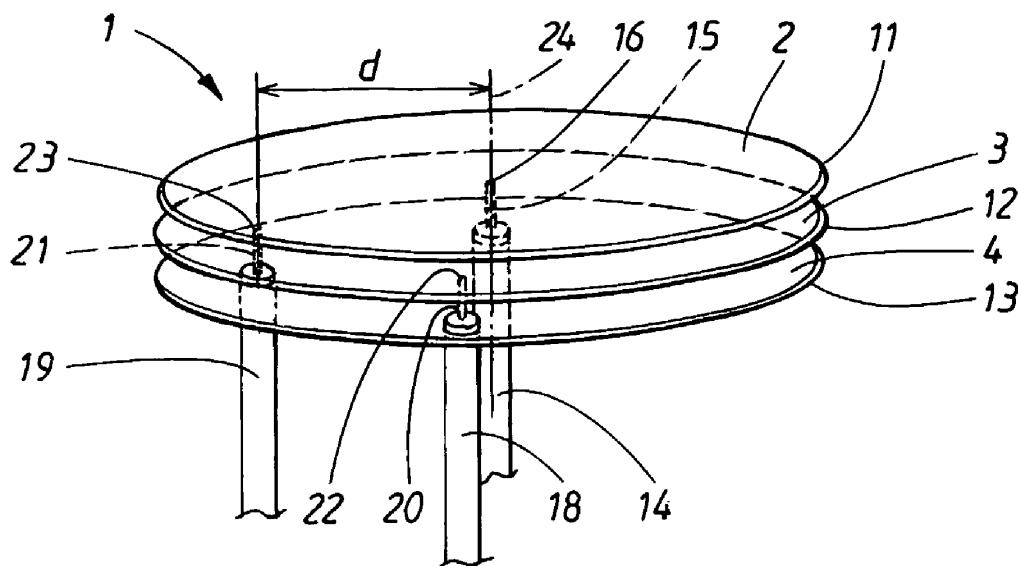

Acrobat 文件



US007468700B2

(12) **United States Patent**
Milosavljevic

(10) **Patent No.:** **US 7,468,700 B2**
(45) **Date of Patent:** **Dec. 23, 2008**

(54) **ADJUSTABLE MULTI-BAND ANTENNA**

- (75) Inventor: **Zlatoljub Milosavljevic**, Kempele (FI)
(73) Assignee: **Pulse Finland Oy**, Kempele (FI)
(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 350 days.

(21) Appl. No.: **11/008,447**

(22) Filed: **Dec. 9, 2004**

(65) **Prior Publication Data**

US 2005/0128152 A1 Jun. 16, 2005

(30) **Foreign Application Priority Data**

Dec. 15, 2003 (FI) 20031833

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/700 MS;
343/850

(58) **Field of Classification Search** 343/700 MS,
343/745, 829, 846, 850, 702, 876
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,585,810 A * 12/1996 Tsuru et al. 343/745
5,874,926 A * 2/1999 Tsuru et al. 343/860
6,255,994 B1 * 7/2001 Saito 343/700 MS
6,353,443 B1 * 3/2002 Ying 715/702
6,462,716 B1 * 10/2002 Kushihi 343/860
6,693,594 B2 * 2/2004 Pankinaho et al. 343/700 MS
6,825,818 B2 * 11/2004 Toncich 343/860
6,836,249 B2 * 12/2004 Kenoun et al. 343/700 MS
6,975,278 B2 * 12/2005 Song et al. 343/795

FOREIGN PATENT DOCUMENTS

EP 0 400 872 A1 12/1990
EP 1 052 723 A2 11/2000
EP 1 113 524 A2 7/2001
FI 113588 B 11/2000
JP 10 28013 1/1998
JP 10 224142 8/1998
JP 2001 53543 2/2001
WO WO-02/11236 2/2002
WO WO-02/067375 A1 8/2002
WO WO-02/078124 A1 10/2002

OTHER PUBLICATIONS

Examination Report dated May 3, 2006 issued by the EPO for European Patent Application No. 04 396 079.8.

* cited by examiner

Primary Examiner—Douglas W. Owens

Assistant Examiner—Jimmy T Vu


(74) *Attorney, Agent, or Firm*—Darby & Darby P.C.

(57) **ABSTRACT**

An adjustable multi-band planar antenna especially applicable in mobile terminals. A conductive element is placed in the structure of an antenna of PIFA type such that the conductive element has a significant electromagnetic coupling to the radiating plane. The parasitic element at issue is connected to a matching circuit (550) consisting of several reactive element. The parasitic element, the matching circuit and a line (540) between them constitute an adjusting circuit of the antenna. The circuit values of the matching circuit can be chosen from at least two alternatives. Alteration in the circuit values changes the coupling between the parasitic element and the ground, in which case an operation band of the antenna is displaced, because the electric length of the antenna's part corresponding that band is changed, measured from the short-circuit point. Regarding the shiftable operation band, proper impedance matching and a proper efficiency can be arranged for the antenna.

10 Claims, 5 Drawing Sheets

900

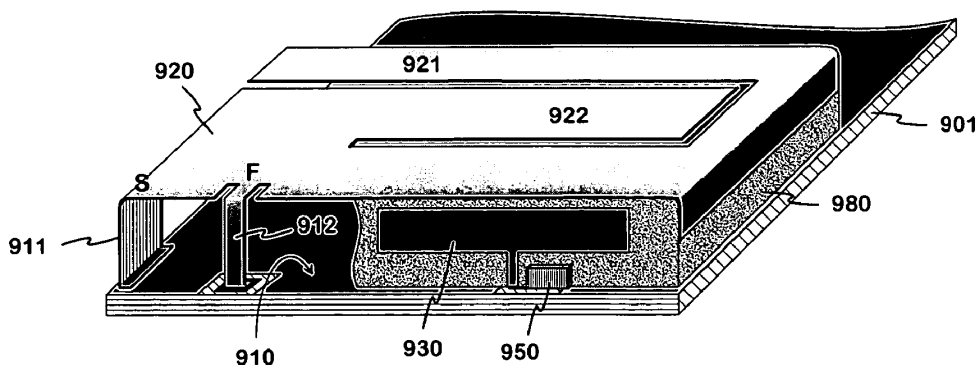

Acrobat 文件



US007468701B2

(12) **United States Patent**
Fujikawa et al.

(10) **Patent No.:** **US 7,468,701 B2**
(45) **Date of Patent:** **Dec. 23, 2008**

(54) **ATTACHMENT/DETACHMENT MECHANISM
FOR COMPACT ANTENNA**

(75) Inventors: **Hiroshi Fujikawa**, Tokyo (JP); **Keiichi Ogura**, Tokyo (JP)

(73) Assignee: **SMK Corporation**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 165 days.

(21) Appl. No.: **11/551,779**

(22) Filed: **Oct. 23, 2006**

(65) **Prior Publication Data**

US 2007/0205960 A1 Sep. 6, 2007

(30) **Foreign Application Priority Data**

Mar. 3, 2006 (JP) 2006-058219

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/715; 343/903;
343/906

(58) **Field of Classification Search** 343/702,
343/715, 888, 900, 903, 906, 700 MS
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,973,645 A * 10/1999 Zigler et al. 343/702
6,283,790 B1 * 9/2001 Idehara et al. 439/582
6,518,928 B1 * 2/2003 Sheu 343/702

6,707,430 B2 * 3/2004 Sakaguchi et al. 343/702
7,046,212 B2 * 5/2006 Tai et al. 343/882
7,193,570 B2 * 3/2007 Liu 343/702
2006/0273980 A1 * 12/2006 Chan 343/906

FOREIGN PATENT DOCUMENTS

JP 2003-032016 A 1/2003

OTHER PUBLICATIONS

Patent Abstracts of Japan for JP2003-032016 published on Jan. 31, 2003.

* cited by examiner

Primary Examiner—Douglas W. Owens


Assistant Examiner—Chuc Tran

(74) *Attorney, Agent, or Firm*—Darby & Darby P.C.

(57) **ABSTRACT**

An attachment/detachment mechanism for an antenna is configured to avoid damage to the antenna when an excessively large force is applied to the antenna, regardless of the direction. A rotational L-shaped connector of an antenna section of the antenna is connected to an antenna housing disposed on a main electronic device unit. A fitting groove is formed on a male fitting cylinder on the rotational L-shaped connector side, and an O-ring is fitted to the groove. An engagement projection formed on an inner wall of a female fitting cylinder on the antenna housing frictionally engages with the O-ring. This configuration allows rotation and attachment/detachment of the antenna section relative to the antenna housing. A contact member is attached to the fitting cylinder to contact a contact spring 31 that presses the O-ring against the engagement projection.

5 Claims, 5 Drawing Sheets

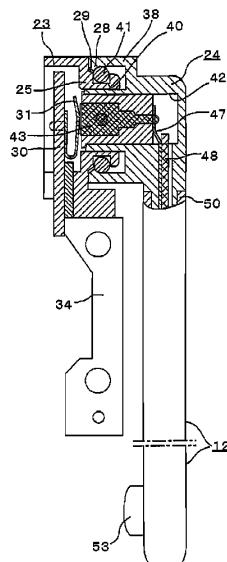

Acrobat 文件



US007468702B2

(12) **United States Patent**
Leizerovich et al.

(10) **Patent No.:** **US 7,468,702 B2**
(45) **Date of Patent:** **Dec. 23, 2008**

(54) **WIRELESS COMMUNICATION DEVICE
WITH INTEGRATED ANTENNA**

(75) Inventors: **Gustavo D. Leizerovich**, Aventura, FL
(US); **Donald W. Burnette**, Sunrise, FL
(US); **Julio C. Castaneda**, Coral
Springs, FL (US); **Orlando Gomez**,
Hialeah, FL (US)

(73) Assignee: **Motorola, Inc.**, Schaumburg, IL (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/929,317**

(22) Filed: **Oct. 30, 2007**

(65) **Prior Publication Data**

US 2008/0055167 A1 Mar. 6, 2008

Related U.S. Application Data

(62) Division of application No. 11/227,367, filed on Sep.
15, 2005, now Pat. No. 7,333,062.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/873**

(58) **Field of Classification Search** 343/702,
343/741, 742, 866, 867, 872, 873
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,710,987 A *	1/1998	Paulick		455/575.7
7,231,237 B2	6/2007	Kinezos et al.		
2005/0064814 A1	3/2005	Matsuo et al.		
2005/0075079 A1	4/2005	Jei et al.		


* cited by examiner

Primary Examiner—HoangAnh T Le

(57) **ABSTRACT**

A near field communication loop antenna (308) is mechanically coupled to the cover (300) of a cellular telephone. The antenna (308) is coupled on the inside of the cover (300) between a keypad (302) and the cover (300), whereby the antenna (308) surrounds the keys (314) and is sandwiched between the keypad assembly (302) and the cover (300). A near field communication antenna (406) is coupled to the outside surface of the cover (300) surrounding a display and sandwiched between a lens (400) and the phone cover (300). A near field communication antenna embedded in the phone cover material, whereby the antenna surrounds either the keys or the display, is disclosed as well.

11 Claims, 4 Drawing Sheets

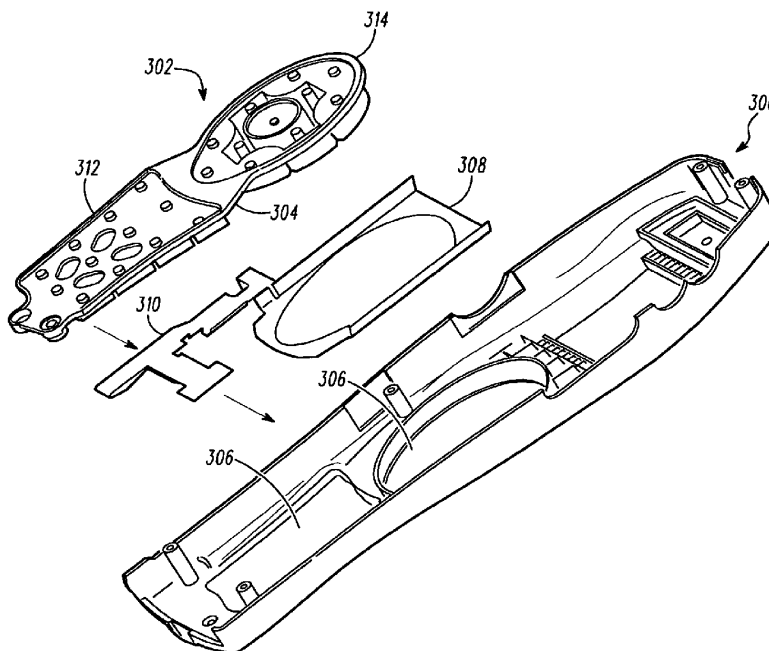

Acrobat 文件



US007468708B2

(12) **United States Patent**
Park et al.

(10) **Patent No.:** **US 7,468,708 B2**
(45) **Date of Patent:** **Dec. 23, 2008**

(54) **MOBILE TERMINAL AND MOBILE
TERMINAL ANTENNA FOR REDUCING
ELECTROMAGNETIC WAVES RADIATED
TOWARDS HUMAN BODY**

(75) Inventors: **Se-hyun Park**, Yongin-si (KR);
Wee-sang Park, Yongin-si (KR);
Yong-eil Kim, Yongin-si (KR); **Jae-hee
Kim**, Pohang-si (KR)

(73) Assignees: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR); **Samsung
Electro-Mechanics Co., Ltd.**, Suwon-si
(KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 12 days.

(21) Appl. No.: **11/634,865**

(22) Filed: **Dec. 7, 2006**

(65) **Prior Publication Data**

US 2008/0001831 A1 Jan. 3, 2008

(30) **Foreign Application Priority Data**

Jun. 30, 2006 (KR) 10-2006-0060440

(51) **Int. Cl.**
H01Q 1/52 (2006.01)
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/841; 343/702; 343/846**

(58) **Field of Classification Search** 343/841,
343/702, 700 MS, 846
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,788,255 B2 * 9/2004 Sakamoto et al. 343/700 MS
7,012,571 B1 * 3/2006 Ozkar et al. 343/702
2006/0214849 A1 * 9/2006 Fabrega-Sanchez et al. . 343/700
MS

FOREIGN PATENT DOCUMENTS

KR 1999-67637 A 8/1999
KR 2001-52847 A 6/2001

* cited by examiner



Primary Examiner—Hoang V Nguyen

(74) *Attorney, Agent, or Firm*—Sughrue Mion, PLLC

(57) **ABSTRACT**

A mobile terminal and a mobile terminal antenna reduce the intensity of electromagnetic waves radiated in the direction of a human body. The mobile terminal antenna includes a radiator, which radiates electromagnetic waves; a ground which is connected with the radiator, and a radiation preventer which has a metallic bar on one side of the ground in parallel with the ground at an interval. Accordingly, the electromagnetic radiation exposure to the human body can be reduced by altering the radiation emission pattern, while the performance of the antenna can be simultaneously enhanced.

6 Claims, 11 Drawing Sheets

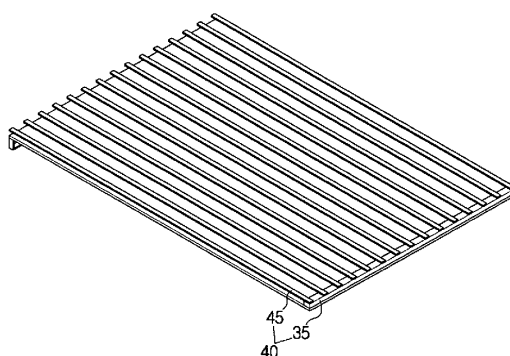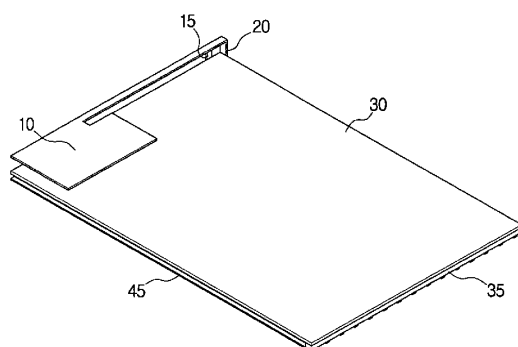

Acrobat 文件



US00D583364S

(12) **United States Design Patent**
Ito et al.

(10) **Patent No.:** **US D583,364 S**

(45) **Date of Patent:** **** Dec. 23, 2008**

(54) **ANTENNA**

(75) Inventors: **Tsutomu Ito**, Akita (JP); **Junichi Noro**, Akita (JP); **Kazunari Saito**, Akita (JP)

(73) Assignee: **Mitsumi Electric Co., Ltd.** (JP)

(**) Term: **14 Years**

(21) Appl. No.: **29/317,794**

(22) Filed: **May 7, 2008**

(30) **Foreign Application Priority Data**

Nov. 8, 2007 (JP) 2007-030900

(51) **LOC (8) Cl.** **14-03**

(52) **U.S. Cl.** **D14/230**

(58) **Field of Classification Search** D14/138,
D14/230-238, 299, 358; D12/42, 43; 343/700 MS,
343/700 R-705, 711-713, 741, 748, 767,
343/795, 819, 840, 846, 866, 871-908; 455/90.2,
455/90.3, 91, 128, 269, 344, 347, 562.1
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,667,718 B2 * 12/2003 Back et al. 343/700 MS
D515,075 S * 2/2006 Kusanagi et al. D14/230
7,042,399 B2 * 5/2006 Noro et al. 343/700 MS
2006/0001579 A1 * 1/2006 Noro et al. 343/702

2006/0071856 A1 * 4/2006 Shinkai et al. 343/700 MS
2007/0024503 A1 * 2/2007 Tsai et al. 343/700 MS
2007/0273528 A1 * 11/2007 Burkholder et al. 340/572.7
2008/0068270 A1 * 3/2008 Thiam et al. 343/700 MS
2008/0079637 A1 * 4/2008 Okamura et al. 343/700 MS
2008/0084355 A1 * 4/2008 Kuraoka et al. 343/702
2008/0169983 A1 * 7/2008 Shigemi et al. 343/700 MS
2008/0198082 A1 * 8/2008 Jordi et al. 343/700 MS

* cited by examiner

Primary Examiner—Robert M Spear

Assistant Examiner—John Windmuller

(74) *Attorney, Agent, or Firm*—Sughrue Mion, PLLC

(57) **CLAIM**

The ornamental design for a antenna, as shown and described.

DESCRIPTION

FIG. 1 is a top perspective view of the antenna according to the present invention;

FIG. 2 is a bottom perspective view thereof;

FIG. 3 is a first side view thereof;

FIG. 4 is a second side view thereof;


FIG. 5 is a first end view thereof;

FIG. 6 is a second end view thereof;

FIG. 7 is a top plan view thereof; and,

FIG. 8 is a bottom plan view thereof.

1 Claim, 4 Drawing Sheets

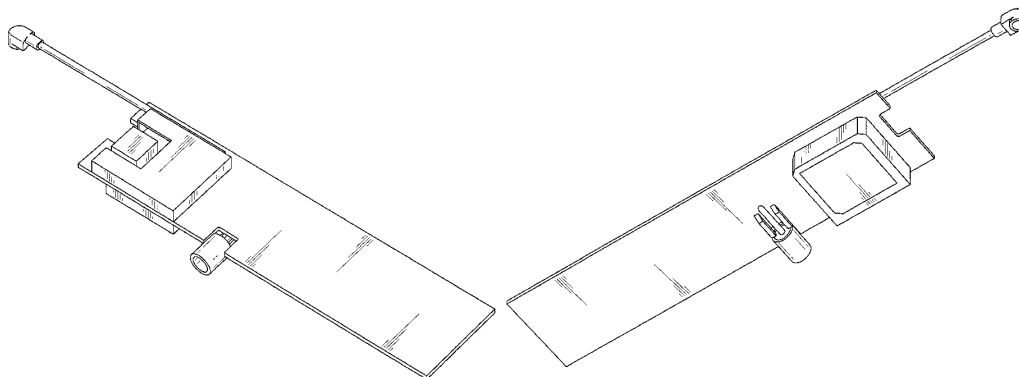

Acrobat 文件