



US007315282B2

(12) **United States Patent**
Shr

(10) **Patent No.:** **US 7,315,282 B2**
(45) **Date of Patent:** **Jan. 1, 2008**

(54) **MICRO-BELT ANTENNA**

(75) Inventor: **Shiuan-Guang Shr**, Taipei (TW)

(73) Assignee: **Lotes Co., Ltd.**, Keelung (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/439,976**

(22) Filed: **May 25, 2006**

(65) **Prior Publication Data**

US 2007/0273587 A1 Nov. 29, 2007

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/846**

(58) **Field of Classification Search** **343/700 MS,**
343/767, 829, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,006,481 A * 2/1977 Young et al. 343/770
4,015,263 A * 3/1977 Koerner et al. 343/708

* cited by examiner


Primary Examiner—Tho Phan

(74) *Attorney, Agent, or Firm*—Rosenberg, Klein & Lee

(57) **ABSTRACT**

An antenna includes a dielectric substrate, a radiator, and a grounding board. A chink is formed at the radiator and the chink is loaded with a resistor. The antenna of the present invention has the following merits. The chink on the radiator increases the current path of the radiator so as to increase the frequency bandwidth of the antenna. The resistor loaded in the chink can improve balance the gain balance in the bandwidth.

12 Claims, 3 Drawing Sheets

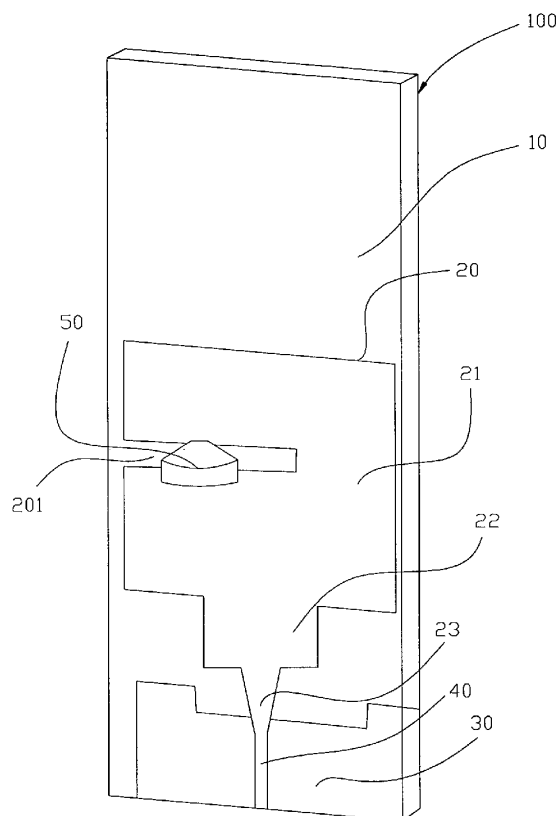

Acrobat 文件



US007315283B2

(12) **United States Patent**
Chang

(10) **Patent No.:** **US 7,315,283 B2**
(45) **Date of Patent:** **Jan. 1, 2008**

(54) **DUAL-BAND CIRCULARLY POLARIZED ANTENNA**

(75) Inventor: **The-Nan Chang**, Taipei (TW)

(73) Assignee: **Tatung Company**, Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 4 days.

(21) Appl. No.: **11/487,377**

(22) Filed: **Jul. 17, 2006**

(65) **Prior Publication Data**

US 2007/0236390 A1 Oct. 11, 2007

(30) **Foreign Application Priority Data**

Apr. 6, 2006 (TW) 95112155 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/770; 343/840; 343/846; 343/853; 343/892; 343/912**

(58) **Field of Classification Search** **343/700 MS; 343/767, 770, 840, 846, 848, 853, 893, 912**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,053,895 A	10/1977	Malagisi	343/700 MS
4,684,952 A	8/1987	Munson et al.	343/700 MS
6,084,548 A *	7/2000	Hirabe	343/700 MS
6,091,365 A	7/2000	Derneryd et al.	343/700 MS
6,195,047 B1	2/2001	Richards	343/700 MS

6,657,592 B2 *	12/2003	Denning et al.	343/700 MS
7,026,998 B2 *	4/2006	Chang et al.	343/700 MS
7,095,373 B2 *	8/2006	Aikawa et al.	343/700 MS
7,138,949 B1 *	11/2006	Ryken et al.	343/700 MS
7,145,518 B2 *	12/2006	Tanaka et al.	343/909

FOREIGN PATENT DOCUMENTS

JP	P3006867	11/1999
JP	P2001-512640 A	8/2001

* cited by examiner

Primary Examiner—Douglas W. Owens



Assistant Examiner—Chuc Tran

(74) *Attorney, Agent, or Firm*—Bacon & Thomas PLLC

(57) **ABSTRACT**

A dual-band circularly polarized antenna is disclosed, more particularly a dual-band circularly polarized antenna being able to transmit and receive circularly polarized signals at two different frequency bands, simultaneously. The dual-band circularly polarized antenna of the present invention comprises a first polarized radiating element with at least one corner being chamfered, a plurality of second polarized radiating elements with each of the second polarized radiating elements having at least one corner being chamfered, a signal distributor for distributing an electrical signal, a signal coupling unit electrically connecting with the first polarized radiating unit and the signal distributor, and a ground plate. The dual-band circularly polarized antenna of the present invention not only can be manufactured with a low cost, but also has a simpler structure. As a result, the dual-band circularly polarized antenna of the present invention can be easily integrated into the antenna module of an RFID system.

16 Claims, 7 Drawing Sheets

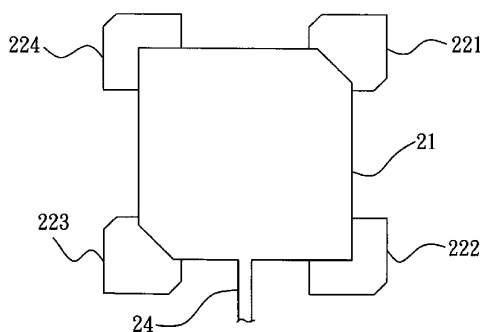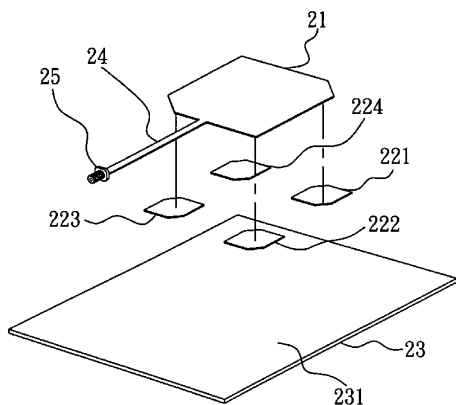

Acrobat 文件



US007315284B2

(12) **United States Patent**
Hsu et al.

(10) **Patent No.:** **US 7,315,284 B2**
(45) **Date of Patent:** **Jan. 1, 2008**

(54) **PORTABLE DEVICE AND ANTENNA THEREOF**

(75) Inventors: **Chieh-Sheng Hsu**, Taipei Hsien (TW);
Chang-Hsiu Huang, Taipei Hsien (TW)

(73) Assignee: **Wistron NeWeb Corporation**,
Hsi-Chih City, Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/534,209**

(22) Filed: **Sep. 21, 2006**

(65) **Prior Publication Data**

US 2007/0241967 A1 Oct. 18, 2007

(30) **Foreign Application Priority Data**

Apr. 17, 2006 (TW) 95113671 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702; 343/846**

(58) **Field of Classification Search** 343/700 MS,
343/702, 846
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,359,589 B1 * 3/2002 Bae 343/700 MS
6,825,811 B2 * 11/2004 Iwai et al. 343/702
2006/0267843 A1 * 11/2006 Sakama et al. 343/700 MS

* cited by examiner


Primary Examiner—Hoang V. Nguyen

(74) *Attorney, Agent, or Firm*—Winston Hsu

(57) **ABSTRACT**

An antenna comprises a substrate, a grounding element and a radiating element. The grounding element has an opening and is disposed on a first surface of the substrate. The radiating element is disposed on a second surface and electrically connects to the grounding element. A projection on the first surface of the radiating element partially covers the opening.

29 Claims, 18 Drawing Sheets

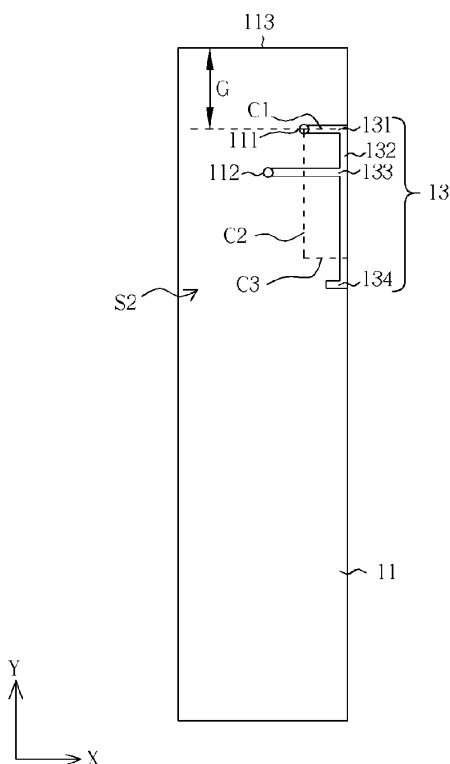

Acrobat 文件



US007315286B2

(12) **United States Patent**
Lee et al.

(10) **Patent No.:** **US 7,315,286 B2**
(45) **Date of Patent:** **Jan. 1, 2008**

(54) **ANTENNA APPARATUS FOR PORTABLE
TERMINAL**

(75) Inventors: **Jae-Ho Lee**, Gumi-si (KR);
Yeong-Moo Ryu, Gumi-si (KR);
Hark-Sang Kim, Daegu (KR); **Ji-Hwa
Kim**, Gyeongsangbuk-do (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**,
Suwon-Si (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 18 days.

(21) Appl. No.: **11/342,628**

(22) Filed: **Jan. 31, 2006**

(65) **Prior Publication Data**

US 2007/0030202 A1 Feb. 8, 2007

(30) **Foreign Application Priority Data**

Aug. 4, 2005 (KR) 10-2005-0071312

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/806; 343/895**

(58) **Field of Classification Search** **343/700 MS,**
343/702, 795, 895, 806
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,136,303 A * 8/1992 Cho et al. 343/718

6,181,282 B1 * 1/2001 Gans et al. 343/700 MS
6,650,294 B2 * 11/2003 Ying et al. 343/700 MS
6,657,593 B2 * 12/2003 Nagumo et al. 343/700 MS
6,822,613 B2 * 11/2004 Kubota 343/713
7,119,743 B2 * 10/2006 Iguchi et al. 343/700 MS

FOREIGN PATENT DOCUMENTS

KR 2001-98511 11/2001
KR 2002-26361 4/2002

* cited by examiner


Primary Examiner—Tan Ho

(74) *Attorney, Agent, or Firm*—Roylance, Abrams, Berdo &
Goodman, L.L.P.

(57) **ABSTRACT**

Provided is an antenna apparatus for a portable terminal including a first antenna pattern, and a second antenna pattern formed to correspond to the first antenna pattern, so that the second antenna provides a capacitive coupling along with the first pattern, thereby configuring a divergent type antenna with the second antenna pattern. The antenna apparatus configured in this manner comprises a pair of meander line antennas, whereby the antenna apparatus can efficiently suppress the generation of noise while being easily housed within the terminal. Furthermore, the antenna apparatus has an advantage of easily enhancing a specific absorption ratio (SAR) induced in a human body, which is an important factor for defining the function and quality of an antenna apparatus.

9 Claims, 5 Drawing Sheets

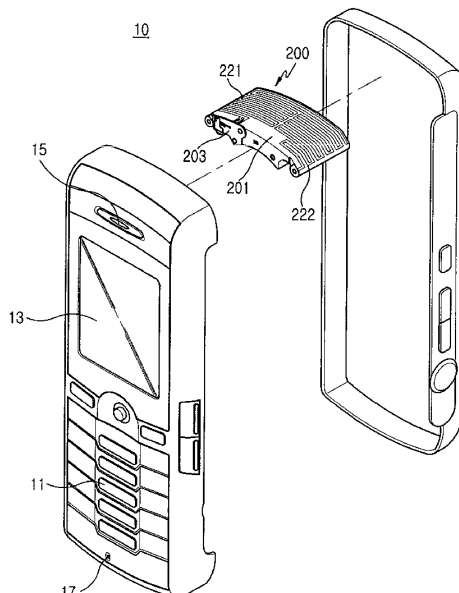

Acrobat 文件



US007315289B2

(12) **United States Patent**
Puente Baliarda et al.

(10) **Patent No.:** **US 7,315,289 B2**
(45) **Date of Patent:** **Jan. 1, 2008**

(54) **COUPLED MULTIBAND ANTENNAS**

FOREIGN PATENT DOCUMENTS

(75) Inventors: **Carles Puente Baliarda**, Sant Cugat del Valles Barcelona (ES); **Jaume Anguera Pros**, Vinaros (ES); **Jordi Soler Castany**, Mataro (ES); **Antonio Condes Martínez**, Esplugues de Llobregat (ES)

EP 0 942 488 9/1999

(Continued)

OTHER PUBLICATIONS

(73) Assignee: **Fractus, S.A.**, Barcelona (ES)

Hisamatsu Nakano et al., "Realization of Dual-Frequency and Wide-Band VSWR Performances Using Normal-Mode Helical and Inverted-F Antennas", IEEE Transactions on Antennas and Propagation, vol. 46, No. 6, Jun. 1998, pp. 788-793.

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 29 days.

(Continued)

Primary Examiner—Shih-Chao Chen

(74) Attorney, Agent, or Firm—Winstead PC

(21) Appl. No.: **11/075,980**

(22) Filed: **Mar. 9, 2005**

(57) **ABSTRACT**

(65) **Prior Publication Data**

US 2005/0195124 A1 Sep. 8, 2005

Related U.S. Application Data

(63) Continuation of application No. PCT/EP02/11355, filed on Sep. 10, 2002.

(51) **Int. Cl.**

H01Q 21/00 (2006.01)

H01Q 1/48 (2006.01)

H01Q 1/36 (2006.01)

H01Q 1/32 (2006.01)

(52) **U.S. Cl.** **343/817**; 343/846; 343/895

(58) **Field of Classification Search** 343/700 MS, 343/702, 711, 795, 814–817, 846, 895
See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

4,628,322 A 12/1986 Marko et al.

The present invention consists of an antenna comprising at least two radiating structures, said radiating structures taking the form of two arms, said arms being made of or limited by a conductor, superconductor or semiconductor material, said two arms being coupled to each other through a region on first and second superconducting arms such that the combined structure of the coupled two-arms forms a small antenna with a broadband behavior, a multiband behavior or a combination of both effects. According to the present invention, the coupling between the two radiating arms is obtained by means of the shape and spatial arrangement of said two arms, in which at least one portion on each arm is placed in close proximity to each other (for instance, at a distance smaller than a tenth of the longest free-space operating wavelength) to allow electromagnetic fields in one arm being transferred to the other through said specific close proximity regions. Said proximity regions are located at a distance from the feeding port of the antenna (for instance a distance larger than $\frac{1}{40}$ of the free-space longest operating wavelength) and specifically exclude said feeding port of the antenna.

(Continued)

52 Claims, 17 Drawing Sheets

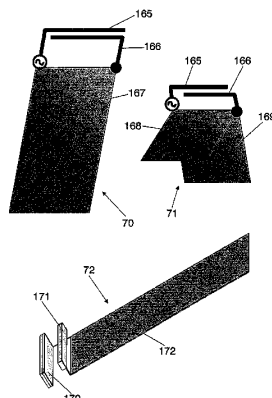

Acrobat 文件



US007317420B2

(12) **United States Patent**
Aisenbrey

(10) **Patent No.:** **US 7,317,420 B2**
(45) **Date of Patent:** ***Jan. 8, 2008**

(54) **LOW COST OMNI-DIRECTIONAL ANTENNA
MANUFACTURED FROM CONDUCTIVE
LOADED RESIN-BASED MATERIALS**

(58) **Field of Classification Search** 29/600;
343/700 MS, 702, 793, 873
See application file for complete search history.

(75) Inventor: **Thomas Aisenbrey**, Littleton, CO (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,916,078 A * 10/1975 Priaroggia 174/10

(73) Assignee: **Integral Technologies, Inc.**,
Bellingham, WA (US)

(Continued)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 64 days.

GB 2377449 A 7/2001

(Continued)

This patent is subject to a terminal dis-
claimer.

OTHER PUBLICATIONS

Co-pending U.S. Appl. No. 10/309,429, filed Dec. 4, 2002, "Low
Cost Antennas Using Conductive Plastics or Conductive Compos-
ites", assigned to the same assignee.

Primary Examiner—Trinh Vo Dinh

(74) *Attorney, Agent, or Firm*—Douglas R. Schnabel

(21) Appl. No.: **10/900,964**

(22) Filed: **Jul. 28, 2004**

(65) **Prior Publication Data**

US 2005/0007290 A1 Jan. 13, 2005

Related U.S. Application Data

(63) Continuation-in-part of application No. 10/309,429,
filed on Dec. 4, 2002, now Pat. No. 6,870,516, which
is a continuation-in-part of application No. 10/075,
778, filed on Feb. 14, 2002, now Pat. No. 6,741,221.

(60) Provisional application No. 60/496,765, filed on Aug.
21, 2003, provisional application No. 60/317,808,
filed on Sep. 7, 2001, provisional application No.
60/269,414, filed on Feb. 16, 2001, provisional appli-
cation No. 60/268,822, filed on Feb. 15, 2001.


(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702;**
343/713; 343/873

(57) **ABSTRACT**

Omni-directional antenna devices are formed of a conduc-
tive loaded resin-based material. The conductive loaded
resin-based material comprises micron conductive
powder(s), conductive fiber(s), or a combination of conduc-
tive powder and conductive fibers in a base resin host. The
percentage by weight of the conductive powder(s), conduc-
tive fiber(s), or a combination thereof is between about 20%
and 50% of the weight of the conductive loaded resin-based
material. The micron conductive powders are formed from
non-metals, such as carbon, graphite, that may also be
metallic plated, or the like, or from metals such as stainless
steel, nickel, copper, silver, that may also be metallic plated,
or the like, or from a combination of non-metal, plated, or
in combination with, metal powders. The micron conductor
fibers preferably are of nickel plated carbon fiber, stainless
steel fiber, copper fiber, silver fiber, or the like.

24 Claims, 7 Drawing Sheets

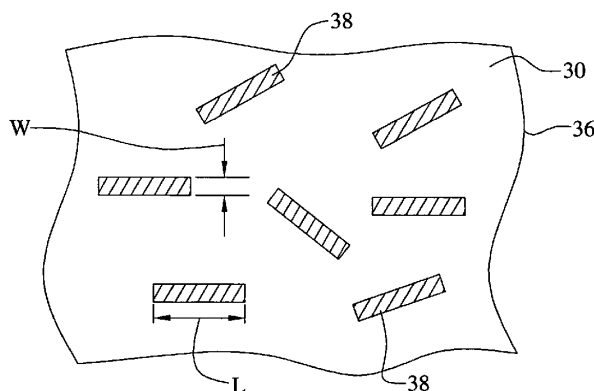

Acrobat 文件



US007317421B2

(12) **United States Patent**
Liu

(10) **Patent No.:** **US 7,317,421 B2**
(45) **Date of Patent:** **Jan. 8, 2008**

(54) **ANTENNA MODULE WITH AN ENHANCED ANGULAR COVERAGE**

(75) Inventor: **I-Ru Liu**, Taipei (TW)

(73) Assignee: **Accton Technology Corporation**,
Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 167 days.

(21) Appl. No.: **11/209,832**

(22) Filed: **Aug. 24, 2005**

(65) **Prior Publication Data**

US 2007/0052589 A1 Mar. 8, 2007

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702, 846**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,072,952	A *	2/1978	Demko	343/700 MS
4,922,259	A *	5/1990	Hall et al.	343/700 MS
5,898,405	A *	4/1999	Iwasaki	343/700 MS
6,836,247	B2 *	12/2004	Soutiaguine et al.	343/700 MS
6,940,460	B2 *	9/2005	Maoz et al.	343/702
2002/0140612	A1 *	10/2002	Kadambi et al.	343/702
2006/0238433	A1 *	10/2006	Chou	343/795

* cited by examiner


Primary Examiner—Hoanganh Le

(74) *Attorney, Agent, or Firm*—Rosenberg, Klein & Lee

(57) **ABSTRACT**

An antenna module includes a substrate with at least a first antenna on one side while at least a second antenna on the other side of the substrate so that both sides of the antenna module are able to radiate signals. Therefore, the effective angular coverage of the antenna module is enlarged and the performance of the embedded wireless network device is improved.

18 Claims, 10 Drawing Sheets

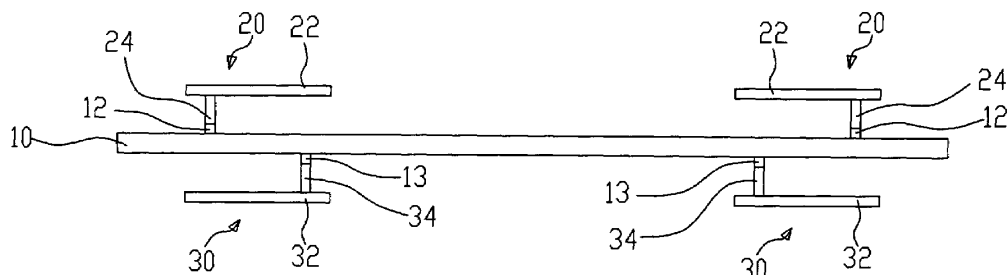

Acrobat 文件



US007317422B2

(12) **United States Patent**
Yun et al.

(10) **Patent No.:** **US 7,317,422 B2**
(45) **Date of Patent:** **Jan. 8, 2008**

(54) **BUILT-IN ANTENNA ASSEMBLY OF
WIRELESS COMMUNICATION TERMINAL**

(75) Inventors: **Young Su Yun**, Kyungki-do (KR);
Wook Hee Lee, Kyungki-do (KR); **Sun
Kyu Han**, Kyungki-do (KR)

(73) Assignee: **Samsung Electro-Mechanics Co., Ltd.**,
Kyungki-Do (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/534,901**

(22) Filed: **Sep. 25, 2006**

(65) **Prior Publication Data**

US 2007/0126645 A1 Jun. 7, 2007

(30) **Foreign Application Priority Data**

Dec. 1, 2005 (KR) 10-2005-0116293

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** **343/702,**
343/700 MS, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,914,568 B2 * 7/2005 Stojkovic et al. 343/702
6,914,569 B2 * 7/2005 Na 343/702
2003/0179144 A1 9/2003 Takesako et al.

FOREIGN PATENT DOCUMENTS

GB 2 403 349 A 12/2004
GB 2 421 636 A 6/2006
JP 2001-156513 A 6/2001
WO 02/052678 A1 7/2002
WO 03/012930 A2 2/2003

OTHER PUBLICATIONS

UK Patent Office, Office Action mailed Jan. 11, 2007.

* cited by examiner


Primary Examiner—Hoang V. Nguyen

(74) *Attorney, Agent, or Firm*—Lowe Hauptman Ham &
Berner

(57) **ABSTRACT**

A built-in antenna assembly of a wireless communication terminal is provided. A base is mounted on a substrate. A radiator is fixed onto an upper end of the base, and transmits/receives a signal. A terminal is extended along an outer surface of the base from the radiator to contact a contact pad protruded from the substrate. The terminal supplies a power to the radiator when in contact with the contact pad and is grounded. A terminal hooker is disposed on an underside surface of the base corresponding to a free end of the terminal so that the free end is fixed to the base. The invention allows easier and more flexible design for the terminal which is in electrical contact with the substrate of the built-in antenna. Moreover, the invention is universally applicable to various terminal models, and enhances productivity due to simpler configuration and easier assembling structure.

10 Claims, 8 Drawing Sheets

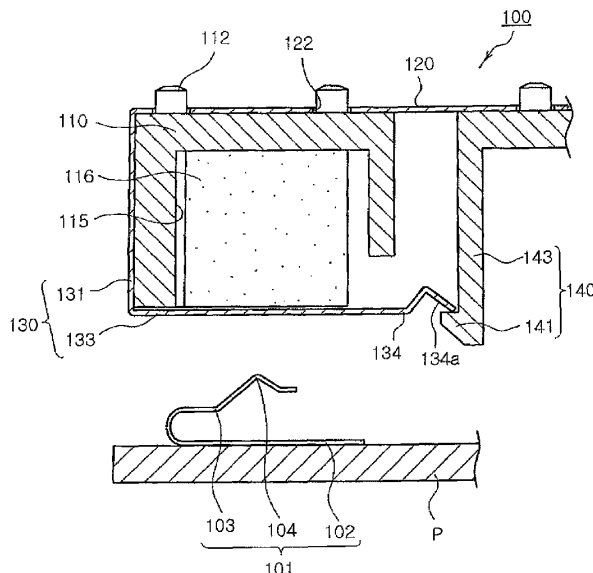

Acrobat 文件



US007317423B2

(12) **United States Patent**
Shimura

(10) **Patent No.:** **US 7,317,423 B2**
(45) **Date of Patent:** **Jan. 8, 2008**

(54) **ANTENNA DEVICE**

(75) Inventor: **Kazuhiro Shimura**, Hiratsuka (JP)

(73) Assignee: **The Yokohama Rubber Co., Ltd.**,
Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/590,559**

(22) PCT Filed: **Mar. 16, 2005**

(86) PCT No.: **PCT/JP2005/004624**

§ 371 (c)(1),
(2), (4) Date: **Aug. 24, 2006**

(87) PCT Pub. No.: **WO2005/087546**

PCT Pub. Date: **Sep. 22, 2005**

(65) **Prior Publication Data**

US 2007/0188314 A1 Aug. 16, 2007

(30) **Foreign Application Priority Data**

Mar. 17, 2004 (JP) 2004-075782

(51) **Int. Cl.**
H01Q 1/32 (2006.01)

(52) **U.S. Cl.** 343/711; 713/717

(58) **Field of Classification Search** 343/711,
343/713, 717, 878
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,304,172	B1	10/2001	Katou et al.	
6,362,733	B1 *	3/2002	Momose et al.	340/447
6,774,777	B2 *	8/2004	Tsujita	340/445
6,931,923	B2 *	8/2005	Katou et al.	73/146.5
6,997,048	B2 *	2/2006	Komatsu et al.	73/146.2

FOREIGN PATENT DOCUMENTS

JP	2-18568	5/1990
JP	8-46414	2/1996
JP	10-126129	5/1998
JP	2000-158923	6/2000
JP	2002-190707	7/2002

* cited by examiner


Primary Examiner—Hoang V. Nguyen

(74) *Attorney, Agent, or Firm*—Greer, Burns & Crain, Ltd.

(57) **ABSTRACT**

An antenna device having an antenna to be mounted on the body side of a vehicle for receiving a radio signal from a tire condition detection device mounted on a tire side, or giving and receiving a radio signal between the tire condition detection device and a device mounted on the vehicle body side. The antenna device includes attachment means with which the antenna can be temporarily attached, moved and securely attached to the vehicle body side.

17 Claims, 4 Drawing Sheets

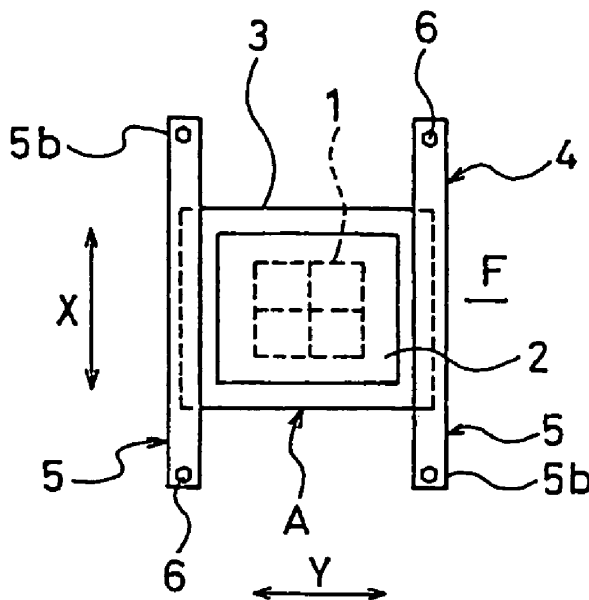

Acrobat 文件



US007317901B2

(12) **United States Patent**
Navsariwala et al.

(10) **Patent No.:** **US 7,317,901 B2**
(45) **Date of Patent:** **Jan. 8, 2008**

(54) **SLOTTED MULTIPLE BAND ANTENNA**

(75) Inventors: **Umesh D. Navsariwala**, Schaumburg, IL (US); **Nicholas E. Buris**, Deer Park, IL (US)

(73) Assignee: **Motorola, Inc.**, Schaumburg, IL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 332 days.

(21) Appl. No.: **10/774,835**

(22) Filed: **Feb. 9, 2004**

(65) **Prior Publication Data**

US 2005/0176390 A1 Aug. 11, 2005

(51) **Int. Cl.**

H01Q 1/24 (2006.01)
H04B 1/16 (2006.01)

(52) **U.S. Cl.** **455/82**; 455/269; 455/273; 343/700 MS; 343/767

(58) **Field of Classification Search** 455/269; 455/272, 273, 282, 288; 343/700 MS, 767-778
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,133,880 A * 10/2000 Grangeat et al. 343/700 MS
6,466,176 B1 * 10/2002 Maoz et al. 343/767

6,670,923 B1 * 12/2003 Kadambi et al. 343/700 MS
6,680,705 B2 * 1/2004 Tan et al. 343/702
6,741,214 B1 * 5/2004 Kadambi et al. 343/700 MS
6,762,723 B2 * 7/2004 Nallo et al. 343/700 MS
6,831,607 B2 * 12/2004 Hebron et al. 343/700 MS
6,856,294 B2 * 2/2005 Kadambi et al. 343/702
6,975,834 B1 * 12/2005 Forster 455/277.2
7,061,440 B2 * 6/2006 Choo et al. 343/728
7,205,942 B2 * 4/2007 Wang et al. 343/700 MS

OTHER PUBLICATIONS

U.S. Appl. No. 10/314,407, filed Dec. 7, 2002, Navsariwala et al.

* cited by examiner


Primary Examiner—Edward F. Urban

Assistant Examiner—Blane J. Jackson

(57) **ABSTRACT**

A multiple band antenna has an RF coupling structure (110) and a resonant RF structure (102). The RF coupling structure (110) has an RF connection (116, 118) and an RF coupling end (112, 114). The resonant RF structure (102) is reactively coupled to the RF coupling end (112, 114). The resonant RF structure (102) has a first end (106) and a second end (108) and has a conductive perimeter (104) enclosing at least one slot area (104) configured to induce an additional resonant RF band for the resonant RF structure (102). The first end (106) and the second end (108) are reactively coupled to a ground plane (124, 120) to facilitate longer wavelength operation. Cellular phones (800) and wireless communications sections incorporating such antennas are also provided.

16 Claims, 5 Drawing Sheets

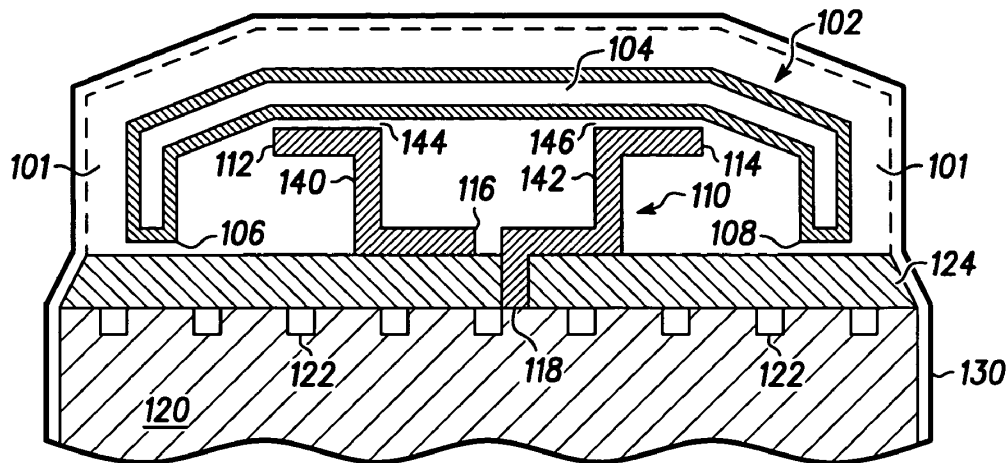

Acrobat 文件



US007319431B2

(12) **United States Patent**
Jeon et al.

(10) **Patent No.:** **US 7,319,431 B2**
(45) **Date of Patent:** **Jan. 15, 2008**

(54) **SURFACE MOUNT ANTENNA APPARATUS
HAVING TRIPLE LAND STRUCTURE**

(75) Inventors: **Chan Ik Jeon**, Suwon-si (KR); **Gun
Sung Jang**, Seoul (KR)

(73) Assignee: **Partron Co., Ltd.**, Gyeonggi-do (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 19 days.

(21) Appl. No.: **11/445,953**

(22) Filed: **Jun. 2, 2006**

(65) **Prior Publication Data**

US 2007/0040749 A1 Feb. 22, 2007

(30) **Foreign Application Priority Data**

Jun. 3, 2005 (KR) 10-2005-0047908

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS,**
343/702, 767, 846, 848, 873, 829
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,952,970 A * 9/1999 Kawahata 343/700 MS

6,549,167 B1 * 4/2003 Yoon 343/700 MS
6,965,346 B2 * 11/2005 Sung et al. 343/702
2003/0218573 A1 * 11/2003 Yoo et al. 343/702
2004/0125030 A1 * 7/2004 Sung et al. 343/702
2006/0044191 A1 * 3/2006 Harihara 343/700 MS

* cited by examiner


Primary Examiner—Huedung Mancuso

(74) *Attorney, Agent, or Firm*—The Webb Law Firm

(57) **ABSTRACT**

Disclosed herein is a surface mount antenna apparatus applied to a wireless terminal. The antenna apparatus includes a printed circuit board having a ground pattern, a land structure, and an antenna. The land structure includes a non-grounded area having no ground electrode, first and second land pads formed on opposite ends of the non-grounded area to be connected to ground electrodes, and an input pad formed between the first and second land pads and separated from them. The input pad is spaced apart from the first land pad by a preset interval. The antenna includes first and second ground electrodes formed on the lower surface of a dielectric block to be connected to the first and second land pads, a feeding electrode connected to the input pad, and a radiation electrode formed on some of the side surfaces and the upper surface of the dielectric block. The radiation electrode is connected to at least one of the first and second ground electrodes and the feeding electrode.

8 Claims, 10 Drawing Sheets

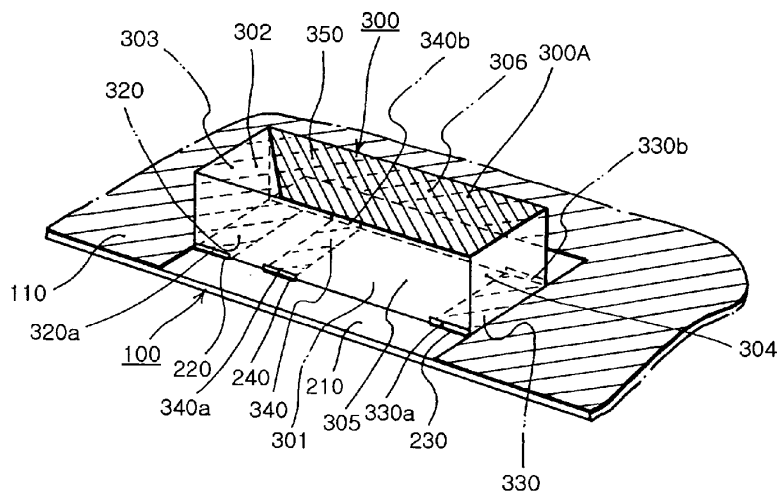

Acrobat 文件



US007319432B2

(12) **United States Patent**
Andersson

(10) **Patent No.:** **US 7,319,432 B2**
(45) **Date of Patent:** **Jan. 15, 2008**

(54) **MULTIBAND PLANAR BUILT-IN RADIO
ANTENNA WITH INVERTED-L MAIN AND
PARASITIC RADIATORS**

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,583,521 A 12/1996 Williams
6,326,921 B1 12/2001 Egorov et al.
6,348,897 B1 * 2/2002 Alameh et al. 343/702

(75) Inventor: **Johan Andersson**, Malmo (SE)

(73) Assignee: **Sony Ericsson Mobile
Communications AB**, Lund (SE)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0757405 2/1997
JP 06-037531 2/1994

(21) Appl. No.: **10/507,574**

(22) PCT Filed: **Mar. 11, 2003**

(86) PCT No.: **PCT/EP03/02473**

§ 371 (c)(1),
(2), (4) Date: **Dec. 2, 2004**

OTHER PUBLICATIONS

P. Song et al., "Triple-Band Planar Inverted F Antenna", IEEE,
1999, pp. 908-911.

(87) PCT Pub. No.: **WO03/077360**

PCT Pub. Date: **Sep. 18, 2003**

(Continued)

Primary Examiner—Shih-Chao Chen

Assistant Examiner—Minh Dieu A

(74) *Attorney, Agent, or Firm*—Renner, Otto, Boisselle &
Sklar, LLP

(65) **Prior Publication Data**

US 2005/0110692 A1 May 26, 2005

Related U.S. Application Data

(60) Provisional application No. 60/366,514, filed on Mar.
19, 2002.

(30) **Foreign Application Priority Data**

Mar. 14, 2002 (EP) 02005816

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**


(58) **Field of Classification Search** **343/702,**
343/846, 815, 817, 700 MS

See application file for complete search history.

(57) **ABSTRACT**

A multi-band radio antenna device (1) for a radio commu-
nication terminal, comprising a flat ground substrate (20), a
flat main radiating element (2, 9) having a radio signal
feeding point (3), and a flat parasitic element (5, 6). The
main radiating 5 element is located adjacent to and in the
same plane as said ground substrate, and preferably dielec-
trically separated therefrom. The antenna device is suitable
for being used as a built-in antenna in portable radio
terminals, such as a mobile phone (30).

33 Claims, 6 Drawing Sheets

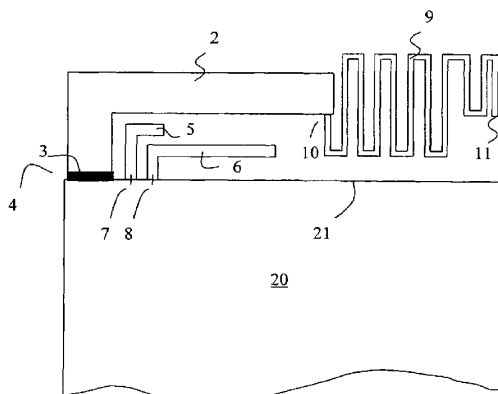

Acrobat 文件



US007319433B2

(12) **United States Patent**
Rosenberg et al.

(10) **Patent No.:** **US 7,319,433 B2**
(45) **Date of Patent:** **Jan. 15, 2008**

(54) **WIDEBAND ANTENNA DEVICE WITH
EXTENDED GROUND PLANE IN A
PORTABLE DEVICE**

(75) Inventors: **Johan Anton Eduard Rosenberg**, Ed
Dwingeloo (NL); **Johannes Lucas
Schreuder**, Ae Borger (NL); **Tjapko
Uildriks**, Tr Anderen (NL)

(73) Assignee: **Sony Ericsson Mobile
Communications AB**, Lund (SE)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/517,902**

(22) PCT Filed: **Jun. 11, 2003**

(86) PCT No.: **PCT/EP03/06109**

§ 371 (c)(1),
(2), (4) Date: **Dec. 15, 2005**

(87) PCT Pub. No.: **WO03/107473**

PCT Pub. Date: **Dec. 24, 2003**

(65) **Prior Publication Data**

US 2006/0109182 A1 May 25, 2006

Related U.S. Application Data

(60) Provisional application No. 60/407,886, filed on Sep.
3, 2002.

(30) **Foreign Application Priority Data**

Jun. 13, 2002 (EP) 02013085
Aug. 26, 2002 (EP) 02018940

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/866; 343/846;
343/741

(58) **Field of Classification Search** 343/702,
343/700 MS, 741, 866, 829, 846-849
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,020,136 A 5/1991 Patsiokas et al. 455/89
5,408,699 A * 4/1995 Yamashita et al. 455/274
6,175,334 B1 * 1/2001 Vannatta et al. 343/702

(Continued)

FOREIGN PATENT DOCUMENTS

WO 01/76006 10/2001

OTHER PUBLICATIONS

International Search Report for PCT/EP03/006109, Nov. 18, 2003.

Primary Examiner—Douglas W. Owens


Assistant Examiner—Tung X Le

(74) *Attorney, Agent, or Firm*—Myers Bigel Sibley &
Sajovec, P.A.

(57) **ABSTRACT**

An antenna device for a portable device has an antenna loop of conducting material to be connected to radio circuitry in the portable device. The antenna loop is positioned opposite a ground plane of a PCB. Also, the antenna device also comprises at least one battery, which is positioned in the extension of a first side of the PCB, and acts as an extension of the ground plane of the PCB.

20 Claims, 4 Drawing Sheets

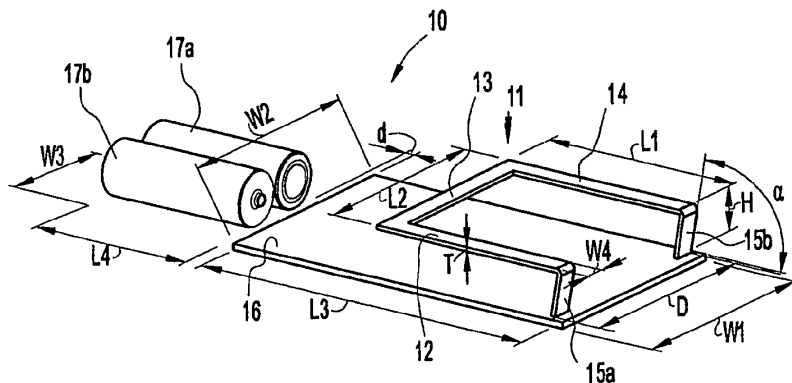

Acrobat 文件



US00D559838S

(12) **United States Design Patent** (10) **Patent No.:** **US D559,838 S**
Yuba et al. (45) **Date of Patent:** **** Jan. 15, 2008**

(54) **PLANAR ANTENNA**

(75) Inventors: **Takashi Yuba**, Shinagawa (JP); **Hideki Iwata**, Shinagawa (JP); **Masahiro Yanagi**, Shinagawa (JP); **Takashi Arita**, Shinagawa (JP)

(73) Assignee: **Fujitsu Component Limited**, Tokyo (JP)

(**) Term: **14 Years**

(21) Appl. No.: **29/257,761**

(22) Filed: **Apr. 11, 2006**

(30) **Foreign Application Priority Data**

Dec. 28, 2005 (JP) 2005-038824

(51) **LOC (8) Cl.** **08-08**

(52) **U.S. Cl.** **D14/230; D14/358**

(58) **Field of Classification Search** D14/138, D14/230-238, 299, 358; D12/42, 43; 343/700 R-705, 343/871-908, 795, 840, 711-713, 819, 846; 455/90.2, 90.3, 91, 128, 269, 344, 347, 562.1
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D345,564 S * 3/1994 Kadono et al. D14/230
D363,488 S * 10/1995 Shumaker D14/230
D379,356 S * 5/1997 Liu et al. D14/230
D398,611 S * 9/1998 Read D14/230
D405,090 S * 2/1999 Guttadauro D14/230
D442,170 S * 5/2001 Mou D14/238
D471,181 S * 3/2003 Haberstick D14/230
D525,239 S * 7/2006 Lai D14/230

D533,544 S * 12/2006 Lai D14/230

* cited by examiner

Primary Examiner—Stella M. Reid
Assistant Examiner—John Windmuller
(74) *Attorney, Agent, or Firm*—Staas & Halsey, LLP

(57) **CLAIM**

The ornamental design for a planar antenna, as shown and described.

DESCRIPTION

FIG. 1 is a top front and right side perspective view of a planar antenna showing our new design;

FIG. 2 is a front view thereof;

FIG. 3 is a rear view thereof;

FIG. 4 is a top view thereof;

FIG. 5 is a bottom view thereof;

FIG. 6 is a right side view thereof;

FIG. 7 is a left side view thereof;

FIG. 8 is a rear bottom and left side perspective view thereof;


FIG. 9 is a top front and right side perspective view thereof where the antenna case thereof is disposed at a different angle from that shown in FIG. 1;

FIG. 10 is a top front and right side perspective view thereof where the antenna case thereof is disposed at a different angle from that shown in FIG. 1; and,

FIG. 11 is a perspective view thereof showing an alternate position of use.

The broken line drawing of a laptop computer in FIG. 11 is for illustrative purposes only and forms no part of the claimed design.

1 Claim, 10 Drawing Sheets



Acrobat 文件



US007321335B2

(12) **United States Patent**
Egorov

(10) **Patent No.:** **US 7,321,335 B2**
(45) **Date of Patent:** **Jan. 22, 2008**

(54) **ANTENNA CONFIGURATION CHANGE**

(75) Inventor: **Igor Egorov**, Lund (SE)

(73) Assignee: **Sony Ericsson Mobile Communications AB**, Lund (SE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/530,331**

(22) Filed: **Sep. 8, 2006**

(65) **Prior Publication Data**

US 2007/0247373 A1 Oct. 25, 2007

Related U.S. Application Data

(60) Provisional application No. 60/745,328, filed on Apr. 21, 2006.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** **343/700 MS, 343/702, 846, 876**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,417,807 B1 * 7/2002 Hsu et al. 343/700 MS

6,501,427 B1 * 12/2002 Lilly et al. 343/700 MS
6,529,749 B1 * 3/2003 Hayes et al. 455/575.7
6,950,065 B2 * 9/2005 Ying et al. 343/700 MS
2006/0262015 A1 * 11/2006 Thornell-Pers et al. 343/702
2007/0069956 A1 * 3/2007 Ozkar 343/700 MS
2007/0069958 A1 * 3/2007 Ozkar 343/700 MS

* cited by examiner


Primary Examiner—Tan Ho

(74) *Attorney, Agent, or Firm*—Harrity Snyder, LLP

(57) **ABSTRACT**

A Portable communication device includes in an interior of the portable communication device a ground plane and an antenna arrangement. The antenna arrangement includes an antenna element combination including a first radiating antenna element to be connected to a feeding potential and dimensioned for resonating in a first frequency band, and a second radiating antenna element dimensioned for resonating in a second frequency band. The antenna arrangement further includes at least one first element joining switch that in a closed position interconnects elements of the antenna element combination for dimensioning the antenna element combination for resonating in a third frequency band and in an open position separates these elements from each other, and a grounding switch which in a closed position joins the second radiating antenna element to a ground plane and in an open position separates the second radiating antenna element from the ground plane.

16 Claims, 4 Drawing Sheets

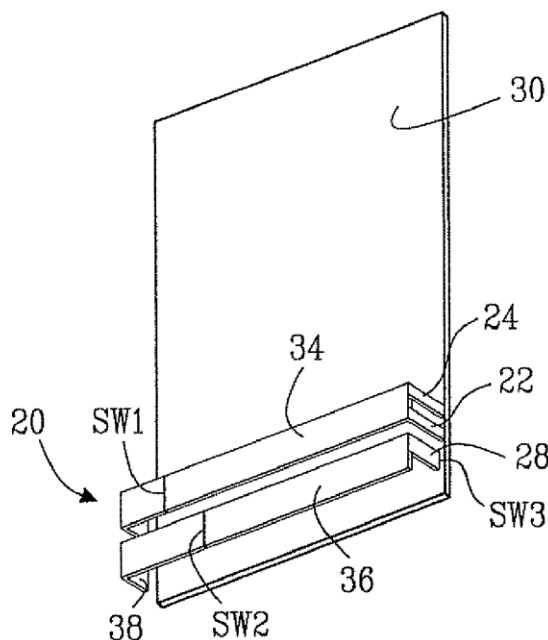

Acrobat 文件



US007321336B2

(12) **United States Patent**
Phillips et al.

(10) **Patent No.:** **US 7,321,336 B2**
(45) **Date of Patent:** **Jan. 22, 2008**

(54) **MOBILE WIRELESS COMMUNICATIONS
DEVICE INCLUDING A WRAP-AROUND
ANTENNA ASSEMBLY AND RELATED
METHODS**

(75) Inventors: **Robert Phillips**, Waterloo (CA);
Yihong Qi, St. Agatha (CA); **Ying
Tong Man**, Waterloo (CA)

(73) Assignee: **Research in Motion Limited**, Ontario
(CA)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/554,874**

(22) Filed: **Oct. 31, 2006**

(65) **Prior Publication Data**

US 2007/0109204 A1 May 17, 2007

Related U.S. Application Data

(60) Provisional application No. 60/732,072, filed on Nov.
1, 2005.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/906**

(58) **Field of Classification Search** **343/702,**
343/906; 439/188, 916
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,124,889 A * 6/1992 Humbert et al. 361/818
5,211,581 A * 5/1993 Schwartz et al. 439/581

5,539,417 A 7/1996 Terry et al. 343/702
6,448,932 B1 9/2002 Stoiljkovic et al. .. 343/700 MS
6,940,459 B2 * 9/2005 Sullivan et al. 343/702
7,023,387 B2 4/2006 Wen et al. 343/700 MS
7,119,748 B2 * 10/2006 Autti 343/702
7,209,086 B2 * 4/2007 Chung 343/702
2003/0098812 A1 5/2003 Ying et al. 343/702
2004/0104856 A1 6/2004 Stoiljkovic et al. 343/702
2005/0026660 A1 2/2005 Park et al. 455/575.5

FOREIGN PATENT DOCUMENTS

WO WO02/29934 4/2002
WO WO0247197 6/2002

* cited by examiner


Primary Examiner—Tho Phan

(74) *Attorney, Agent, or Firm*—Allen, Dyer, Doppelt,
Milbrath & Gilchrist, P.A.

(57) **ABSTRACT**

A mobile wireless communications device may include a housing, a printed circuit board (PCB) carried by the housing, at least one wireless RF circuit carried by the PCB, and a first contact(s) carried by the PCB and electrically connected to the at least one wireless RF circuit. The device may further include a wrap-around antenna assembly comprising an antenna retainer frame removably coupled to an edge of the PCB and having first and second portions wrapping around adjacent first and second surfaces of the PCB at the edge thereof when the antenna retainer frame is coupled to the PCB. The wrap-around antenna assembly may also include an antenna carried by the antenna retainer frame and extending along the first and second portions thereof. The antenna may include a second contact(s) removably coupled to the first contact(s) when the antenna retainer frame is coupled to the PCB.

23 Claims, 6 Drawing Sheets

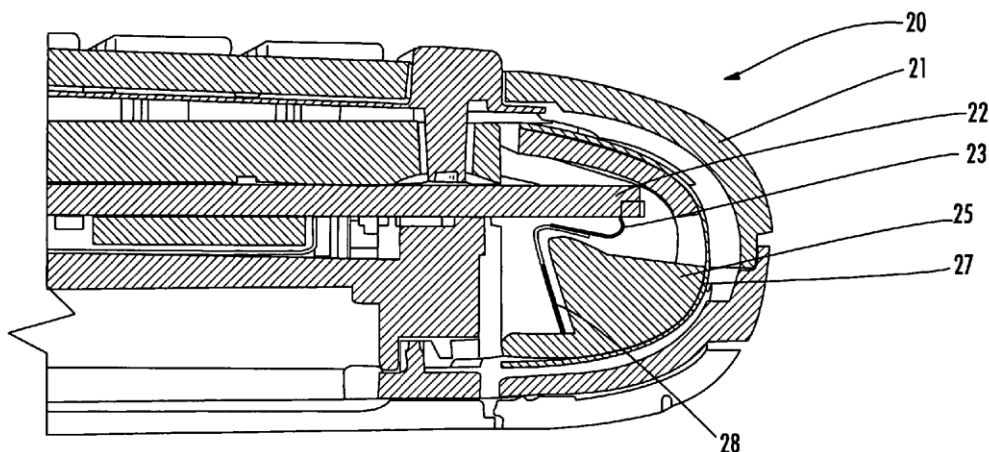

Acrobat 文件



US007321337B2

(12) **United States Patent**
Ikeda et al.

(10) **Patent No.:** **US 7,321,337 B2**

(45) **Date of Patent:** **Jan. 22, 2008**

(54) **ELECTRONIC DEVICE HAVING METAL PACKAGE UNIT HAVING BUILT-IN ANTENNA UNIT**

(75) Inventors: **Ienobu Ikeda**, Tokyo (JP); **Takashi Ihara**, Tokyo (JP); **Minoru Kobayashi**, Tokyo (JP); **Yasuo Maekawa**, Tokyo (JP)

(73) Assignee: **Citizen Holdings Co., Ltd.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/536,763**

(22) PCT Filed: **May 17, 2004**

(86) PCT No.: **PCT/JP2004/006999**

§ 371 (c)(1),

(2), (4) Date: **May 26, 2005**

(87) PCT Pub. No.: **WO2004/102738**

PCT Pub. Date: **Nov. 25, 2004**

(65) **Prior Publication Data**

US 2006/0109188 A1 May 25, 2006

(30) **Foreign Application Priority Data**

May 15, 2003 (JP) 2003-136757

May 19, 2003 (JP) 2003-140456

(51) **Int. Cl.**

H01Q 1/12 (2006.01)

H01Q 7/08 (2006.01)

(52) **U.S. CL.** **343/718; 343/702; 343/788; 343/985; 343/866**

(58) **Field of Classification Search** **343/718, 343/702; 368/10, 278, 47, 281, 276**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,411,569 B1 6/2002 Megner et al.

6,825,751 B1 * 11/2004 Kita et al. 340/5.61

6,853,605 B2 * 2/2005 Fujisawa et al. 368/10

6,934,222 B2 * 8/2005 Fujimori 368/204

(Continued)

FOREIGN PATENT DOCUMENTS

DE 202 11 848 12/2002

(Continued)

Primary Examiner—Douglas W. Owens

Assistant Examiner—Chuc Tran


(74) *Attorney, Agent, or Firm*—Greer, Burns & Crain, Ltd.

(57) **ABSTRACT**

An electronic device an antenna, an information processing apparatus for the purpose of processing information captured by the antenna, and a metal exterior parts capable of housing therewithin the antenna and the information processing apparatus, wherein the metal exterior parts is configured so that the antenna can receive magnetic flux from outside the metal exterior parts that has passed through the metal exterior parts and can resonate, and wherein at least a part of the metal exterior parts has an electrical resistance value that is different from another part of the metal exterior parts.

67 Claims, 34 Drawing Sheets

30

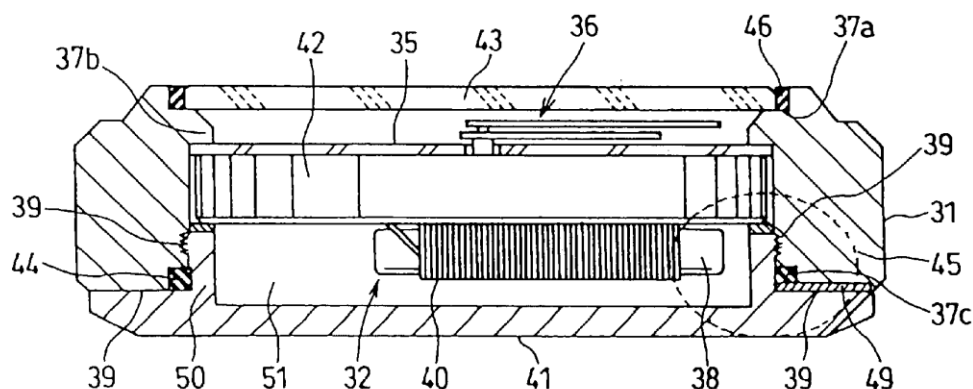

Acrobat 文件



US007321338B2

(12) **United States Patent**
Komatsu et al.

(10) **Patent No.:** **US 7,321,338 B2**
(45) **Date of Patent:** **Jan. 22, 2008**

(54) **ON-BOARD ANTENNA**

(75) Inventors: **Satoru Komatsu**, Saitama (JP);
Hiroshi Kuribayashi, Saitama (JP);
Tomoyuki Fukumaru, Saitama (JP);
Hiroshi Iijima, Osaka (JP); **Hideaki**
Oshima, Osaka (JP); **Tatsuo**
Matsushita, Ibaraki (JP)

(73) Assignee: **Honda Motor Co., Ltd.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/743,408**

(22) Filed: **Dec. 23, 2003**

(65) **Prior Publication Data**

US 2004/0169605 A1 Sep. 2, 2004

(30) **Foreign Application Priority Data**

Dec. 27, 2002 (JP) P2002-379994

(51) **Int. Cl.**

H01Q 1/48 (2006.01)

H01Q 1/38 (2006.01)

H01Q 1/32 (2006.01)

(52) **U.S. Cl.** **343/846**; 343/700 MS;
343/711

(58) **Field of Classification Search** 343/828,
343/700 MS, 769, 846, 850, 711, 713, 767,
343/712, 714-718
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,921,177 A * 11/1975 Munson 343/846
4,987,421 A * 1/1991 Sunahara et al. 343/700 MS
5,124,714 A * 6/1992 Harada 343/713

5,355,144 A * 10/1994 Walton et al. 343/713
5,410,322 A * 4/1995 Sonoda 343/700 MS
5,510,803 A * 4/1996 Ishizaka et al. 343/700 MS
5,519,565 A * 5/1996 Kalt et al. 361/280
5,594,455 A * 1/1997 Hori et al. 343/700 MS
6,057,814 A * 5/2000 Kalt 345/58
6,097,345 A 8/2000 Walton 343/769
6,124,829 A * 9/2000 Iwasaki 343/700 MS
6,542,131 B1 4/2003 Haapanen
6,556,168 B1 * 4/2003 Marumoto et al. 342/372
6,906,677 B2 * 6/2005 Yamamoto et al. 343/789
2002/0149520 A1 * 10/2002 Laubner et al. 343/700 MS
2003/0011522 A1 * 1/2003 McKinzie et al. ... 343/700 MS

FOREIGN PATENT DOCUMENTS

GB	2 290 417 A	12/1995
JP	40-1681	1/1940
JP	09-246852	9/1997
JP	11-312922	11/1999
JP	2000-223943	8/2000
JP	2000-307339	11/2000
JP	2001-144532	5/2001
JP	2001-284937	10/2001
JP	2002-185243	6/2002
JP	2002-252520	9/2002
WO	WO 00/70708	11/2000

* cited by examiner

Primary Examiner—Shih-Chao Chen


Assistant Examiner—Minh Dieu

(74) *Attorney, Agent, or Firm*—Arent Fox LLP

(57) **ABSTRACT**

An on-board antenna includes a radiation element provided on a dielectric substrate, a grounding conductor surrounding a periphery of an outer edge portion of the radiation element at a position spaced away outwardly from the outer edge portion, and a conductive member provided on the surface at a position spaced away outwardly from an outer edge portion of the grounding conductor.

8 Claims, 3 Drawing Sheets

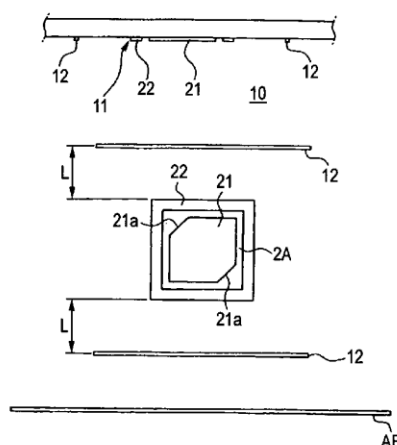

Acrobat 文件



US007321341B2

(12) **United States Patent**
Lee et al.

(10) **Patent No.:** **US 7,321,341 B2**
(45) **Date of Patent:** **Jan. 22, 2008**

(54) **COMPACT BROADBAND ANTENNA WITH
CONSTANT RADIATION PATTERN**

(75) Inventors: **Yoonjae Lee**, Fairfax, VA (US); **Suman
Ganguly**, Falls Church, VA (US)

(73) Assignee: **Center for Remote Sensing, Inc.**,
Fairfax, VA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/453,566**

(22) Filed: **Jun. 15, 2006**

(65) **Prior Publication Data**

US 2006/0290586 A1 Dec. 28, 2006

Related U.S. Application Data

(63) Continuation of application No. 11/165,613, filed on
Jun. 23, 2005, now abandoned.

(51) **Int. Cl.**
H01Q 21/00 (2006.01)

(52) **U.S. Cl.** **343/893; 343/810**

(58) **Field of Classification Search** **343/893,**
343/810, 900, 773, 774

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,990,845 A * 11/1999 Sharp et al. 343/846
6,198,454 B1 * 3/2001 Sharp et al. 343/773

* cited by examiner


Primary Examiner—Hoanganh Le

(74) *Attorney, Agent, or Firm*—Hoffman, Wasson & Gitler,
PC

(57) **ABSTRACT**

An antenna having multiple antenna elements of unequal lengths, form in a conical shape. The longest antenna element has a trap in a specific location of the antenna element. Multiple traps can be used for extended coverage depending upon the frequency band. The antenna elements are connected together through a transversal-wire ring and a feed transmission line is attached to it. The antenna occupies minimal footprint in the horizontal direction and maintains a low VSWR and a uniform beam pattern over a wide frequency band, more than 1:20. The antenna has a constant radiation pattern over a 1:6 bandwidth and the pattern bandwidth may be increased using more antenna elements and traps. The elevation and azimuth patterns show a consistent characteristic from 100 MHz to 600 MHz.

14 Claims, 8 Drawing Sheets

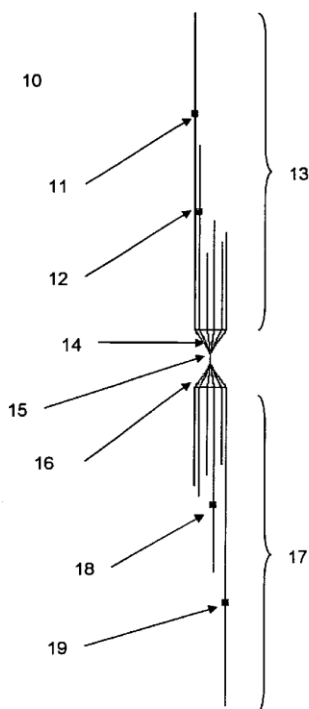

Acrobat 文件



US007324049B2

(12) **United States Patent**
Myoung et al.

(10) **Patent No.:** **US 7,324,049 B2**
(45) **Date of Patent:** **Jan. 29, 2008**

(54) **MINIATURIZED ULTRA-WIDEBAND
MICROSTRIP ANTENNA**

(75) Inventors: **Soung-ho Myoung**, Hanam-si (KR);
Do-Hoon Kwon, Seoul (KR);
Seong-soo Lee, Suwon-si (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**,
Suwon-Si (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 188 days.

(21) Appl. No.: **11/024,715**

(22) Filed: **Dec. 30, 2004**

(65) **Prior Publication Data**

US 2005/0156787 A1 Jul. 21, 2005

(30) **Foreign Application Priority Data**

Jan. 5, 2004 (KR) 10-2004-0000384

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/846**

(58) **Field of Classification Search** **343/700 MS,**
343/702, 833, 834, 846, 790, 792
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,828,340 A * 10/1998 Johnson 343/700 MS
6,392,599 B1 * 5/2002 Ganeshmoorthy
et al. 343/700 MS
6,747,600 B2 * 6/2004 Wong et al. 343/700 MS
6,828,939 B2 * 12/2004 Li 343/700 MS
6,861,990 B2 * 3/2005 Hung et al. 343/702

7,042,403 B2 * 5/2006 Colburn et al. 343/702
2003/0210187 A1 11/2003 Wong et al. 343/700
2004/0017315 A1 1/2004 Fang et al. 343/700
2004/0233110 A1 11/2004 Hung et al. 343/700

FOREIGN PATENT DOCUMENTS

GB 2150356 6/1985
JP 06-052215 7/1994
JP 11-261308 9/1999
JP 11-340728 12/1999

(Continued)

OTHER PUBLICATIONS

Jen-Yea Jan et al., "Planar Monopole Antennas For 2.4/5.2 Ghz
Dual-Band Application," IEEE Antennas and Propagation Society
Int'l Symposium, 2003 Digest, Jun. 22-27, New York, NY, 2003, pp.
158-161, vol. 4, IEEE.

(Continued)


Primary Examiner—Tho Phan

(74) *Attorney, Agent, or Firm*—Staas & Halsey LLP

(57) **ABSTRACT**

A miniaturized ultra-wideband microstrip antenna, includes:
a dielectric substrate; a feed line disposed on the dielectric
substrate, and supplying an electromagnetic energy supplied
from an external power source; a main radiating element
radiating the electromagnetic energy inputted by the feed
line; and at least one sub-radiating element disposed in
proximity to the main radiating element for multi-radiation.
Also, the antenna further includes at least one connection
plate electrically connecting the main radiating element to at
least one of the sub-radiating elements. The miniaturized
ultra-wideband microstrip antenna can also be made
ultralight, and include additional sub-radiating elements
besides the main radiating element, whereby multi-radiation
in UWB's range can be attained.

45 Claims, 11 Drawing Sheets

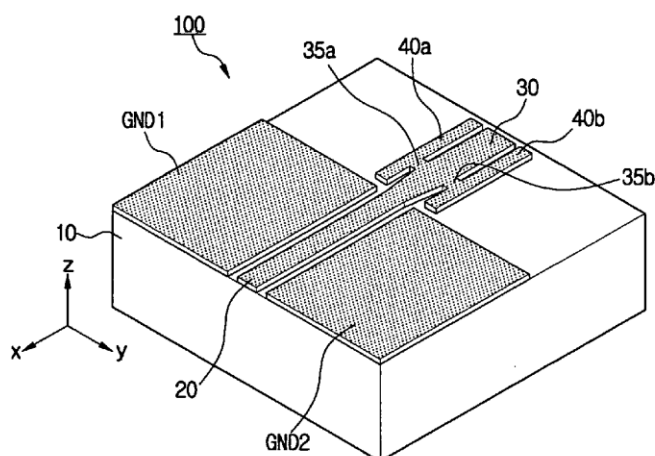

Acrobat 文件



US007324050B2

(12) **United States Patent**
Chung et al.

(10) **Patent No.:** **US 7,324,050 B2**
(45) **Date of Patent:** **Jan. 29, 2008**

(54) **ANTENNA**

(75) Inventors: **Tsung-Ying Chung**, Taipei (TW);
Hsi-Tseng Chou, Taipei (TW);
Chih-Ming Wang, Taipei (TW)

(73) Assignee: **Wistron NeWeb Corp.**, Taipei Hsien
(TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 156 days.

(21) Appl. No.: **11/251,459**

(22) Filed: **Oct. 13, 2005**

(65) **Prior Publication Data**

US 2007/0008224 A1 Jan. 11, 2007

(30) **Foreign Application Priority Data**

Jul. 11, 2005 (TW) 94123342 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**

(58) **Field of Classification Search** **343/700 MS,**
343/702, 767, 895

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,410,749 A *	4/1995	Siwiak et al.	455/280
6,040,803 A *	3/2000	Spall	343/700 MS
7,215,286 B2 *	5/2007	Chen	343/700 MS
2006/0038721 A1 *	2/2006	Ozkar et al.	343/700 MS
2006/0061513 A1 *	3/2006	Sato	343/767
2006/0082503 A1 *	4/2006	Gaucher et al.	343/700 MS

* cited by examiner

Primary Examiner—Huedung Mancuso


(74) *Attorney, Agent, or Firm*—Quintero Law Office

(57) **ABSTRACT**

An antenna comprises a signal line, a conductive element, a receiving element, a ground element, a short element and a bandwidth modifying element. The conductive element is coupled to the signal line. The receiving element is connected to the conductive element. The short element is coupled to the ground element and the conductive element. The bandwidth modifying element is connected to the conductive element and located between the receiving element and the ground element. The antenna receives a plurality of wireless signals comprising a center signal with a center frequency, and the center signal comprises a center wavelength λ .

27 Claims, 6 Drawing Sheets

101

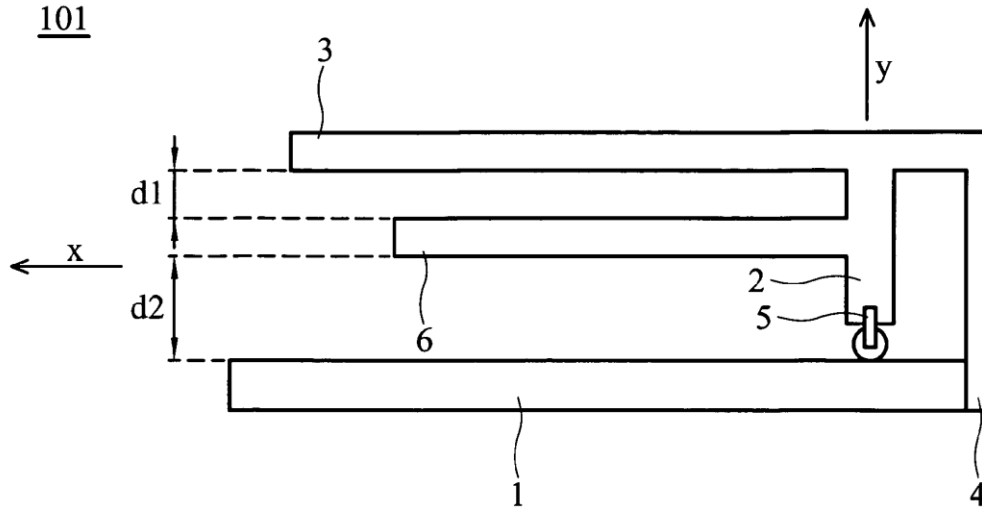

Acrobat 文件



US007324051B2

(12) **United States Patent**
Hayes

(10) **Patent No.:** **US 7,324,051 B2**
(45) **Date of Patent:** **Jan. 29, 2008**

(54) **SUPPLEMENTAL PARASITIC ANTENNA APPARATUS**

2003/0176164 A1 * 9/2003 Hefetz 455/3.06
2005/0156796 A1 * 7/2005 Nysen 343/702

(75) Inventor: **Gerard James Hayes**, Wake Forest, NC (US)

FOREIGN PATENT DOCUMENTS

DE 100 37 475 2/2002
EP 1 128 465 8/2001
WO WO 98-01919 1/1998

(73) Assignee: **Sony Ericsson Mobile Communications AB**, Lund (SE)

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 107 days.

Tritium, Flatenna, Extend WiFi Range, Increase WiFi Range, Long Range, WiFi Antenn . . . , <http://www.tritium.co.uk/Flatennaroot.htm>, Printed Jan. 24, 2005.
Tritium, Flatenna Photos, Flatenna Photographs, WLAN Antenna, WiFi Antenna, <http://www.tritium.co.uk/FlatennaPhoto.ht>, Printed Jan. 24, 2005.

(21) Appl. No.: **10/963,250**

(22) Filed: **Oct. 12, 2004**

(Continued)

(65) **Prior Publication Data**

US 2006/0077103 A1 Apr. 13, 2006

Primary Examiner—Shih-Chao Chen

Assistant Examiner—Minh Dieu A

(74) *Attorney, Agent, or Firm*—Myers Bigel Sibley & Sajovec

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** 343/702, 343/700 MS, 756, 814–818, 872
See application file for complete search history.

(57) **ABSTRACT**


A supplemental antenna assembly is provided for use with an electronic device having an integral radio antenna, such as a wireless-enabled laptop computer, notebook computer, gaming device, personal digital assistant (PDA), or circuit card (e.g., a PCMCIA card) or other circuit assembly designed be used with such a device. The supplemental antenna assembly includes a parasitic element supported by a frame. The frame is configured to be attached to the housing of the portable device such that an inductive coupling is provided between the parasitic element and the integral radio antenna. The parasitic element may include, for example, an antenna and/or a coupling element, e.g., a coupling element configured to be connected to an external antenna.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,532,703 A 7/1996 Stephens et al.
5,566,226 A 10/1996 Mizoguchi et al.
5,940,038 A 8/1999 Brown et al.
6,437,745 B1 * 8/2002 Vaisanen et al. 343/702
6,456,245 B1 * 9/2002 Crawford 343/702
6,509,876 B1 * 1/2003 Jones et al. 343/702
6,536,172 B1 * 3/2003 Amend 52/426
6,753,826 B2 * 6/2004 Chiang et al. 343/834
6,933,896 B2 * 8/2005 Sward et al. 343/702
6,980,166 B2 * 12/2005 Gilmore 343/725

26 Claims, 10 Drawing Sheets

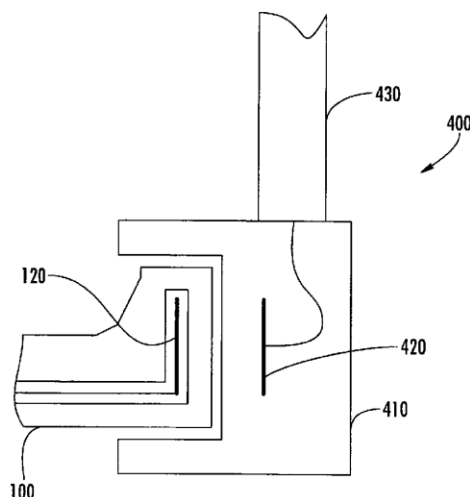

Acrobat 文件



US00D560214S

(12) **United States Design Patent** (10) **Patent No.:** **US D560,214 S**
Yuba et al. (45) **Date of Patent:** **** Jan. 22, 2008**

(54) **PLANAR ANTENNA**

(75) Inventors: **Takashi Yuba**, Shinagawa (JP); **Hideki Iwata**, Shinagawa (JP); **Masahiro Yanagi**, Shinagawa (JP); **Takashi Arita**, Shinagawa (JP)

(73) Assignee: **Fujitsu Component Limited**, Tokyo (JP)

(**) Term: **14 Years**

(21) Appl. No.: **29/257,759**

(22) Filed: **Apr. 11, 2006**

(30) **Foreign Application Priority Data**

Dec. 28, 2005 (JP) 2005-038825

(51) **LOC (8) Cl.** **14-03**

(52) **U.S. Cl.** **D14/230; D14/358**

(58) **Field of Classification Search** D14/138,
D14/230-238, 299, 358; D12/42, 43; 343/700 R-705,
343/871-908, 795, 840, 711-713, 819, 846;
455/90.2, 90.3, 91, 128, 269, 344, 347, 562.1
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D315,351 S *	3/1991	Velazquez		D14/234
D345,564 S *	3/1994	Kadono et al.		D14/230
5,467,477 A *	11/1995	Furuta et al.		455/348
D418,839 S *	1/2000	Brunner et al.		D14/230
D442,170 S *	5/2001	Mou		D14/238
D454,125 S *	3/2002	Stout et al.		D14/230

* cited by examiner

Primary Examiner—Stella M. Reid

Assistant Examiner—John Windmuller

(74) *Attorney, Agent, or Firm*—Staas & Halsey, LLP

(57) **CLAIM**

The ornamental design for a planar antenna, as shown and described.

DESCRIPTION

FIG. 1 is a top front and right side perspective view of a planar antenna showing our new design;

FIG. 2 is a front view thereof;

FIG. 3 is a rear view thereof;

FIG. 4 is a top view thereof;

FIG. 5 is a bottom view thereof;

FIG. 6 is a right side view thereof;

FIG. 7 is a left side view thereof;

FIG. 8 is a rear bottom and left side perspective view thereof;


FIG. 9 is a top front and right side perspective view thereof where the antenna case thereof is disposed at a different angle from that shown in FIG. 1;

FIG. 10 is a top front and right side perspective view thereof where the antenna case thereof is disposed at a different angle from that shown in FIG. 1; and,

FIG. 11 is a perspective view thereof showing an alternate position of use.

The broken line showing of a laptop computer in FIG. 11 is included for the purpose of illustrating environment and forms no part of the claimed design.

1 Claim, 11 Drawing Sheets

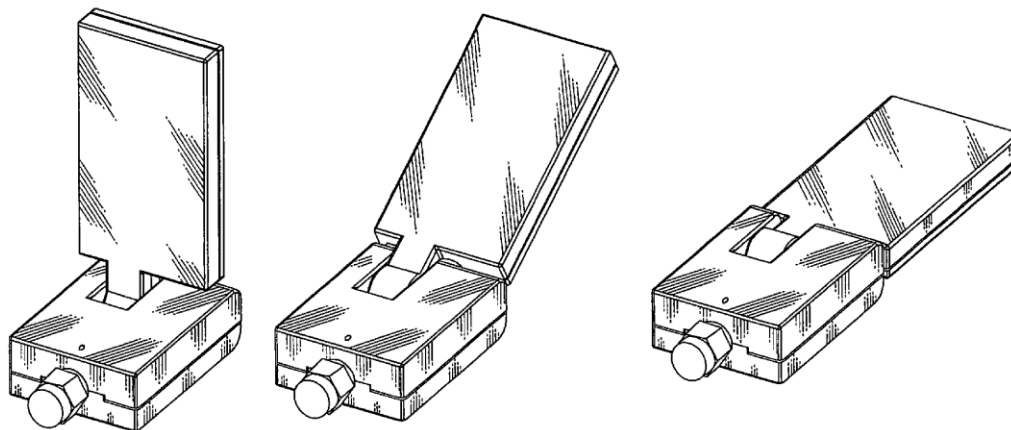

Acrobat 文件



US007324052B2

(12) **United States Patent**
Hamm et al.

(10) **Patent No.:** **US 7,324,052 B2**
(45) **Date of Patent:** **Jan. 29, 2008**

(54) **ANTENNA FOR A MOBILE TRANSMITTER
AND/OR RECEIVER DEVICE**

(75) Inventors: **Dirk Hamm**, Willich (DE); **Marc
Lenkeit**, Willich (DE)

(73) Assignee: **Success Chip Ltd.**, Tortola (VG)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 18 days.

(21) Appl. No.: **11/037,520**

(22) Filed: **Jan. 18, 2005**

(65) **Prior Publication Data**

US 2006/0152418 A1 Jul. 13, 2006

(30) **Foreign Application Priority Data**

Jan. 7, 2005 (EP) 05000255

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** **343/702,**
343/700 MS, 725, 727

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,160,512	A *	12/2000	Desclos et al.	343/700 MS
6,452,558	B1 *	9/2002	Saitou et al.	343/725
6,507,318	B2 *	1/2003	Ito et al.	343/702
6,529,168	B2 *	3/2003	Mikkola et al.	343/702
7,068,228	B2 *	6/2006	Soutome	343/702
7,075,487	B2 *	7/2006	Mattsson et al.	343/702
2003/0048227	A1 *	3/2003	Nakamura	343/702

* cited by examiner


Primary Examiner—Tan Ho

(74) *Attorney, Agent, or Firm*—Stoel Rives LLP

(57) **ABSTRACT**

An antenna for a mobile transmitter and/or receiver device
suitable for a hand-held transmitter/receiver for a wireless
microphone includes a monopole or dipole antenna element
for the excitation of a monopole or diopole and an additional
antenna element for the excitation of a parallel line mode.

14 Claims, 5 Drawing Sheets

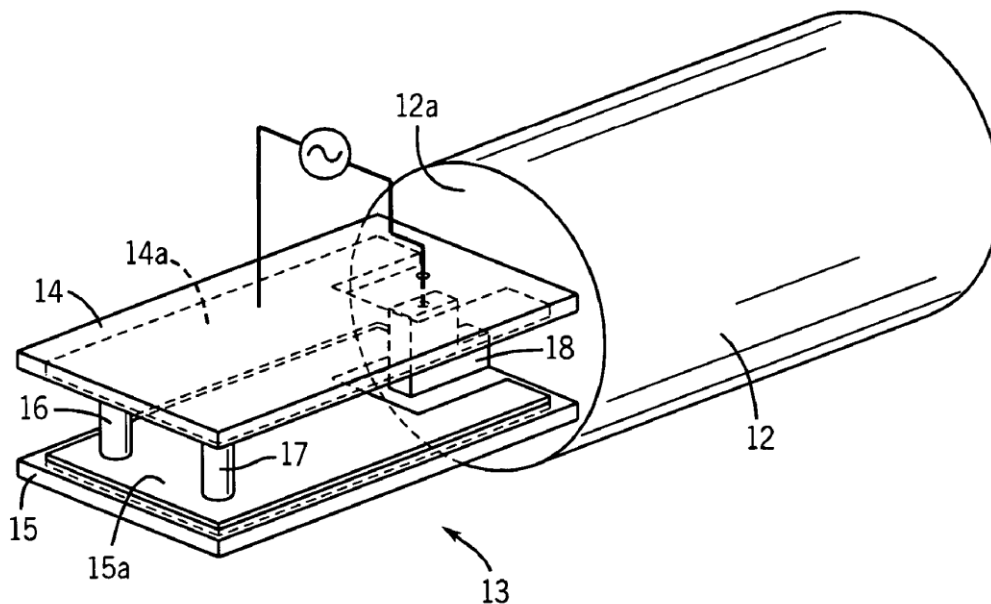

Acrobat 文件



US007324055B2

(12) **United States Patent**
Wan

(10) **Patent No.:** **US 7,324,055 B2**
(45) **Date of Patent:** **Jan. 29, 2008**

(54) **ANTENNA HAVING WIDE TRANSMITTING ANGLE**

(75) Inventor: **Tze Chung Wan**, Taoyuan Hsien (TW)

(73) Assignee: **Joymax Electronics Co., Ltd.**, Chongli Gonyeh Chu, Chongli Taoyuan Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/410,464**

(22) Filed: **Apr. 25, 2006**

(65) **Prior Publication Data**
US 2007/0247382 A1 Oct. 25, 2007

(51) **Int. Cl.**
H01Q 21/00 (2006.01)

(52) **U.S. Cl.** **343/725; 343/729**

(58) **Field of Classification Search** **343/725, 343/729, 702, 711, 713**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,181,286 B1 *	1/2001	Roscoe et al.	343/725
6,417,809 B1	7/2002	Kadambi et al.	343/702
6,806,838 B2 *	10/2004	Petros et al.	343/725
6,906,670 B2	6/2005	Shi	343/702

* cited by examiner


Primary Examiner—Hoang V. Nguyen

(74) *Attorney, Agent, or Firm*—Charles E. Baxley

(57) **ABSTRACT**

An antenna device includes a seat, a longitudinal antenna member having a lower portion disposed on the seat, and a cylindrical antenna member having a lower portion disposed on the seat and having a chamber formed by an outer peripheral wall, and the longitudinal antenna member is disposed in the chamber of the cylindrical antenna member and spaced from the outer peripheral wall of the cylindrical antenna member for a distance, and the longitudinal antenna member includes an upper portion extended outwardly beyond the cylindrical antenna member. The antenna members may be used for receiving and transmitting signal of different frequencies.

6 Claims, 5 Drawing Sheets

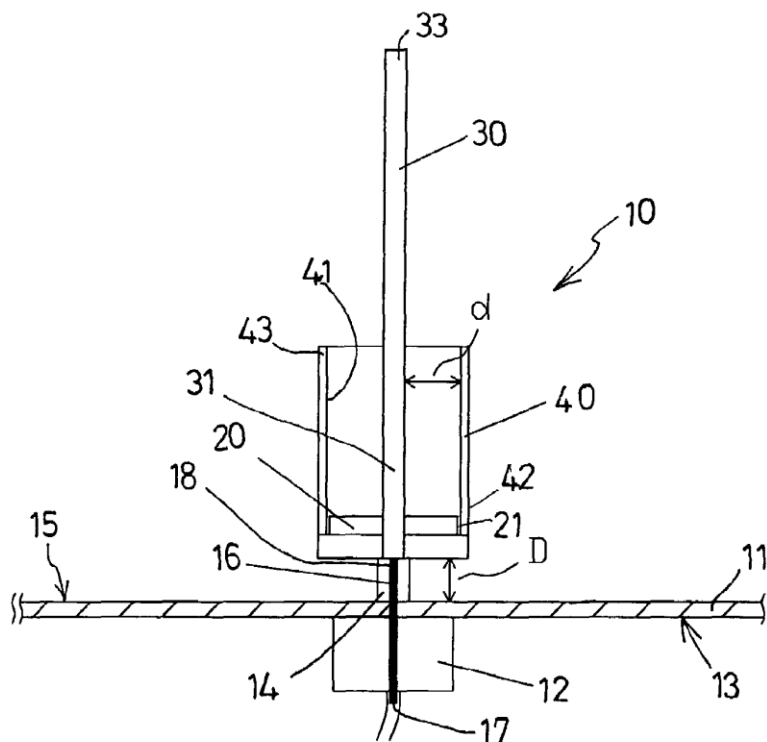

Acrobat 文件



US007324058B2

(12) **United States Patent**
Kai et al.

(10) **Patent No.:** **US 7,324,058 B2**
(45) **Date of Patent:** **Jan. 29, 2008**

(54) **TAG ANTENNA, TAG AND RFID SYSTEM USING THE SAME**

(75) Inventors: **Manabu Kai**, Kawasaki (JP); **Toru Maniwa**, Kawasaki (JP); **Takashi Yamagajo**, Kawasaki (JP)

(73) Assignee: **Fujitsu Limited**, Kawasaki (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 47 days.

(21) Appl. No.: **11/349,179**

(22) Filed: **Feb. 8, 2006**

(65) **Prior Publication Data**

US 2007/0085751 A1 Apr. 19, 2007

(30) **Foreign Application Priority Data**

Oct. 19, 2005 (JP) 2005-303886

(51) **Int. Cl.**
H01Q 9/28 (2006.01)

(52) **U.S. Cl.** **343/795; 343/793**

(58) **Field of Classification Search** **343/700 MS, 343/793, 795, 895; 340/572.7**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,860,019 A 8/1989 Jiang et al.
5,986,609 A * 11/1999 Spall 343/702
6,147,606 A 11/2000 Duan
6,285,342 B1 * 9/2001 Brady et al. 343/895
6,313,809 B1 11/2001 Gabriel et al.

6,417,816 B2 * 7/2002 Sadler et al. 343/795
6,535,175 B2 * 3/2003 Brady et al. 343/795
6,844,851 B2 1/2005 Yoon et al.
2002/0005811 A1 * 1/2002 Tsai et al. 343/795
2005/0024287 A1 2/2005 Jo et al.

FOREIGN PATENT DOCUMENTS

DE 19703864 6/1998
EP 1 271 692 1/2003
EP 1 542 312 6/2005
JP 2004-334432 11/2004
JP 2005-216077 8/2005
WO 00/39894 7/2000

OTHER PUBLICATIONS

Constantine A. Balanis, *Antenna Theory: Analysis and Design*, New York, NY: John Wiley & Sons, pp. 17-21, no dated.

* cited by examiner


Primary Examiner—Tho Phan

(74) *Attorney, Agent, or Firm*—Bingham McCutchen LLP

(57) **ABSTRACT**

A communication distance difference due to an attached object can be canceled, and an RFID system can be provided which has approximately the same communication distance regardless of an attached position (surface) of a tag. A tag antenna used for such the RFID system is for transmitting/receiving a radio signal to/from an RFID reader/writer in an RFID system has a pair of antenna elements centered on a feeding point and when a carrier wavelength of the radio signal is λ , each of the pair of the antenna elements includes a dipole portion which has a length from the feeding point of approximate $\lambda/4$ and a plurality of bending portions as well as a circular polarized wave generation portion linked to an end of the dipole portion.

9 Claims, 21 Drawing Sheets

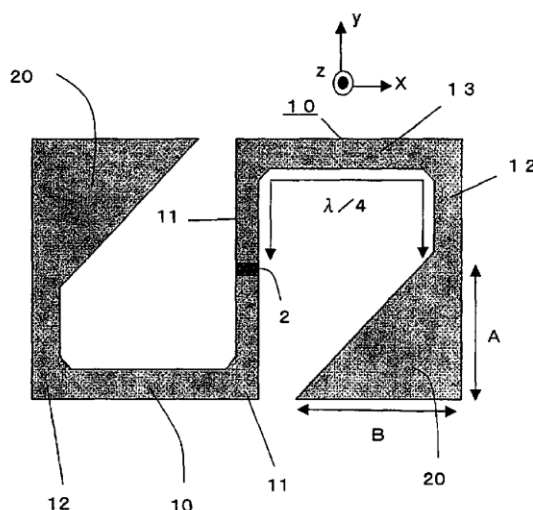

Acrobat 文件



US007324059B2

(12) **United States Patent**
Lee et al.

(10) **Patent No.:** **US 7,324,059 B2**
(45) **Date of Patent:** **Jan. 29, 2008**

(54) **STUB PRINTED DIPOLE ANTENNA (SPDA) HAVING WIDE-BAND AND MULTI-BAND CHARACTERISTICS AND METHOD OF DESIGNING THE SAME**

2002/0084943 A1* 7/2002 Tsai et al. 343/795
2006/0187135 A1* 8/2006 Maniwa et al. 343/795
2007/0024517 A1* 2/2007 Shimoda 343/795
2007/0052610 A1* 3/2007 Lee 343/795

(75) Inventors: **Sung-Jun Lee**, Gyeonggi-do (KR);
Kwang-Chun Lee, Daejeon (KR)

(73) Assignee: **Electronics and Telecommunications Research Institute**, Daejeon (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/504,512**

(22) Filed: **Aug. 15, 2006**

(65) **Prior Publication Data**

US 2007/0040759 A1 Feb. 22, 2007

(30) **Foreign Application Priority Data**

Aug. 19, 2005 (KR) 10-2005-0076503
Nov. 11, 2005 (KR) 10-2005-0108100

(51) **Int. Cl.**
H01Q 9/18 (2006.01)

(52) **U.S. Cl.** **343/795**; 343/793; 343/700 MS

(58) **Field of Classification Search** 343/700 MS,
343/793, 795, 812

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,791,506 B2 9/2004 Suganthan et al.

OTHER PUBLICATIONS

Tefiku, F., et al. "Design of Broad-Band and Dual-Band Antennas Comprised of Series-Fed Printed-Strip Dipole Pairs". *IEEE Transactions on Antennas and Propagation*. 2000. 48:895-900.

Chen, H., et al. "Feed for dual-band printed dipole antenna". *Electronics Letters*. 2004. 40:1320-1322.

Chen, G., et al. "A printed dipole antenna with microstrip tapered balun". *Microwave and Optical Technology Letters*. 2004. 40:344-346.

* cited by examiner



Primary Examiner—Trinh Vo Dinh

(74) Attorney, Agent, or Firm—Ladas & Parry LLP

(57) **ABSTRACT**

A stub printed antenna (SPDA) and a method of designing the same are provided. The SPDA include: a substrate; dipole arms disposed at both surfaces of the substrate for transmitting/receiving a signal; a parallel metal strip line disposed at both surfaces of the substrate, and each having one end connected to each of the dipole arms; a stub disposed at both surfaces of the substrate, and connected to the other end of the parallel metal strip line; a coaxial probe connected to the junction of the parallel metal strip line and the stub for feeding signals; a hole for inserting an inner conductor of the coaxial probe; and a contact for connecting to an outer conductor of the coaxial probe.

11 Claims, 13 Drawing Sheets

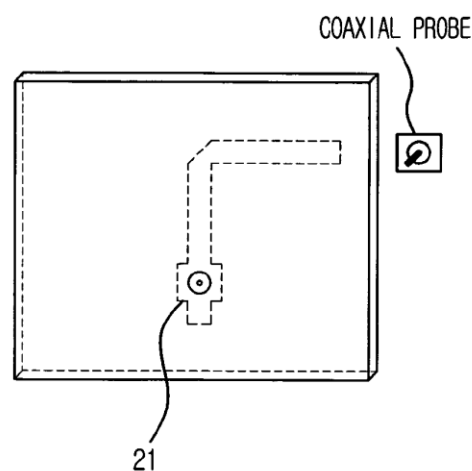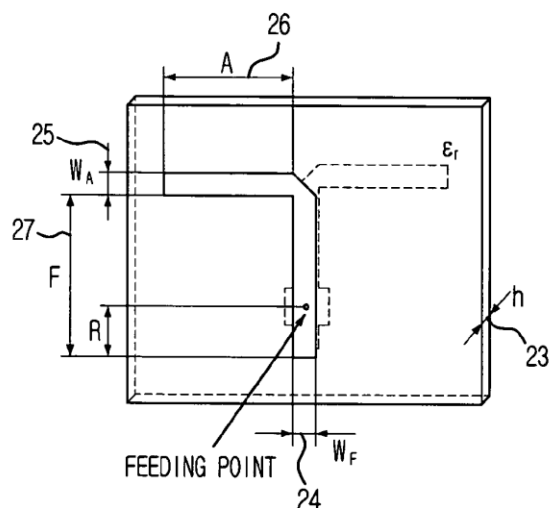

Acrobat 文件



US007324061B1

(12) **United States Patent**
Hadley

(10) **Patent No.:** **US 7,324,061 B1**
(45) **Date of Patent:** **Jan. 29, 2008**

(54) **DOUBLE INDUCTOR LOOP TAG ANTENNA**

(75) Inventor: **Mark A. Hadley**, Newark, CA (US)

(73) Assignee: **Alien Technology Corporation**,
Morgan Hill, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 214 days.

(21) Appl. No.: **10/848,643**

(22) Filed: **May 18, 2004**

Related U.S. Application Data

(60) Provisional application No. 60/472,258, filed on May
20, 2003.

(51) **Int. Cl.**
H01Q 1/40 (2006.01)

(52) **U.S. Cl.** **343/873; 343/870; 340/572.7**

(58) **Field of Classification Search** 340/10.2,
340/505, 825.3, 572.7, 673; 342/51; 343/870,
343/872, 873; 361/767, 783
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,008,647 A * 4/1991 Brunt et al. 340/432
5,545,291 A 8/1996 Smith et al. 343/795

5,608,417 A * 3/1997 de Vall 343/895
6,028,564 A 2/2000 Duan et al. 343/795
6,072,383 A * 6/2000 Gallagher et al. 340/10.2
6,107,920 A * 8/2000 Eberhardt et al. 340/572.7
6,181,287 B1 * 1/2001 Beigel 343/741
6,252,508 B1 * 6/2001 Vega et al. 340/572.1
6,281,038 B1 8/2001 Jacobsen et al. 343/872
6,291,896 B1 9/2001 Smith 343/795
6,384,727 B1 * 5/2002 Diprizio et al. 340/572.7
6,535,175 B2 3/2003 Brady et al.
6,555,408 B1 4/2003 Jacobsen et al. 343/873
6,606,247 B2 8/2003 Credelle et al. 343/795
6,925,701 B2 * 8/2005 Eckstein et al. 29/602.1
6,980,184 B1 12/2005 Stewart et al. 343/818

* cited by examiner

Primary Examiner—Douglas W. Owens


Assistant Examiner—Jimmy Vu

(74) *Attorney, Agent, or Firm*—Blakely, Sokoloff, Taylor &
Zafman LLP

(57) **ABSTRACT**

An RFID tag in one embodiment. The RFID tag includes at
least one integrated circuit and an antenna pattern coupled to
the integrated circuit, wherein the antenna pattern has an
inductor pattern which limits the effect of misplacement of
the integrated circuit relative to the inductor pattern. Other
embodiments and methods of making these apparatuses are
described.

6 Claims, 8 Drawing Sheets

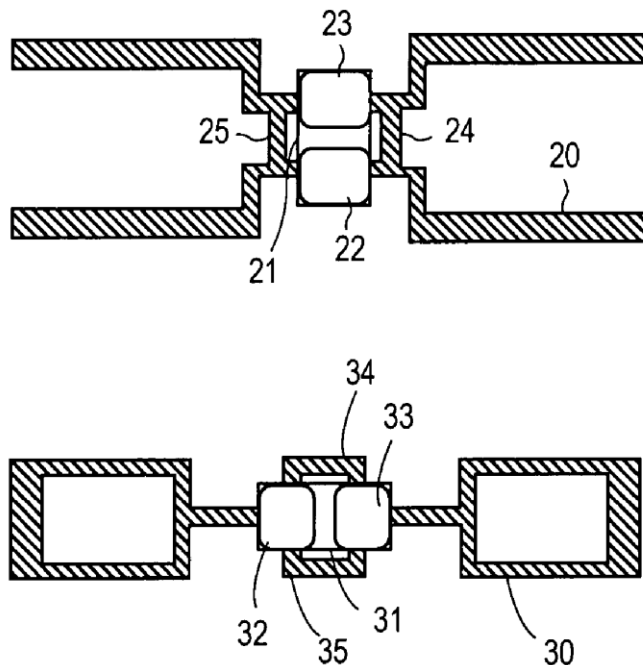

Acrobat 文件



US007324062B2

(12) **United States Patent**
Noro et al.

(10) **Patent No.:** **US 7,324,062 B2**
(45) **Date of Patent:** **Jan. 29, 2008**

(54) **ANTENNA UNIT**

(75) Inventors: **Junichi Noro**, Akita (JP); **Takao Kato**, Akita (JP)

(73) Assignee: **Mitsumi Electric Co., Ltd.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 27 days.

(21) Appl. No.: **11/318,408**

(22) Filed: **Dec. 22, 2005**

(65) **Prior Publication Data**

US 2006/0202902 A1 Sep. 14, 2006

(30) **Foreign Application Priority Data**

Mar. 10, 2005 (JP) 2005-067191

(51) **Int. Cl.**

H01Q 1/36 (2006.01)

H01Q 1/42 (2006.01)

(52) **U.S. Cl.** **343/895**; 343/872

(58) **Field of Classification Search** 343/700 MS,
343/702, 872, 895

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,357,261 A 10/1994 Brandigampola
5,838,285 A * 11/1998 Tay et al. 343/895
6,150,984 A 11/2000 Suguro et al.
6,278,414 B1 * 8/2001 Filipovic 343/895
6,339,408 B1 1/2002 Edvardsson et al.
6,429,830 B2 8/2002 Noro et al.
6,433,755 B1 8/2002 Kuramoto et al.
6,587,081 B2 7/2003 Noro et al.
6,628,241 B1 9/2003 Fukushima et al.
6,642,893 B1 * 11/2003 Hebron et al. 343/702

6,784,850 B2 8/2004 Mooroka et al.
6,919,859 B2 7/2005 McCarthy et al.
2002/0018026 A1 2/2002 Noro
2006/0022891 A1 2/2006 O'Neill, Jr. et al.
2006/0202901 A1 9/2006 Noro et al.
2006/0202903 A1 9/2006 Noro et al.
2006/0202904 A1 9/2006 Noro et al.
2007/0018905 A1 1/2007 Kato et al.

FOREIGN PATENT DOCUMENTS

JP 2001-339227 A 12/2001
JP 2001-339228 A 12/2001
JP 2003-037430 A 2/2003

OTHER PUBLICATIONS

Related U.S. Appl. No. 11/318,409, filed Dec. 22, 2005; Inventor:

J. Noro et al.

Related U.S. Appl. No. 11/318,411, filed Dec. 22, 2005; Inventor:

J. Noro et al.

Related U.S. Appl. No. 11/318,407, filed Dec. 22, 2005; Inventor:

J. Noro et al.

* cited by examiner


Primary Examiner—Shih-Chao Chen

(74) *Attorney, Agent, or Firm*—Frishauf, Holtz, Goodman & Chick, P.C.

(57) **ABSTRACT**

An antenna unit comprises a hollow cylindrical member obtained by forming a flexible insulating film member into a hollow cylinder and an antenna pattern composed of four conductors formed on an inner peripheral surface of the hollow cylindrical member. A phase shifter pattern is formed on the inner peripheral surface of the hollow cylindrical member so as to be electrically connected to the antenna pattern. The antenna unit further comprises a hollow cylindrical cover case covering the hollow cylindrical member and a shield member provided so as to cover the phase shifter pattern.

5 Claims, 12 Drawing Sheets



Acrobat 文件



US007324063B2

(12) **United States Patent**
Bae et al.

(10) **Patent No.:** **US 7,324,063 B2**

(45) **Date of Patent:** **Jan. 29, 2008**

(54) **RECTANGULAR HELICAL ANTENNA**

(75) Inventors: **Seok Bae**, Kyungki-do (KR); **Jae Suk Sung**, Kyungki-do (KR); **Mano Yasuhiko**, Kyungki-do (KR)

(73) Assignee: **Samsung Electro-Mechanics Co., Ltd.**, Kyungki-Do (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/433,676**

(22) Filed: **May 15, 2006**

(65) **Prior Publication Data**

US 2006/0256031 A1 Nov. 16, 2006

(30) **Foreign Application Priority Data**

May 16, 2005 (KR) 10-2005-0040875

(51) **Int. Cl.**
H01Q 1/36 (2006.01)

(52) **U.S. Cl.** **343/895; 343/787**

(58) **Field of Classification Search** **343/787, 343/895**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,977,927 A * 11/1999 Mandai et al. 343/788
6,486,852 B1 * 11/2002 Hirose et al. 343/895

6,674,405 B2 * 1/2004 Wang 343/700 MS
2004/0119647 A1 * 6/2004 Harihara 343/700 MS

FOREIGN PATENT DOCUMENTS

KR 1995-31988 A 12/1995
KR 1998-70284 10/1998
KR 10-2001-25172 A 4/2001

OTHER PUBLICATIONS

Korean Intellectual Property Office, Office Action mailed, Sep. 18, 2006.

* cited by examiner


Primary Examiner—Tho Phan

(74) *Attorney, Agent, or Firm*—Lowe Hauptman Ham & Berner

(57) **ABSTRACT**

In a helical antenna to be installed inside a mobile communication terminal, for processing low-bandwidth signals, a substrate is made of magnetic dielectric material, a plurality of lower electrodes are disposed on the underside of the substrate, and a plurality of upper electrodes are disposed on the top of the substrate. The upper electrodes are inclined with respect to the lower electrodes, respectively, at a predetermined angle. A plurality of side electrodes electrically connect the lower electrodes with the upper electrodes, respectively. At least a part of a magnetic moment vector, which is formed around each of the lower electrodes by a current flowing in the each lower electrode, is directed in parallel with a current flowing in each of the upper electrodes corresponding to the each lower electrode.

9 Claims, 11 Drawing Sheets

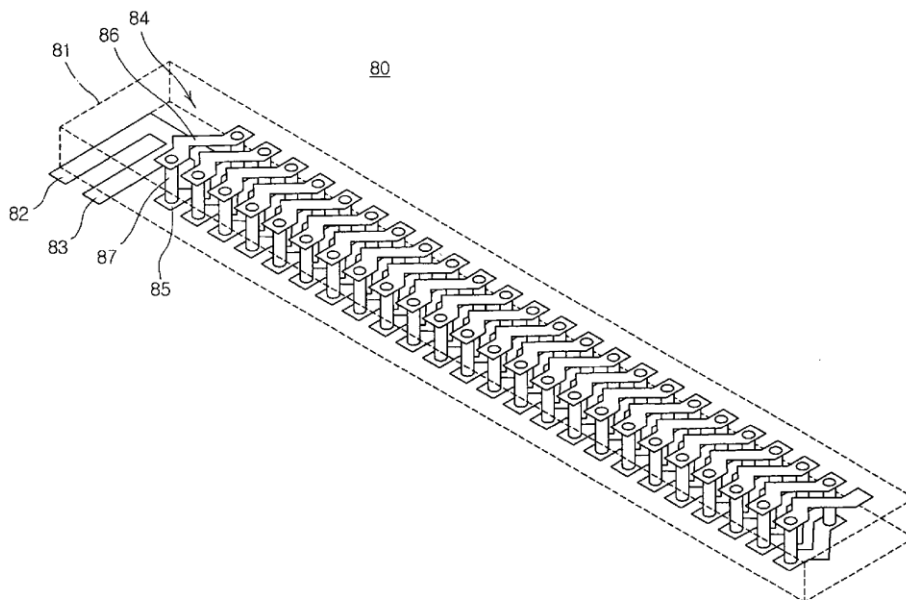

Acrobat 文件