



US007808435B2

(12) **United States Patent**
Nagumo et al.

(10) **Patent No.:** **US 7,808,435 B2**
(45) **Date of Patent:** **Oct. 5, 2010**

(54) **ANTENNA STRUCTURE AND WIRELESS COMMUNICATION APPARATUS INCLUDING SAME**

6,597,317 B2 7/2003 Talvitie
6,693,594 B2 * 2/2004 Pankinaho et al. 343/700 MS
7,136,020 B2 11/2006 Yamaki
2001/0048390 A1 12/2001 Nagumo et al.

(75) Inventors: **Shoji Nagumo**, Sagamihara (JP);
Kazuyuki Furuya, Yokohama (JP); **Mie Shimizu**, Yokohama (JP); **Hirotaka Fujii**, Sagamihara (JP)

(Continued)

(73) Assignee: **Murata Manufacturing Co., Ltd.**,
Kyoto (JP)

FOREIGN PATENT DOCUMENTS

EP 1122812 8/2001

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 81 days.

(Continued)

(21) Appl. No.: **12/188,550**

OTHER PUBLICATIONS

(22) Filed: **Aug. 8, 2008**

International Search Report (Apr. 2005).

(65) **Prior Publication Data**
US 2009/0015497 A1 Jan. 15, 2009

(Continued)

Related U.S. Application Data

Primary Examiner—Tan Ho
(74) Attorney, Agent, or Firm—Keating & Bennett, LLP

(63) Continuation of application No. PCT/JP2006/323818, filed on Nov. 29, 2006.

(57) **ABSTRACT**

(30) **Foreign Application Priority Data**

Feb. 14, 2006 (JP) 2006-036830

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702, 750**

See application file for complete search history.


(56) **References Cited**

U.S. PATENT DOCUMENTS

3,503,556 A 3/1970 Moulton
3,528,737 A 9/1970 Denner
3,658,639 A 4/1972 Wirth
6,300,909 B1 10/2001 Tsubaki et al.

In an antenna structure in which a base is mounted in a ground region on a circuit board, the base having formed thereon a driven radiating electrode and a parasitic radiating electrode, the parasitic radiating electrode causing multiple resonance at least in a harmonic resonant frequency band of the driven radiating electrode, capacitance loading means for loading a capacitance to a harmonic-mode zero voltage region of the driven radiating electrode is provided. The capacitance loading means is electrically connected to a ground electrode in the ground region on the circuit board via a grounding conduction path and switching means. By switching the switching means ON/OFF, capacitance loading by the capacitance loading means to the harmonic-mode zero voltage region of the driven radiating electrode is switched ON/OFF to switch a base resonant frequency in a base resonant frequency band of the driven radiating electrode.

20 Claims, 11 Drawing Sheets

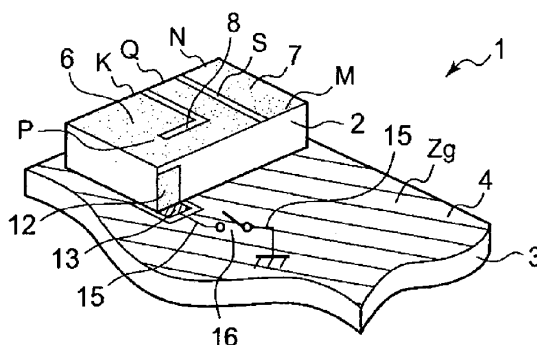

Acrobat 文件



US007808436B2

(12) **United States Patent**
Nakasato et al.

(10) **Patent No.:** **US 7,808,436 B2**
(45) **Date of Patent:** **Oct. 5, 2010**

(54) **FOLDING TYPE COMMUNICATION
TERMINAL DEVICE**

6,952,187 B2 * 10/2005 Annamaa et al. 343/702
7,228,112 B2 * 6/2007 Ota et al. 455/90.3

(75) Inventors: **Mitsuharu Nakasato**, Miyagi (JP);
Hironori Kikuchi, Miyagi (JP); **Satoru
Watanabe**, Kanagawa (JP)

(Continued)

(73) Assignee: **Panasonic Corporation**, Osaka (JP)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 575 days.

CN 1416194 A 5/2003

(21) Appl. No.: **11/573,208**

(Continued)

(22) PCT Filed: **Aug. 9, 2005**

OTHER PUBLICATIONS

(86) PCT No.: **PCT/JP2005/014586**

International Search Report dated Nov. 15, 2005.

§ 371 (c)(1),
(2), (4) Date: **Feb. 5, 2007**

(Continued)

(87) PCT Pub. No.: **WO2006/016585**

Primary Examiner—Michael C Wimer
Assistant Examiner—Kyana R Robinson
(74) Attorney, Agent, or Firm—Pearne & Gordon LLP

PCT Pub. Date: **Feb. 16, 2006**

(57) **ABSTRACT**

(65) **Prior Publication Data**

US 2008/0316113 A1 Dec. 25, 2008

(30) **Foreign Application Priority Data**

Aug. 10, 2004 (JP) 2004-233351

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**; 455/575.3; 455/575.7

(58) **Field of Classification Search** 343/702,
343/841; 455/575.3, 575.7

See application file for complete search history.


(56) **References Cited**

U.S. PATENT DOCUMENTS

6,295,462 B1 * 9/2001 Kudoh 455/41.3
6,897,825 B2 5/2005 Kim et al.

In a communication terminal in which a first enclosure and a second enclosure are foldable, to provide the communication terminal with an antenna characteristic with a wide band performance in either when the enclosures are opened or folded. In a folding communication terminal comprising an upper enclosure 2 and a lower enclosure 3 which are foldable through a hinge, and an antenna 5 attached to the lower enclosure 3, the antenna 5 is arranged along the edge of the end face 3A on the upper side abutting on the hinge of the lower enclosure 3, a conductor is placed in the upper enclosure 2 not provided with the antenna, and a second printed board 31 is provided so that when the upper enclosure 2 and the lower enclosure 3 are opened, it is connected to the antenna 5 at a high frequency to operate as the antenna, thereby transmitting/receiving an electromagnetic wave.

8 Claims, 9 Drawing Sheets

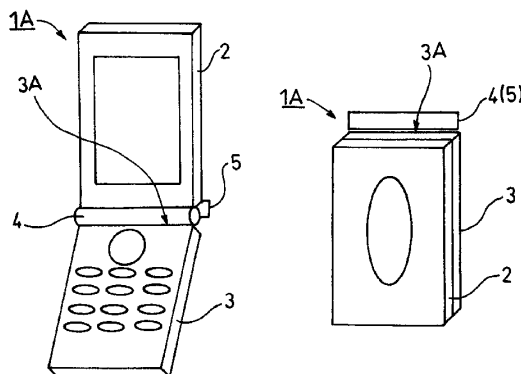

Acrobat 文件



US007808437B2

(12) **United States Patent**
Ying

(10) **Patent No.:** **US 7,808,437 B2**

(45) **Date of Patent:** **Oct. 5, 2010**

(54) **ANTENNA ARRANGEMENT**

(75) Inventor: **Zhinong Ying**, Lund (SE)

(73) Assignee: **Sony Ericsson Mobile Communications AB**, Lund (SE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 555 days.

(21) Appl. No.: **11/720,634**

(22) PCT Filed: **Dec. 2, 2005**

(86) PCT No.: **PCT/EP2005/056425**

§ 371 (c)(1),

(2), (4) Date: **Nov. 14, 2007**

(87) PCT Pub. No.: **WO2006/061352**

PCT Pub. Date: **Jun. 15, 2006**

(65) **Prior Publication Data**

US 2008/0252538 A1 Oct. 16, 2008

(30) **Foreign Application Priority Data**

Dec. 7, 2004 (EP) 04028916

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 1/38 (2006.01)

H01Q 13/10 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS; 343/767**

(58) **Field of Classification Search** 343/700 MS, 343/702, 767, 846, 848, 893
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,424,300	B1	7/2002	Sanford et al.	
6,535,167	B2 *	3/2003	Masuda et al.	343/700 MS
6,774,850	B2 *	8/2004	Chen	343/700 MS
7,081,854	B2 *	7/2006	Ying et al.	343/702
7,319,432	B2 *	1/2008	Andersson	343/702
2002/0135525	A1	9/2002	Ikegaya et al.	

FOREIGN PATENT DOCUMENTS

EP	1 359 638	11/2003
WO	01/47059	6/2001

OTHER PUBLICATIONS

International Search Report for corresponding Application No. PCT/EP2005/056425 mailed Mar. 10, 2006.

* cited by examiner


Primary Examiner—Shih-Chao Chen

(74) *Attorney, Agent, or Firm*—Renner, Otto, Boisselle & Sklar, LLP

(57) **ABSTRACT**

An antenna arrangement comprising a multi-layer PCB (10) with a ground plane (20) in a first layer and a first antenna (11) in a second layer, and an extended ground plane (20) connected to the ground plane of the PCB. A second antenna (110, 120, 130, 140, 150) is formed integral with the extended ground plane (20). The extended ground plane is positioned opposite the first antenna.

15 Claims, 3 Drawing Sheets

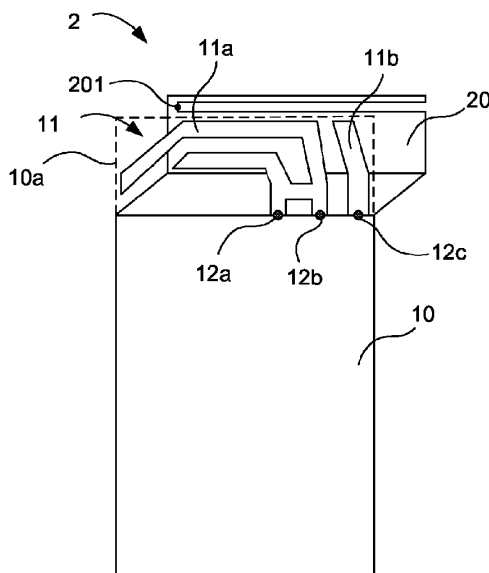

Acrobat 文件



US007808438B2

(12) **United States Patent**
Schlub et al.

(10) **Patent No.:** **US 7,808,438 B2**
(45) **Date of Patent:** **Oct. 5, 2010**

(54) **HANDHELD ELECTRONIC DEVICES WITH ISOLATED ANTENNAS**

(75) Inventors: **Robert W. Schlub**, Campbell, CA (US);
Robert J. Hill, Salinas, CA (US); **Juan Zavala**, Watsonville, CA (US); **Ruben Caballero**, San Jose, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/504,246**

(22) Filed: **Jul. 16, 2009**

(65) **Prior Publication Data**
US 2009/0275370 A1 Nov. 5, 2009

Related U.S. Application Data

(62) Division of application No. 11/650,071, filed on Jan. 4, 2007, now Pat. No. 7,595,759.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
(52) **U.S. Cl.** **343/702; 343/700 MS**
(58) **Field of Classification Search** **343/702, 343/700, 725, 767, 829, 846**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,339,400 B1 * 1/2002 Flint et al. 343/702
6,346,914 B1 * 2/2002 Annamaa 343/700 MS
6,384,696 B1 5/2002 Miller et al.
6,573,869 B2 * 6/2003 Moore 343/702
6,624,789 B1 * 9/2003 Kangasvieri et al. 343/702
6,670,923 B1 * 12/2003 Kadambi et al. 343/700 MS
6,741,214 B1 5/2004 Kadambi et al.
6,747,601 B2 6/2004 Boyle
6,831,607 B2 * 12/2004 Hebron et al. 343/700 MS

6,856,294 B2 2/2005 Kadambi et al.
6,980,154 B2 12/2005 Vance et al.
7,027,838 B2 4/2006 Zhou et al.
7,116,276 B2 10/2006 Lee
7,119,747 B2 10/2006 Lin et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1 315 238 A 7/2003


(Continued)

Primary Examiner—Tho G Phan
(74) *Attorney, Agent, or Firm*—Treyz Law Group; G. Victor Treyz; David C. Kellogg

(57) **ABSTRACT**

Handheld electronic devices are provided that contain wireless communications circuitry having at least first and second antennas. An antenna isolation element reduces signal interference between the antennas, so that the antennas may be used in close proximity to each other. A planar ground element may be used as a ground by the first and second antennas. The first antenna may be formed using a hybrid planar-inverted-F and slot arrangement in which a planar resonating element is located above a rectangular slot in the planar ground element. The second antenna may be formed from an L-shaped strip. The planar resonating element of the first antenna may have first and second arms. The first arm may resonate at a common frequency with the second antenna and may serve as the isolation element. The second arm may resonate at approximately the same frequency as the slot portion of the hybrid antenna.

5 Claims, 12 Drawing Sheets

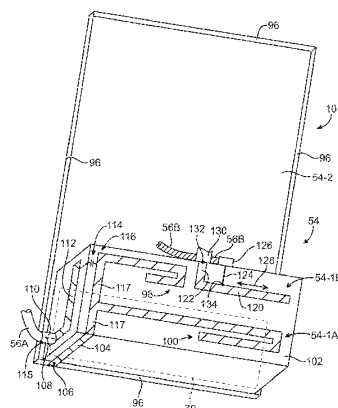

Acrobat 文件



US007808442B2

(12) **United States Patent**
Chiu et al.

(10) **Patent No.:** **US 7,808,442 B2**

(45) **Date of Patent:** **Oct. 5, 2010**

(54) **MULTI-BAND ANTENNA**

(75) Inventors: **Yi-Hung Chiu**, Taipei Hsien (TW);
Chia-Tien Li, Taipei Hsien (TW)

(73) Assignee: **WISTRON NeWeb Corp.**, Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/129,685**

(22) Filed: **May 30, 2008**

(65) **Prior Publication Data**
US 2009/0224979 A1 Sep. 10, 2009

(30) **Foreign Application Priority Data**
Mar. 5, 2008 (TW) 97107723 A

(51) **Int. Cl.**
H01Q 1/48 (2006.01)
H01Q 21/30 (2006.01)

(52) **U.S. Cl.** **343/826**; 343/829; 343/833;
343/846

(58) **Field of Classification Search** 343/702,
343/833, 846, 700 MS, 826, 828, 829, 831
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,650,294 B2 * 11/2003 Ying et al. 343/700 MS
6,812,892 B2 11/2004 Tai et al.
7,256,743 B2 * 8/2007 Korva 343/702

* cited by examiner

Primary Examiner—Michael C Wimer


(74) *Attorney, Agent, or Firm*—Pai Patent & Trademark Law Firm; Chao-Chang David Pai

(57) **ABSTRACT**

The present invention discloses a multi-band antenna. The antenna includes a ground portion, a parasitic unit connecting with the ground portion and operated at a first frequency band, a first radiation portion having a feeding point and operated at a second frequency band, a second radiation portion connecting with the feeding point and operated at a third frequency band. The first radiation portion and the second radiation portion are located between the parasitic unit and the ground portion.

33 Claims, 12 Drawing Sheets

200

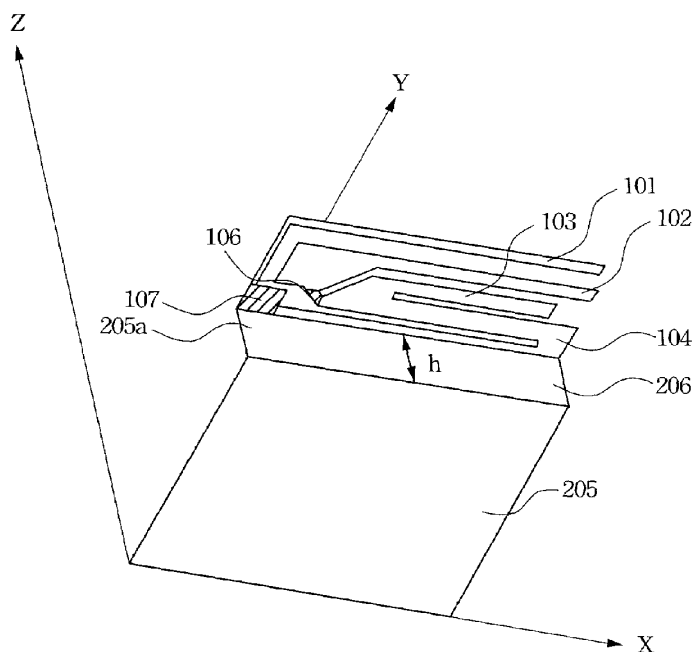

Acrobat 文件





US007812772B2

(12) **United States Patent**
Wen et al.

(10) **Patent No.:** **US 7,812,772 B2**
(45) **Date of Patent:** **Oct. 12, 2010**

(54) **ANTENNA, AND ASSOCIATED METHOD,
FOR A MULTI-BAND RADIO DEVICE**

(75) Inventors: **Geyi Wen**, Waterloo (CA); **Dong Wang**,
Waterloo (CA); **Mark Pecan**, Waterloo
(CA)

(73) Assignee: **Research In Motion Limited**, Waterloo
(CA)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 61 days.

(21) Appl. No.: **11/843,851**

(22) Filed: **Aug. 23, 2007**

(65) **Prior Publication Data**

US 2009/0051597 A1 Feb. 26, 2009

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/700 MS

(58) **Field of Classification Search** 343/702,
343/700 MS

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,068,230 B2 * 6/2006 Qi et al. 343/702

7,196,667 B2 * 3/2007 Watada et al. 343/700 MS
2002/0101382 A1 8/2002 Konishi et al.
2003/0001781 A1 1/2003 Konishi et al.
2003/0142022 A1 7/2003 Ollikainen et al.
2004/0252063 A1 12/2004 Sadamori et al.
2004/0263396 A1 * 12/2004 Sung 343/702
2005/0062650 A1 * 3/2005 Furuno et al. 343/700 MS
2006/0244665 A1 * 11/2006 Tung 343/702
2008/0007464 A1 * 1/2008 Hsu 343/702

FOREIGN PATENT DOCUMENTS

EP 1162688 A1 12/2001


* cited by examiner

Primary Examiner—Hoang V Nguyen

(57) **ABSTRACT**

Antenna apparatus, and an associated method, for a mobile station, or other radio device. A folded conducting strip is formed upon multiple sides of a cube-shaped, or other three-dimensional substrate of small dimensions. The conducting strip exhibits resonance at multiple frequencies, such as at frequencies encompassing the 800/900/1800/1900/2200 MHz frequencies. Because of the positioning of the conducting strip upon the multiple sides of the substrate, a conducting strip of increase length is provided while permitting the dimensional requirements of the antenna structure to be small. Multiple antennas are able to be positioned at the radio device to provide for multiple-input, multiple-output radio operation.

13 Claims, 9 Drawing Sheets

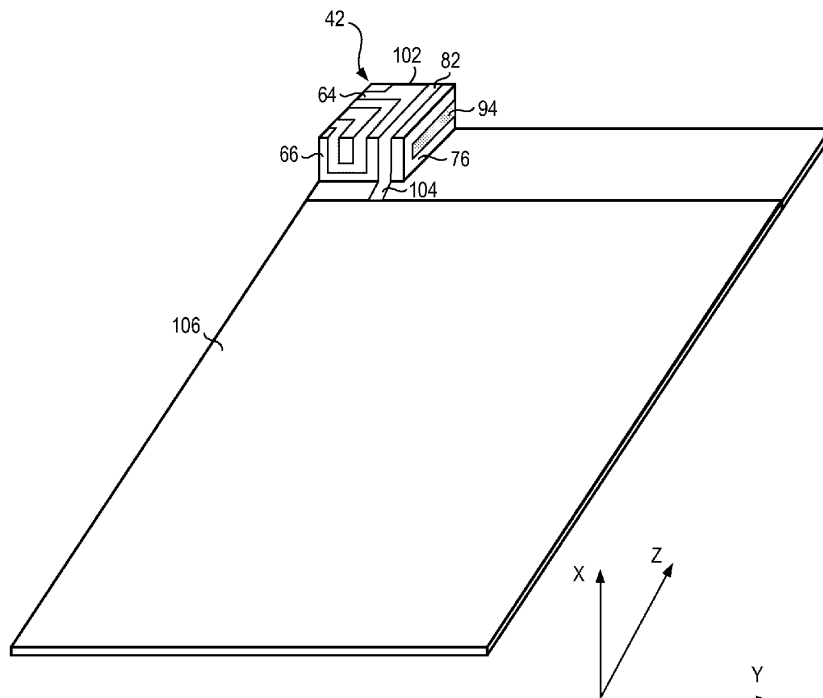

Acrobat 文件



US007812773B2

(12) **United States Patent**
Qi et al.

(10) **Patent No.:** **US 7,812,773 B2**
(45) **Date of Patent:** **Oct. 12, 2010**

(54) **MOBILE WIRELESS COMMUNICATIONS
DEVICE ANTENNA ASSEMBLY WITH
ANTENNA ELEMENT AND FLOATING
DIRECTOR ELEMENT ON FLEXIBLE
SUBSTRATE AND RELATED METHODS**

(75) Inventors: **Yihong Qi**, St. Agatha (CA); **Ying Tong
Man**, Waterloo (CA); **Adrian Cooke**,
Kitchener (CA)

(73) Assignee: **Research In Motion Limited**, Waterloo,
Ontario (CA)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 49 days.

(21) Appl. No.: **11/863,324**

(22) Filed: **Sep. 28, 2007**

(65) **Prior Publication Data**

US 2009/0085812 A1 Apr. 2, 2009

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 19/00 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS;**
343/833

(58) **Field of Classification Search** 343/700 MS,
343/702, 833; 379/429, 430, 433.01, 433.11–433.13;
455/575.7, 25

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,031,505 A 2/2000 Qi et al. 343/795
6,249,255 B1 * 6/2001 Eggleston 343/702

6,329,951 B1 12/2001 Wen et al. 343/702
6,765,536 B2 7/2004 Phillips et al. 343/702
7,199,760 B2 * 4/2007 Gilmore et al. 343/702
2002/0135523 A1 9/2002 Romero et al. 343/741
2003/0160729 A1 * 8/2003 Komiyama 343/702
2005/0270241 A1 * 12/2005 Qi et al. 343/702
2007/0164910 A1 7/2007 Qi et al. 343/702
2007/0188392 A1 8/2007 Kanazawa et al. 343/702

FOREIGN PATENT DOCUMENTS

EP 1487051 12/2004
WO WO0205384 1/2002
WO 2004/021511 3/2004
WO WO2004077610 9/2004
WO WO2005004277 1/2005

* cited by examiner

Primary Examiner—Rexford N Barnie


Assistant Examiner—Matthew C Tabler

(74) *Attorney, Agent, or Firm*—Allen, Dyer, Doppelt,
Milbrath & Gilchrist, P.A.

(57) **ABSTRACT**

A mobile wireless communications device may include a portable housing, a circuit board carried by the portable housing and having a ground plane thereon, wireless communications circuitry carried by the circuit board, and an antenna assembly carried by the housing. More particularly, the antenna assembly may include a flexible substrate, an electrically conductive antenna element on the flexible substrate and connected to the wireless communications circuitry and the ground plane, and a floating, electrically conductive director element on the flexible substrate for directing a beam pattern of the antenna element.

25 Claims, 7 Drawing Sheets

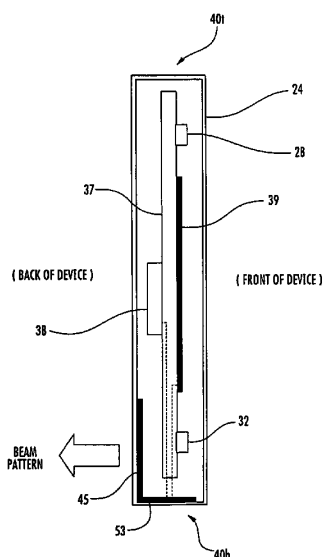

Acrobat 文件



US007812774B2

(12) **United States Patent**
Friman et al.

(10) **Patent No.:** **US 7,812,774 B2**
(45) **Date of Patent:** **Oct. 12, 2010**

(54) **ACTIVE TUNED LOOP-COUPLED ANTENNA**

(56) **References Cited**

(75) Inventors: **Alf Friman**, Växjö (SE); **Sverker Petersson**, Nybro (SE); **Laurent Desclos**, San Diego, CA (US); **Jeffrey Shamblin**, San Marcos, CA (US)

U.S. PATENT DOCUMENTS

5,874,926	A *	2/1999	Tsuru et al.	343/860
7,109,945	B2 *	9/2006	Mori	343/861
2007/0290934	A1 *	12/2007	Nakamura et al.	343/702
2008/0252549	A1 *	10/2008	Ohtaki et al.	343/861

(73) Assignee: **Ethertronics, Inc.**, San Diego, CA (US)

* cited by examiner

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 232 days.

Primary Examiner—Hoang V Nguyen

(74) *Attorney, Agent, or Firm*—Coastal Patent, LLC; Joshua S. Schoonover

(21) Appl. No.: **12/117,669**

(57) **ABSTRACT**

(22) Filed: **May 8, 2008**

An active tuned loop-coupled antenna capable of optimizing performance over incremental bandwidths and capable of tuning over a large total bandwidth to be used in wireless communications. The active loop is capable of serving as the radiating element or a radiating element can be coupled to this active loop. Multiple active tuned loops can be coupled together to extend the total bandwidth of the antenna. Active components can be incorporated into the antenna structure to provide yet additional extension of the bandwidth along with increased optimization of antenna performance over the frequency range of the antenna.

(65) **Prior Publication Data**

US 2009/0278756 A1 Nov. 12, 2009


(51) **Int. Cl.**
H01Q 7/00 (2006.01)

(52) **U.S. Cl.** **343/748**; 343/745

(58) **Field of Classification Search** 343/745, 343/748, 850, 860, 861

See application file for complete search history.

27 Claims, 10 Drawing Sheets

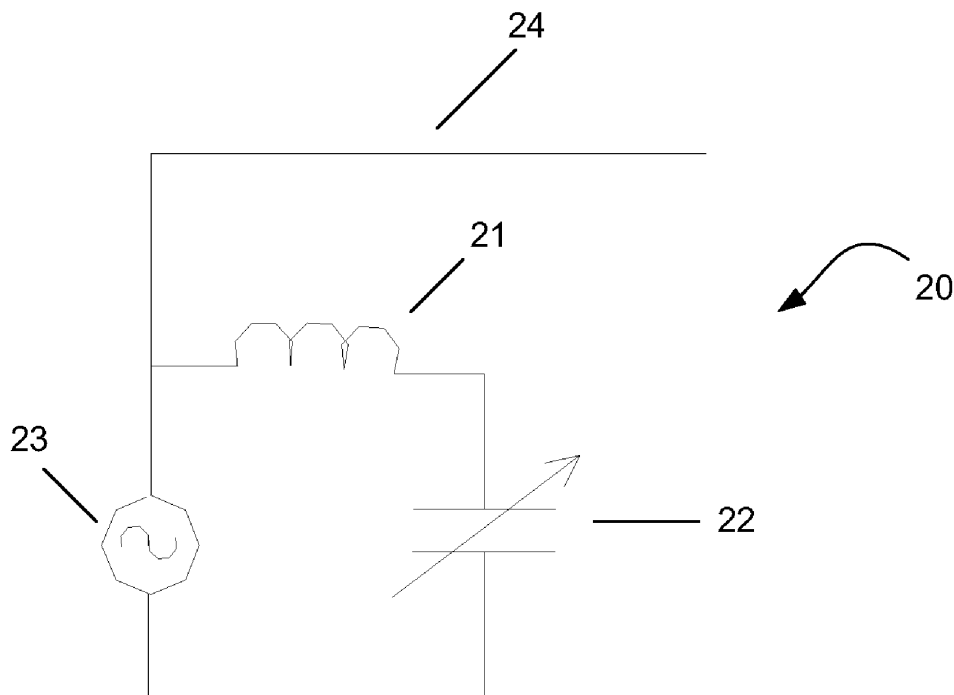

Acrobat 文件



US007812777B2

(12) **United States Patent**
Yosui et al.

(10) **Patent No.:** **US 7,812,777 B2**
(45) **Date of Patent:** **Oct. 12, 2010**

(54) **ANTENNA COIL TO BE MOUNTED ON A
CIRCUIT BOARD AND ANTENNA DEVICE**

(75) Inventors: **Kuniaki Yosui**, Kanazawa (JP);
Hiroyuki Kubo, Kusatsu (JP);
Hiromitsu Ito, Hakusan (JP)

(73) Assignee: **Murata Manufacturing Co., Ltd.**,
Kyoto (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 351 days.

(21) Appl. No.: **11/843,901**

(22) Filed: **Aug. 23, 2007**

(65) **Prior Publication Data**

US 2008/0007473 A1 Jan. 10, 2008

Related U.S. Application Data

(63) Continuation of application No. PCT/JP2007/055069,
filed on Mar. 14, 2007.

(30) **Foreign Application Priority Data**

Jul. 7, 2006	(JP)	2006-187484
Jul. 20, 2006	(JP)	2006-198253
Feb. 26, 2007	(JP)	2007-045422

(51) **Int. Cl.**
H01Q 7/08 (2006.01)

(52) **U.S. Cl.** 343/788; 343/787; 343/702

(58) **Field of Classification Search** 343/788,
343/787, 702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,148,036	A *	4/1979	Miller	343/788
5,583,330	A	12/1996	Fallah et al.	
6,028,568	A	2/2000	Asakura et al.	

6,384,799	B1 *	5/2002	Otomo et al.	343/895
2003/0226892	A1	12/2003	Arimura	
2005/0162331	A1	7/2005	Endo et al.	
2005/0179552	A1	8/2005	Shoji et al.	
2006/0125636	A1 *	6/2006	Nishida et al.	340/572.1

FOREIGN PATENT DOCUMENTS

EP	0 923 153	A1	6/1999
EP	1 439 608	A1	7/2004

(Continued)

OTHER PUBLICATIONS

Official Communication for PCT Application No. PCT/JP2007/
055069; mailed Apr. 24, 2007.

(Continued)


Primary Examiner—Douglas W Owens
Assistant Examiner—Dieu Hien T Duong

(74) *Attorney, Agent, or Firm*—Keating & Bennett, LLP

(57) **ABSTRACT**

In an antenna coil including a first magnetic core, a second magnetic core, and a flexible board, coil conductors are provided on a surface of the flexible board. By winding the flexible board around the first magnetic core and the second magnetic core, a first coil portion is disposed around the first magnetic core and a second coil portion is disposed around the second magnetic core. The winding direction of the second coil portion is opposite to that of the first coil portion. The first coil portion and the second coil portion are connected to define one coil as a whole.

14 Claims, 11 Drawing Sheets

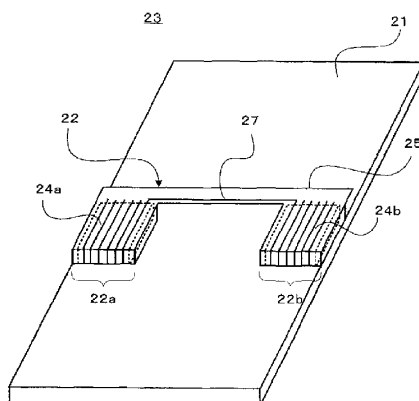

Acrobat 文件



US007817093B2

(12) **United States Patent**
Agata et al.

(10) **Patent No.:** **US 7,817,093 B2**
(45) **Date of Patent:** **Oct. 19, 2010**

(54) **PORTABLE COMPUTER AND ANTENNA
DISTANCE SETTING MECHANISM**

(75) Inventors: **Hiroaki Agata**, Yokohama (JP); **Mitsuo Horiuchi**, Sagami-hara (JP); **Hirohide Komiyama**, Zama (JP); **Shigeki Mori**, Yamato (JP); **Tetsuya Ohtani**, Yokohama (JP); **Osamu Yamamoto**, Yamato (JP)

(73) Assignee: **Lenovo (Singapore) Pte. Ltd.**, Singapore (SG)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 335 days.

(21) Appl. No.: **12/058,398**

(22) Filed: **Mar. 28, 2008**

(65) **Prior Publication Data**

US 2008/0238788 A1 Oct. 2, 2008

(30) **Foreign Application Priority Data**

Mar. 28, 2007 (JP) 2007-083667

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 1/42 (2006.01)

G06F 1/16 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/872; 361/679.55; 361/679.01

(58) **Field of Classification Search** None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,973,645 A * 10/1999 Zigler et al. 343/702

6,421,011 B1 * 7/2002 Van Egmond et al. . 343/700 MS
6,839,034 B2 * 1/2005 Shimura 343/702
7,321,337 B2 * 1/2008 Ikeda et al. 343/718
7,423,867 B2 * 9/2008 Yamamoto et al. 361/679.32
7,499,000 B2 * 3/2009 Chan et al. 343/872
7,592,960 B2 * 9/2009 Byrne et al. 343/713

FOREIGN PATENT DOCUMENTS

JP 2002-149273 5/2002
JP 2003-202938 7/2003
JP 2004-280331 10/2004

* cited by examiner


Primary Examiner—Trinh V Dinh

(74) Attorney, Agent, or Firm—Ference & Associates LLP

(57) **ABSTRACT**

An apparatus has an antenna distance setting mechanism that sets a distance between a cosmetic cover and a radio antenna. An upper housing and a radio antenna, which has a ground and a radiating element and is movably attached to the upper housing, are covered by a cosmetic cover formed of a dielectric material. An antenna distance setting mechanism includes a radio antenna supporting member, elastic members, and protrusions. The radio antenna-supporting member is movably attached to the upper housing. When the cosmetic cover is attached to the upper housing, an inner wall of the cosmetic cover pushes the ends of the protrusions against an elastic force of the elastic members to set the distance between the radiating element and the inner wall of the cosmetic cover to a predetermined distance.

20 Claims, 4 Drawing Sheets

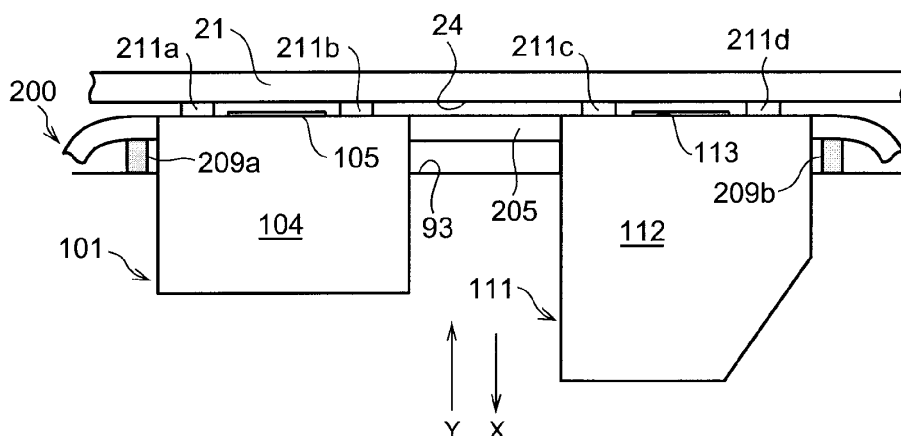

Acrobat 文件



US007817094B2

(12) **United States Patent**
Adachi et al.

(10) **Patent No.:** **US 7,817,094 B2**
(45) **Date of Patent:** **Oct. 19, 2010**

(54) **ANTENNA, AND WIRELESS MODULE,
WIRELESS UNIT AND WIRELESS
APPARATUS HAVING THE ANTENNA**

(75) Inventors: **Satoshi Adachi**, Yokohama (JP);
Makoto Katagishi, Chigasaki (JP); **Ikuo
Murata**, Yokohama (JP); **Masumi
Iwamura**, Yokohama (JP); **Ken Takei**,
Kawasaki (JP); **Takahiro Sugiyama**,
Hitachi (JP); **Yohei Shirakawa**, Hitachi
(JP)

(73) Assignees: **Hitachi, Ltd.**, Tokyo (JP); **Hitachi
Media Electronics Co., Ltd.**, Iwate (JP);
Hitachi Cable, Ltd., Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/213,318**

(22) Filed: **Jun. 18, 2008**

(65) **Prior Publication Data**

US 2008/0258984 A1 Oct. 23, 2008

Related U.S. Application Data

(62) Division of application No. 11/448,128, filed on Jun. 7,
2006, now Pat. No. 7,714,787.

(30) **Foreign Application Priority Data**

Jun. 7, 2005 (JP) 2005-166671

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** 343/702; 343/745; 343/750;
343/752

(58) **Field of Classification Search** 343/745,
343/702, 750, 752

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,209,358 A	9/1965	Felsenheld	
6,034,640 A	3/2000	Toshifumi et al.	
6,862,432 B1 *	3/2005	Kim	455/80
6,876,332 B1	4/2005	Chung et al.	
2002/0044092 A1 *	4/2002	Kushihi	343/702
2002/0167448 A1	11/2002	Yuichi et al.	

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0 869 579 A1 10/1998

(Continued)

OTHER PUBLICATIONS

European Search Report issued in corresponding European Patent
Application No. Ep 06 25 2889, dated Sep. 7, 2006.

(Continued)

Primary Examiner—Douglas W Owens

Assistant Examiner—Dieu Hien T Duong


(74) *Attorney, Agent, or Firm*—McDermott Will & Emery
LLP

(57) **ABSTRACT**

In an antenna that has high sensitivity to frequencies of nar-
row bands and over a wide band and that can be small-sized,
and in a wireless module, wireless unit and wireless apparatus
using this antenna, the antenna is comprised of a transmission
line, and variable capacitance means connected to this trans-
mission line, and the variable capacitance means controls the
resonant frequency.

2 Claims, 19 Drawing Sheets

103

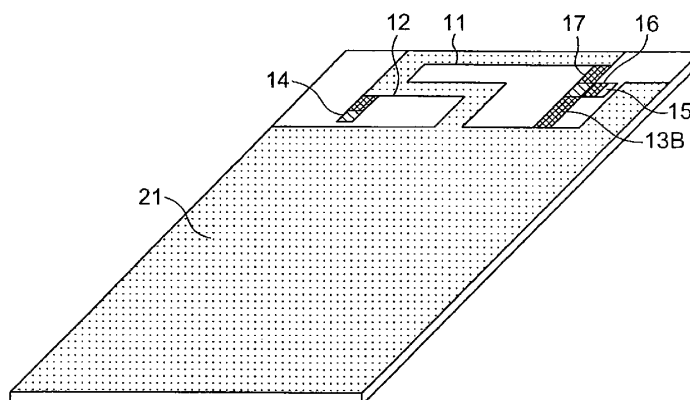

Acrobat 文件



US007817103B2

(12) **United States Patent**
Kersten et al.

(10) **Patent No.:** **US 7,817,103 B2**
(45) **Date of Patent:** **Oct. 19, 2010**

(54) **DUAL-BAND MULTI-PITCH PARASITIC
HALF-WAVE (MPPH) ANTENNA**

(75) Inventors: **Stephen L. Kersten**, Coral Springs, FL
(US); **Ovadia Grossman**, Tel Aviv (IL);
Sooliam Ooi, Plantation, FL (US)

(73) Assignee: **Motorola, Inc.**, Schaumburg, IL (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 288 days.

(21) Appl. No.: **12/039,369**

(22) Filed: **Feb. 28, 2008**

(65) **Prior Publication Data**

US 2009/0219220 A1 Sep. 3, 2009

(51) **Int. Cl.**
H01Q 1/36 (2006.01)

(52) **U.S. Cl.** **343/895**

(58) **Field of Classification Search** 343/711-713,
343/700 MS, 702, 895
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,923,305 A * 7/1999 Sadler et al. 343/895
6,107,972 A * 8/2000 Seward et al. 343/722
6,297,711 B1 10/2001 Seward et al.
6,329,962 B2 * 12/2001 Ying 343/895
2006/0250319 A1 11/2006 Ooi et al.
2008/0174501 A1 * 7/2008 Licul et al. 343/703

FOREIGN PATENT DOCUMENTS

EP 1291967 A 3/2003

GB 2400497 A 10/2004
JP 2001 024424 A * 1/2001
JP 2001024424 A 1/2001
JP 2001223518 A 8/2001
JP 2003037426 A 2/2003

OTHER PUBLICATIONS

PCT/US2009/035202—European Search Report-Written Opinion,
mailed Jul. 3 2009—17 pages.

Sooliam Ooi—"Wideband Monopole Antenna for Public Safety
Radio"—Antennas and Propagation Society Int'l
Symposium—IEEE, vol. 2A, Jul. 2005—pp. 363-366.

Hisamatsu Nakano et al—"Realization of Dual-Frequency and
Wide-Band VSWR Performances Using Normal-Mode Helical and
Inverted-F Antennas"—IEEE Transaction, vol. 46, Issue 6—Jun.
1998—pp. 788-793.

* cited by examiner


Primary Examiner—Huedung Mancuso

(74) *Attorney, Agent, or Firm*—Barbara R. Doutre

(57) **ABSTRACT**

A dual band multi-pitch helical antenna (101) includes a first
section (201) positioned adjacent to the feed point having a
widely spaced pitch. A second section (203) is attached to the
first section (201) having a narrowly spaced pitch. A third
section (205) is attached to the second section (203) having a
widely spaced pitch, while a fourth section (207) is attached
to the third section (205) having a narrowly spaced pitch. The
antenna further includes a parasitic element (213a/213b) that
is positioned adjacent to each of the first section (201), second
section (203), third section (205), and fourth section (207) for
enhancing broad-band antenna performance. A matching net-
work (216) is connected between an antenna feed point and
the first section (201) for matching the dual band multi-pitch
helical antenna to a predetermined feed point impedance such
that the antenna is resonant in at least two frequency bands.

20 Claims, 4 Drawing Sheets

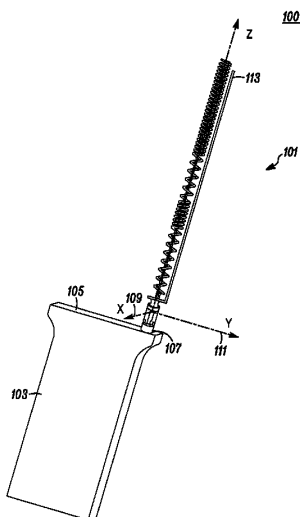

Acrobat 文件



US007821459B2

(12) **United States Patent**
Su et al.

(10) **Patent No.:** **US 7,821,459 B2**
(45) **Date of Patent:** **Oct. 26, 2010**

(54) **MULTI-BAND ANTENNA**

(75) Inventors: **Wen-Fong Su**, Tu-Cheng (TW);
Chen-Ta Hung, Tu-Cheng (TW);
Shu-Yean Wang, Tu-Cheng (TW)

(73) Assignee: **Hon Hai Precision Ind. Co., Ltd.**,
Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 414 days.

(21) Appl. No.: **11/825,891**

(22) Filed: **Jul. 10, 2007**

(65) **Prior Publication Data**
US 2008/0007461 A1 Jan. 10, 2008

(30) **Foreign Application Priority Data**
Jul. 10, 2006 (TW) 95125030 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. CL.** **343/700 MS; 343/702;**
343/846

(58) **Field of Classification Search** 343/700 MS,
343/702, 829, 846
See application file for complete search history.

(56) **References Cited**

FOREIGN PATENT DOCUMENTS

TW	410488	11/2000
TW	558084	10/2003
TW	253070	12/2004


Primary Examiner—Tho G Phan

(74) *Attorney, Agent, or Firm*—Wei Te Chung; Andrew C.
Cheng; Ming Chieh Chang

(57) **ABSTRACT**

A multi-band antenna includes a radiating element having at least two frequency bands and comprising a gap on one side edge thereof, a grounding element coupling and being perpendicular to said radiating element, and a reactance assembled to said radiating element and received in said gap.

16 Claims, 5 Drawing Sheets

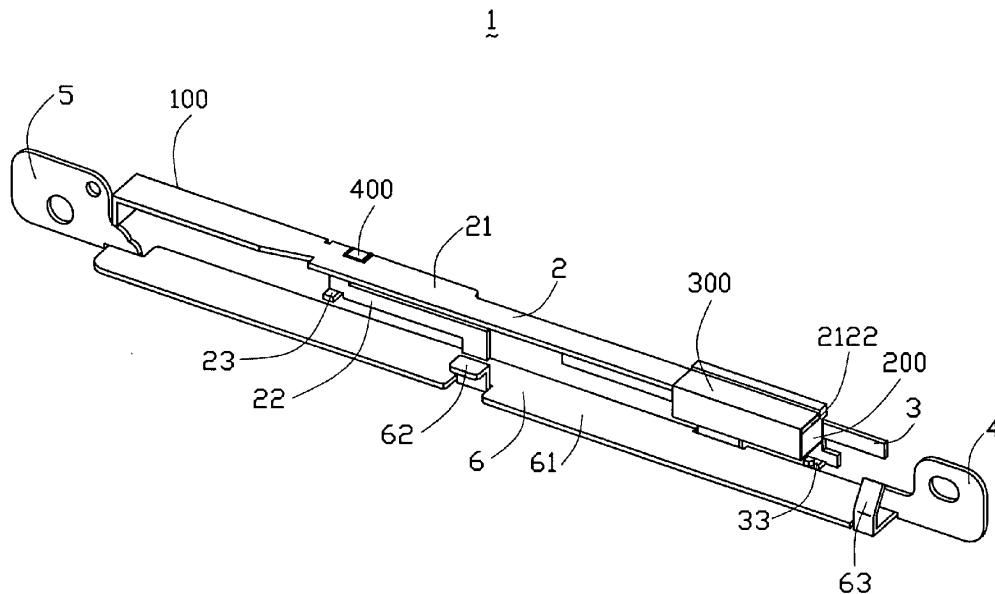

Acrobat 文件



US007821460B2

(12) **United States Patent**
Schillmeier et al.

(10) **Patent No.:** **US 7,821,460 B2**
(45) **Date of Patent:** **Oct. 26, 2010**

(54) **TUNABLE PATCH ANTENNA OF PLANAR CONSTRUCTION**

(75) Inventors: **Gerald Schillmeier**, München (DE);
Frank Mierke, München (DE)

(73) Assignee: **Kathrein-Werke KG**, Rosenheim (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 94 days.

(21) Appl. No.: **11/889,842**

(22) Filed: **Aug. 16, 2007**

(65) **Prior Publication Data**

US 2008/0042915 A1 Feb. 21, 2008

(30) **Foreign Application Priority Data**

Aug. 17, 2006 (DE) 10 2006 038 528

(51) **Int. Cl.**
H01Q 5/00 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/767; 343/825; 343/846**

(58) **Field of Classification Search** **343/745, 343/700 MS, 789, 825, 767, 846, 826**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,475,108 A 10/1984 Moser
5,943,016 A 8/1999 Snyder, Jr. et al.
6,028,561 A * 2/2000 Takei 343/767
6,034,644 A * 3/2000 Okabe et al. 343/767
6,188,369 B1 * 2/2001 Okabe et al. 343/767
6,462,712 B1 10/2002 Liang

6,639,558 B2 * 10/2003 Kellerman et al. 343/700 MS
6,731,243 B2 * 5/2004 Taira et al. 343/700 MS
6,756,942 B2 * 6/2004 Heyde 343/700 MS
6,864,843 B2 3/2005 du Toit et al.
7,109,926 B2 * 9/2006 du Toit 343/700 MS
2004/0201527 A1 10/2004 Hani et al.

FOREIGN PATENT DOCUMENTS

JP 02150101 6/1990
JP 07094934 4/1995
KR 1020040072974 8/2004
WO WO 2007000749 A1 * 1/2007

OTHER PUBLICATIONS

Munson, "Conformal Microstrip Antennas and Microstrip Phased Arrays", IEEE Transactions on Antennas and Propagation (1974).
Waterhouse et al., "Scan Performance of Infinite Arrays of Microstrip Patch Elements Loaded with Varactor Diodes", IEEE Transactions on Antennas and Propagation, pp. 1273-1280 (1993).

(Continued)

Primary Examiner—Douglas W Owens

Assistant Examiner—Jae K Kim

(74) *Attorney, Agent, or Firm*—Nixon & Vanderhye, PC


(57) **ABSTRACT**

An improved tunable antenna of planar construction is distinguished by the following features:

in plan view perpendicular to the effective surface (7), the electrically conductive structure (13, 113) completely or partially covers the effective surface (7),

the electrically conductive structure (13, 113) is coupled and/or connected galvanically or capacitively or serially and/or with interposition with at least one electrical component (125) with the ground surface (3) and/or a chassis (B) located on a potential or ground.

29 Claims, 5 Drawing Sheets

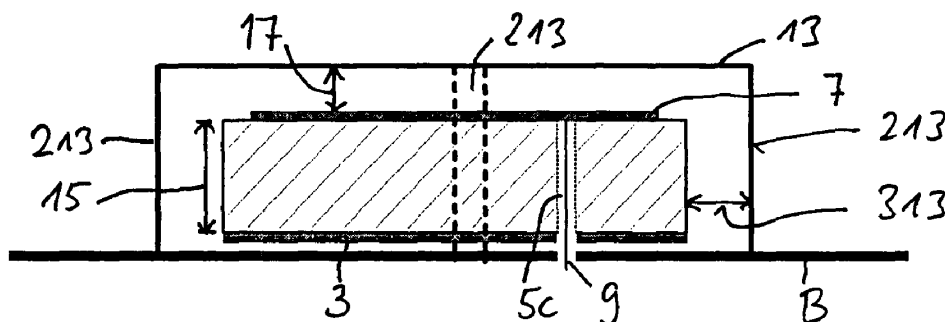

Acrobat 文件



US007821461B2

(12) **United States Patent**
Lai et al.

(10) **Patent No.:** **US 7,821,461 B2**
(45) **Date of Patent:** **Oct. 26, 2010**

(54) **ANTENNA**

(75) Inventors: **Ming-Iu Lai**, Taipei (TW);
Chun-Hsiung Wang, Taipei (TW)

(73) Assignee: **ASUSTek Computer Inc.**, Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 358 days.

(21) Appl. No.: **12/118,612**

(22) Filed: **May 9, 2008**

(65) **Prior Publication Data**

US 2008/0278381 A1 Nov. 13, 2008

(30) **Foreign Application Priority Data**

May 10, 2007 (TW) 96116641 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/846;**
343/829; 343/850; 343/865

(58) **Field of Classification Search** None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,410,891 A 10/1983 Schaubert et al.
6,850,192 B2 * 2/2005 Yeh 343/700 MS
6,917,342 B2 7/2005 Thudor et al.
6,970,135 B2 * 11/2005 Sato et al. 343/702
7,403,169 B2 * 7/2008 Svensson et al. 343/767
7,436,360 B2 * 10/2008 Chen et al. 343/700 MS

7,443,346 B2 * 10/2008 Shih 343/700 MS
7,443,350 B2 * 10/2008 Gaucher et al. 343/702
7,619,564 B2 * 11/2009 Chang et al. 343/700 MS

FOREIGN PATENT DOCUMENTS

KR 2005-0022846 3/2005

OTHER PUBLICATIONS

Carl B. Dietrich et al. "Spatial, Polarization, and Pattern Diversity for Wireless Handheld Terminals", Sep. 2001, pp. 1271-1281, IEEE Transactions of Antennas and Propagation, vol. 49, No. 9, US.
Simon R. Saunders. pp. 323-342, Antenna and Propagation for Wireless Communication System, John Wiley & Sons, Ch. 15, 1999, US.
Nader Behdad et al. "Dual-Band Reconfigurable Antenna with a Very Wide Tunability Range", Feb. 2006, pp. 409-416, IEEE Transactions of Antennas and Propagation, vol. 54, No. 2, US.

(Continued)


Primary Examiner—Trinh V Dinh

(57) **ABSTRACT**

An antenna includes a base plate, a grounding component, a feed-in conductor, a first controlling unit and a second controlling unit. The base plate includes a first surface and a second surface. The grounding component is provided on the first surface and includes a first part, a second part and a notch formed between the first part and the second part. The feed-in conductor is provided on the second surface and includes a first conducting part. The first conducting part extends across the notch, and is coupled to the first part. The first controlling unit is provided on the second surface and includes a first wire. The first wire extends across the notch, and is coupled to the first part. The second controlling unit is provided on the second surface and includes a second wire. The second wire extends across the notch, and is coupled to the first part.

24 Claims, 7 Drawing Sheets

100

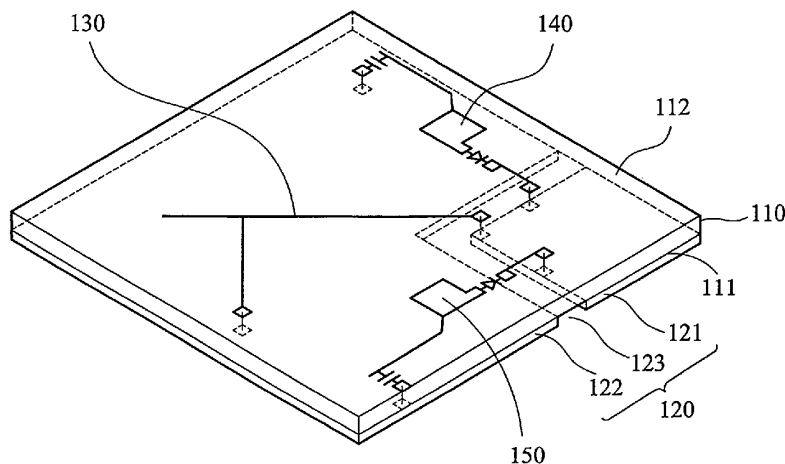

Acrobat 文件



US007821467B2

(12) **United States Patent**
Sugiyama

(10) **Patent No.:** **US 7,821,467 B2**
(45) **Date of Patent:** **Oct. 26, 2010**

(54) **TUNABLE ANTENNA MODULE WITH
FREQUENCY CORRECTION CIRCUIT AND
MANUFACTURING METHOD THEREOF**

(75) Inventor: **Takahiro Sugiyama**, Hitachi (JP)

(73) Assignee: **Hitachi Cable, Ltd.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 64 days.

(21) Appl. No.: **12/195,546**

(22) Filed: **Aug. 21, 2008**

(65) **Prior Publication Data**

US 2009/0051610 A1 Feb. 26, 2009

(30) **Foreign Application Priority Data**

Aug. 22, 2007 (JP) 2007-215743

(51) **Int. Cl.**
H01Q 9/00 (2006.01)

(52) **U.S. Cl.** **343/745**

(58) **Field of Classification Search** **343/745,**
343/860, 702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,381,566 A * 4/1983 Kane 455/193.3
4,754,265 A * 6/1988 Henderson et al. 340/653

6,054,965 A * 4/2000 Yamamoto 343/860
6,606,069 B2 * 8/2003 Kitamura et al. 343/745
7,145,509 B2 * 12/2006 Ikuta et al. 343/700 MS
7,253,781 B2 * 8/2007 Furuhi et al. 343/753
7,375,695 B2 * 5/2008 Ishizuka et al. 343/745
2006/0279469 A1 12/2006 Adachi et al.
2009/0245425 A1 * 10/2009 Tsutsui et al. 375/319

FOREIGN PATENT DOCUMENTS

JP 10-173426 6/1998
JP 2000-151448 5/2000
JP 2003-298341 10/2003
JP 2006/345042 12/2006
JP 2006-345042 12/2006

* cited by examiner


Primary Examiner—Huedung Mancuso

(74) *Attorney, Agent, or Firm*—Antonelli, Terry, Stout & Kraus, LLP.

(57) **ABSTRACT**

A tunable antenna module with frequency correction circuit having an antenna element, a variable capacity means connected to the antenna element, and a frequency control source that generates a controlling voltage for varying the capacity of the variable capacity means to vary a tuning frequency according to the frequency of radio wave received by the antenna element. The module further has a voltage divider circuit comprised of resistors for dividing the controlling voltage, and connected between the frequency control source and the variable capacity means. The tuning frequency is corrected by the voltage divider circuit.

7 Claims, 4 Drawing Sheets

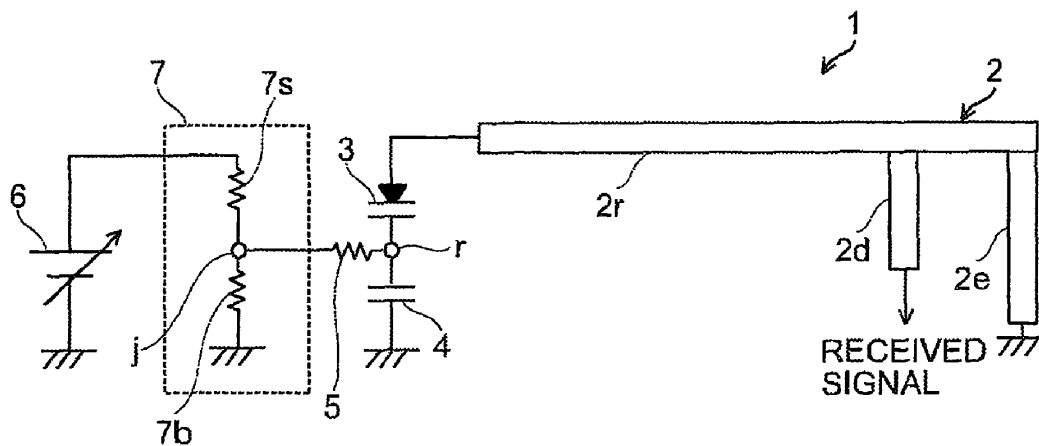

Acrobat 文件



US007821468B2

(12) **United States Patent**
Aoyama et al.

(10) **Patent No.:** **US 7,821,468 B2**
(45) **Date of Patent:** **Oct. 26, 2010**

(54) **CHIP ANTENNA, AN ANTENNA DEVICE,
AND A COMMUNICATION EQUIPMENT**

(75) Inventors: **Hiroyuki Aoyama**, Kumagaya (JP);
Masayuki Gonda, Kumagaya (JP);
Sigeo Fujii, Kumagaya (JP); **Shuuichi
Takano**, Tottori (JP)

(73) Assignee: **Hitachi Metals, Ltd.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 873 days.

(21) Appl. No.: **11/690,231**

(22) Filed: **Mar. 23, 2007**

(65) **Prior Publication Data**

US 2007/0222689 A1 Sep. 27, 2007

(30) **Foreign Application Priority Data**

Mar. 23, 2006	(JP)	2006-081063
Apr. 24, 2006	(JP)	2006-118661
Jun. 21, 2006	(JP)	2006-171428

(51) **Int. Cl.**
H01Q 1/00 (2006.01)
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/787**; 343/702; 343/700 MS;
343/872

(58) **Field of Classification Search** None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,668,557 A * 9/1997 Kawahata 343/700 MS

5,854,606 A *	12/1998	Kawahata et al.	343/702
5,936,593 A *	8/1999	Mandai et al.	343/895
6,028,554 A *	2/2000	Mandai et al.	343/700 MS
6,556,172 B2 *	4/2003	Noro	343/715
6,623,879 B2 *	9/2003	Okano et al.	428/701
6,660,179 B2 *	12/2003	Umeda et al.	252/62.63
2002/0008673 A1 *	1/2002	Shiroki et al.	343/895
2002/0036596 A1	3/2002	Noro	
2008/0316111 A1 *	12/2008	Aoyama et al.	343/700 MS

FOREIGN PATENT DOCUMENTS

EP	0 762 537 A2	3/1997
EP	0 812 030 A1	12/1997
EP	1 270 168 A2	1/2003
EP	1 505 689 A1	2/2005
JP	49-40046	4/1974
JP	56-64502	6/1981
JP	3-44203	2/1991
JP	10-145123	5/1998
JP	2003-002656	1/2003
JP	2003-243218	8/2003
JP	2005-175757	6/2005

* cited by examiner


Primary Examiner—Trinh V Dinh

(74) *Attorney, Agent, or Firm*—Paul F. Neils, Esq.; Akerman
Senterfitt

(57) **ABSTRACT**

The linear conductor **2** penetrates the magnetic base **1** along with the longitudinal direction of the magnetic base **1**. The linear conductor **2** has a straight shape. The straight shape conductor **2** is installed so that it is surrounded by outside planes of the magnetic base **1**, such as the side of a rectangular parallelepiped or a cylindrical peripheral face, and it penetrates both end sides of the magnetic base **1** in the longitudinal direction.

14 Claims, 29 Drawing Sheets

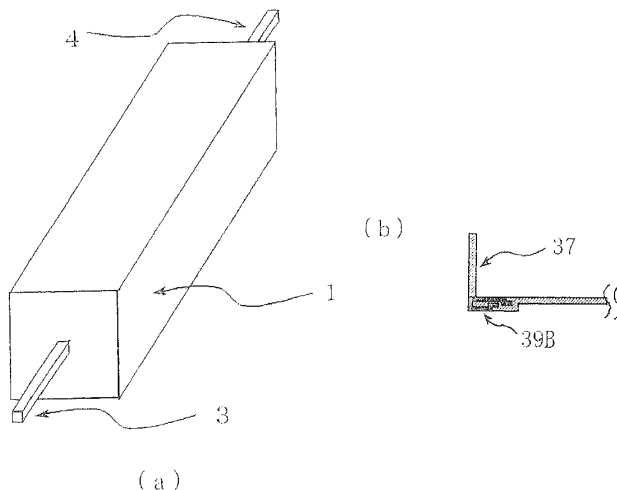

Acrobat 文件



US007821469B2

(12) **United States Patent**
Yu et al.

(10) **Patent No.:** **US 7,821,469 B2**
(45) **Date of Patent:** **Oct. 26, 2010**

(54) **PRINTED ANTENNA**

(75) Inventors: **Zhi-Cheng Yu**, Shenzhen (CN); **Cho-Ju Chung**, Taipei Hsien (TW)

(73) Assignees: **Hong Fu Jin Precision Industry (ShenZhen) Co., Ltd.**, Shenzhen, Guangdong Province (CN); **Hon Hai Precision Industry Co., Ltd.**, Tu-Cheng, Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 127 days.

(21) Appl. No.: **12/206,725**

(22) Filed: **Sep. 8, 2008**

(65) **Prior Publication Data**
US 2009/0262026 A1 Oct. 22, 2009

(30) **Foreign Application Priority Data**
Apr. 16, 2008 (CN) 2008 1 0301147

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/828; 343/829; 343/833**

(58) **Field of Classification Search** 343/846,
343/848, 828, 829, 830, 831, 702, 700 MS,
343/833
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,552,686 B2 * 4/2003 Ollikainen et al. 343/700 MS
7,113,135 B2 * 9/2006 Jo et al. 343/702

FOREIGN PATENT DOCUMENTS

TW 200803053 1/2008

* cited by examiner

Primary Examiner—Michael C Wimer


Assistant Examiner—Kyana R Robinson

(74) *Attorney, Agent, or Firm*—Frank R. Niranjan

(57) **ABSTRACT**

A printed antenna is positioned on a substrate, and includes a feeding portion and a radiating portion. The feeding portion is configured for feeding electromagnetic signals. The radiating portion is electronically connected to the feeding portion for transceiving the electromagnetic signals, and includes a first radiator, a second radiator, and a guiding portion. The first radiator is electronically connected to the feeding portion, and includes an arc-shaped radiating section. The second radiator is electronically connected to the feeding portion and the first radiator. The guiding portion is arc-shaped. The guiding portion and the second radiator are respectively positioned on different sides of the first radiator. A space between the guiding portion and the arc-shaped radiating section of the first radiator defines a first slot.

12 Claims, 5 Drawing Sheets

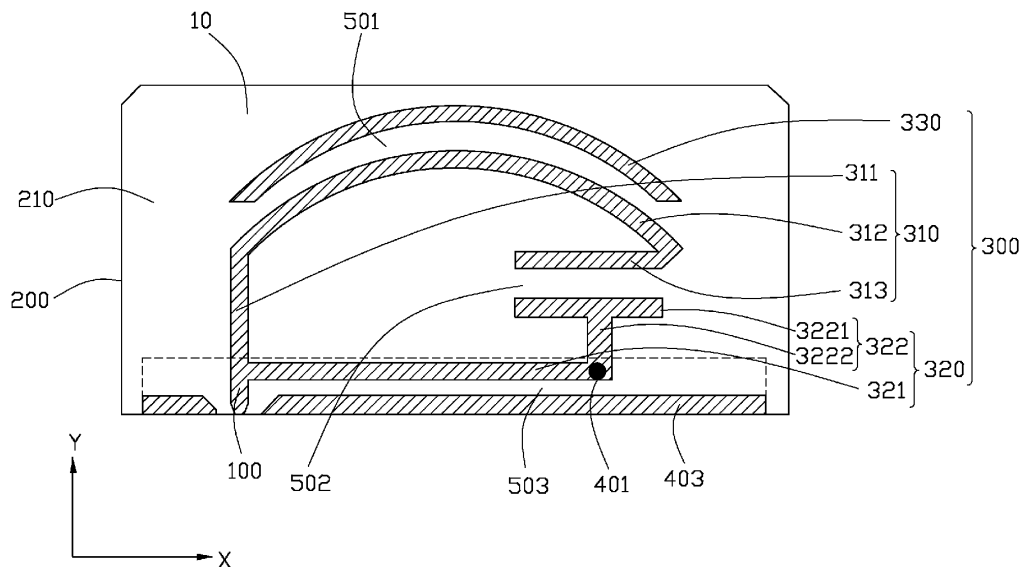

Acrobat 文件



US007821470B2

(12) **United States Patent**
Azhari

(10) **Patent No.:** **US 7,821,470 B2**
(45) **Date of Patent:** **Oct. 26, 2010**

(54) **ANTENNA ARRANGEMENT**

2008/0055160 A1 3/2008 Kim et al.

(75) Inventor: **Alexander Azhari**, Stockholm (SE)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Sony Ericsson Mobile Communications AB**, Lund (SE)

EP	0 942 488 A2	9/1999
EP	1 052 723 A2	11/2000
EP	1 755 191 A1	2/2007
WO	WO 2006/031170	3/2006
WO	WO 2006/120817	11/2006

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 103 days.

OTHER PUBLICATIONS

(21) Appl. No.: **12/175,784**

Written Opinion of the International Searching Authority corresponding to PCT/EP2009/050529 dated May 11, 2009, 11 pages.
Patent Cooperation Treaty International Search Report and Written Opinion of the International Searching Authority corresponding to PCT/EP2009/050528 dated May 11, 2009, 10 pages.
Co-pending U.S. Appl. No. 12/175,828, filed Jul. 18, 2008, entitled "Antenna Arrangement," [Alexander Azhari].

(22) Filed: **Jul. 18, 2008**

(65) **Prior Publication Data**

US 2010/0013714 A1 Jan. 21, 2010

* cited by examiner

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

Primary Examiner—Michael C Wimer

(52) **U.S. Cl.** **343/846**; 343/700 MS;
343/833

(74) *Attorney, Agent, or Firm*—Harrity & Harrity, LLP

(58) **Field of Classification Search** 343/702,
343/834, 846, 700 MS, 833
See application file for complete search history.

(57) **ABSTRACT**

(56) **References Cited**


U.S. PATENT DOCUMENTS

6,326,921 B1 12/2001 Egorov et al.
7,629,928 B2 * 12/2009 Fabrega-Sanchez et al. . 343/700 MS

An antenna for a wireless communication may include a ground plane provided on a carrying structure, a feed element, and a radiating element coupled to the feed element, the radiating element being substantially parallel to and vertically displaced from the ground plane by the feed element and a shortening element. The antenna may also include a parasitic element provided directly on the carrying structure as part of the carrying structure ground layer.

2004/0227672 A1 11/2004 Chen et al.

6 Claims, 3 Drawing Sheets

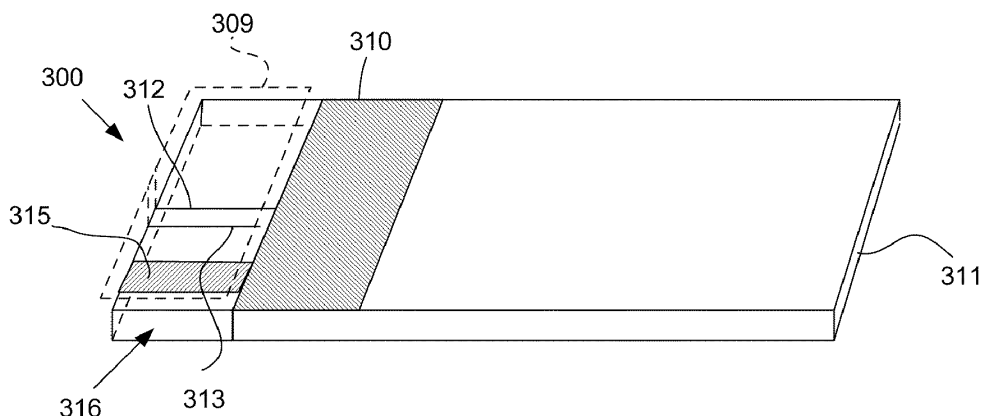

Acrobat 文件



US007821471B2

(12) **United States Patent**
Yoshioka et al.

(10) **Patent No.:** **US 7,821,471 B2**
(45) **Date of Patent:** **Oct. 26, 2010**

(54) **ASYMMETRICAL FLAT ANTENNA,
METHOD OF MANUFACTURING THE
ASYMMETRICAL FLAT ANTENNA, AND
SIGNAL-PROCESSING UNIT USING THE
SAME**

(75) Inventors: **Masahiro Yoshioka**, Tokyo (JP);
Takashi Nakanishi, Tokyo (JP); **Seiji
Wada**, Kanagawa (JP); **Tetsujiro
Kondo**, Tokyo (JP)

(73) Assignee: **Sony Corporation**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 302 days.

(21) Appl. No.: **11/677,286**

(22) Filed: **Feb. 21, 2007**

(65) **Prior Publication Data**
US 2007/0200767 A1 Aug. 30, 2007

(30) **Foreign Application Priority Data**
Feb. 28, 2006 (JP) 2006-053732

(51) **Int. Cl.**
H01Q 1/50 (2006.01)
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/850; 343/700 MS**

(58) **Field of Classification Search** **343/700 MS,**
343/702, 893, 850, 853, 860, 862, 863, 864,
343/846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,292,154 B1 *	9/2001	Deguchi et al.	343/806
6,496,148 B2 *	12/2002	Ngounou Kouam et al.	343/700 MS
7,116,276 B2 *	10/2006	Lee	343/700 MS
7,339,533 B2 *	3/2008	Kurashima et al.	343/702
2005/0052322 A1	3/2005	Park et al.	
2007/0069959 A1 *	3/2007	Wu	343/700 MS
2008/0316108 A1 *	12/2008	Chen et al.	343/700 MS

FOREIGN PATENT DOCUMENTS

JP	2004-220264	8/2004
JP	2005-192183	7/2005

* cited by examiner

Primary Examiner—Hoang V Nguyen


Assistant Examiner—Robert Karacsony

(74) *Attorney, Agent, or Firm*—Oblon, Spivak, McClelland,
Maier & Neustadt, L.L.P.

(57) **ABSTRACT**

An asymmetrical flat antenna contains an insulation layer. The antenna also contains a conductive power supply pattern that is provided on the insulation layer and a conductive antenna pattern that extends from the power supply pattern and is provided on the insulation layer. The conductive antenna pattern has an asymmetrical configuration with respect to the power supply pattern.

20 Claims, 32 Drawing Sheets

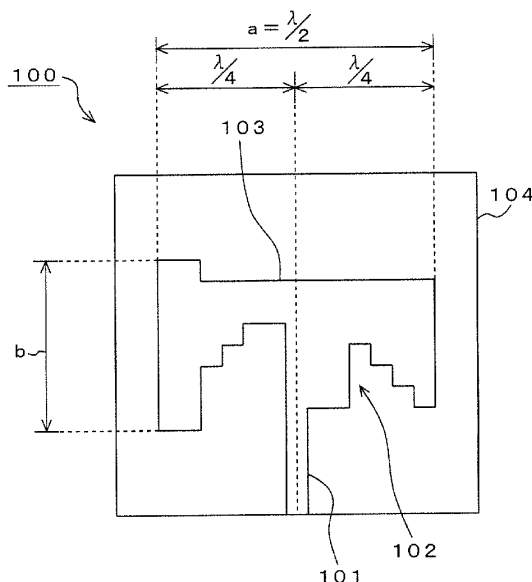

Acrobat 文件