



US007671804B2

(12) **United States Patent**
Zhang et al.

(10) **Patent No.:** **US 7,671,804 B2**
(45) **Date of Patent:** **Mar. 2, 2010**

(54) **TUNABLE ANTENNAS FOR HANDHELD DEVICES**

(75) Inventors: **Zhijun Zhang**, Santa Clara, CA (US);
Ruben Caballero, San Jose, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 668 days.

(21) Appl. No.: **11/516,433**

(22) Filed: **Sep. 5, 2006**

(65) **Prior Publication Data**

US 2008/0055164 A1 Mar. 6, 2008

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,832,372 A 11/1998 Clelland et al.
6,034,636 A * 3/2000 Saitoh 343/700 MS
6,414,641 B1 * 7/2002 Carlson et al. 343/702
6,423,915 B1 7/2002 Winter
6,504,507 B2 1/2003 Geeraert
6,650,295 B2 11/2003 Ollikainen et al.
6,714,162 B1 3/2004 Kadambi et al.
6,734,825 B1 5/2004 Guo et al.
6,762,723 B2 7/2004 Nallo et al.
6,836,249 B2 12/2004 Kenoun et al.
6,917,335 B2 7/2005 Kadambi et al.

6,933,893 B2 8/2005 Rubinshteyn et al.
6,950,065 B2 9/2005 Ying et al.
6,970,137 B1 11/2005 Maslovski et al.
7,079,079 B2 7/2006 Jo et al.
2004/0140933 A1 * 7/2004 Shikata et al. 343/700 MS
2005/0151689 A1 7/2005 Vesterinen
2005/0280587 A1 * 12/2005 Svigelj et al. 343/702

FOREIGN PATENT DOCUMENTS

EP 0 892 459 1/1999
EP 1 146 590 10/2001
EP 1 168 496 1/2002
EP 1 387 435 2/2004
WO 01/29927 4/2001

* cited by examiner


Primary Examiner—Tan Ho

(74) *Attorney, Agent, or Firm*—Treyz Law Group; G. Victor Treyz

(57) **ABSTRACT**

A compact tunable antenna for a handheld electronic device and methods for calibrating and using compact tunable antennas are provided. The antenna can have multiple ports. Each port can have an associated feed and ground. The antenna design can be implemented with a small footprint while covering a large bandwidth. The antenna can have a radiating element formed from a conductive structure such as a patch or helix. The antenna can be shaped to accommodate buttons and other components in the handheld device. The antenna may be connected to a printed circuit board in the handheld device using springs, pogo pins, and other suitable connecting structures. Radio-frequency switches and passive components such as duplexers and diplexers may be used to couple radio-frequency transceiver circuitry to the different feeds of the antenna. Antenna efficiency can be enhanced by avoiding the use of capacitive loading for antenna tuning.

11 Claims, 14 Drawing Sheets

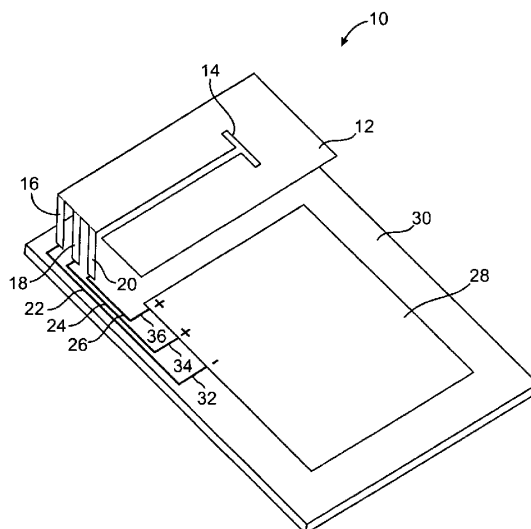

Acrobat 文件



US007671807B2

(12) **United States Patent**
Fu et al.

(10) **Patent No.:** **US 7,671,807 B2**
(45) **Date of Patent:** **Mar. 2, 2010**

(54) **HIGH-DIRECTIONAL WIDE-BANDWIDTH ANTENNA**

(75) Inventors: **I Ju Fu**, Taoyuan (TW); **Yung Chih Lo**,
Changhua (TW); **Yao Jen Chen**,
Kaohsiung (TW)

(73) Assignee: **Amos Technologies Inc.**, Hsinchu 300
(TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 149 days.

(21) Appl. No.: **12/078,828**

(22) Filed: **Apr. 7, 2008**

(65) **Prior Publication Data**

US 2009/0051599 A1 Feb. 26, 2009

(30) **Foreign Application Priority Data**

Aug. 22, 2007 (TW) 96131092 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**

(58) **Field of Classification Search** 343/700 MS,
343/702, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,476,769 B1 * 11/2002 Lehtola 343/702
6,765,539 B1 * 7/2004 Wang et al. 343/795
6,961,028 B2 * 11/2005 Joy et al. 343/895
2004/0090378 A1 * 5/2004 Dai et al. 343/700 MS

* cited by examiner


Primary Examiner—Hoang V Nguyen

(74) *Attorney, Agent, or Firm*—Bacon & Thomas, PLLC

(57) **ABSTRACT**

A high-directional wide-bandwidth antenna is disclosed. The high-directional wide-bandwidth antenna includes a first element, a first radiating body, a second radiating body, a third radiating body, and a fourth radiating body. The first element has a first feeding point, wherein its equivalent reactance is inductive. One end of the first radiating body is connected to the first element and the other end of the first radiating body is a coupling surface. The second radiating body has a second feeding point and is extended through the second feeding point to the coupling surface so that the energy is transferred between the first radiating body and the second radiating body through the coupling surface. The first resonant frequency is attained by the first radiating body and the second radiating body, and the second resonant frequency is attained by the third radiating body and the fourth radiating body.

16 Claims, 5 Drawing Sheets

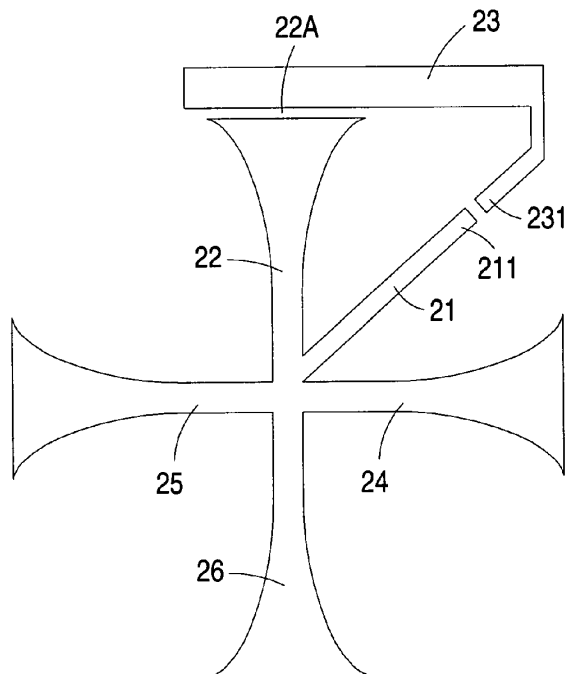

Acrobat 文件



US007671808B2

(12) **United States Patent**
Boyle

(10) **Patent No.:** **US 7,671,808 B2**
(45) **Date of Patent:** **Mar. 2, 2010**

(54) **COMMUNICATION DEVICE AND AN ANTENNA THEREFOR**

(75) Inventor: **Kevin R. Boyle**, Horsham (GB)

(73) Assignee: **NXP B.V.**, Eindhoven (NL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 197 days.

(21) Appl. No.: **10/563,649**

(22) PCT Filed: **Jul. 2, 2004**

(86) PCT No.: **PCT/IB2004/002235**

§ 371 (c)(1),
(2), (4) Date: **Jan. 6, 2006**

(87) PCT Pub. No.: **WO2005/006493**

PCT Pub. Date: **Jan. 20, 2005**

(65) **Prior Publication Data**

US 2006/0234657 A1 Oct. 19, 2006

(30) **Foreign Application Priority Data**

Jul. 10, 2003 (GB) 0316169.2

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** **343/700 MS, 343/702**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,414,641	B1 *	7/2002	Carlson et al.	343/702
6,662,028	B1 *	12/2003	Hayes et al.	455/575.7
6,911,942	B2 *	6/2005	Fukuda et al.	343/700 MS
2002/0140612	A1 *	10/2002	Kadambi et al.	343/702
2003/0098813	A1 *	5/2003	Koskineniemi et al.	343/702
2003/0103010	A1	6/2003	Boyle	
2003/0132885	A1 *	7/2003	Kuramoto et al.	343/702
2004/0095281	A1 *	5/2004	Poilasne et al.	343/702
2004/0252062	A1 *	12/2004	Tracy et al.	343/702

FOREIGN PATENT DOCUMENTS

EP	0932219	A2	7/1999
WO	WO0124311	A1	4/2001
WO	WO0137369	A1	5/2001

* cited by examiner



Primary Examiner—Douglas W Owens

Assistant Examiner—Dieu Hien T Duong

(57) **ABSTRACT**

A communications device, such as a cellular telephone, comprises a RF circuit and a PIFA antenna having feed and shorting terminations. An electrically conductive, self supporting member is provided to effect a connection between contact points of the RF circuit and the antenna. The member has at least one feed pillar and a shorting pillar which are substantially permanently connected to respective contact points of the RF circuit, and an antenna interface which forms a pressure connection with the terminations of the antenna.

19 Claims, 2 Drawing Sheets

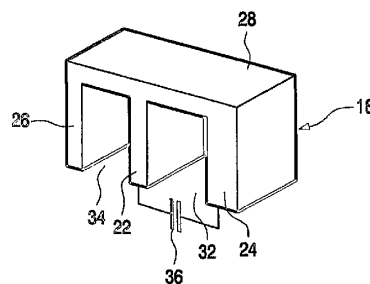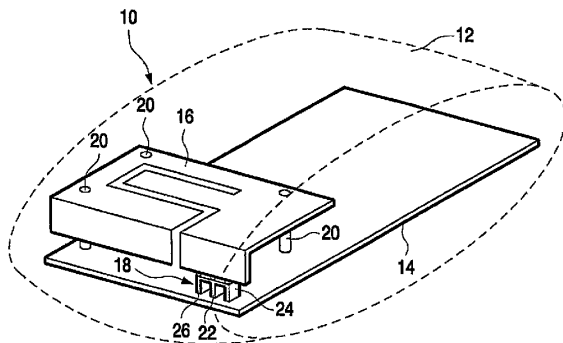

Acrobat 文件



US007671811B2

(12) **United States Patent**
Cheng et al.

(10) **Patent No.:** **US 7,671,811 B2**
(45) **Date of Patent:** **Mar. 2, 2010**

(54) **ANTENNA DEVICE WITH GROUND PLANE
COUPLED TO CONDUCTIVE PORTION OF
AN ELECTRONIC DEVICE**

(58) **Field of Classification Search** 343/700 MS,
343/702, 846
See application file for complete search history.

(75) Inventors: **Yu-Chiang Cheng**, Taipei (TW);
Ping-Cheng Chang, Chaozhou Town
(TW); **Cheng-Zing Chou**, Xinying
(TW)

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,724,348	B2 *	4/2004	Fang	343/702
6,995,718	B2 *	2/2006	Fang	343/702
7,187,331	B2 *	3/2007	Chen et al.	343/702
7,233,294	B2 *	6/2007	Fang	343/702
2005/0195119	A1	9/2005	Gaucher et al.	

* cited by examiner

Primary Examiner—Shih-Chao Chen

(74) *Attorney, Agent, or Firm*—Quintero Law Office

(73) Assignee: **Getac Technology Corporation**,
Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 166 days.

(21) Appl. No.: **11/878,674**

(22) Filed: **Jul. 26, 2007**

(65) **Prior Publication Data**
US 2008/0169986 A1 Jul. 17, 2008

Related U.S. Application Data

(63) Continuation-in-part of application No. 11/651,981,
filed on Jan. 11, 2007, now abandoned.


(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/48 (2006.01)

(52) **U.S. Cl.** **343/702; 343/846**

(57) **ABSTRACT**

Disclosed is an antenna device arranged inside a display
module of an electronic device with a conductive portion. The
antenna device includes an antenna element with a ground
plane and a signal feeding end for transceiving a wireless
signal, an antenna signal feeding line coupled to the signal
feeding end of the antenna element for feeding the wireless
signal transceived by the antenna element. At least one
mounting element for fixing the antenna element onto the
casing and forcing the ground plane of the antenna electri-
cally contacting with the conductive portion of the casing, so
that the conductive portion serves as an extended ground for
the ground plane of the antenna element.

15 Claims, 9 Drawing Sheets

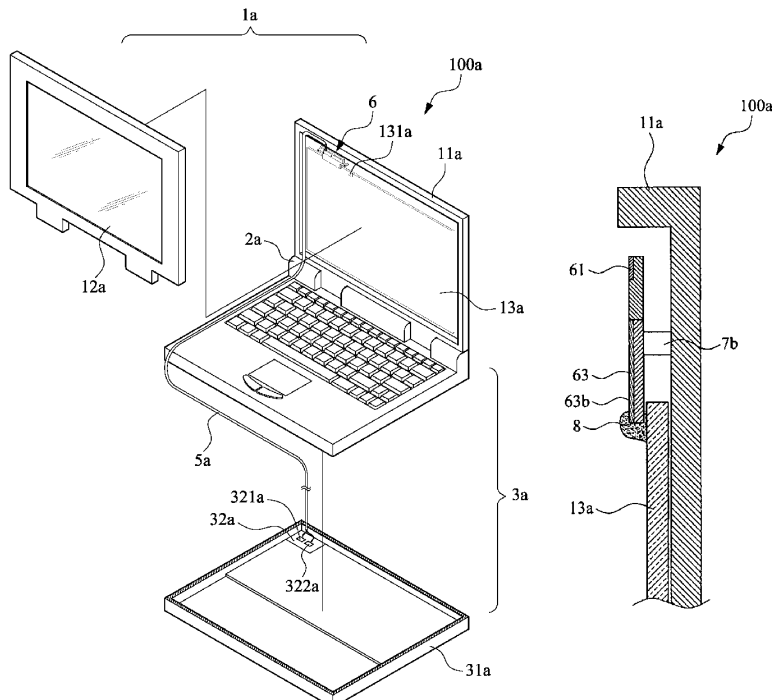

Acrobat 文件



US007671817B2

(12) **United States Patent**
Moser

(10) **Patent No.:** **US 7,671,817 B2**
(45) **Date of Patent:** **Mar. 2, 2010**

(54) **WIDEBAND ANTENNA**

(75) Inventor: **Michael Moser**, Hägersten (SE)

(73) Assignee: **Sony Ericsson Mobile Communications AB**, Lund (SE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 186 days.

(21) Appl. No.: **11/679,442**

(22) Filed: **Feb. 27, 2007**

(65) **Prior Publication Data**

US 2008/0204354 A1 Aug. 28, 2008

(51) **Int. Cl.**

H01Q 1/00 (2006.01)

H01Q 21/00 (2006.01)

H01Q 1/36 (2006.01)

H01Q 13/00 (2006.01)

(52) **U.S. Cl.** **343/828**; 343/829; 343/825; 343/908; 343/773

(58) **Field of Classification Search** 343/702, 343/896, 897, 898, 899, 825, 828, 829, 908, 343/846, 848, 773, 786

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,659,002 A 11/1953 Keeler

3,401,387 A 9/1968 Milligan et al.
7,023,397 B2 * 4/2006 Kurashima et al. 343/845
7,027,002 B2 * 4/2006 Suh et al. 343/773
2006/0181471 A1 * 8/2006 Kim et al. 343/767
2008/0252536 A1 * 10/2008 Anguera et al. 343/702

FOREIGN PATENT DOCUMENTS

EP 0 766 343 A2 4/1997
JP 2005-252526 9/2005
WO WO 03/034538 A1 4/2003

OTHER PUBLICATIONS

International Search Report issued for corresponding application no. PCT/EP2007/058701, mailed Feb. 4, 2008, 4 pages.

* cited by examiner

Primary Examiner—Douglas W Owens


Assistant Examiner—Jennifer F Hu

(74) *Attorney, Agent, or Firm*—Harrity & Harrity, LLP

(57) **ABSTRACT**

An antenna arrangement for a communication device is provided that may include a monopole antenna element having a bottom side joined to a first lateral side and joined to a second lateral side. The bottom side may be joined to each lateral side at an angle less than 90 degrees for forming an antenna element area defined at least by the bottom side and the first and second lateral sides. The antenna element area may include a central part arcuate around a longitudinal axis in a conical fashion, so that at least a part of the bottom side is provided half a turn around the longitudinal axis.

20 Claims, 3 Drawing Sheets

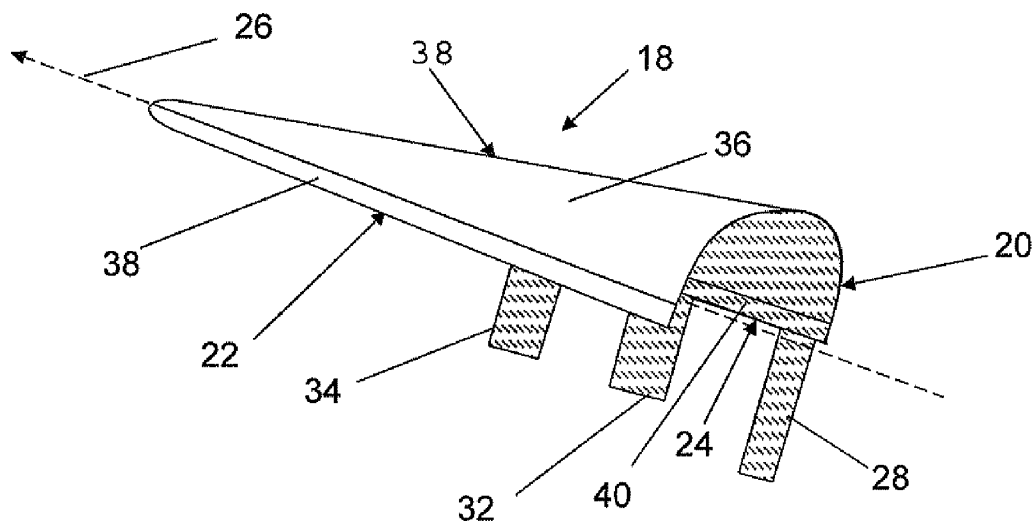

Acrobat 文件



US007675463B2

(12) **United States Patent**
Wallace et al.

(10) **Patent No.:** **US 7,675,463 B2**

(45) **Date of Patent:** **Mar. 9, 2010**

(54) **MINIATURIZED INTEGRATED MONOPOLE ANTENNA**

(75) Inventors: **Richard Wallace**, Jaerfaella (SE); **Are Bjornekleit**, Vaesteras (SE)

(73) Assignee: **Infineon Technologies AG**, Munich (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/522,097**

(22) Filed: **Sep. 15, 2006**

(65) **Prior Publication Data**

US 2007/0103373 A1 May 10, 2007

(30) **Foreign Application Priority Data**

Sep. 15, 2005 (EP) 05020115

(51) **Int. Cl.**

H01Q 1/38 (2006.01)

H01Q 1/36 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/895**

(58) **Field of Classification Search** **343/700 MS**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,568,206 A * 3/1971 Sisson et al. 343/750
6,353,443 B1 3/2002 Ying
6,362,784 B1 * 3/2002 Kane et al. 343/700 MS
6,535,166 B1 3/2003 Alil
6,894,646 B2 * 5/2005 Washiro et al. 343/700 MS

6,930,640 B2 * 8/2005 Chung et al. 343/700 MS
2002/0140081 A1 10/2002 Chou et al.
2003/0156065 A1 * 8/2003 Jo et al. 343/700 MS

FOREIGN PATENT DOCUMENTS

EP 0938158 A 8/1999
JP 2002 026624 A 1/2001
WO WO 00/03453 1/2000
WO WO 01/06596 1/2001
WO WO 01/37437 5/2001
WO WO 01/78354 A2 10/2001
WO WO 02/067375 A1 8/2002
WO WO 02/095870 11/2002
WO WO03/010796 A2 2/2003
WO WO 03/061065 7/2003

* cited by examiner


Primary Examiner—Trinh V Dinh

(74) Attorney, Agent, or Firm—Maginot, Moore & Beck

(57) **ABSTRACT**

The invention is related to a monopole antenna provided for short-range applications, having a conductive pattern arranged on a dielectric substrate. The conductive pattern has a first straight radiating element connected to an antenna feeding point, a second straight radiating element arranged essentially parallel to the first radiating element and interconnected to it, and further a third straight radiating element arranged between the first and second radiating elements and essentially parallel to both of the first and second radiating elements and interconnected to the second radiating element. The electric and magnetic fields of the first and the third radiating elements are thereby interacting constructively. The invention is also related to an integrated circuit having such monopole antenna, and a method for manufacturing such monopole antenna.

17 Claims, 3 Drawing Sheets

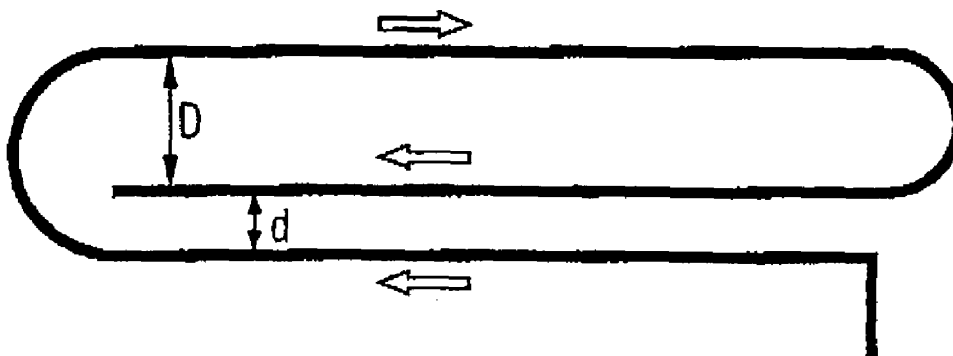

Acrobat 文件



US007675470B2

(12) **United States Patent**
Sanz et al.

(10) **Patent No.:** **US 7,675,470 B2**
(45) **Date of Patent:** ***Mar. 9, 2010**

(54) **MULTI-BAND MONOPOLE ANTENNA FOR A MOBILE COMMUNICATIONS DEVICE**

(75) Inventors: **Alfonso Sanz**, Barcelona (ES); **Carles Puente Baliarda**, Barcelona (ES)

(73) Assignee: **Fractus, S.A.**, Barcelona (ES)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0 884 796 12/1998

(21) Appl. No.: **12/055,748**

(22) Filed: **Mar. 26, 2008**

(Continued)

(65) **Prior Publication Data**

US 2008/0211722 A1 Sep. 4, 2008

OTHER PUBLICATIONS

C. Puente et al., "Small But Long Koch Fractal Monopole", Electronics Letters, Jan. 8, 1998, vol. 34, No. 1, pp. 9-10.

(Continued)

Related U.S. Application Data

(63) Continuation of application No. 11/713,324, filed on Mar. 2, 2007, now Pat. No. 7,403,164, which is a continuation of application No. 11/124,768, filed on May 9, 2005, now Pat. No. 7,411,556, which is a continuation of application No. PCT/EP02/14706, filed on Dec. 22, 2002.

Primary Examiner—Tan Ho
(74) Attorney, Agent, or Firm—Winstead PC

(57) **ABSTRACT**

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** **343/700 MS, 343/702**

See application file for complete search history.


(56) **References Cited**

U.S. PATENT DOCUMENTS

4,123,756 A 10/1978 Nagata et al.
4,389,651 A 6/1983 Tomasky
4,578,654 A 3/1986 Tait
5,248,988 A 9/1993 Makino

A multi-band monopole antenna for a mobile communications device includes a common conductor coupled to both a first radiating arm and a second radiating arm. The common conductor includes a feeding port for coupling the antenna to communications circuitry in a mobile communications device. In one embodiment, the first radiating arm includes a space-filling curve. In another embodiment, the first radiating arm includes a meandering section extending from the common conductor in a first direction and a contiguous extended section extending from the meandering section in a second direction.

20 Claims, 7 Drawing Sheets

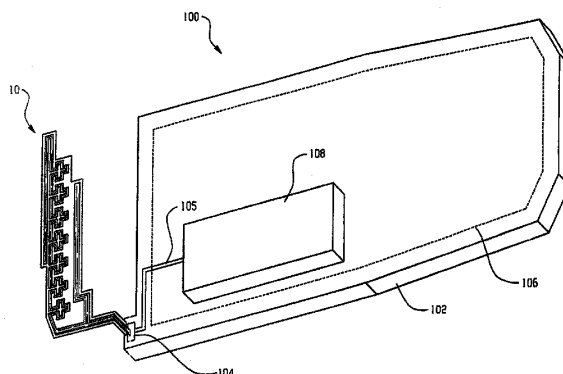

Acrobat 文件



US007678853B2

(12) **United States Patent**
Oohira

(10) **Patent No.:** **US 7,678,853 B2**
(45) **Date of Patent:** **Mar. 16, 2010**

(54) **HIGHLY DIELECTRIC ELASTOMER
COMPOSITION AND DIELECTRIC
ANTENNA**

(75) Inventor: **Kouya Oohira**, Iwata (JP)

(73) Assignee: **NTN Corporation**, Osaka (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 423 days.

(21) Appl. No.: **11/629,646**

(22) PCT Filed: **Jun. 15, 2005**

(86) PCT No.: **PCT/JP2005/010949**

§ 371 (c)(1),

(2), (4) Date: **Dec. 15, 2006**

(87) PCT Pub. No.: **WO2005/123841**

PCT Pub. Date: **Dec. 29, 2005**

(65) **Prior Publication Data**

US 2007/0182640 A1 Aug. 9, 2007

(30) **Foreign Application Priority Data**

Jun. 16, 2004 (JP) P2004-177969

Jul. 30, 2004 (JP) P2004-222910

Dec. 10, 2004 (JP) P2004-358623

(51) **Int. Cl.**
C08K 3/10 (2006.01)

(52) **U.S. Cl.** **524/403**; 343/785; 343/907;
501/138; 501/139

(58) **Field of Classification Search** 524/403;
501/138, 139; 343/785, 907

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,677,029 A * 10/1997 Prevorsek et al. 428/113

5,962,122 A * 10/1999 Walpita et al. 428/325

6,686,406 B2 * 2/2004 Tomomatsu et al. 524/403

FOREIGN PATENT DOCUMENTS

JP 06-029727 2/1994

JP 07-066620 3/1995

JP 09-031244 A 2/1997

(Continued)

OTHER PUBLICATIONS

International Search Report, Oct. 11, 2005.

Electronic Monthly, Jul. 1998, pp. 16-19.


Primary Examiner—Peter D Mulcahy

(74) *Attorney, Agent, or Firm*—Headman & Costigan; James
V. Costigan

(57) **ABSTRACT**

The present invention provides a highly dielectric elastomer composition which shows a high dielectric constant in a wide temperature range from low to high temperature and has a low dielectric loss tangent, and a dielectric antenna composed of the highly dielectric elastomer composition. A dielectric antenna including a molding of a highly dielectric elastomer composition composed of an elastomer and a highly dielectric ceramic powder mixed with the elastomer and an electrode formed on the molding. The highly dielectric ceramic powder of barium titanate-neodymium ceramic has a temperature coefficient α (unit: $1/^{\circ}\text{C}.$) of a dielectric constant of the ceramic powder on $25^{\circ}\text{C}.$ standard ranging from -200×10^{-6} to 100×10^{-6} over a temperature range from $-40^{\circ}\text{C}.$ to $100^{\circ}\text{C}.$ The dielectric constant of the highly dielectric elastomer composition is ≥ 7 and a dielectric loss tangent thereof is ≤ 0.01 .

5 Claims, 3 Drawing Sheets

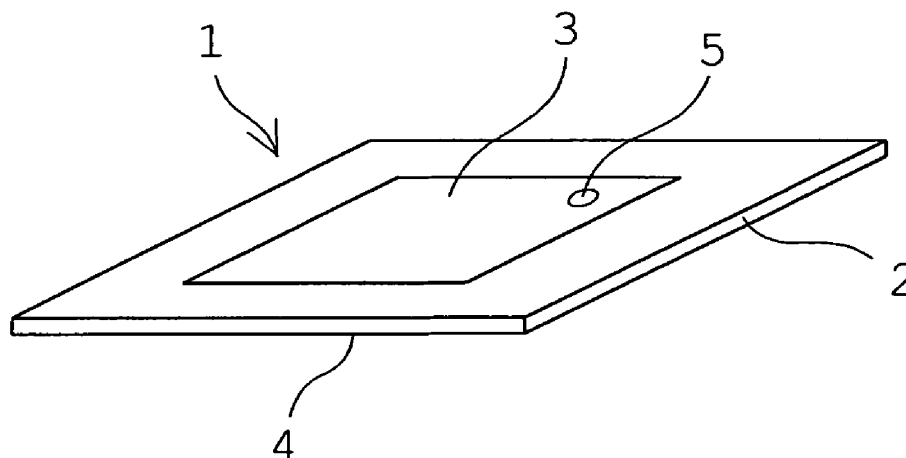

Acrobat 文件



US007679565B2

(12) **United States Patent**
Sorvala

(10) **Patent No.:** **US 7,679,565 B2**

(45) **Date of Patent:** **Mar. 16, 2010**

(54) **CHIP ANTENNA APPARATUS AND METHODS**

5,349,700 A 9/1994 Parker
5,382,959 A * 1/1995 Pett et al. 343/700 MS

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0 376 643 A2 4/1990

(Continued)

OTHER PUBLICATIONS

"A Novel Approach of a Planar Multi-Band Hybrid Series Feed Network for Use in Antenna Systems Operating at Millimeter Wave Frequencies," by M.W. Elsallal and B.L. Hauck, Rockwell Collins, Inc., pp. 15-24, waelsall@rockwellcollins.com and blhauck@rockwellcollins.com.

(Continued)

Primary Examiner—Tho G Phan

(74) Attorney, Agent, or Firm—Gazdzinski & Associates, PC

(75) Inventor: **Juha Sorvala**, Oulu (FI)

(73) Assignee: **Pulse Finland Oy** (FI)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 224 days.

(21) Appl. No.: **11/648,431**

(22) Filed: **Dec. 28, 2006**

(65) **Prior Publication Data**

US 2007/0152885 A1 Jul. 5, 2007

Related U.S. Application Data

(63) Continuation of application No. PCT/FI2005/050089, filed on Mar. 16, 2005.

(30) **Foreign Application Priority Data**

Jun. 28, 2004 (FI) 20040892

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/846**

(58) **Field of Classification Search** **343/700 MS; 343/846**

See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

4,069,483 A * 1/1978 Kaloi 343/700 MS
5,157,363 A 10/1992 Puurunen
5,281,326 A 1/1994 Galla
5,298,873 A 3/1994 Ala-Kojola

(57) **ABSTRACT**

A chip component with dielectric substrate and plurality of radiating antenna elements on the surface thereof. In one embodiment, two (2) substantially symmetric elements are used, each covering an opposite head and upper surface portion of the device. The surface between the elements comprises a slot. The chip is mounted on a circuit board (e.g., PCB) whose conductor pattern is part of the antenna. No ground plane is used under the chip or its sides to a certain distance. One of the antenna elements is coupled to the feed conductor on the PCB and to the ground plane, while the parasitic element is coupled only to the ground plane. The parasitic element is fed through coupling over the slot, and both elements resonate at the operating frequency. The antenna can be tuned and matched without discrete components, is substantially omni-directional, and has low substrate losses due to simple field image.

44 Claims, 5 Drawing Sheets

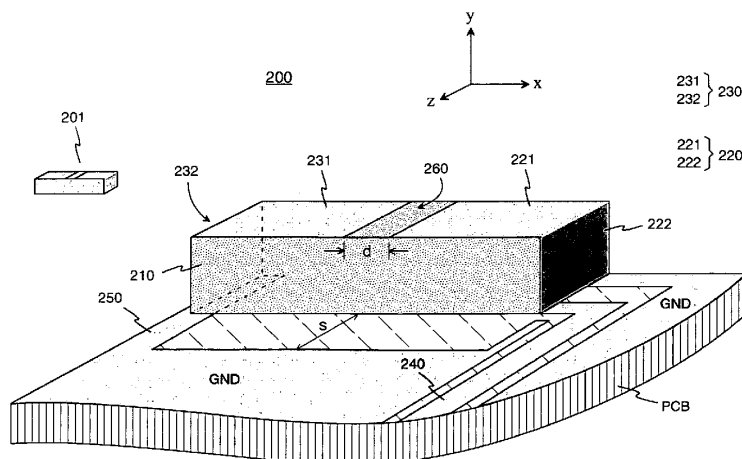

Acrobat 文件



US007679566B2

(12) **United States Patent**
Higasa et al.

(10) **Patent No.:** **US 7,679,566 B2**
(45) **Date of Patent:** **Mar. 16, 2010**

(54) **ANTENNA STRUCTURE HAVING STABLE PROPERTIES AND HEADSET**

(75) Inventors: **Masahiko Higasa**, Fukushima-ken (JP);
Akihiro Kato, Fukushima-ken (JP);
Masao Miyaura, Fukushima-ken (JP);
Atsushi Murata, Fukushima-ken (JP)

(73) Assignee: **Alps Electric Co., Ltd.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 209 days.

(21) Appl. No.: **11/895,254**

(22) Filed: **Aug. 22, 2007**

(65) **Prior Publication Data**
US 2008/0079645 A1 Apr. 3, 2008

(30) **Foreign Application Priority Data**
Sep. 29, 2006 (JP) 2006-268875

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** 343/700 MS; 343/846

(58) **Field of Classification Search** 343/770,
343/700 MS, 702
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,239,753 B1 5/2001 Kado et al.
6,741,214 B1* 5/2004 Kadambi et al. 343/700 MS

6,917,334 B2* 7/2005 Chen 343/700 MS
2004/0171404 A1 9/2004 Annamaa et al.
2005/0110689 A1* 5/2005 Masutani 343/700 MS
2006/0033665 A1* 2/2006 Yang 343/700 MS

FOREIGN PATENT DOCUMENTS

EP 1 453 213 9/2004
EP 1 703 589 9/2006
JP 11 8894 1/1999
JP 2002-111352 12/2002
WO 2004/040697 5/2004

OTHER PUBLICATIONS

European Search Report dated Jan. 24, 2008 for corresponding European Application No. 07019050.9.

* cited by examiner

Primary Examiner—Michael C Wimer


Assistant Examiner—Kyana R Robinson

(74) *Attorney, Agent, or Firm*—Beyer Law Group LLP

(57) **ABSTRACT**

An antenna structure includes a radiation conductor made of a metal plate that is supported by legs provided upright on a surface of a dielectric substrate and is spaced apart from the surface. The radiation conductor is circularly shaped such that the contour of the radiation conductor conforms to the outer periphery of the dielectric substrate and such that the radiation conductor includes an open portion. One of the legs functions as a feeding terminal and the other functions as a grounding terminal, whereby the radiation conductor operates as a dipole antenna. The radiation conductor has slots for adjusting impedance. Impedance can be adjusted by changing the length of the slots.

9 Claims, 5 Drawing Sheets

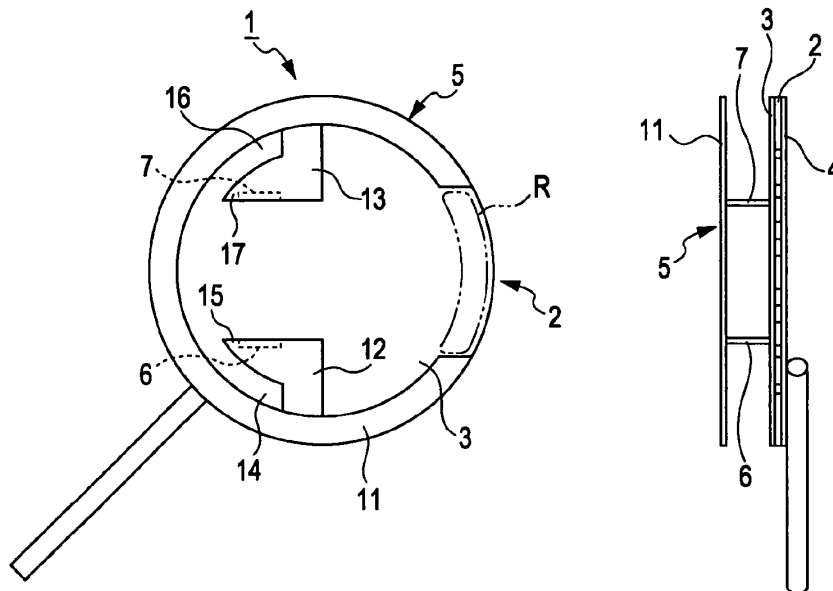

Acrobat 文件



US007679569B2

(12) **United States Patent**
Takaki et al.

(10) **Patent No.:** **US 7,679,569 B2**
(45) **Date of Patent:** **Mar. 16, 2010**

(54) **ANTENNA DEVICE AND MULTI-BAND TYPE WIRELESS COMMUNICATION APPARATUS USING SAME**

(75) Inventors: **Yasunori Takaki**, Saitama (JP); **Hiroyuki Aoyama**, Saitama (JP); **Hiroto Ideno**, Tottori (JP)

(73) Assignee: **Hitachi Metals, Ltd.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 369 days.

(21) Appl. No.: **11/723,878**

(22) Filed: **Mar. 22, 2007**

(65) **Prior Publication Data**

US 2007/0290944 A1 Dec. 20, 2007

(30) **Foreign Application Priority Data**

Apr. 10, 2006 (JP) 2006-107177
Aug. 12, 2006 (JP) 2006-220792

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** 373/702,
373/700 MS, 725-726, 729
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,644,319 A * 7/1997 Chen et al. 343/702

5,936,583 A * 8/1999 Sekine et al. 343/702
6,031,503 A * 2/2000 Preiss et al. 343/770
6,911,944 B2 * 6/2005 Sekine et al. 343/702
7,286,090 B1 * 10/2007 Rowell 343/702
7,525,488 B2 * 4/2009 Rowell 343/700 MS

FOREIGN PATENT DOCUMENTS

JP 3-502157 5/1991
JP 2004-007803 1/2004
JP 2004-363789 12/2004
JP 2005-229365 8/2005
WO WO 99/28990 6/1999

* cited by examiner


Primary Examiner—Huedung Mancuso

(74) *Attorney, Agent, or Firm*—McGinn IP Law Group PLLC

(57) **ABSTRACT**

An antenna device is provided which is capable of saving space, of operating in wide bands (in a multi-band) and of achieving an excellent gain and maintaining non-directivity of vertically polarized waves in each band. The antenna device has a conductor antenna. An end portion 111a on one end side of the conductor antenna is mounted as a power feeding section and an end portion 112a on the other end side of the conductor antenna 110 is mounted as an open end terminal. The antenna device also has a base body made of an insulating material which is coupled to one end and other end of the conductor antenna. The base band is coupled in a place where an electric field strength of the conductor antenna having a folded-back portion is increased, thus achieving the wideband and high-gain antenna device.

29 Claims, 42 Drawing Sheets

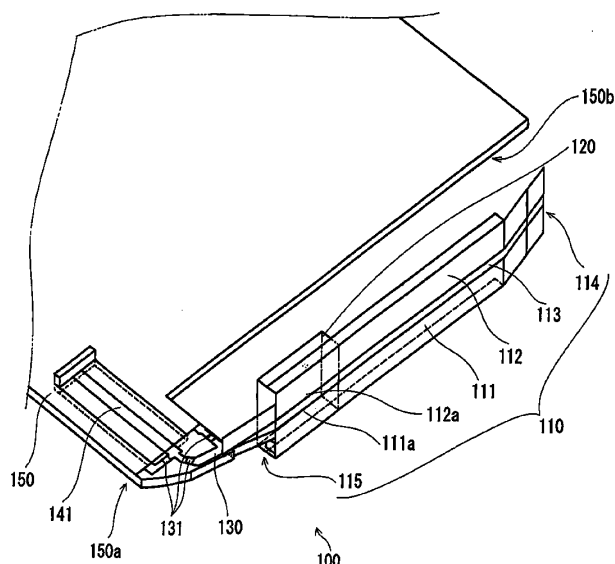

Acrobat 文件



US007683839B2

(12) **United States Patent**
Ollikainen et al.

(10) **Patent No.:** **US 7,683,839 B2**
(45) **Date of Patent:** **Mar. 23, 2010**

(54) **MULTIBAND ANTENNA ARRANGEMENT**

2005/0184914 A1 * 8/2005 Ollikainen et al. 343/702

(75) Inventors: **Jani Ollikainen**, Helsinki (FI); **Antero Lehtola**, Turku (FI); **Joonas Krogerus**, Espoo (FI); **Jussi Rahola**, Espoo (FI)

FOREIGN PATENT DOCUMENTS

WO WO 2008000891 A1 * 1/2008

OTHER PUBLICATIONS

(73) Assignee: **Nokia Corporation**, Espoo (FI)

J. Ollikainen, M. Fischer, and P. Vainikainen, "Thin dual-resonant stacked shorted patch antenna for mobile communications," *Electronics Letters* vol. 35, No. 6, pp. 437-438, Mar. 18, 1999.*

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

Yong-Xin Guo, Michael Yan Wah Chia, and Zhi Ning Chen, "Miniature Built-In Multiband Antennas for Mobile Handsets," *IEEE Transactions on Antennas and Propagation*, vol. 52, No. 8, Aug. 2004.*

(21) Appl. No.: **11/479,651**

Xu Jing, Zhengwei Du, and Ke Gong, "A Compact Multiband Planar Antenna for Mobile Handsets," *IEEE Antennas and Wireless Propagation Letters*, vol. 5, Mar. 24, 2006.*

(22) Filed: **Jun. 30, 2006**

Yazdandoost, "Ultra Wideband Antennas," *IEEE Radio Communications*, Jun. 2004.*

(65) **Prior Publication Data**

US 2008/0122698 A1 May 29, 2008

Written Opinion of the International Searching Authority of application PCT/FI2007/000181, Jan. 6, 2009.*

* cited by examiner

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 1/38 (2006.01)

H01Q 5/00 (2006.01)

H01Q 9/04 (2006.01)

H01Q 1/48 (2006.01)

Primary Examiner—Douglas W Owens

Assistant Examiner—Jennifer F Hu

(74) *Attorney, Agent, or Firm*—Harrington & Smith

(52) **U.S. Cl.** **343/702**; 343/846; 343/700 MS

(58) **Field of Classification Search** 343/700 MS, 343/702, 846, 848

See application file for complete search history.

(57) **ABSTRACT**


The invention relates to a radio antenna and, more specifically, to an internal multiband antenna for use e.g. in a portable telecommunication device, such as a mobile phone. In particular the invention relates to an antenna module for a mobile terminal including a non-resonant antenna element, two resonant antenna elements each covering at least any one of a first, second, third or fourth frequency band, said two resonant elements are substantially in the same plane and define a planar surface wherein the two resonant elements are each positioned at a corner of the planar surface and the non-resonant element is positioned along an edge of the planar surface.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,118,379 A * 9/2000 Kodukula et al. 340/572.8
6,326,921 B1 * 12/2001 Egorov et al. 343/700 MS
6,734,825 B1 * 5/2004 Guo et al. 343/700 MS
2002/0021253 A1 * 2/2002 Muramoto et al. 343/702
2002/0047802 A1 * 4/2002 Voipio 343/700 MS
2003/0030587 A1 * 2/2003 Yuasa et al. 343/700 MS
2003/0193437 A1 * 10/2003 Kangasvieri et al. 343/702
2004/0233109 A1 * 11/2004 Ying et al. 343/700 MS

22 Claims, 8 Drawing Sheets

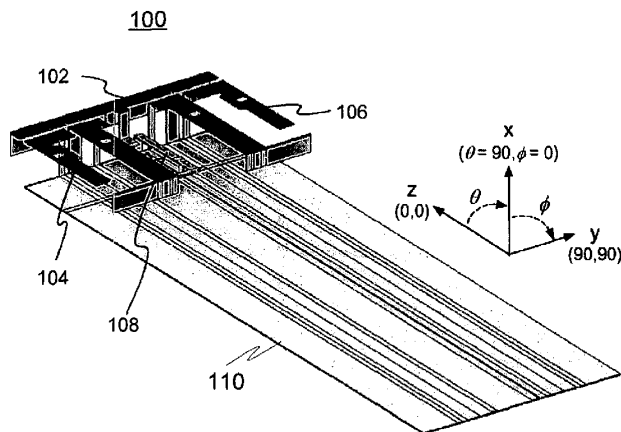

Acrobat 文件



US007683840B2

(12) **United States Patent**
Lin et al.

(10) **Patent No.:** **US 7,683,840 B2**
(45) **Date of Patent:** **Mar. 23, 2010**

(54) **INTEGRATED BROADBAND ANTENNA
DEVICE WITH WIDE BAND FUNCTION**

7,050,010 B2 * 5/2006 Wang et al. 343/702
7,242,352 B2 * 7/2007 Tavassoli Hozouri . 343/700 MS

(75) Inventors: **Yu-Ching Lin**, Taipei (TW);
Tsung-Wen Chiu, Taipei (TW); **Fu-Ren
Hsiao**, Taipei (TW); **Chun-Ching Lan**,
Taipei (TW); **Yun-Fan Bai**, Taipei (TW)

* cited by examiner

(73) Assignee: **Advanced Connectek, Inc.**, Taipei (TW)

Primary Examiner—Hoang V Nguyen

Assistant Examiner—Robert Karacsony

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 170 days.

(74) *Attorney, Agent, or Firm*—Schmeiser, Olsen & Watts
LLP

(57) **ABSTRACT**

(21) Appl. No.: **11/652,137**

(22) Filed: **Jan. 11, 2007**

(65) **Prior Publication Data**

US 2008/0012777 A1 Jan. 17, 2008

(30) **Foreign Application Priority Data**

Jul. 14, 2006 (TW) 95125855 A

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** 343/702,
343/749, 752

See application file for complete search history.


(56) **References Cited**

U.S. PATENT DOCUMENTS

5,764,190 A 6/1998 Murch et al.

An integrated broadband antenna device with wide band function is disclosed. The antenna device comprises a ground plate, a feeding wire, a first metal radiator, a second metal radiator, a ground metal radiator and a parasitic metal radiator. The first metal radiator is connected with the positive ends of signals of the feeding wire for transmitting electric signals and producing a high frequency mode. The first metal radiator is coupled to and energizes the second metal radiator and the parasitic metal radiator, and then the two metal radiator producing a low frequency mode and a second high frequency mode along with the ground metal radiator obtains a wider bandwidth. The broadband antenna device integrating various kinds of antennas is able to have a enough bandwidth to meet the requirements of AMPS (824~894 MHz), GSM (880~960 MHz), GPS (1575 MHz), DCS (1710~1880 MHz), PCS (1850~1990 MHz), UMTS (1920~2170 MHz) and Wi-Fi (2400~2500 MHz).

2 Claims, 7 Drawing Sheets

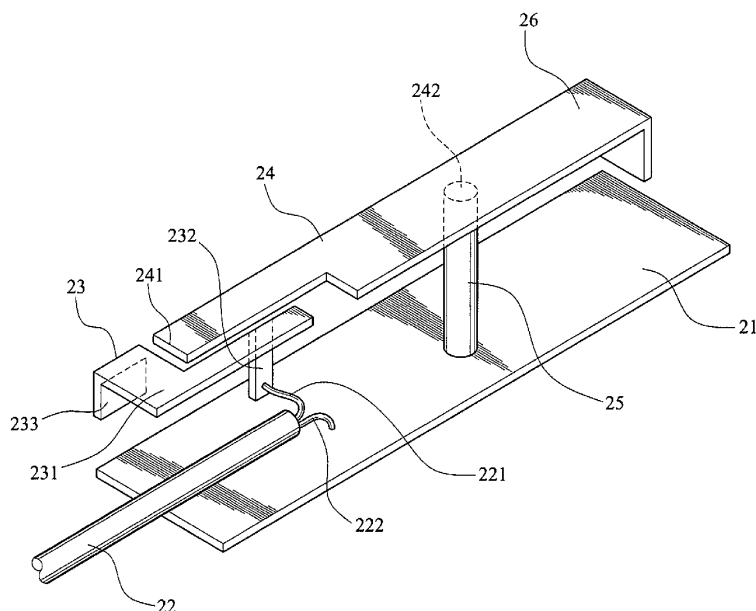

Acrobat 文件