



US007688266B2

(12) **United States Patent**
Akiyama et al.

(10) **Patent No.:** **US 7,688,266 B2**
(45) **Date of Patent:** **Mar. 30, 2010**

(54) **ANTENNA MODULE**

2008/0018539 A1 * 1/2008 Jung et al. 343/700 MS

(75) Inventors: **Kiyokazu Akiyama**, Okazaki (JP); **Yuji Sugimoto**, Kariya (JP); **Taizo Mizutani**, Nagoya (JP)

FOREIGN PATENT DOCUMENTS

JP	57-142003	9/1982
JP	9-246681	9/1997
JP	2000-196344	7/2000
JP	2001-119232	4/2001
JP	2004-129209	4/2004
JP	2005-094437	4/2005
JP	2006-14154	1/2006
JP	2006-174365	6/2006
JP	2006-345038	12/2006
JP	2007-043582	2/2007

(73) Assignee: **Denso Corporation**, Kariya (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 204 days.

(21) Appl. No.: **12/080,265**

OTHER PUBLICATIONS

(22) Filed: **Apr. 1, 2008**

Office action dated Mar. 23, 2009 in Japanese Application No. 2007-097455.

(65) **Prior Publication Data**

US 2008/0284658 A1 Nov. 20, 2008

Office action dated Jun. 16, 2009 in Japanese Application No. 2007-097455.

(30) **Foreign Application Priority Data**

Apr. 3, 2007 (JP) 2007-097455

Office action dated Sep. 8, 2009 in corresponding Japanese Application No. 2007-097455.

* cited by examiner

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 1/48 (2006.01)

Primary Examiner—Trinh V Dinh

(74) *Attorney, Agent, or Firm*—Harness, Dickey & Pierce, PLC

(52) **U.S. Cl.** **343/700 MS; 343/846; 343/829**

(57) **ABSTRACT**

(58) **Field of Classification Search** None
See application file for complete search history.


An antenna module includes a substrate; a ground element disposed on the substrate; a first antenna element disposed on the substrate; and a second antenna element disposed on the substrate. The first antenna element and the second antenna element are, respectively, capable of transmitting radio waves having a first polarization direction and a second polarization direction unparallel to each other. A spacing between a perimeter of the ground element and the first antenna element increases as a function of increasing distance from the second antenna element. A spacing between the perimeter of the ground element and the second antenna element increases as a function of increasing distance from the first antenna element.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,369,762	B1	4/2002	Yanagisawa et al.
6,624,790	B1	9/2003	Wong et al.
7,081,859	B2	7/2006	Miyoshi et al.
7,271,777	B2	9/2007	Yuanzhu
2005/0248487	A1 *	11/2005	Okado 343/700 MS
2007/0210965	A1 *	9/2007	Takada et al. 343/700 MS
2007/0229367	A1 *	10/2007	Fukui et al. 343/700 MS
2007/0290926	A1 *	12/2007	Tseng 343/700 MS

10 Claims, 4 Drawing Sheets

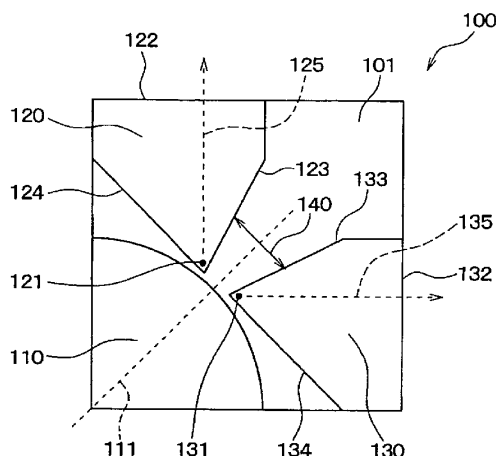

Acrobat 文件



US007688267B2

(12) **United States Patent
Hill**

(10) **Patent No.:** **US 7,688,267 B2**
(45) **Date of Patent:** **Mar. 30, 2010**

(54) **BROADBAND ANTENNA WITH COUPLED
FEED FOR HANDHELD ELECTRONIC
DEVICES**

(75) Inventor: **Robert J. Hill**, Salinas, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 495 days.

(21) Appl. No.: **11/593,752**

(22) Filed: **Nov. 6, 2006**

(65) **Prior Publication Data**

US 2008/0106478 A1 May 8, 2008

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** **343/700 MS,**
343/702, 725, 815–817, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,876,552 A 10/1989 Zakman
4,903,326 A 2/1990 Zakman et al.
5,274,391 A 12/1993 Connolly
6,281,850 B1 8/2001 Klostermann et al.
6,292,153 B1 9/2001 Aiello et al.
6,486,836 B1 11/2002 Hill
6,603,430 B1 8/2003 Hill et al.
6,903,692 B2* 6/2005 Kivekas et al. 343/702
6,982,675 B2* 1/2006 Kwak et al. 343/702
7,352,326 B2* 4/2008 Korva et al. 343/700 MS
2002/0019247 A1* 2/2002 Egorov 455/557
2004/0008146 A1 1/2004 Ikegaya et al.
2004/0017318 A1 1/2004 Annabi et al.
2004/0108957 A1 6/2004 Umehara et al.

2004/0212545 A1 10/2004 Li et al.
2004/0257283 A1 12/2004 Asano et al.
2005/0093750 A1* 5/2005 Vance 343/702
2005/0128151 A1* 6/2005 Kwak et al. 343/702
2006/0038721 A1* 2/2006 Ozkar et al. 343/700 MS
2006/0208950 A1 9/2006 Tago
2007/0182658 A1* 8/2007 Ozden 343/866
2008/0231521 A1 9/2008 Anguera Pros et al.

FOREIGN PATENT DOCUMENTS

EP 1 351 334 A 10/2003
EP 1 401 050 A 3/2004
FR 2 821 985 9/2002
WO 2004/001894 A 12/2003
WO 2005/109567 A 11/2005
WO 2006/070017 7/2006

* cited by examiner


Primary Examiner—Huedung Mancuso

(74) *Attorney, Agent, or Firm*—Treyz Law Group; G. Victor Treyz; Nancy Y. Ru

(57) **ABSTRACT**

Broadband antennas and handheld electronic devices with broadband antennas are provided. A handheld electronic device may have a housing in which electrical components such as integrated circuits and a broadband antenna are mounted. The broadband antenna may have a ground element and a resonating element. The resonating element may have two arms of unequal length and may have a self-resonant element. The antenna may have a feed terminal connected to the self-resonant element and a ground terminal connected to the ground element. The self-resonant element may be near-field coupled to one of the arms of the resonating element. With one suitable arrangement, the self-resonant element may be formed using a conductive rectangular element that is not electrically shorted to the ground element or the arms of the resonating element. The antenna may operate over first and second frequency ranges of interest.

27 Claims, 16 Drawing Sheets

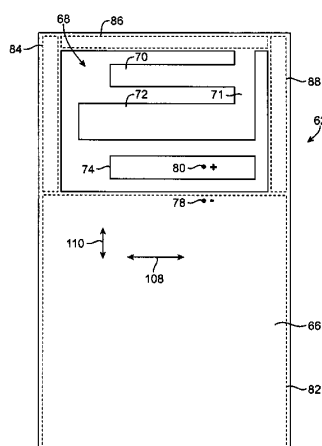

Acrobat 文件



US007688276B2

(12) **United States Patent**
Quintero Illera et al.

(10) **Patent No.:** **US 7,688,276 B2**
(45) **Date of Patent:** ***Mar. 30, 2010**

(54) **MULTILEVEL AND SPACE-FILLING
GROUND-PLANES FOR MINIATURE AND
MULTIBAND ANTENNAS**

(75) Inventors: **Ramiro Quintero Illera**, Barcelona
(ES); **Carles Puente Baliarda**,
Barcelona (ES)

(73) Assignee: **Fractus, S.A.**, Barcelona (ES)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **12/033,446**

(22) Filed: **Feb. 19, 2008**

(65) **Prior Publication Data**

US 2008/0174507 A1 Jul. 24, 2008

Related U.S. Application Data

(63) Continuation of application No. 10/797,732, filed on
Mar. 10, 2004, now Pat. No. 7,362,283, which is a
continuation of application No. PCT/EP01/10589,
filed on Sep. 13, 2001.

(51) **Int. Cl.**
H01Q 1/48 (2006.01)

(52) **U.S. Cl.** **343/846; 343/700 MS**

(58) **Field of Classification Search** **343/846,**
343/848, 700 MS, 702
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,696,438 A 10/1972 Ingerson
5,262,792 A 11/1993 Egashira
5,495,261 A 2/1996 Baker et al.
5,497,167 A 3/1996 Luoma

5,646,637 A 7/1997 Miller
5,703,600 A 12/1997 Burrell et al.
5,903,822 A 5/1999 Sekine et al.
5,945,954 A 8/1999 Johnson
6,002,367 A 12/1999 Engblom et al.
6,140,975 A 10/2000 Cohen
6,218,992 B1 4/2001 Sadler
6,271,798 B1 8/2001 Endo et al.
6,285,326 B1 9/2001 Diximus et al.
6,314,273 B1 11/2001 Matsuda

(Continued)

FOREIGN PATENT DOCUMENTS

CA 2416437 A1 7/2001

(Continued)

OTHER PUBLICATIONS

Chih-Yu Huang et al., "Cross-Slot-Coupled Microstrip Antenna and
Dielectric Resonator Antenna for Circular Polarization", IEEE vol.
47, No. 4, Apr. 1999 (5 pages).

(Continued)


Primary Examiner—HoangAnh T Le

(74) *Attorney, Agent, or Firm*—Winstead PC

(57) **ABSTRACT**

An antenna system includes one or more conductive elements
acting as radiating elements, and a multilevel or space-filling
ground-plane, wherein said ground-plane has a particular
geometry which affects the operating characteristics of the
antenna. The return loss, bandwidth, gain, radiation effi-
ciency, and frequency performance can be controlled through
multilevel and space-filling ground-plane design. Also, said
ground-plane can be reduced compared to those of antennas
with solid ground-planes.

51 Claims, 19 Drawing Sheets

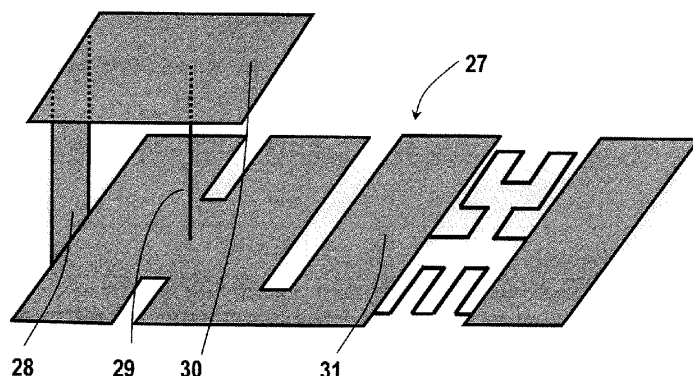

Acrobat 文件



US007692595B2

(12) **United States Patent**
Kim

(10) **Patent No.:** **US 7,692,595 B2**
(45) **Date of Patent:** **Apr. 6, 2010**

(54) **BROADBAND INTERNAL ANTENNA
COMBINED WITH MONOPOLE ANTENNA
AND LOOP ANTENNA**

(75) Inventor: **Sung-Min Kim**, Seongnam-si (KR)

(73) Assignee: **KT Tech, Inc.**, Seongnam-si,
Gyeonggi-do (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 120 days.

(21) Appl. No.: **12/073,626**

(22) Filed: **Mar. 7, 2008**

(65) **Prior Publication Data**

US 2009/0073048 A1 Mar. 19, 2009

(30) **Foreign Application Priority Data**

Sep. 14, 2007 (KR) 10-2007-0093875

(51) **Int. Cl.**
H01Q 21/00 (2006.01)

(52) **U.S. Cl.** **343/728; 343/702; 343/725**

(58) **Field of Classification Search** **343/700 MS,**
343/702, 725, 728

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,307,591 B2 *	12/2007	Zheng	343/702
7,352,326 B2 *	4/2008	Korva et al.	343/700 MS
7,379,027 B2 *	5/2008	Kezys et al.	343/702
7,482,985 B2 *	1/2009	Qi et al.	343/702

* cited by examiner


Primary Examiner—Tan Ho

(74) *Attorney, Agent, or Firm*—Harness, Dickey & Pierce,
P.L.C.

(57) **ABSTRACT**

Provided is a broadband internal antenna including a ground plate and an antenna unit. The antenna unit can include a feed point; a first radiator, formed with a bar shape having the feed point as one end part and the other end part from which an uncurved 'C' shape is extended; a ground point, connected to the ground plate; a second radiator, having one end part on which the ground point is mounted and the other end part that is connected to an area from which the uncurved 'C' shape of the first radiator starts to be formed in an open loop form; a first protrusion part, protruded from the uncurved 'C' shape of the first radiator to be formed in a closed loop form; and a second protrusion part, formed inside the open loop shape of the first radiator in an inverse L' form.

12 Claims, 12 Drawing Sheets

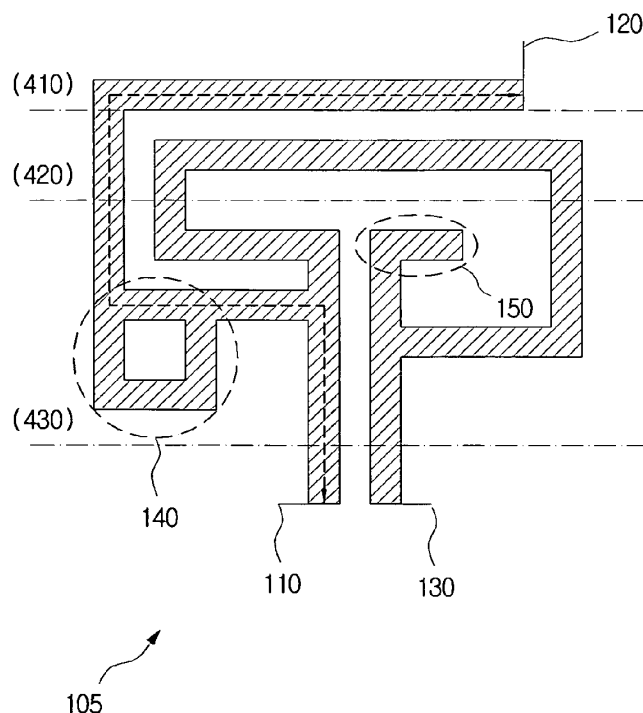

Acrobat 文件



US007692599B2

(12) **United States Patent**
Wong et al.

(10) **Patent No.:** **US 7,692,599 B2**
(45) **Date of Patent:** **Apr. 6, 2010**

(54) **ULTRA-WIDEBAND SHORTED DIPOLE ANTENNA**

(75) Inventors: **Kin-Lu Wong**, Kaohsiung (TW);
Wei-Yu Li, Yilan (TW); **Saou-Wen Su**,
Taipei (TW)

(73) Assignees: **National Sun Yat-Sen University**,
Kaohsiung (TW); **Lite-On Technology**
Corporation, Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/007,919**

(22) Filed: **Jan. 17, 2008**

(65) **Prior Publication Data**
US 2008/0174505 A1 Jul. 24, 2008

(30) **Foreign Application Priority Data**
Jan. 18, 2007 (TW) 96101962 A

(51) **Int. Cl.**
H01Q 9/28 (2006.01)
H01Q 9/16 (2006.01)
H01Q 9/04 (2006.01)

(52) **U.S. Cl.** 343/795; 343/793; 343/700 MS

(58) **Field of Classification Search** 343/793-823
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,107,920 A * 8/2000 Eberhardt et al. 340/572.7

6,624,793 B1 *	9/2003	Su et al.	343/795
6,975,281 B2	12/2005	Neel	
7,019,704 B2 *	3/2006	Weiss	343/770
7,145,517 B1 *	12/2006	Cheng	343/795
7,339,550 B2 *	3/2008	Hayama et al.	343/895
7,342,553 B2 *	3/2008	Soler Castany et al.	343/853
7,394,425 B2 *	7/2008	Luch	343/700 MS
2004/0222936 A1 *	11/2004	Hung et al.	343/795
2005/0024287 A1 *	2/2005	Jo et al.	343/822
2006/0055542 A1 *	3/2006	Forster et al.	340/572.7
2006/0250315 A1 *	11/2006	Parsche	343/773
2008/0180342 A1 *	7/2008	Kerselaers	343/795

FOREIGN PATENT DOCUMENTS

TW 574771 2/2004

* cited by examiner

Primary Examiner—Vibol Tan


Assistant Examiner—Dylan White

(74) *Attorney, Agent, or Firm*—Bacon & Thomas, PLLC

(57) **ABSTRACT**

An ultra-wideband shorted dipole antenna includes a coaxial cable line and first and second open-loop radiating metal plates with substantially the same shape. The coaxial cable line has a central conducting wire and an outer grounder sheath. The first and second open-loop radiating metal plates are symmetrically disposed on two sides of the antenna to form two arms of the antenna and are electrically connected to each other. Each of the first and second open-loop radiating metal plates has a signal feeding point electrically connected to the central conducting wire or the outer grounder sheath of the coaxial cable line.

10 Claims, 9 Drawing Sheets

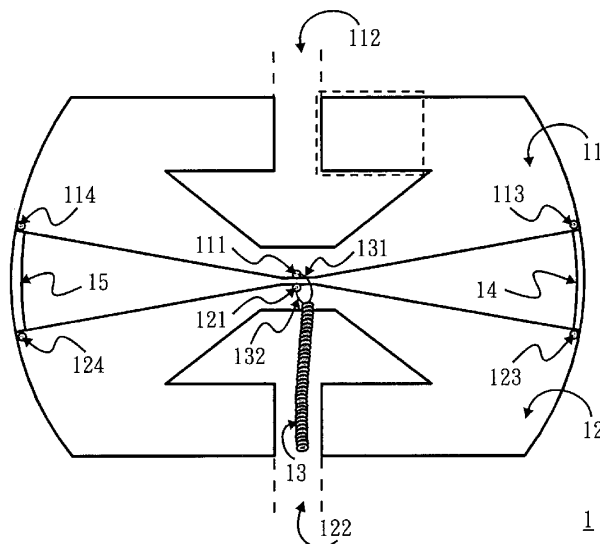

Acrobat 文件



US007696927B2

(12) **United States Patent**
Bae et al.

(10) **Patent No.:** **US 7,696,927 B2**
(45) **Date of Patent:** **Apr. 13, 2010**

(54) **CAPACITIVE FEED ANTENNA**

(56) **References Cited**

(75) Inventors: **Charlie Bae**, Seoul (KR); **Haim Yona**, Tiberias (IL); **Snir Azulay**, Tiberias (IL); **Stefan Quantz**, Tianjin (CN); **Xiujuan Xu**, Tianjin (CN); **Xiao Da Tian**, Yin Hai Li Wuxi (CN)

U.S. PATENT DOCUMENTS

5,764,190 A 6/1998 Murch et al.

(Continued)

FOREIGN PATENT DOCUMENTS

GB 2 403 069 12/2004

(Continued)

OTHER PUBLICATIONS

Sanad M., "A compact dual-broadband microstrip antenna having both stacked and planar parasitic elements", IEEE Antennas and Propagation Society International Symposium 1996 Digest. Baltimore, Jul. 21-26, 1996.

(Continued)

Primary Examiner—Tan Ho

(74) Attorney, Agent, or Firm—Abelman, Frayne & Schwab

(57)

ABSTRACT

The present invention seeks to provide an antenna having multiple radiating bands, including a ground plane, a feed plate extending generally parallel to and being spaced from the ground plane by a first distance and having a feed connection extending between the feed plate and the ground plane, at least one radiating element extending generally parallel to and being spaced from the feed plate by a second distance and at least one galvanic connector connecting the at least one radiating element at a first location on the at least one radiating element to the ground plane at a first location on the ground plane, the first location on the ground plane being separated from the feed connection by a third distance, the first, second and third distances being selected to achieve desired impedance matching of the feed plate, and the feed plate feeding the at least one radiating element at a location corresponding to an impedance substantially greater than 50 Ohm at least one band.

(73) Assignee: **Galtronics Ltd.**, Tiberias (IL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/573,350**

(22) PCT Filed: **Mar. 12, 2006**

(86) PCT No.: **PCT/IL2006/000322**

§ 371 (c)(1),
(2), (4) Date: **Jul. 29, 2008**

(87) PCT Pub. No.: **WO2006/097918**

PCT Pub. Date: **Sep. 21, 2006**

(65) **Prior Publication Data**

US 2008/0291111 A1 Nov. 27, 2008

Related U.S. Application Data

(60) Provisional application No. 60/661,750, filed on Mar. 15, 2005, provisional application No. 60/749,364, filed on Dec. 9, 2005.


(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/848**

(58) **Field of Classification Search** **343/700 MS, 343/846**

See application file for complete search history.

26 Claims, 4 Drawing Sheets

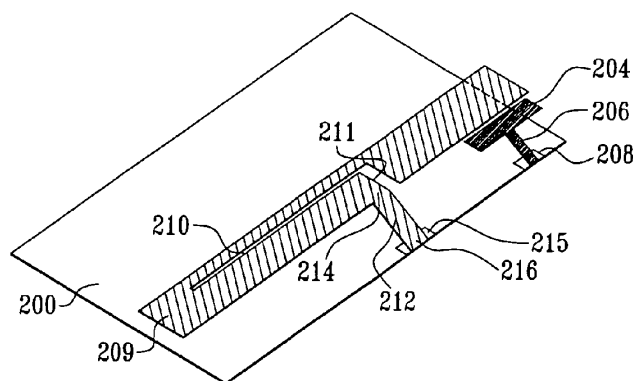

Acrobat 文件



US007696931B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 7,696,931 B2**
(45) **Date of Patent:** **Apr. 13, 2010**

(54) **ANTENNA FOR ENHANCING BANDWIDTH AND ELECTRONIC DEVICE HAVING THE SAME**

(75) Inventors: **Hong-Teuk Kim**, Gyeonggi-Do (KR); **Kyung-Hack Yi**, Seoul (KR); **Ho-Seon Lee**, Chungcheongnam-Do (KR)

(73) Assignee: **LG Electronics, Inc.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 225 days.

(21) Appl. No.: **11/604,122**

(22) Filed: **Nov. 22, 2006**

(65) **Prior Publication Data**

US 2007/0115183 A1 May 24, 2007

(30) **Foreign Application Priority Data**

Nov. 24, 2005 (KR) 10-2005-0113147

Nov. 24, 2005 (KR) 10-2005-0113152

Mar. 29, 2006 (KR) 10-2006-0028608

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** 343/702, 343/700 MS
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2004/0135729 A1 * 7/2004 Talvitie et al. 343/702

FOREIGN PATENT DOCUMENTS

EP 1 372 213 A1 12/2003

KR 2005-0003341 1/2005

KR 10-0636384 10/2006

* cited by examiner

Primary Examiner—Trinh V Dinh


Assistant Examiner—Dieu Hien T Duong

(74) *Attorney, Agent, or Firm*—Lee, Hong, Degerman, Kang & Waimey

(57) **ABSTRACT**

An antenna comprises a high frequency antenna body, and a low frequency antenna body electrically connected to a point of the high frequency antenna body where a high frequency current distribution is minimized. By independently designing a high frequency bandwidth and a low frequency bandwidth from each other, an antenna having an optimum function in a desired frequency band can be easily fabricated.

24 Claims, 14 Drawing Sheets

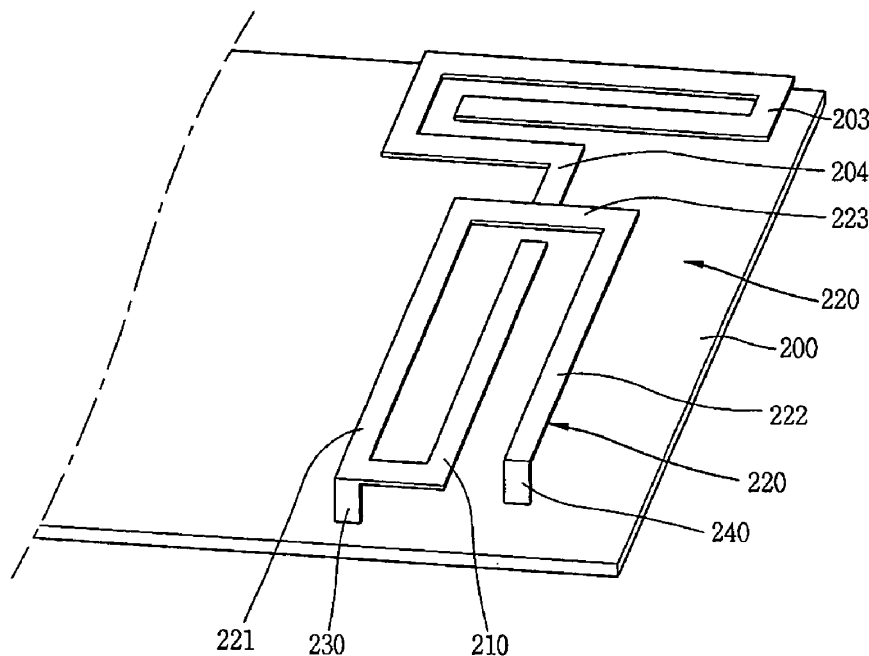

Acrobat 文件



US007696950B2

(12) **United States Patent**
Tsai et al.

(10) **Patent No.:** **US 7,696,950 B2**
(45) **Date of Patent:** **Apr. 13, 2010**

(54) **ANTENNA WITH SYMMETRICAL FIRST AND SECOND MONOPOLE RADIATING ELEMENTS**

(75) Inventors: **Tiao-Hsing Tsai**, Tao Yuan Shien (TW);
Chao-Hsu Wu, Tao Yuan Shien (TW);
Chieh-Ping Chiu, Tao Yuan Shien (TW)

(73) Assignee: **Quanta Computer, Inc.**, Tao Yuan Shien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/152,696**

(22) Filed: **May 15, 2008**

(65) **Prior Publication Data**
US 2009/0135069 A1 May 28, 2009

(30) **Foreign Application Priority Data**
Nov. 22, 2007 (TW) 96144237 A

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 21/00 (2006.01)

(52) **U.S. Cl.** **343/893**; 343/702; 343/806

(58) **Field of Classification Search** 343/700 MS,
343/702, 806, 795, 803, 850, 853, 893, 895
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,381,566 A * 4/1983 Kane 455/193.3
5,936,587 A * 8/1999 Gudilev et al. 343/752

* cited by examiner



Primary Examiner—Michael C Wimer

(74) *Attorney, Agent, or Firm*—David N. Lathrop

(57) **ABSTRACT**

An antenna, which is operable in a digital video broadcasting for handhelds (DVB-H) frequency range, includes first and second monopole radiating elements and a feeding element. The first and second monopole radiating elements are symmetrical about an axis of symmetry and have a meandering shape. The feeding element interconnects the first and second monopole radiating elements.

10 Claims, 7 Drawing Sheets

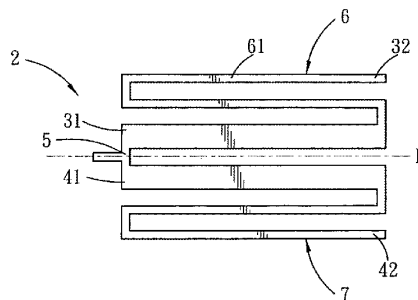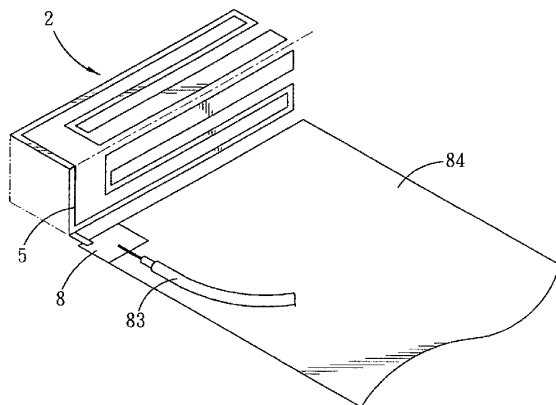

Acrobat 文件



US007701394B2

(12) **United States Patent**
Hook et al.

(10) **Patent No.:** **US 7,701,394 B2**
(45) **Date of Patent:** **Apr. 20, 2010**

(54) **PATCH ANTENNA**

(75) Inventors: **Anders Hook**, Hindas (SE); **Jessica Westerberg**, Gothenburg (SE); **Joakim Johansson**, Tollsjo (SE)

(73) Assignee: **Telefonaktiebolaget L M Ericsson (publ)**, Stockholm (SE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 229 days.

(21) Appl. No.: **11/569,011**

(22) PCT Filed: **Jun. 10, 2004**

(86) PCT No.: **PCT/SE2004/000918**

§ 371 (c)(1),
(2), (4) Date: **Nov. 13, 2006**

(87) PCT Pub. No.: **WO2005/122330**

PCT Pub. Date: **Dec. 22, 2005**

(65) **Prior Publication Data**

US 2008/0012770 A1 Jan. 17, 2008

(51) **Int. Cl.**

H01Q 1/38 (2006.01)

H01Q 5/00 (2006.01)

H01Q 9/04 (2006.01)

H01Q 21/00 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/893; 343/725**

(58) **Field of Classification Search** **343/700 MS, 343/893, 725, 824, 826**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,229,777 A * 7/1993 Doyle 343/700 MS

6,597,316 B2 7/2003 Rao
6,816,118 B2 * 11/2004 Kingsley et al. 343/700 MS
6,989,794 B2 * 1/2006 Tran 343/702
7,209,080 B2 * 4/2007 Crouch et al. 343/700 MS
2003/0184478 A1 * 10/2003 Kingsley et al. 343/700 MS
2003/0197647 A1 * 10/2003 Waterman 343/700 MS
2004/0155817 A1 * 8/2004 Kingsley et al. 343/700 MS
2006/0007044 A1 * 1/2006 Crouch et al. 343/700 MS

FOREIGN PATENT DOCUMENTS

GB 2140974 A * 12/1984

OTHER PUBLICATIONS

S.P. Kingsley and S.G. O'Keefe, "Beam steering and monopulse processing of probe-fed dielectric resonator antennas," IEE Proc-Radar, Sonar Navig., vol. 146, No. 3, Jun. 1999.*

(Continued)

Primary Examiner—Douglas W Owens



Assistant Examiner—Jennifer F Hu

(74) *Attorney, Agent, or Firm*—Roger S. Burleigh

(57) **ABSTRACT**

A self-complementary patch antenna is disclosed. A hexagonal lattice (10) consisting of triangular conducting patches (1) is formed together with at least one dielectric layer onto a ground-plane. Each triangular patch is then fed by means of three RF signal probes in a symmetrical configuration positioned near each corner of the triangle, whereby an arbitrary lobe-steering and polarization state can be established by selection of amplitude and phase for each RF signal probe.

10 Claims, 3 Drawing Sheets

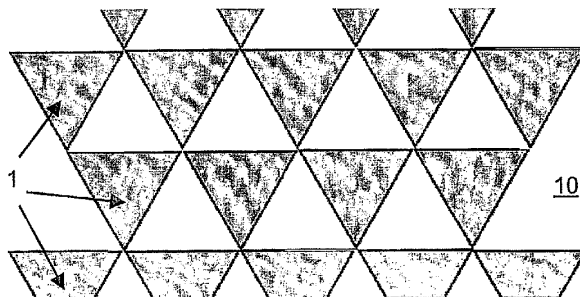

Acrobat 文件



US007701400B2

(12) **United States Patent**
Su et al.

(10) **Patent No.:** **US 7,701,400 B2**
(45) **Date of Patent:** **Apr. 20, 2010**

(54) **ANTENNA ASSEMBLY WITH A MOVEABLE ANTENNA**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(75) Inventors: **Wen-Fong Su**, Tu-Cheng (TW);
Lung-Sheng Tai, Tu-Cheng (TW);
Yao-Shien Huang, Tu-Cheng (TW);
Yu-Lung Shih, Tu-Cheng (TW);
Li-Heng Cheng, Tu-Cheng (TW)

6,239,765 B1 * 5/2001 Johnson et al. 343/795
2001/0052879 A1 * 12/2001 Gunee et al. 343/702
2007/0096995 A1 * 5/2007 Lee 343/702

* cited by examiner

(73) Assignee: **Hon Hai Precision Ind. Co., Ltd.**,
Taipei Hsien (TW)

Primary Examiner—Trinh V Dinh

Assistant Examiner—Dieu Hien T Duong

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 336 days.

(74) *Attorney, Agent, or Firm*—Wei Te Chung; Andrew C. Cheng; Ming Chieh Chang

(57) **ABSTRACT**

(21) Appl. No.: **11/890,954**

(22) Filed: **Aug. 8, 2007**

(65) **Prior Publication Data**

US 2008/0036684 A1 Feb. 14, 2008

(30) **Foreign Application Priority Data**

Aug. 8, 2006 (TW) 95128971 A

(51) **Int. Cl.**
H01Q 1/24 (2006.01)


(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** 343/702,
343/700 MS

See application file for complete search history.

An antenna assembly with a movable antenna, assembled on an electronic device, includes a fixed portion adapted for assembling to said electronic device, an active portion movably assembled to the fixed portion and receiving the antenna therein, a first guiding means is served by some guiding slots formed on one of the fixed portion and the active portion and some guiding tabs corresponding to the guiding slots and formed on one of the active portion and the fixed portion; wherein the movable antenna capable of moving between a close position and an open position, and said guiding tabs are capable of sliding along the guiding slots and being stopped by the guiding slots to achieve the open position and close position of the antenna.

12 Claims, 4 Drawing Sheets

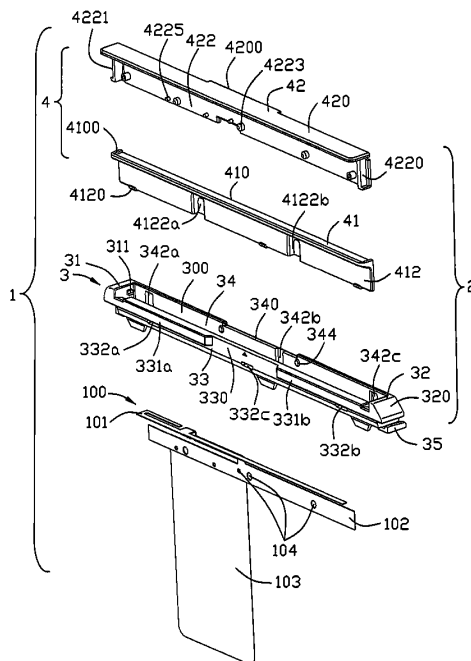

Acrobat 文件



US007701401B2

(12) **United States Patent**
Suzuki et al.

(10) **Patent No.:** **US 7,701,401 B2**
(45) **Date of Patent:** **Apr. 20, 2010**

(54) **ANTENNA DEVICE HAVING NO LESS THAN TWO ANTENNA ELEMENTS**

(75) Inventors: **Hiromichi Suzuki**, Tokyo (JP); **Satoshi Mizoguchi**, Tokyo (JP); **Isao Ohba**, Tokyo (JP)

(73) Assignee: **Kabushiki Kaisha Toshiba**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 174 days.

(21) Appl. No.: **11/975,332**

(22) Filed: **Oct. 18, 2007**

(65) **Prior Publication Data**

US 2009/0009401 A1 Jan. 8, 2009

(30) **Foreign Application Priority Data**

Jul. 4, 2007 (JP) 2007-176503

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** **343/702**,
343/700 MS, 846-848, 767
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,339,402 B1 * 1/2002 McKivergan 343/702
6,850,196 B2 * 2/2005 Wong et al. 343/702
6,914,565 B2 * 7/2005 Shikata et al. 343/700 MS
7,289,064 B2 * 10/2007 Cheng 343/700 MS
7,477,201 B1 * 1/2009 Bit-Babik et al. 343/702
2004/0212542 A1 * 10/2004 Rahim 343/742

2006/0044196 A1 * 3/2006 Grant et al. 343/713
2007/0182651 A1 * 8/2007 Grant et al. 343/713
2008/0094303 A1 * 4/2008 Tseng et al. 343/848

FOREIGN PATENT DOCUMENTS

JP 2003-332840 A 11/2003
JP 2005-033736 A 2/2005
JP 2005-198245 A 7/2005
JP 2006-203446 A 8/2006
JP 2006-332792 A 12/2006
JP 2007-088975 A 4/2007

OTHER PUBLICATIONS

Japanese Office Action dated Oct. 31, 2008 and English translation thereof issued in a counterpart Japanese Application.

* cited by examiner


Primary Examiner—Huedung Mancuso

(74) Attorney, Agent, or Firm—Frishauf, Holtz, Goodman & Chick, P.C.

(57) **ABSTRACT**

An antenna device provided in a radio apparatus having a printed circuit board includes a first antenna element and a second antenna element. The first antenna element is configured to be fed and grounded at a first feed portion and at a first short-circuit portion both on the printed circuit board, respectively. The second antenna element is configured to be fed and grounded at a second feed portion and at a second short-circuit portion both on the printed circuit board, respectively. The second feed portion is located farther from the first feed portion than the first short-circuit portion, farther than the first short-circuit portion is from the first feed portion, farther from the first short-circuit portion than from the second short-circuit portion, and farther than the second short-circuit portion is from the first short-circuit portion.

12 Claims, 6 Drawing Sheets

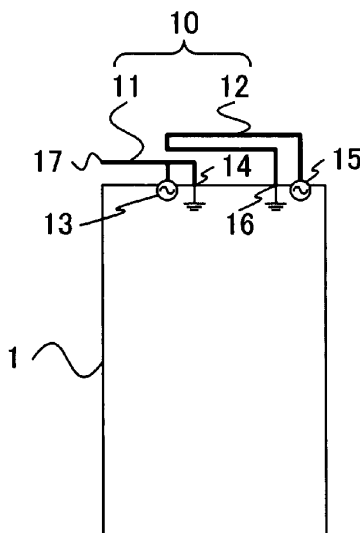

Acrobat 文件



US007701402B2

(12) **United States Patent**
Tsai et al.

(10) **Patent No.:** **US 7,701,402 B2**
(45) **Date of Patent:** **Apr. 20, 2010**

(54) **ANTENNA HAVING WIDE IMPEDANCE BANDWIDTHS BOTH AT LOW AND HIGH FREQUENCIES**

(75) Inventors: **Tiao-Hsing Tsai**, Yungho (TW);
Chieh-Ping Chiu, Yunlin Shien (TW);
Chih-Wei Liao, Yilan Shien (TW)

(73) Assignee: **Quanta Computer Inc.** (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 82 days.

(21) Appl. No.: **12/188,321**

(22) Filed: **Aug. 8, 2008**

(65) **Prior Publication Data**
US 2009/0179808 A1 Jul. 16, 2009

(30) **Foreign Application Priority Data**
Jan. 16, 2008 (TW) 97101651 A

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS;**
343/767

(58) **Field of Classification Search** 343/700 MS,
343/702, 767
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,650,298 B2 * 11/2003 Abbasi et al. 343/702
7,224,312 B2 * 5/2007 Wen et al. 343/700 MS
7,626,551 B2 * 12/2009 Chien et al. 343/700 MS

* cited by examiner


Primary Examiner—Tan Ho

(74) *Attorney, Agent, or Firm*—Sunstein Kahn Murphy & Timbers LLP

(57) **ABSTRACT**

An antenna includes a base element, grounding and feeding points, and first and second radiating elements. Each of the grounding and feeding points is provided on the base element. The first radiating element is operable in a first frequency band, and extends from the base element. The second radiating element is operable in a second frequency band lower than the first frequency band, extends from the base element, and is formed with a slot.

10 Claims, 6 Drawing Sheets

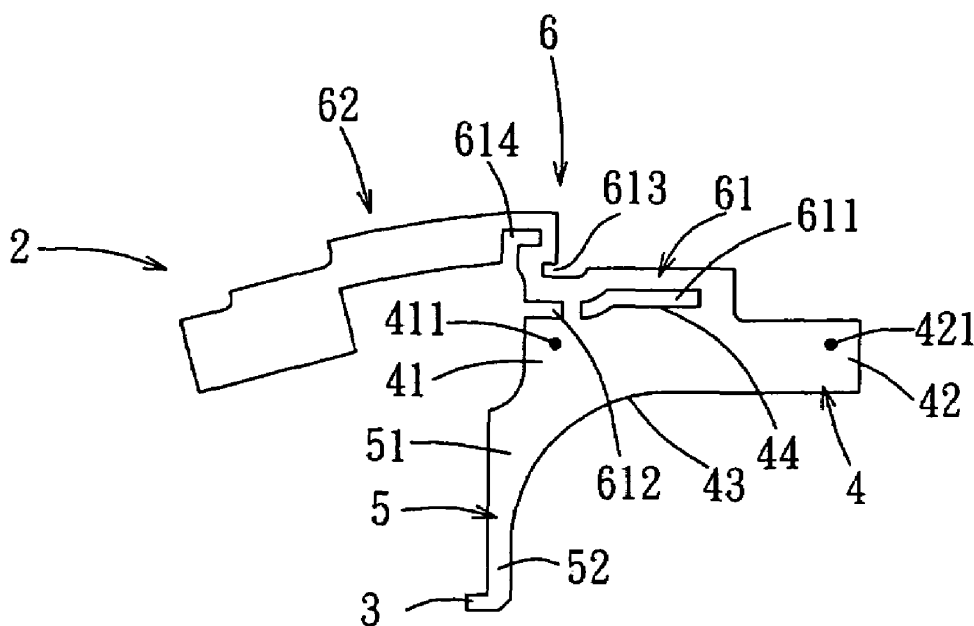

Acrobat 文件



US007701407B2

(12) **United States Patent**
Kanno et al.

(10) **Patent No.:** **US 7,701,407 B2**
(45) **Date of Patent:** **Apr. 20, 2010**

(54) **WIDE-BAND SLOT ANTENNA APPARATUS WITH STOP BAND**

2007/0164918 A1 7/2007 Kanno et al.

FOREIGN PATENT DOCUMENTS

(75) Inventors: **Hiroshi Kanno**, Osaka (JP); **Tomoyasu Fujishima**, Kanagawa (JP)

JP 2003-273638 9/2003
JP 2004-336328 11/2004
JP 4050307 12/2007

(73) Assignee: **Panasonic Corporation**, Osaka (JP)

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 203 days.

L. Zhu et al., "A Novel Broadband Microstrip-Fed Wide Slot Antenna with Double Rejection Zeros", IEEE Antennas and Wireless Propagation Letters, vol. 2, pp. 194-196, 2003.
H. R. Chuang et al., "A Printed UWB Triangular Monopole Antenna" Microwave Journal, vol. 49, No. 1, Jan. 2006.

* cited by examiner

(21) Appl. No.: **12/116,754**

(22) Filed: **May 7, 2008**

Primary Examiner—Hoang V Nguyen

(65) **Prior Publication Data**

US 2008/0284670 A1 Nov. 20, 2008

(74) Attorney, Agent, or Firm—Wenderoth, Lind & Ponack, L.L.P.

(30) **Foreign Application Priority Data**

May 8, 2007 (JP) 2007-123206

(57) **ABSTRACT**

(51) **Int. Cl.**
H01Q 13/10 (2006.01)

(52) **U.S. Cl.** **343/767**

(58) **Field of Classification Search** **343/767**,
343/768, 770, 700 MS, 846

See application file for complete search history.


A slot antenna apparatus includes a grounding conductor having an outer edge including a first portion facing a radiation direction and a second portion other than the first portion, a one-end-open feed slot formed in the grounding conductor along the radiation direction such that an open end is provided at a center of the first portion, and a feed line including a strip conductor close to the grounding conductor and intersecting with the feed slot at at least a part thereof to feed a radio frequency signal to the feed slot. The slot antenna apparatus further comprises at least one one-end-open parasitic slot having an electrical length equivalent to one-quarter effective wavelength in a certain stop band, the parasitic slot having an open end at the second portion, and being formed in the grounding conductor so as not to intersect with the feed line.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,445,906 B1 * 9/2002 Nguyen et al. 455/73
6,864,848 B2 * 3/2005 Sievenpiper 343/767
7,132,992 B2 * 11/2006 Mori 343/770

5 Claims, 29 Drawing Sheets

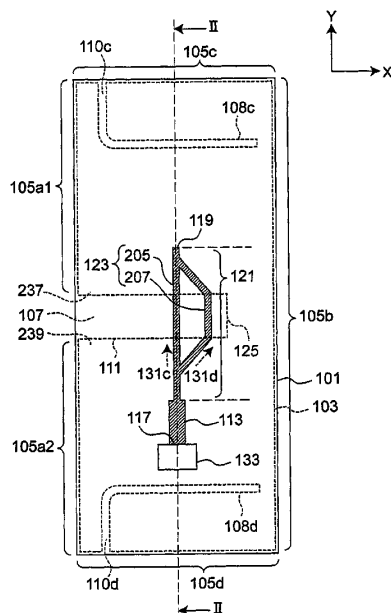

Acrobat 文件



US007705783B2

(12) **United States Patent**
Rao et al.

(10) **Patent No.:** **US 7,705,783 B2**
(45) **Date of Patent:** **Apr. 27, 2010**

(54) **SLOT-STRIP ANTENNA APPARATUS FOR A RADIO DEVICE OPERABLE OVER MULTIPLE FREQUENCY BANDS**

(75) Inventors: **Qinjiang Rao**, Waterloo (CA); **Geyi Wen**, Waterloo (CA); **Mark Pecan**, Waterloo (CA)

(73) Assignee: **Research In Motion Limited**, Waterloo (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 424 days.

(21) Appl. No.: **11/697,349**

(22) Filed: **Apr. 6, 2007**

(65) **Prior Publication Data**

US 2008/0246678 A1 Oct. 9, 2008

(51) **Int. Cl.**

H01Q 1/38 (2006.01)

H01Q 13/10 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/770**

(58) **Field of Classification Search** **343/700 MS, 343/702, 770, 895**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,292,154 B1 * 9/2001 Deguchi et al. 343/806
6,320,545 B1 * 11/2001 Nagumo et al. 343/700 MS
2008/0231532 A1 * 9/2008 Rao et al. 343/770

FOREIGN PATENT DOCUMENTS

EP 1168491 A1 1/2002
WO 93/12559 A1 6/1993
WO 00/36700 A1 6/2000
WO 00/52784 A1 9/2000

* cited by examiner


Primary Examiner—Shih-Chao Chen

(57) **ABSTRACT**

A hybrid slot-strip antenna apparatus, and an associated methodology, for a multi-mode mobile station or other radio device. The antenna is formed of a plurality of slot-strips disposed upon a printed circuit board, or other substrate. The antenna is defined by width and length design parameters, the selections of which are determinative of the antenna functionality. Through appropriate selection of the design parameters, the antenna is operable, that is, resonant, at each of the frequency bands of the multi-mode mobile station.

15 Claims, 9 Drawing Sheets

32

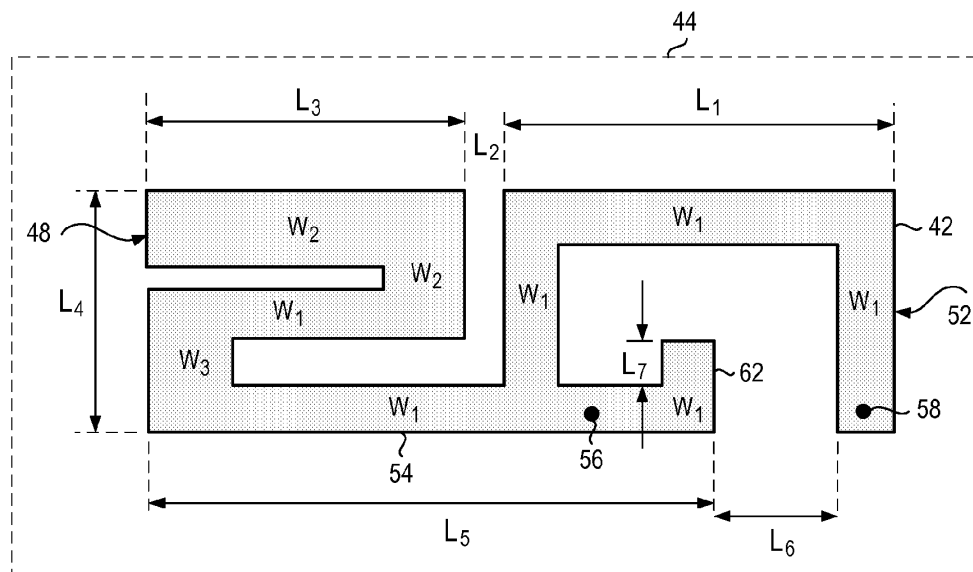

Acrobat 文件



US007705784B2

(12) **United States Patent**
Lai et al.

(10) **Patent No.:** **US 7,705,784 B2**
(45) **Date of Patent:** **Apr. 27, 2010**

(54) **MULTI-FREQUENCY ANTENNA**

(75) Inventors: **Ying-Jiunn Lai**, Taipei Hsien (TW);
Jiunn-Ming Huang, Taipei Hsien (TW);
Kuan-Hsueh Tseng, Taipei Hsien (TW)

(73) Assignee: **Wistron NeWeb Corp.**, Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 419 days.

(21) Appl. No.: **11/853,020**

(22) Filed: **Sep. 11, 2007**

(65) **Prior Publication Data**

US 2008/0136711 A1 Jun. 12, 2008

(30) **Foreign Application Priority Data**

Dec. 7, 2006 (TW) 95145782 A

(51) **Int. Cl.**
H01Q 9/04 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702; 343/846; 343/848**

(58) **Field of Classification Search** **343/700 MS; 343/702, 846, 848**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,515,630 B2 *	2/2003	Honda		343/702
6,535,166 B1 *	3/2003	Ali		343/700 MS
7,042,404 B2 *	5/2006	Jo et al.		343/702

* cited by examiner

Primary Examiner—Douglas W Owens

Assistant Examiner—Chuc D Tran


(74) *Attorney, Agent, or Firm*—Pai Patent & Trademark Law Firm; Chao-Chang David Pai

(57) **ABSTRACT**

A multi-frequency antenna for receiving a first frequency and second frequency signals comprises a grounding element, a first conductive member, a first radiation member, and a second radiation member. The first conductive member connects to the grounding element. The first radiation member and the second radiation member connect to the first conductive member separately. The multi-frequency antenna further comprises a parasitic structure. The parasitic structure structurally encircles the second radiation member and the encirclement is a partial encirclement. Moreover, the parasitic structure connects to the grounding element.

30 Claims, 18 Drawing Sheets

100

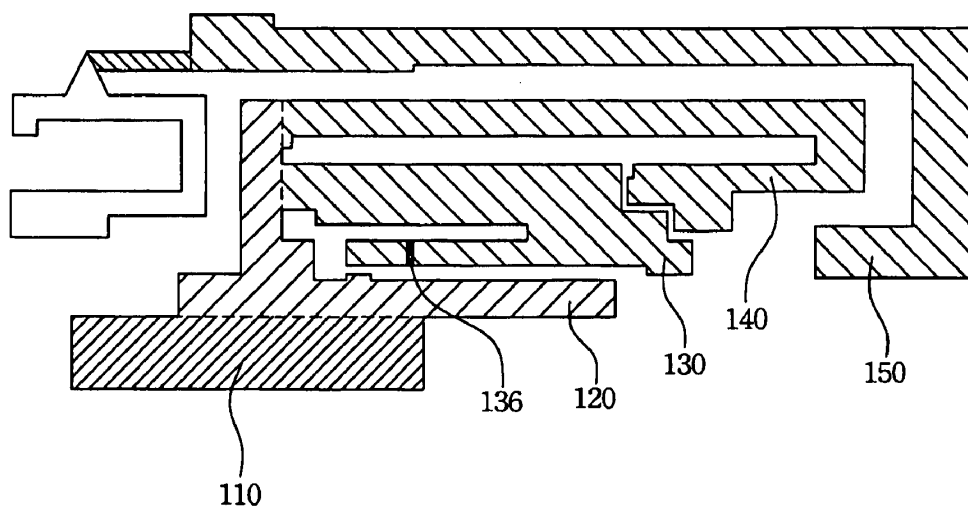

Acrobat 文件



US007705786B2

(12) **United States Patent**
Iellici et al.

(10) **Patent No.:** **US 7,705,786 B2**
(45) **Date of Patent:** **Apr. 27, 2010**

(54) **ANTENNA FOR MOBILE TELEPHONE
HANDSETS, PDAS, AND THE LIKE**

(75) Inventors: **Devis Iellici**, Cambridge (GB); **Simon Philip Kingsley**, Cambridge (GB); **James William Kingsley**, Cambridge (GB); **Steven Gregory O'Keefe**, Queensland (AU)

(73) Assignee: **Antenova Ltd.**, Cambridge (GB)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 554 days.

(21) Appl. No.: **10/582,641**

(22) PCT Filed: **Dec. 10, 2004**

(86) PCT No.: **PCT/GB2004/005158**

§ 371 (c)(1),
(2), (4) Date: **Jun. 12, 2006**

(87) PCT Pub. No.: **WO2005/057722**

PCT Pub. Date: **Jun. 23, 2005**

(65) **Prior Publication Data**

US 2007/0120740 A1 May 31, 2007

(30) **Foreign Application Priority Data**

Dec. 12, 2003 (GB) 0328811.5

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** **343/702, 343/700 MS**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,010,349 A * 4/1991 Mizuno et al. 343/700 MS
5,434,579 A 7/1995 Kagoshima et al.
5,684,492 A 11/1997 Kagoshima et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1 018 779 7/2000

(Continued)

OTHER PUBLICATIONS

Kingsley, S.P. et al.: "Advancements in Antennas: The development of dielectric antennas technology", Antenna Systems, Oct. 8, 2003, 6 pages.

(Continued)

Primary Examiner—Trinh V Dinh


Assistant Examiner—Dieu Hien T Duong

(74) *Attorney, Agent, or Firm*—Pearl Cohen Zedek Latzer, LLP

(57) **ABSTRACT**

The present invention relates to an antenna structure comprising a dielectric pellet and a dielectric substrate with upper and lower surfaces and at least one groundplane, wherein the dielectric pellet is elevated above the upper surface of the dielectric substrate such that the dielectric pellet does not directly contact the dielectric substrate or the groundplane, and wherein the dielectric pellet is provided with a conductive direct feed structure. A radiating antenna component is additionally provided and arranged so as to be excited by the dielectric pellet. Elevating the dielectric antenna component so that it does not directly contact the groundplane or the dielectric substrate significantly improves bandwidth of the antenna as a whole.

27 Claims, 11 Drawing Sheets

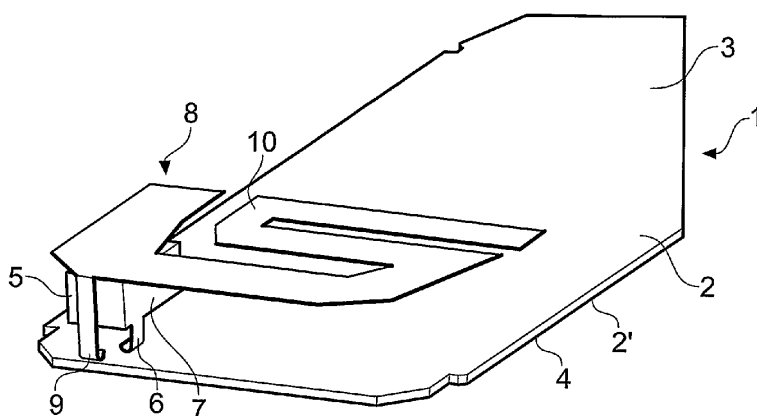

Acrobat 文件



US007705787B2

(12) **United States Patent**
Ponce De Leon et al.

(10) **Patent No.:** **US 7,705,787 B2**
(45) **Date of Patent:** **Apr. 27, 2010**

(54) **COUPLED SLOT PROBE ANTENNA**

(75) Inventors: **Lorenzo A. Ponce De Leon**, Lake Worth, FL (US); **Naveed Mirza**, Boynton Beach, FL (US); **Paul Morningstar**, North Lauderdale, FL (US)

(73) Assignee: **Motorola, Inc.**, Schaumburg, IL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 79 days.

(21) Appl. No.: **11/691,186**

(22) Filed: **Mar. 26, 2007**

(65) **Prior Publication Data**

US 2008/0238780 A1 Oct. 2, 2008

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** **343/700 MS, 343/702**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,866,453 A	9/1989	Nagy et al.	
6,714,162 B1 *	3/2004	Kadambi et al.	343/700 MS
2005/0134510 A1 *	6/2005	Asai	343/702
2005/0212706 A1	9/2005	Ying et al.	
2006/0038721 A1	2/2006	Ozkar et al.	

2006/0099914 A1 *	5/2006	Andersson	455/90.3
2007/0057854 A1 *	3/2007	Oodachi et al.	343/702
2007/0247373 A1 *	10/2007	Egorov	343/702

FOREIGN PATENT DOCUMENTS

EP	1067627 A1	1/2001
JP	2002330022 A	11/2002
JP	2007028255 A	2/2007
KR	1020030082101 A	10/2003
KR	1020060122046 A	11/2006

* cited by examiner


Primary Examiner—Douglas W Owens

Assistant Examiner—Dieu Hien T Duong

(57) **ABSTRACT**

A coupled slot probe antenna for use with antenna structures in mobile communication devices, such as cellular telephones and other wireless communication devices. The coupled slot probe antenna includes at least one first conductive element, and a second conductive element coupled between the first conductive element and the printed circuit board (PCB) ground plane of the mobile communication device. The first and second conductive elements define a tunable coupled slot area and the coupled slot probe antenna is coupled to the PCB ground plane in such a way that the coupled slot area is near a low-impedance point of the antenna structure, wherein coupling therebetween improves the bandwidth and the efficiency of the antenna structure. The coupled slot area can be tuned by changing the size of the coupled slot area and by changing the position of the coupled slot area relative to the low-impedance point of the antenna structure.

19 Claims, 6 Drawing Sheets

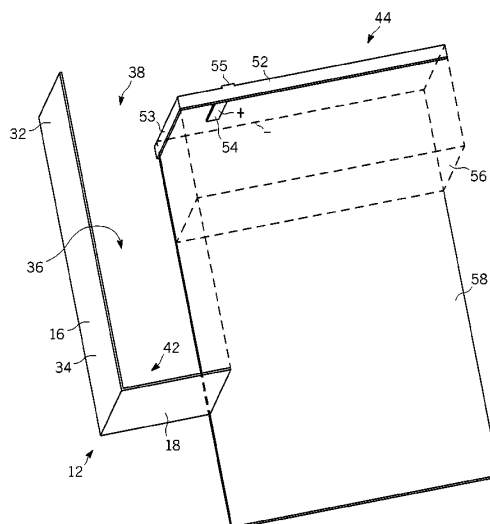



US007705788B2

(12) **United States Patent**
Hung et al.

(10) **Patent No.:** **US 7,705,788 B2**
(45) **Date of Patent:** **Apr. 27, 2010**

(54) **MULTI-BAND ANTENNA**

(75) Inventors: **Chen-Ta Hung**, Tu-Cheng (TW);
Shang-Jen Chen, Tu-Cheng (TW);
Hsien-Sheng Tseng, Tu-Cheng (TW)

(73) Assignee: **Hon Hai Precision Ind. Co., Ltd.**,
Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 175 days.

(21) Appl. No.: **11/825,889**

(22) Filed: **Jul. 9, 2007**

(65) **Prior Publication Data**

US 2008/0007469 A1 Jan. 10, 2008

(30) **Foreign Application Priority Data**

Jul. 7, 2006 (CN) 2006 1 0086343

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/700 MS;
343/803; 343/846; 343/853

(58) **Field of Classification Search** 343/700 MS,
343/846, 853, 895, 702, 803
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,847,682 A * 12/1998 Ke 343/752
6,404,395 B1 * 6/2002 Masuda 343/702

6,535,167 B2 * 3/2003 Masuda et al. 343/700 MS
7,057,560 B2 * 6/2006 Erkocevic 343/700 MS
7,218,282 B2 * 5/2007 Humpfer et al. 343/700 MS
7,286,090 B1 * 10/2007 Rowell 343/702
2006/0273977 A1 * 12/2006 Ke et al. 343/795
2008/0238800 A1 * 10/2008 Collins 343/795

FOREIGN PATENT DOCUMENTS

TW 1220581 8/2004

* cited by examiner

Primary Examiner—Douglas W Owens
Assistant Examiner—Chuc D Tran


(74) *Attorney, Agent, or Firm*—Wei Te Chung; Andrew C.
Cheng; Ming Chieh Chang

(57) **ABSTRACT**

A multi-band antenna used in a portable electrical device can operate in WWAN. The multi-band antenna includes a PCB, a first antenna body, and a second antenna body. The PCB has a first surface and an opposite second surface and defines a through hole extending from the first surface to the second surface. The first antenna body is formed on the first surface of the PCB comprising a first radiating element and a first grounding element. The second antenna body is formed on the second surface of the PCB. The second antenna body comprises a second radiating element, a second grounding element, and a connecting element connecting the second radiating element and the second grounding element. The first radiating element and the second radiating element electrically connect with each other via the through hole of the PCB. A feeding line has an inner conductor electrically connecting to the first radiating element and an outer conductor electrically connecting to the first grounding element.

19 Claims, 4 Drawing Sheets

1

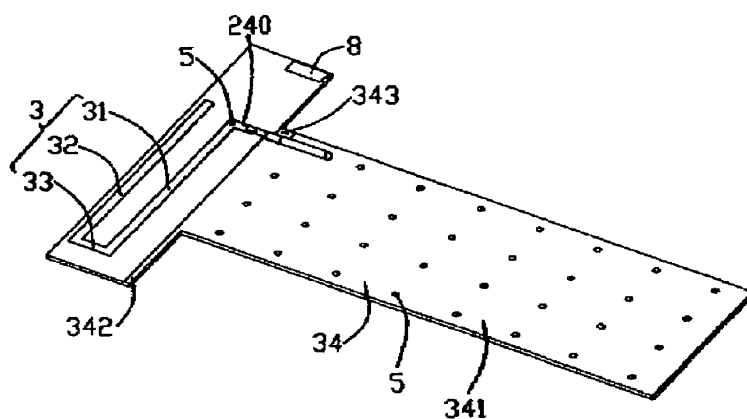

Acrobat 文件



US007705791B2

(12) **United States Patent**
Ollikainen

(10) **Patent No.:** **US 7,705,791 B2**
(45) **Date of Patent:** **Apr. 27, 2010**

(54) **ANTENNA HAVING A PLURALITY OF
RESONANT FREQUENCIES**

(75) Inventor: **Jani Ollikainen**, Helsinki (FI)

(73) Assignee: **Nokia Corporation**, Espoo (FI)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/151,293**

(22) Filed: **May 5, 2008**

(65) **Prior Publication Data**

US 2008/0211725 A1 Sep. 4, 2008

Related U.S. Application Data

(62) Division of application No. 11/107,159, filed on Apr. 15, 2005, now Pat. No. 7,629,931.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** **343/702**,
343/700 MS, 728, 866, 741-742
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,315,309 A	5/1994	Rudow et al.	343/705
5,654,724 A	8/1997	Chu	343/742
5,764,195 A	6/1998	Colclough et al.	343/797
5,880,697 A	3/1999	McCarrick et al.	343/742
6,014,107 A	1/2000	Wiesenfarth	343/742
6,236,368 B1	5/2001	Johson	343/702

6,597,317 B2	7/2003	Talvitie	343/700 MS
6,909,402 B2 *	6/2005	Vance	343/702
6,917,335 B2 *	7/2005	Kadambi et al.	343/700 MS
7,215,293 B2	5/2007	Chen et al.	343/741
7,307,591 B2 *	12/2007	Zheng	343/702
2003/0098814 A1 *	5/2003	Keller et al.	343/742
2006/0017635 A1	1/2006	Zheng	343/748
2008/0042916 A1 *	2/2008	Ma	343/767
2008/0211725 A1 *	9/2008	Ollikainen	343/749

OTHER PUBLICATIONS

Jani Ollikainen et al., "Internal Dual-Band Patch Antenna for Mobile Phones", 2000 European Space Agency (ESA), Proceedings of the AP2000 Millennium Conference on Antennas & Propagation, Davos, Switzerland, Apr. 9-14, 2000, CD-ROM SP 444, paper p 1111.pdf.
Juha Villanen et al., "Compact Antenna Structures For Mobile Handsets", Mar. 2003 IEEE, pp. 40-44.
Pertti Vainikainen et al., "Resonator-Based Analysis Of The Combination Of Mobile Handset Antenna And Chassis", IEEE Transactions on Antennas and Propagation, vol. 50, No. 10, Oct. 2002, pp. 1433-1443.

* cited by examiner

Primary Examiner—Huedung Mancuso


(74) *Attorney, Agent, or Firm*—Harrington & Smith

(57) **ABSTRACT**

An antenna having a plurality of resonant frequencies and including a ground plane having an edge; a feed point; a ground point; and

an antenna track extending between the feed point and the ground point and comprising, in series connection, a first loop and a second loop wherein a least a portion of the first loop and a portion of the second loop are adjacent at least the edge of the ground plane.

19 Claims, 5 Drawing Sheets

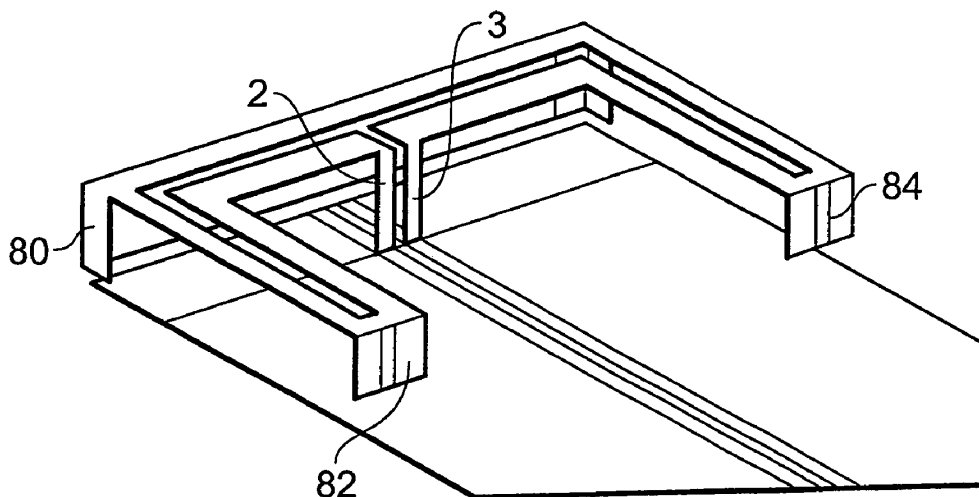

Acrobat 文件