



US008049670B2

(12) **United States Patent**
Jung et al.

(10) **Patent No.:** **US 8,049,670 B2**

(45) **Date of Patent:** **Nov. 1, 2011**

(54) **PORTABLE TERMINAL**

(75) Inventors: **Kang-Jae Jung**, Seoul (KR); **An-Sun Hyun**, Seoul (KR); **Chang-Won Yun**, Gyeonggi-Do (KR)

(73) Assignee: **LG Electronics Inc.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 352 days.

(21) Appl. No.: **12/394,224**

(22) Filed: **Feb. 27, 2009**

(65) **Prior Publication Data**

US 2009/0243944 A1 Oct. 1, 2009

(30) **Foreign Application Priority Data**

Mar. 25, 2008 (KR) 10-2008-0027548

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. CL.** **343/702; 343/846**

(58) **Field of Classification Search** 381/312, 381/323, 322, 315, 60; 343/841, 702; 455/575.1, 455/575.7

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2005/0197014 A1* 9/2005 Kim et al. 439/629
2007/0176833 A1* 8/2007 Haho et al. 343/702

* cited by examiner


Primary Examiner — Hoanganh Le

(74) *Attorney, Agent, or Firm* — KED & Associates, LLP

(57) **ABSTRACT**

A portable terminal may include a terminal body, a printed circuit board having a ground unit coupled to an antenna, and an electric field reducing unit to transfer a current flowing in the ground unit to a side surface of the terminal body and to reduce strength of an electric field.

11 Claims, 5 Drawing Sheets

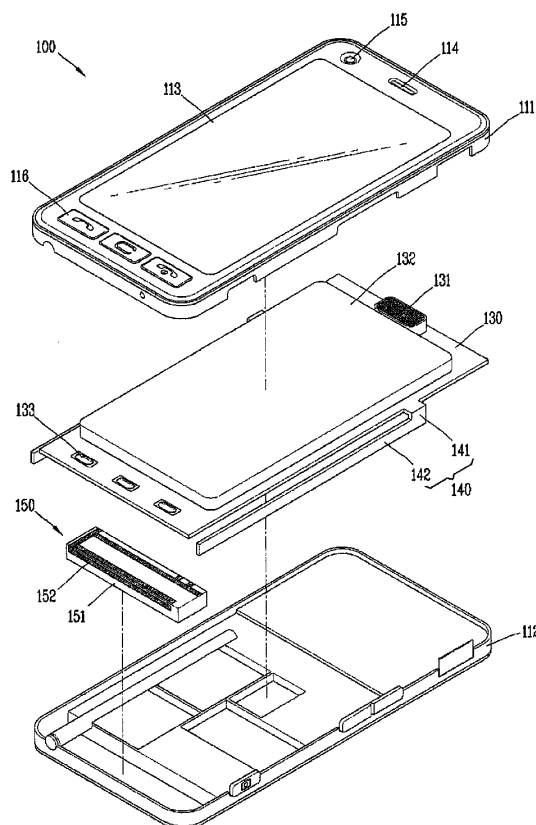

Acrobat Document



US008049672B2

(12) **United States Patent**
Chang et al.

(10) **Patent No.:** **US 8,049,672 B2**

(45) **Date of Patent:** **Nov. 1, 2011**

(54) **ULTRA WIDEBAND ANTENNA WITH
BAND-NOTCHED CHARACTERISTICS**

(75) Inventors: **The-Nan Chang**, Taipei (TW); **Min-Chi Wu**, Taipei (TW)

(73) Assignees: **Tatung University**, Taipei (TW); **Tatung Company**, Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 400 days.

(21) Appl. No.: **12/314,398**

(22) Filed: **Dec. 10, 2008**

(65) **Prior Publication Data**

US 2010/0066621 A1 Mar. 18, 2010

(30) **Foreign Application Priority Data**

Sep. 18, 2008 (TW) 097135741 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 13/12 (2006.01)

(52) **U.S. Cl.** 343/767; 343/700 MS; 343/769;
343/770

(58) **Field of Classification Search** 343/700 MS;
343/767, 769, 770

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,646,341 B1 * 1/2010 Lin et al. 343/700 MS

OTHER PUBLICATIONS

J. Liu, Compact printed ultra-wideband monopole antenna with dual band-notched characteristics, Jun. 2008, Electronic Letters, vol. 44, No. 12.*

V. Crnojevic-Bengin, Complementary split rings resonators using square sierpinski fractal curves, Proceedings of the 36th European Microwave Conference, pp. 1333-1335.*

* cited by examiner

Primary Examiner — Jacob Y Choi


Assistant Examiner — Hasan Islam

(74) *Attorney, Agent, or Firm* — Bacon & Thomas, PLLC

(57) **ABSTRACT**

An ultra wideband antenna includes: a substrate; a grounding unit, installed on the substrate and scooped with a first slot and a first strip hole; a signal feeding unit, installed on the substrate and including a horizontal portion and a vertical portion, in which the horizontal portion is located in the first slot and the vertical portion is located in the first strip hole; a first complementary, separate, circular resonator; and a second complementary, separate, circular resonator, wherein the first complementary, separate, circular resonator and the second complementary, separate, circular resonator are installed in the horizontal portion of the signal feeding unit and are connected with each other.

11 Claims, 6 Drawing Sheets

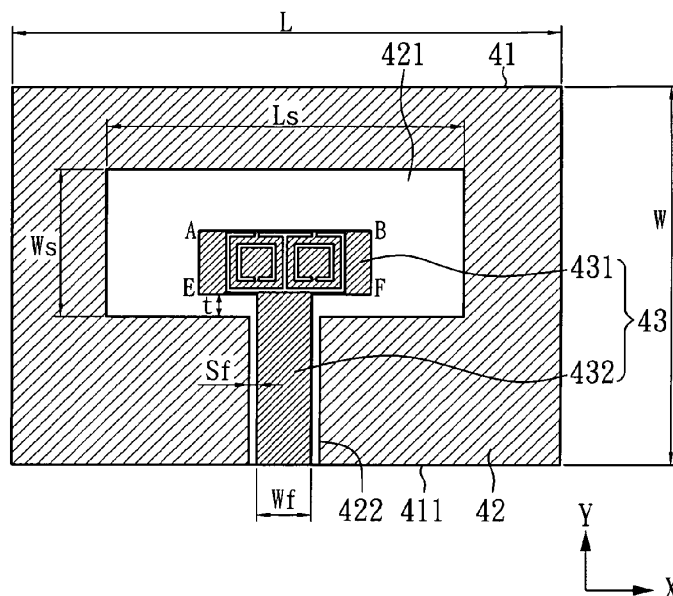

Acrobat Document



US008049673B2

(12) **United States Patent**
Hsieh et al.

(10) **Patent No.:** **US 8,049,673 B2**

(45) **Date of Patent:** **Nov. 1, 2011**

(54) **ELECTRONIC DEVICE AND
MULTI-FREQUENCY ANTENNA THEREOF**

(75) Inventors: **Po-Chuan Hsieh**, Taipei Hsien (TW);
Yu-Chang Pai, Taipei Hsien (TW);
Hsiao-Yun Su, Taipei Hsien (TW);
Chien-Hung Liu, Taipei Hsien (TW);
Jia-Chi Chen, Taipei Hsien (TW)

(73) Assignee: **Hon Hai Precision Industry Co., Ltd.**,
Tu-Cheng, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 385 days.

(21) Appl. No.: **12/475,512**

(22) Filed: **May 30, 2009**

(65) **Prior Publication Data**
US 2010/0283697 A1 Nov. 11, 2010

(51) **Int. Cl.**
H01Q 13/00 (2006.01)

(52) **U.S. Cl.** **343/767**

(58) **Field of Classification Search** **343/767,**
343/702, 700 MS, 770, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,945,954 A *	8/1999	Johnson	343/702
6,710,748 B2 *	3/2004	Yarasi et al.	343/702
6,741,214 B1 *	5/2004	Kadambi et al.	343/700 MS
2009/0262028 A1 *	10/2009	Mumbru et al.	343/702
2011/0156975 A1 *	6/2011	Pros et al.	343/767

* cited by examiner


Primary Examiner — Huedung Mancuso

(74) *Attorney, Agent, or Firm* — Altis Law Group, Inc.

(57) **ABSTRACT**

An electronic device includes a multi-frequency antenna. The multi-frequency antenna includes a ground portion, a support body, a radiation portion, and a strap. The ground portion defines a gap, and two grooves communicating with the gap and located at opposite ends of the gap. The radiation portion resists against a sidewall bounding the gap, and is connected to the strap. The radiation portion is accommodated in the gap and substantially coplanar with the ground portion. The radiation portion defines a slot. The support body is located in the gap and on the radiation portion, to support the strap.

13 Claims, 5 Drawing Sheets

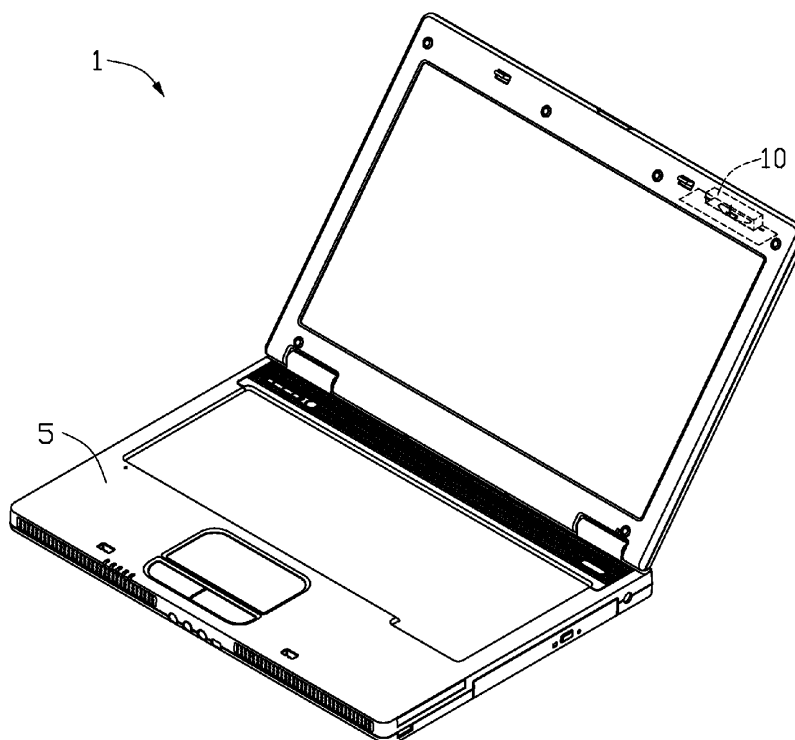

Acrobat Document



US008054227B2

(12) **United States Patent**
Chang et al.

(10) **Patent No.:** **US 8,054,227 B2**

(45) **Date of Patent:** **Nov. 8, 2011**

(54) **CHIP ANTENNA**

(75) Inventors: **Ki Won Chang**, Gyeonggi-do (KR);
Jeong Sik Seo, Gyeonggi-do (KR); **Hyun Do Park**, Gyeonggi-do (KR); **Jae Suk Sung**, Gyeonggi-do (KR)

(73) Assignee: **Samsung Electro-Mechanics Co., Ltd.**,
Gyeonggi-do (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 845 days.

2003/0132885 A1 7/2003 Kuramoto et al.
2003/0222827 A1 12/2003 Sung
2004/0246180 A1 12/2004 Okado
2009/0040109 A1 2/2009 Iguchi et al.

FOREIGN PATENT DOCUMENTS

EP 1 146 589 A1 10/2001
EP 1 267 441 A3 12/2002
EP 1 482 592 A1 1/2004
EP 1 564 837 A2 8/2005
EP 1860732 A1 11/2007
JP 2001-36317 A 2/2001
JP 2006295876 A 10/2006
WO 2005-078860 A1 8/2005

(Continued)

(21) Appl. No.: **11/944,575**

(22) Filed: **Nov. 23, 2007**

(65) **Prior Publication Data**

US 2008/0122722 A1 May 29, 2008

(30) **Foreign Application Priority Data**

Nov. 22, 2006 (KR) 10-2006-0115951

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/846,**
343/700 MS, 702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,861,854 A 1/1999 Kawahata et al.
6,614,398 B2* 9/2003 Kushihi et al. 343/700 MS
6,762,731 B1 7/2004 Chou
7,034,752 B2 4/2006 Sekiguchi et al.
7,265,724 B1 9/2007 Tan et al.
7,479,928 B2 1/2009 Tan et al.

OTHER PUBLICATIONS

UK Intellectual Property Office English Language Search Report,
mailed Mar. 17, 2008.

(Continued)

Primary Examiner — Jacob Y Choi


Assistant Examiner — Robert Karacsony

(74) *Attorney, Agent, or Firm* — Lowe, Hauptham, Ham & Berner, LLP

(57) **ABSTRACT**

There is provided a chip antenna including: a dielectric block; a first conductive pattern formed on at least one surface of the dielectric block to connect to an external feeding part; a second conductive pattern spaced apart from the first conductive pattern at a certain distance so as to be capacitively coupled to the first conductive pattern to act as a radiator, the second conductive pattern having one end connected to an external ground part; and a third conductive pattern spaced apart from the first conductive pattern at a certain distance so as to be capacitively coupled to the first conductive pattern to enable impedance matching of the antenna, the third conductive pattern having one end connected to the external ground part.

13 Claims, 5 Drawing Sheets

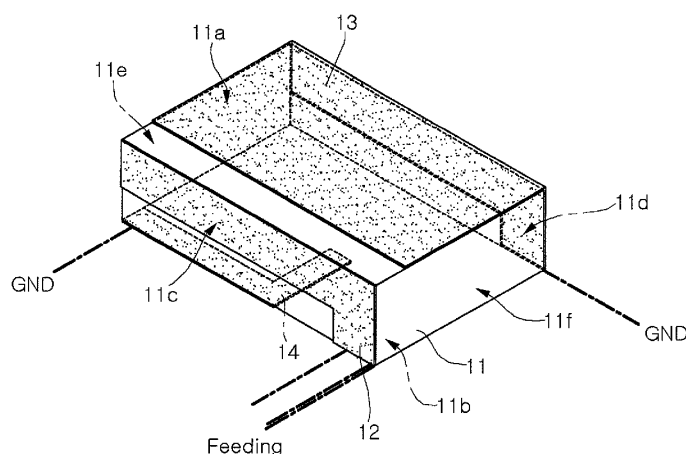

Acrobat Document



US008054229B2

(12) **United States Patent**
Kaneoya

(10) **Patent No.:** **US 8,054,229 B2**
(45) **Date of Patent:** **Nov. 8, 2011**

(54) **ANTENNA AND PORTABLE WIRELESS
DEVICE**

7,405,703 B2 * 7/2008 Qi et al. 343/702
2005/0099335 A1 5/2005 Chung et al.
2005/0212704 A1 9/2005 Hofmann

(75) Inventor: **Masanori Kaneoya**, Musashimurayama
(JP)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Casio Hitachi Mobile Communications
Co., Ltd.**, Tokyo (JP)

EP 0 526 643 2/1993
EP 1 263 083 12/2002
EP 1 575 125 9/2005
EP 1 608 035 12/2005
EP 1 638 165 3/2006
JP 3033537 6/1996
JP 3033537 U 11/1996
JP 09-260922 10/1997
JP 11-284427 10/1999
JP 2001-168620 6/2001

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 826 days.

(21) Appl. No.: **11/820,130**

(Continued)

(22) Filed: **Jun. 18, 2007**

OTHER PUBLICATIONS

(65) **Prior Publication Data**

US 2008/0001833 A1 Jan. 3, 2008

Office Action dated Apr. 8, 2008 (with English translation) issued for
the Japanese Patent Application No. 2006-178830.

(30) **Foreign Application Priority Data**

Jun. 28, 2006 (JP) 2006-178830

Primary Examiner — Huedung Mancuso

(74) *Attorney, Agent, or Firm* — Cozen O'Connor

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** 343/702,

343/895, 700 MS; 455/90, 575.5

See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

6,456,242 B1 * 9/2002 Crawford 343/700 MS
6,456,245 B1 * 9/2002 Crawford 343/702
6,850,197 B2 * 2/2005 Paun 343/702
6,876,332 B1 * 4/2005 Chung et al. 343/702
6,879,849 B2 * 4/2005 Begic 455/575.7
6,992,631 B2 * 1/2006 Lu 343/700 MS
7,397,431 B2 * 7/2008 Baliarda et al. 343/702

(57) **ABSTRACT**

A dual-band antenna with little limitation on the mounting
space, which allows two antenna elements coping with dif-
ferent frequency bands to be laid out at a narrow space, and a
portable wireless device having the same are provided. A
band-like first antenna element, a sheet-like dielectric ele-
ment, and a band-like second antenna element are fitted in a
groove of a support member. The end portion of the second
antenna element overlaps with the end portion of the first
antenna element, and the dielectric element is sandwiched
therebetween. The sandwiched dielectric element constitutes
a capacitor, and first antenna element, the capacitor and the
second antenna element are connected in series. The other
end portion of the second antenna element is connected to a
circuit in a bottom casing, and power is supplied through the
other end portion thereof.

17 Claims, 11 Drawing Sheets

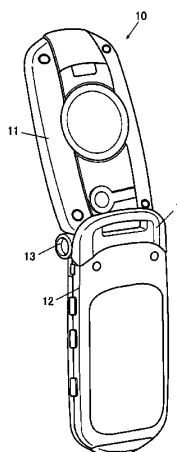

Acrobat Document



US008054230B2

(12) **United States Patent**
Su et al.

(10) **Patent No.:** **US 8,054,230 B2**

(45) **Date of Patent:** **Nov. 8, 2011**

(54) **MULTI-BAND ANTENNA**

(75) Inventors: **Wen-Fong Su**, Tu-cheng (TW);
Shu-Yean Wang, Tu-cheng (TW);
Hsien-Sheng Tseng, Tu-cheng (TW);
Shang-Jen Chen, Tu-cheng (TW);
Chun-Ming Chiu, Tu-cheng (TW)

(73) Assignee: **Hon Hai Precision Ind. Co., Ltd.**, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 622 days.

(21) Appl. No.: **12/221,290**

(22) Filed: **Jul. 31, 2008**

(65) **Prior Publication Data**

US 2009/0033560 A1 Feb. 5, 2009

(30) **Foreign Application Priority Data**

Jul. 31, 2007 (TW) 96212499 A

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** 343/702; 343/700 MS; 343/846

(58) **Field of Classification Search** 343/700,
343/702, 829, 846
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,861,986 B2 3/2005 Fang
7,839,342 B2 * 11/2010 Su et al. 343/702
2009/0073050 A1 * 3/2009 Cheng 343/700 MS

FOREIGN PATENT DOCUMENTS

CN 1747235 A 3/2006
CN 2924808 Y 7/2007

* cited by examiner

Primary Examiner — Tho G Phan


(74) *Attorney, Agent, or Firm* — Wei Te Chung; Andrew C. Cheng; Ming Chieh Chang

(57) **ABSTRACT**

A multi-band antenna includes a grounding element having a first side, a radiating element separated from the first side of the grounding element, and a connecting element. The connecting element connects the grounding element to the radiating element and includes a first end slantwise extending from the grounding to form a first angle except a right angle between the connecting element and the grounding element.

19 Claims, 3 Drawing Sheets

1
~

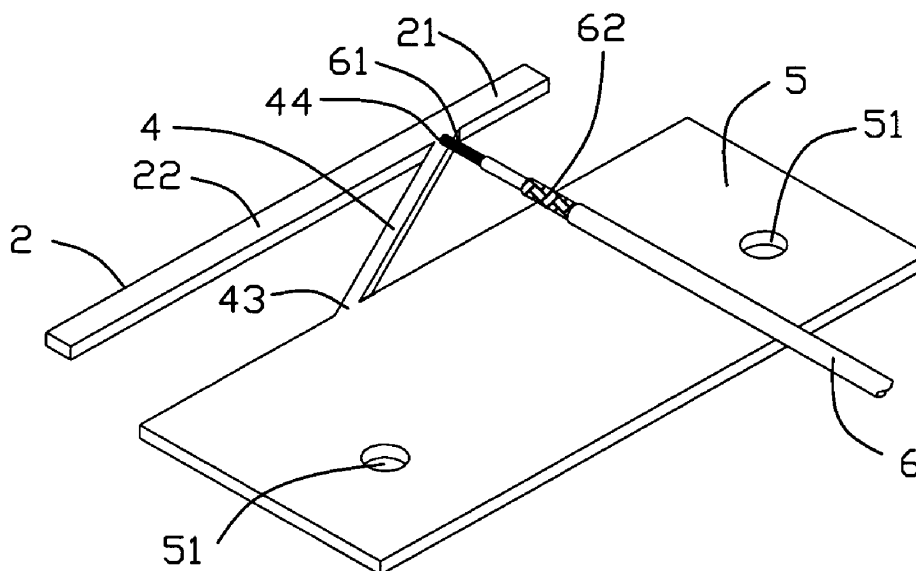

Acrobat Document



US008054231B2

(12) **United States Patent**
Ahn et al.

(10) **Patent No.:** **US 8,054,231 B2**
(45) **Date of Patent:** **Nov. 8, 2011**

(54) **MOBILE TERMINAL HAVING METAL CASE
AND ANTENNA STRUCTURE**

(75) Inventors: **Jung Ho Ahn**, Seoul (KR); **Yong Jin Kim**, Seoul (KR); **Dong Hwan Kim**, Hwaseong-si (KR); **Jae Ho Lee**, Yongin-si (KR); **Seung Hwan Kim**, Suwon-si (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**, Suwon-si (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 312 days.

(21) Appl. No.: **12/419,503**

(22) Filed: **Apr. 7, 2009**

(65) **Prior Publication Data**
US 2009/0278757 A1 Nov. 12, 2009

(30) **Foreign Application Priority Data**
May 6, 2008 (KR) 10-2008-0041704

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 13/10 (2006.01)

(52) **U.S. Cl.** **343/702; 343/770**

(58) **Field of Classification Search** 343/702,
343/767, 770, 872
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2009/0153412 A1 * 6/2009 Chiang et al. 343/702
2009/0231215 A1 * 9/2009 Taura 343/702

FOREIGN PATENT DOCUMENTS

WO 2007/058230 A1 5/2007

* cited by examiner


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — Jefferson IP Law, LLP

(57) **ABSTRACT**

A mobile terminal including a metal case and an antenna structure that can exhibit optimum radiation performance is provided. The antenna structure includes an antenna having a radiation unit for transmitting and for receiving electric waves, a Printed Circuit Board (PCB) to which the antenna is mechanically coupled at one surface thereof and having a power supply unit electrically coupled to the radiation unit, and a case constructed using a metal material within which the PCB is disposed, wherein the case has at least one slot formed in a surface thereof opposite to the surface to which the PCB is fastened and adjacent to the radiation unit.

15 Claims, 12 Drawing Sheets

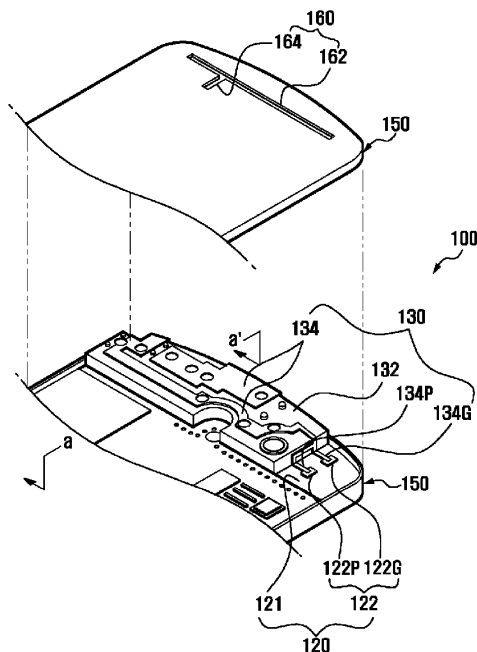

Acrobat Document



US008054232B2

(12) **United States Patent**
Chiang et al.

(10) **Patent No.:** **US 8,054,232 B2**
(45) **Date of Patent:** **Nov. 8, 2011**

(54) **ANTENNAS FOR WIRELESS ELECTRONIC DEVICES**

(75) Inventors: **Bing Chiang**, Cupertino, CA (US);
Douglas Blake Kough, San Jose, CA (US); **Enrique Ayala Vazquez**,
Watsonville, CA (US); **Eduardo Lopez Camacho**, Watsonville, CA (US);
Gregory Allen Springer, Sunnyvale, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/871,825**

(22) Filed: **Aug. 30, 2010**

(65) **Prior Publication Data**

US 2010/0321249 A1 Dec. 23, 2010

Related U.S. Application Data

(62) Division of application No. 12/104,359, filed on Apr. 16, 2008, now Pat. No. 7,804,453.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/48 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/700 MS; 343/846

(58) **Field of Classification Search** 343/700 MS,
343/702, 846
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,703,600 A * 12/1997 Burrell et al. 343/700 MS
6,081,729 A 6/2000 Bauerschmidt et al.
6,339,400 B1 1/2002 Flint et al.
6,380,930 B1 4/2002 Van Ruymbeke

6,621,466 B2 * 9/2003 Kuck 343/846
7,486,242 B2 * 2/2009 Gala Gala et al. 343/702
7,629,930 B2 * 12/2009 Murch et al. 343/700 MS
7,688,276 B2 * 3/2010 Quintero Illera et al. 343/846
2002/0149523 A1 10/2002 Fang et al.
2004/0051670 A1 3/2004 Sato
2006/0244663 A1 11/2006 Fleck et al.
2007/0057855 A1 3/2007 Mizoguchi et al.
2007/0115187 A1 5/2007 Zhang et al.
2008/0018551 A1 1/2008 Cheng et al.
2009/0262029 A1 10/2009 Chiang et al.
2010/0060529 A1 3/2010 Schlub et al.
2010/0182205 A1 7/2010 Chiang

FOREIGN PATENT DOCUMENTS

CN 1256802 A 6/2000
CN 2850006 Y 12/2006
EP 1329979 A1 7/2003
EP 1329985 A1 7/2003
WO 99/36988 7/1999

* cited by examiner


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — Treyz Law Group; David C. Kellogg; G. Victor Treyz

(57) **ABSTRACT**

Antenna window structures and antennas are provided for electronic devices. The electronic devices may be laptop computers or other devices that have conductive housings. Antenna windows can be formed from dielectric members. The dielectric members can have elastomeric properties. An antenna may be mounted inside a conductive housing beneath a dielectric member. The antenna can be formed from a parallel plate waveguide structure. The parallel plate waveguide structure may have a ground plate and a radiator plate and may have dielectric material between the ground and radiator plates. The ground plate can have a primary ground plate portion and a ground strip. The ground strip may reflect radio-frequency signals so that they travel through the dielectric member. The antenna may handle radio-frequency antenna signals in one or more communications bands. The radio-frequency antenna signals pass through the dielectric member.

6 Claims, 10 Drawing Sheets

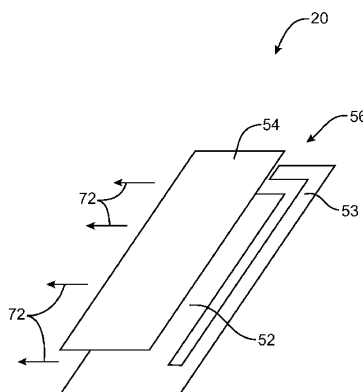

Acrobat Document



US008054238B2

(12) **United States Patent**
Lin

(10) **Patent No.:** **US 8,054,238 B2**

(45) **Date of Patent:** **Nov. 8, 2011**

(54) **BALANCED PIFA AND METHOD FOR
MANUFACTURING THE SAME**

(75) Inventor: **Junn Yi Lin**, Hsinchu County (TW)

(73) Assignee: **Ralink Technology Corporation**,
Hsinchu County (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 411 days.

(21) Appl. No.: **12/470,906**

(22) Filed: **May 22, 2009**

(65) **Prior Publication Data**

US 2010/0085270 A1 Apr. 8, 2010

(30) **Foreign Application Priority Data**

Oct. 2, 2008 (TW) 97137847 A

(51) **Int. Cl.**
H01Q 1/50 (2006.01)

(52) **U.S. Cl.** 343/859

(58) **Field of Classification Search** 343/821, 850, 860, 749, 853; 333/25-26;
455/333, 338

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,459,412 B1 * 10/2002 Koyanagi et al. 343/702
6,549,169 B1 * 4/2003 Matsuyoshi et al. 343/702
2009/0058751 A1 * 3/2009 Suh et al. 343/795
2009/0109104 A1 * 4/2009 Ide et al. 343/730
2009/0153415 A1 * 6/2009 Hsieh et al. 343/702
2010/0328185 A1 * 12/2010 Soler Castany et al. 343/860
* cited by examiner


Primary Examiner — Huedung Mancuso

(74) *Attorney, Agent, or Firm* — WPAT, P.C.; Anthony King

(57) **ABSTRACT**

A balanced patched inverse F antenna comprises a radiation conductor and a balun circuit. The radiation conductor includes a main body, a first branch and a second branch. The balun circuit includes an unbalanced port, a balanced port, and first, second, third and fourth components, with the first, second, third and fourth components being serially connected. A feeding input of the unbalanced port is connected to the second and third components, a grounding wire of the unbalanced port is connected to the first and fourth components, an inverting terminal of the balanced port is connected to the first and second components, a non-inverting terminal of the balanced port is connected to the third and fourth components, and the inverting and non-inverting terminals are respectively connected to the first and second branches.

18 Claims, 6 Drawing Sheets

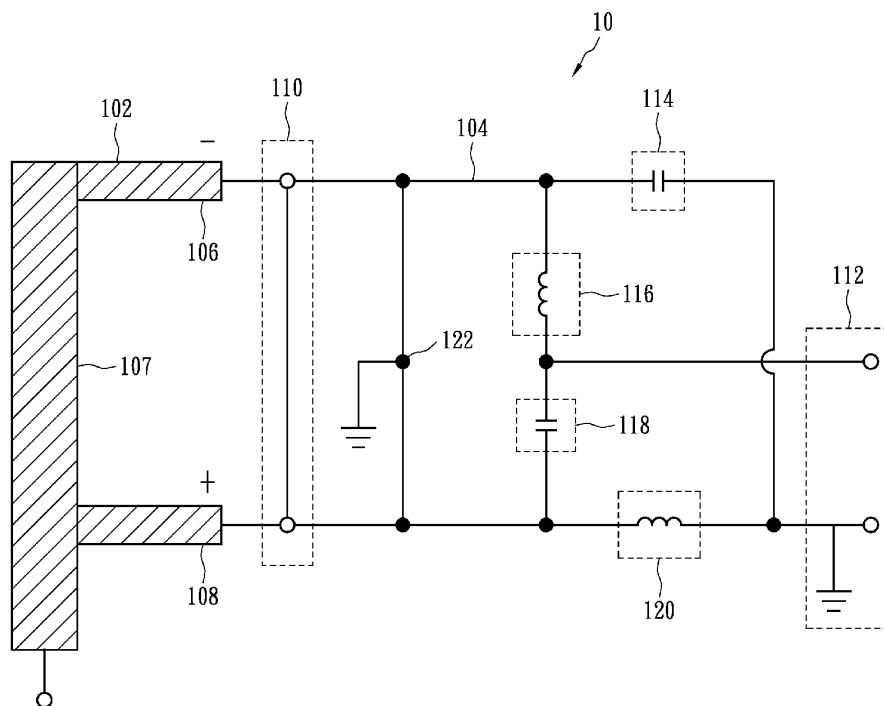

Acrobat Document



US008059033B2

(12) **United States Patent**
Säily

(10) **Patent No.:** **US 8,059,033 B2**
(45) **Date of Patent:** **Nov. 15, 2011**

(54) **PATCH ANTENNA**

(75) Inventor: **Jussi Säily**, Espoo (FI)

(73) Assignee: **Nokia Siemens Networks GmbH & Co. KG**, Munich (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 421 days.

(21) Appl. No.: **12/320,067**

(22) Filed: **Jan. 15, 2009**

(65) **Prior Publication Data**

US 2009/0201211 A1 Aug. 13, 2009

(30) **Foreign Application Priority Data**

Jan. 15, 2008 (EP) 08000696

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/700 MS**

(58) **Field of Classification Search** **343/700 MS, 343/702**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,165,109 A * 11/1992 Han et al. 343/700 MS
5,231,406 A * 7/1993 Sreenivas 343/700 MS

5,576,718 A * 11/1996 Buralli et al. 343/700 MS
5,896,107 A * 4/1999 Huynh 343/700 MS
5,955,994 A * 9/1999 Staker et al.
6,031,491 A * 2/2000 Daniel et al. 343/700 MS
6,300,906 B1 * 10/2001 Rawnick et al. 343/700 MS
6,407,705 B1 6/2002 Sanad
2002/0175879 A1 * 11/2002 Sabet et al. 343/895

FOREIGN PATENT DOCUMENTS

EP 0154858 A 9/1985
GB 2067842 A 7/1981
JP 09246852 A 9/1997
WO WO 91/12637 A 8/1991

OTHER PUBLICATIONS

Saily J: "Proximity-coupled and dual-polarized microstrip patch antenna for WCDMA base station arrays" Proceedings of 2006 Asia Pacific Microwave Conference, Dec. 12, 2006, Dec. 12-15, 2006 (2006-12-15) pp. 628-631, XP002476331 Yokohama, Japan * the whole document*.

* cited by examiner


Primary Examiner — Tho G Phan

(74) *Attorney, Agent, or Firm* — Staas & Halsey LLP

(57) **ABSTRACT**

A patch antenna has a primary radiator, a dual microstrip feed line configured to utilize corner-feeding to enable substantially diagonal radiating modes, and at least two parasitic patches that are arranged adjacent and on opposite sides to the primary radiator.

20 Claims, 7 Drawing Sheets

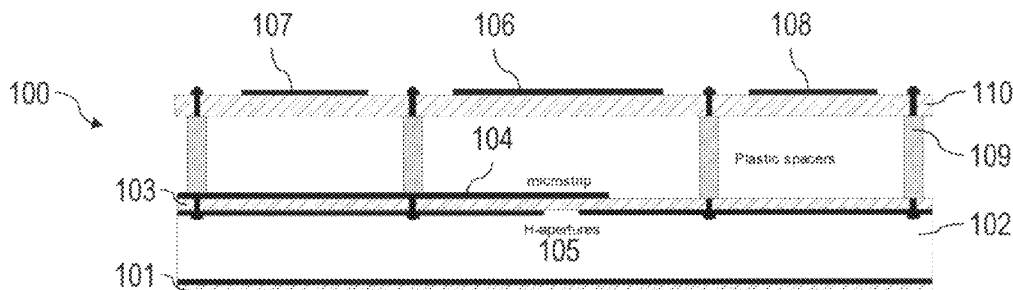

Acrobat Document



US008059035B2

(12) **United States Patent**
Chang et al.

(10) **Patent No.:** **US 8,059,035 B2**
(45) **Date of Patent:** **Nov. 15, 2011**

(54) **ANTENNA STRUCTURE CAPABLE OF INCREASING ITS FREQUENCY BANDWIDTH/FREQUENCY BAND BY BENDING A CONNECTION ELEMENT THEREOF**

(75) Inventors: **Cheng-Wei Chang**, Taipei Hsien (TW);
Shen-Pin Wei, Taipei Hsien (TW)

(73) Assignee: **Wistron NeWeb Corporation**,
Hsi-Chih, Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 298 days.

(21) Appl. No.: **12/464,889**

(22) Filed: **May 13, 2009**

(65) **Prior Publication Data**
US 2010/0220014 A1 Sep. 2, 2010

(30) **Foreign Application Priority Data**
Feb. 27, 2009 (TW) 98203007 U

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/848**
(58) **Field of Classification Search** 343/700 MS,
343/702, 848
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,864,841 B2 * 3/2005 Dai et al. 343/700 MS
2006/0279464 A1 * 12/2006 Mei 343/700 MS
* cited by examiner


Primary Examiner — Tan Ho

(74) *Attorney, Agent, or Firm* — Winston Hsu; Scott Margo

(57) **ABSTRACT**

An antenna structure consists of a radiation element, a grounding element, a short element, a connection element, and a signal feeding element. The short element is coupled between the radiation element and the grounding element. The connection element is disposed between the radiation element and the grounding element. The connection element has at least a first segment and a second segment, wherein the first segment and the second segment form a bend. The signal feeding element is coupled between the connection element and the grounding element. The first segment of the connection element is substantially parallel to the grounding element and is at a designated distance from the grounding element.

21 Claims, 14 Drawing Sheets

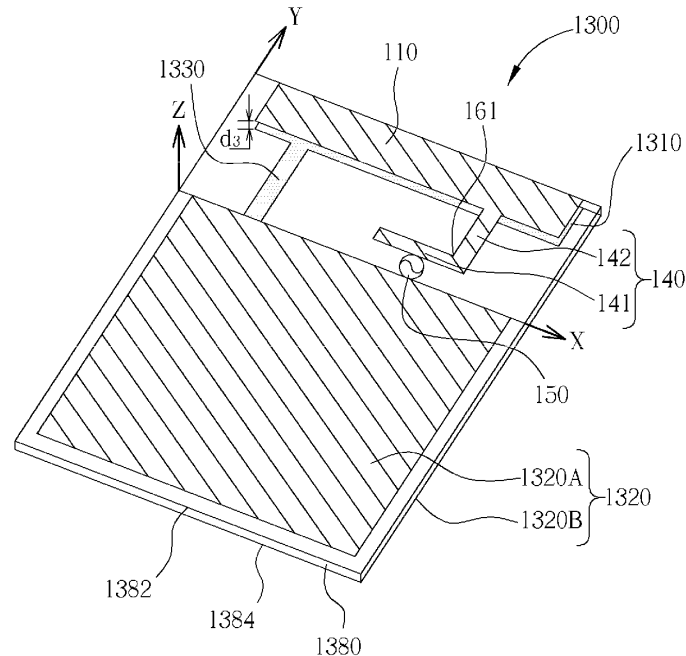

Acrobat Document



US008059036B2

(12) **United States Patent**
Bengtsson

(10) **Patent No.:** **US 8,059,036 B2**
(45) **Date of Patent:** **Nov. 15, 2011**

(54) **ENHANCED RADIATION PERFORMANCE
ANTENNA SYSTEM**

(56) **References Cited**

(75) Inventor: **Erik Bengtsson**, Eslov (SE)

(73) Assignee: **Nokia Corporation**, Espoo (FI)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 974 days.

(21) Appl. No.: **11/810,749**

(22) Filed: **Jun. 6, 2007**

(65) **Prior Publication Data**

US 2008/0303723 A1 Dec. 11, 2008

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/846**

(58) **Field of Classification Search** **343/702, 343/846, 848**

See application file for complete search history.

U.S. PATENT DOCUMENTS

6,801,164	B2	10/2004	Bit-Babik et al.	343/700 MS
2005/0001768	A1 *	1/2005	Sekiguchi et al.	343/700 MS
2005/0242996	A1	11/2005	Palmer et al.	343/700 MS
2005/0243001	A1 *	11/2005	Miyata et al.	343/702
2007/0120748	A1 *	5/2007	Jenwatanavet et al.	343/702
2007/0216584	A1 *	9/2007	Nishikido et al.	343/702
2010/0073244	A1 *	3/2010	Hui et al.	343/702

FOREIGN PATENT DOCUMENTS

WO	WO 2004/017461	A1	2/2004
WO	WO 2005/006486	A1	1/2005

* cited by examiner


Primary Examiner — Hoanganh Le

(74) *Attorney, Agent, or Firm* — Harrington & Smith

(57) **ABSTRACT**

A wireless electronic device is disclosed that includes one or more ground planes and an antenna electrically coupled to the one or more ground planes. The antenna is positioned adjacent to a portion of the one or more ground planes. The wireless electronic device includes a material placed in a position and having a dielectric constant selected to increase an effective electrical size of the one or more ground planes relative to the effective electrical size of the one or more ground planes without the material. Other wireless electronic devices and methods for forming the same are also disclosed.

32 Claims, 15 Drawing Sheets

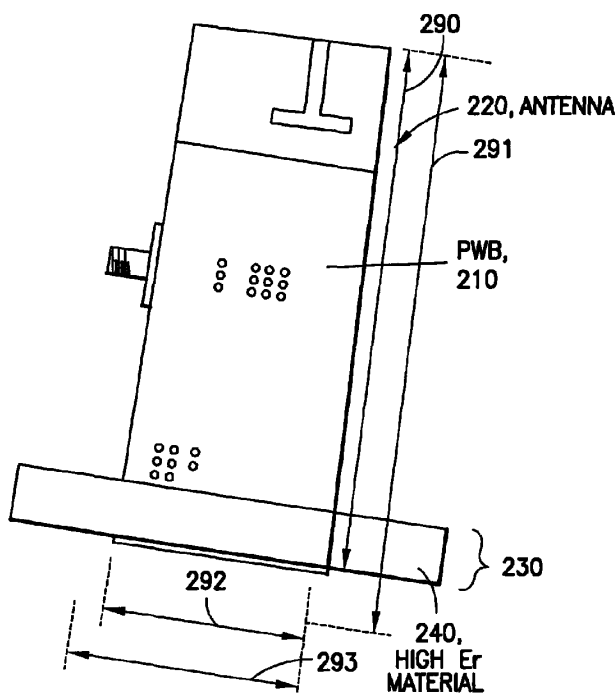

Acrobat Document



US008059039B2

(12) **United States Patent**
Ayala Vazquez et al.

(10) **Patent No.:** **US 8,059,039 B2**
(45) **Date of Patent:** **Nov. 15, 2011**

(54) **CLUTCH BARREL ANTENNA FOR WIRELESS ELECTRONIC DEVICES**

(75) Inventors: **Enrique Ayala Vazquez**, Watsonville, CA (US); **Hao Xu**, Cupertino, CA (US); **Gregory A. Springer**, Sunnyvale, CA (US); **Bing Chiang**, Cupertino, CA (US); **Eduardo Lopez Camacho**, Watsonville, CA (US); **Douglas B. Kough**, San Jose, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 429 days.

(21) Appl. No.: **12/238,385**

(22) Filed: **Sep. 25, 2008**

(65) **Prior Publication Data**
US 2010/0073242 A1 Mar. 25, 2010

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
(52) **U.S. Cl.** **343/702; 343/767**
(58) **Field of Classification Search** **343/702, 343/700 MS, 767, 770**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,258,892 A 11/1993 Stanton et al.
5,608,413 A * 3/1997 Macdonald 343/700 MS
6,272,356 B1 * 8/2001 Dolman et al. 455/575.3
6,392,610 B1 5/2002 Braun et al.
6,414,643 B2 7/2002 Cheng et al.
6,421,029 B1 7/2002 Tanabe
6,448,942 B2 9/2002 Weinberger et al.

6,539,608 B2 4/2003 McKinnon et al.
6,570,538 B2 5/2003 Vaisanen et al.
6,667,719 B2 * 12/2003 LaKowski 343/702
6,781,546 B2 * 8/2004 Wang et al. 343/700 MS
6,847,329 B2 * 1/2005 Ikegaya et al. 343/702
7,345,646 B1 3/2008 Lin et al.
7,705,789 B2 * 4/2010 Suzuki et al. 343/702
2001/0040529 A1 * 11/2001 Cheng et al. 343/702
(Continued)

OTHER PUBLICATIONS

R. Bancroft "A Commercial Perspective on the Development and Integration of an 802.11a/big HiperLanNVLAN Antenna into Laptop Computers", IEEE Antennas and Propagation Magazine, vol. 48, No. 4, Aug. 2006, pp. 12-18.*

(Continued)


Primary Examiner — Hoanganh Le

(74) *Attorney, Agent, or Firm* — Treyz Law Group; G. Victor Treyz; David C. Kellogg

(57) **ABSTRACT**

Wireless portable electronic devices such as laptop computers are provided with antennas. An antenna may be provided within a clutch barrel in a laptop computer. The clutch barrel may have a dielectric cover. Antenna elements may be mounted within the clutch barrel cover on an antenna support structure. There may be two or more antenna elements mounted to the antenna support structure. These antenna elements may be of different types. A first antenna element for the clutch barrel antenna may be formed from a dual band antenna element having a closed slot and an open slot. A second antenna element for the clutch barrel antenna may be formed from a dual band antenna element of a hybrid type having a planar resonating element arm and a slot resonating element. Flex circuit structures may be used in implanting the first and second antenna elements for the clutch barrel antenna.

18 Claims, 13 Drawing Sheets

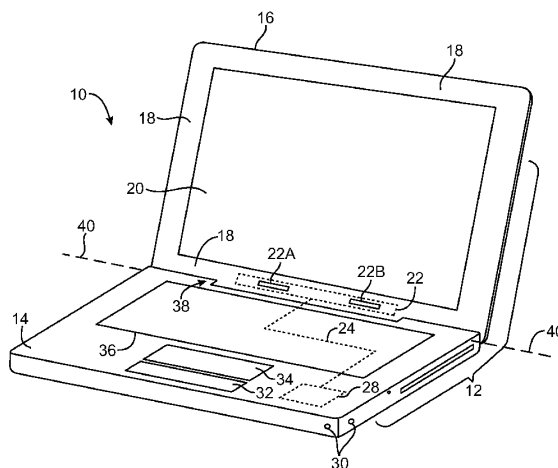

Acrobat Document



US008059042B2

(12) **United States Patent**
Su et al.

(10) **Patent No.:** **US 8,059,042 B2**

(45) **Date of Patent:** ***Nov. 15, 2011**

(54) **SHORTED MONOPOLE ANTENNA**

(75) Inventors: **Saou-Wen Su**, Taipei (TW); **Jui-Hung Chou**, Taichung (TW)

(73) Assignees: **Silitek Electronic (Guangzhou) Co., Ltd.**, Guangzhou (CN); **Lite-On Technology Corporation**, Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **12/956,353**

(22) Filed: **Nov. 30, 2010**

(65) **Prior Publication Data**

US 2011/0074654 A1 Mar. 31, 2011

Related U.S. Application Data

(63) Continuation of application No. 12/230,302, filed on Aug. 27, 2008, now abandoned.

(30) **Foreign Application Priority Data**

Jul. 11, 2008 (CN) 2008 1 0133548

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** 343/700 MS, 343/702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2009/0073046 A1 * 3/2009 Chang et al. 343/700 MS
2009/0115664 A1 * 5/2009 Chung et al. 343/700 MS

* cited by examiner

Primary Examiner — Jacob Y Choi


Assistant Examiner — Kyana R McCain

(74) *Attorney, Agent, or Firm* — Li&Cai Intellectual Property (USA) Office

(57) **ABSTRACT**

The present invention is related to a shorted monopole antenna. The antenna includes a ground portion, a radiating portion, a shorting portion, an assembling portion, and a coaxial cable. The ground portion includes a signal grounding point. The radiating portion is located above the ground portion and bent at least once, and includes a signal feeding point. One end of the shorting portion is connected to one of the short edges of the ground portion, and the other end is connected to one edge portion of the radiating portion. The assembling portion is connected to the long edge of the ground portion. The coaxial cable includes an inner conductor and an outer conductor, which are connected to the signal feeding point and the signal grounding point respectively. The antenna invented has good impedance bandwidth and radiation characteristics, can easily be installed inside the housing of an electronic device, and is well suitable for applications in wireless communications devices.

9 Claims, 5 Drawing Sheets

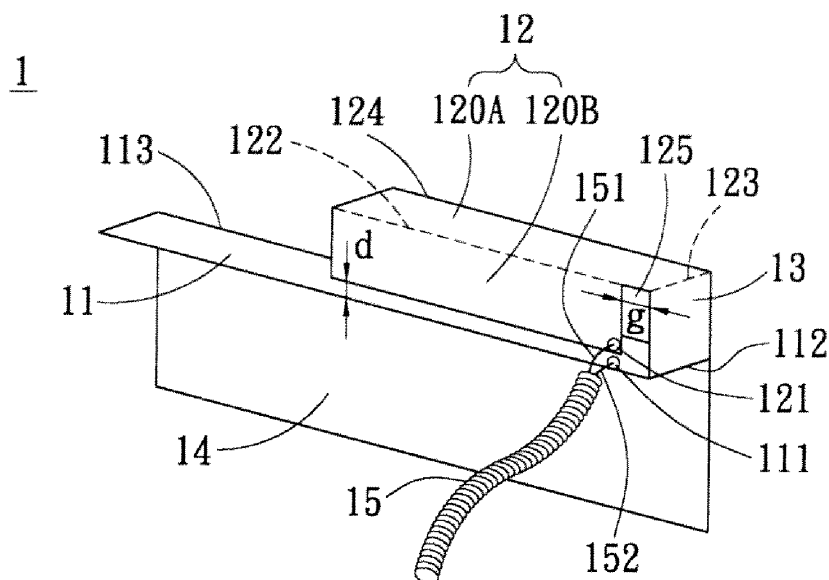

Acrobat Document



US008059047B2

(12) **United States Patent**
Desclos et al.

(10) **Patent No.:** **US 8,059,047 B2**

(45) **Date of Patent:** **Nov. 15, 2011**

(54) **CAPACITIVELY LOADED DIPOLE ANTENNA
OPTIMIZED FOR SIZE**

(75) Inventors: **Laurent Desclos**, San Diego, CA (US);
Mark Krier, Fountain Valley, CA (US);
Shane Thornwall, Moreno Valley, CA
(US); **Vaneet Pathak**, San Diego, CA
(US); **Gregory Poilasne**, San Diego, CA
(US); **Sebastian Rowson**, San Diego,
CA (US)

(73) Assignee: **Ethertronics, Inc.**, San Diego, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 1895 days.

(21) Appl. No.: **10/375,423**

(22) Filed: **Feb. 27, 2003**

(65) **Prior Publication Data**

US 2004/0169614 A1 Sep. 2, 2004

(51) **Int. Cl.**
H01Q 7/00 (2006.01)
H01Q 9/32 (2006.01)

(52) **U.S. Cl.** **343/749; 343/741; 343/846**

(58) **Field of Classification Search** 343/702,
343/795, 741–749, 700 MS, 793, 802, 803,
343/806, 828, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,725,940	A *	4/1973	Siple	343/713
6,281,854	B1	8/2001	Ohoka et al.	
6,424,300	B1	7/2002	Sanford et al.	
6,549,169	B1	4/2003	Matsuyoshi et al.	
6,597,318	B1	7/2003	Parsche et al.	
6,674,409	B2 *	1/2004	Cheah	343/795
7,038,635	B2	5/2006	Fukushima et al.	
2004/0135726	A1 *	7/2004	Shamir et al.	343/700 MS
2004/0169614	A1	9/2004	Desclos et al.	

FOREIGN PATENT DOCUMENTS

GB 2387486 A 10/2003

* cited by examiner


Primary Examiner — Michael C Wimer

(74) *Attorney, Agent, or Firm* — Coastal Patent, LLC

(57) **ABSTRACT**

A capacitively loaded magnetic dipole antenna is provided with a portion that comprises a length that is longer than a straight line distance between a first end and a second end of the third portion such that antenna with a tower profile and/or smaller form factor is achieved.

17 Claims, 5 Drawing Sheets

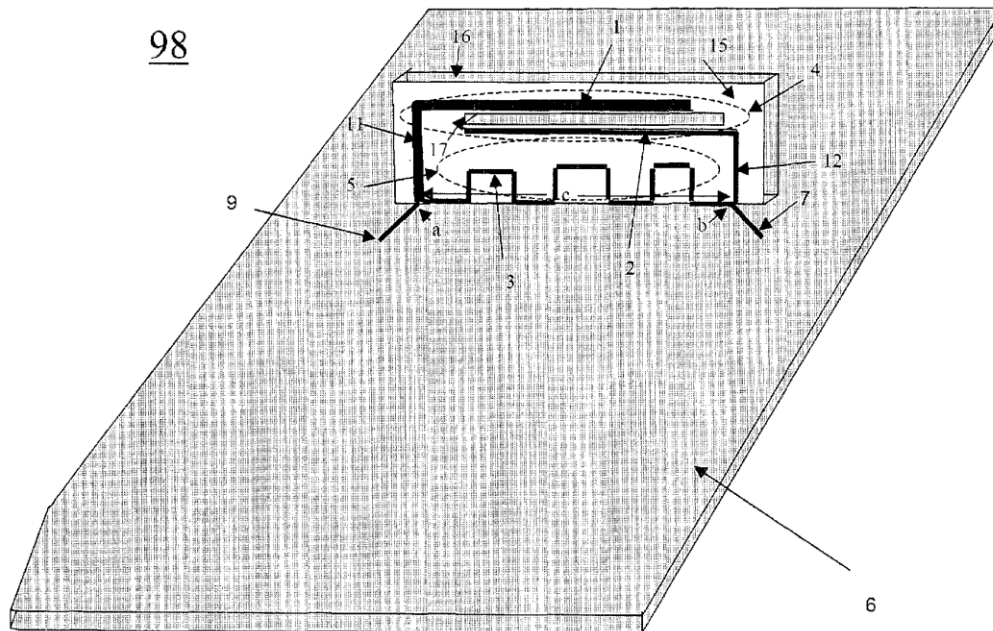

Acrobat Document



US008059055B2

(12) **United States Patent**
Tsai et al.

(10) **Patent No.:** **US 8,059,055 B2**
(45) **Date of Patent:** **Nov. 15, 2011**

(54) **ULTRA-WIDEBAND ANTENNA**

(75) Inventors: **Tiao-Hsing Tsai**, Yungho (TW);
Chih-Wei Liao, Yilan Shien (TW);
Chao-Hsu Wu, Tao Yuan Shien (TW);
Chi-Yin Fang, Pingtung (TW)

(73) Assignee: **Quanta Computer Inc.** (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 529 days.

(21) Appl. No.: **12/169,346**

(22) Filed: **Jul. 8, 2008**

(65) **Prior Publication Data**

US 2009/0237307 A1 Sep. 24, 2009

(30) **Foreign Application Priority Data**

Mar. 19, 2008 (TW) 97109618 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/826; 343/702**

(58) **Field of Classification Search** 343/702,
343/844, 828, 829, 846, 825, 826, 843

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,625,212 A * 11/1986 Oda et al. 343/702
7,170,456 B2 1/2007 Kwak et al.
7,268,741 B2 9/2007 Sarabandi et al.

OTHER PUBLICATIONS

Search Report—Taiwanese Application No. 097109618, dated Apr. 28, 2011 (1 page).

* cited by examiner


Primary Examiner — Michael C Wimer

(74) *Attorney, Agent, or Firm* — Sunstein Kann Murphy & Timbers LLP

(57) **ABSTRACT**

An antenna includes first and second radiating elements and a conductive arm. The second radiating element has opposite feeding and grounding end portions, each of which is coupled to a respective one of feeding and grounding end portions of the first radiating element. The conductive arm is coupled to the feeding end portion of the second radiating element.

16 Claims, 11 Drawing Sheets

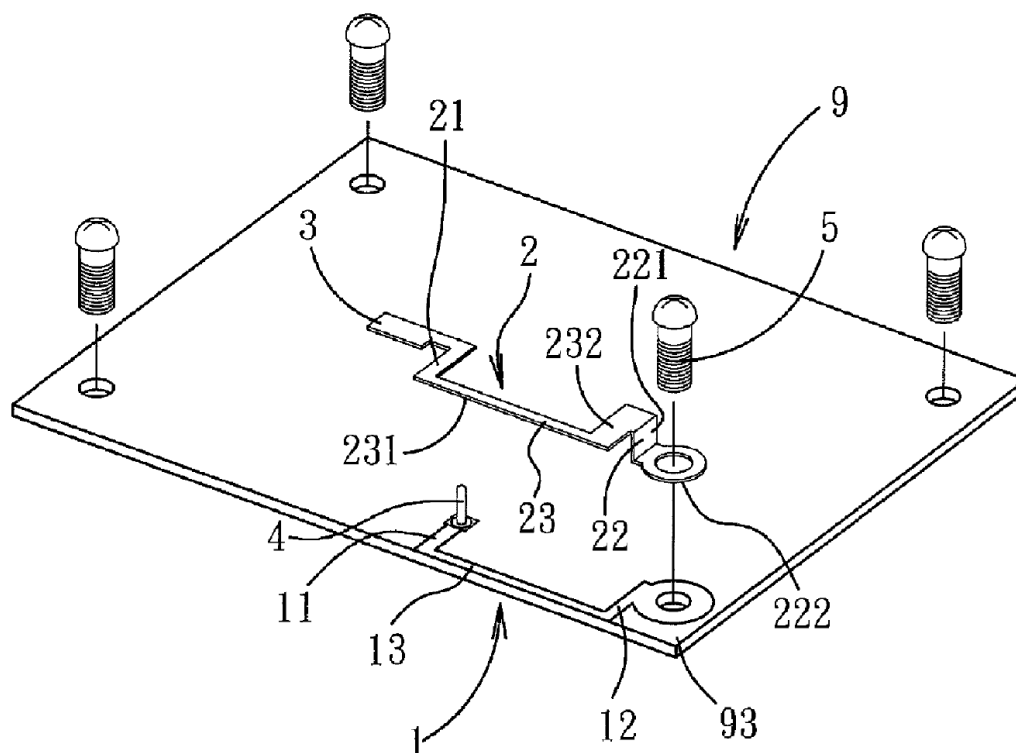



US008059056B2

(12) **United States Patent**
Ma et al.

(10) **Patent No.:** **US 8,059,056 B2**
(45) **Date of Patent:** **Nov. 15, 2011**

(54) **DIRECTIONAL ANTENNA AND PORTABLE ELECTRONIC DEVICE USING THE SAME**

(75) Inventors: **Chin-Hung Ma**, Taoyuan County (TW);
Shih-Liang Tsai, Taoyuan County (TW)

(73) Assignee: **Foxconn Communication Technology Corp.**, Taoyuan County (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 998 days.

(21) Appl. No.: **11/961,156**

(22) Filed: **Dec. 20, 2007**

(65) **Prior Publication Data**
US 2009/0109118 A1 Apr. 30, 2009

(30) **Foreign Application Priority Data**
Oct. 31, 2007 (TW) 96140955 A

(51) **Int. Cl.**
H01Q 19/00 (2006.01)
H01Q 3/24 (2006.01)

(52) **U.S. Cl.** **343/833**; 343/836; 343/876

(58) **Field of Classification Search** 343/702,
343/846, 833, 834, 700 MS, 876, 912, 835,
343/836

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,439,921	B2 *	10/2008	Hu et al.	343/702
7,656,353	B2 *	2/2010	Qi et al.	343/702
7,834,813	B2 *	11/2010	Caimi et al.	343/745
2005/0184914	A1 *	8/2005	Ollikainen et al.	343/702
2008/0001824	A1 *	1/2008	Castaneda et al.	343/700 MS

FOREIGN PATENT DOCUMENTS

WO WO2005041350 * 5/2005

* cited by examiner

Primary Examiner — Jacob Y Choi


Assistant Examiner — Robert Karacsony

(74) *Attorney, Agent, or Firm* — Altis Law Group, Inc.

(57) **ABSTRACT**

A directional antenna and a portable electronic device using the same are provided. The directional antenna includes L-shaped radiator, L-shaped oscillator, and L-shaped reflector and it is preferred that the directional antenna is positioned at corners of the substrate. The L-shaped radiator is made resonant by the L-shaped oscillator and has higher gain to maximize performance of signal transmission. The directional antenna achieves signal transmission in a specific direction over a long distance by the L-shaped reflector. In addition, with the gravity sensor, the processor and the switches, the directional antenna is automatically adjusted to a predetermined direction to transmit and receive signals even through orientation of the electronic device is changing at any time.

19 Claims, 5 Drawing Sheets

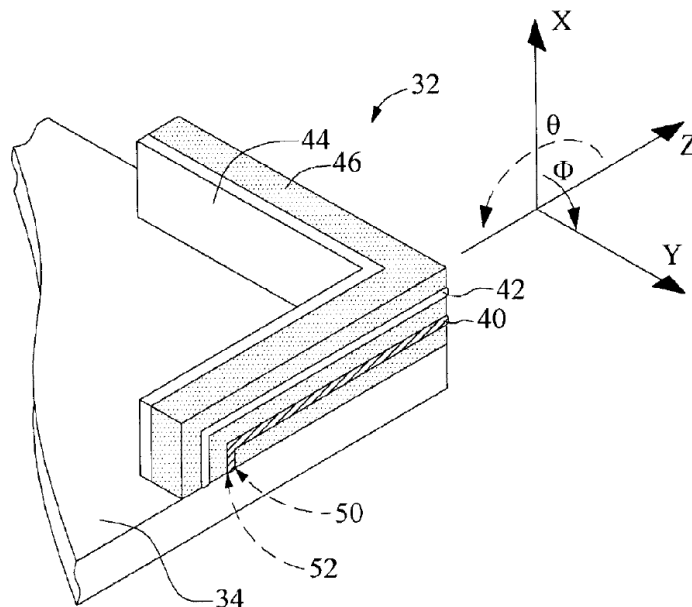



US008059061B2

(12) **United States Patent**
Ryou et al.

(10) **Patent No.:** **US 8,059,061 B2**

(45) **Date of Patent:** **Nov. 15, 2011**

(54) **SUBMINIATURE INTERNAL ANTENNA**

(75) Inventors: **Byung-Hoon Ryou**, Seoul (KR);
Won-Mo Sung, Gyeonggi-do (KR);
Jee-Hun Seo, Seoul (KR)

(73) Assignee: **EMW Co., Ltd.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 241 days.

(21) Appl. No.: **12/088,074**

(22) PCT Filed: **Oct. 2, 2006**

(86) PCT No.: **PCT/KR2006/003963**

§ 371 (c)(1),

(2), (4) Date: **Sep. 22, 2008**

(87) PCT Pub. No.: **WO2007/040327**

PCT Pub. Date: **Apr. 12, 2007**

(65) **Prior Publication Data**

US 2009/0033583 A1 Feb. 5, 2009

(30) **Foreign Application Priority Data**

Oct. 4, 2005 (KR) 20-2005-0028301

(51) **Int. Cl.**
H01Q 1/36 (2006.01)

(52) **U.S. Cl.** **343/895; 343/741**

(58) **Field of Classification Search** **343/741,**

343/866, 895

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,019,439 A * 1/1962 Herbert et al. 343/853
3,454,951 A * 7/1969 Patterson et al. 343/895
3,568,206 A * 3/1971 Sisson et al. 343/750
3,825,933 A * 7/1974 Debski et al. 343/895

5,929,825 A 7/1999 Niu et al.
7,542,009 B2 * 6/2009 Hsu et al. 343/895
2004/0150562 A1 8/2004 Paun
2006/0152411 A1 * 7/2006 Iguchi et al. 343/700 MS

FOREIGN PATENT DOCUMENTS

DE 199 04 943 A1 8/2000
DE 101 10 230 A1 9/2002
EP 1 443 591 A1 8/2004
KR 10-2001-0039987 A 5/2001
WO WO 00/03453 1/2000
WO WO 03/023900 A1 3/2003
WO WO 2004/025778 A1 3/2004
WO WO 2007/040327 A1 4/2007

OTHER PUBLICATIONS

International Search Report, PCT/KR2006/003963, mailed Jan. 11, 2007, 2 pages.

(Continued)


Primary Examiner — Tho G Phan

(74) *Attorney, Agent, or Firm* — Blakely, Sokoloff, Taylor & Zafman LLP

(57) **ABSTRACT**

Disclosed herein is a subminiature internal antenna, which exhibits a multi-band characteristic. The internal antenna includes a radiator electrically coupled at one end thereof to a feed element of a communication device and formed in a spiral shape as a whole. The radiator is disposed in such a manner as to extend at the other end thereof outwardly from the spiral shape. According to the present invention, the electromagnetic coupling is achieved in the radiator of the internal antenna and the other end of the radiator is disposed outwardly from the spiral shape so that the radiation interference is reduced to thereby obtain the multi-band characteristic.

6 Claims, 2 Drawing Sheets

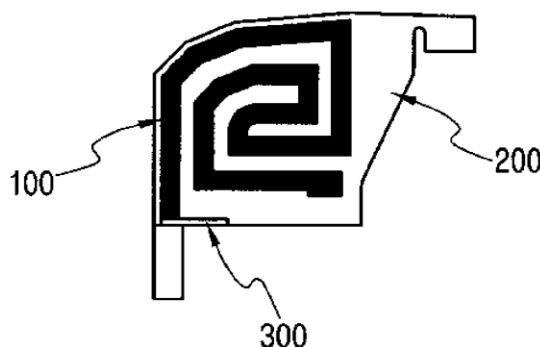

Acrobat Document



US008060167B2

(12) **United States Patent**
Saitou et al.

(10) **Patent No.:** **US 8,060,167 B2**
(45) **Date of Patent:** **Nov. 15, 2011**

(54) **PORTABLE WIRELESS MACHINE**

(56) **References Cited**

(75) Inventors: **Yutaka Saitou**, Ishikawa (JP); **Yoshio Koyanagi**, Kanagawa (JP); **Kenichi Yamada**, Kanagawa (JP); **Masashi Koshi**, Ishikawa (JP); **Yukari Yamazaki**, Ishikawa (JP)

(73) Assignee: **Panasonic Corporation**, Osaka (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 99 days.

(21) Appl. No.: **10/521,490**

(22) PCT Filed: **Jun. 26, 2003**

(86) PCT No.: **PCT/JP03/08149**

§ 371 (c)(1),
(2), (4) Date: **Jan. 18, 2005**

(87) PCT Pub. No.: **WO2004/010530**

PCT Pub. Date: **Jan. 29, 2004**

(65) **Prior Publication Data**

US 2005/0239519 A1 Oct. 27, 2005

(30) **Foreign Application Priority Data**

Jul. 19, 2002	(JP)	2002-210612
Jan. 24, 2003	(JP)	2003-015675
Jun. 12, 2003	(JP)	2003-167962

(51) **Int. Cl.**
H04M 1/00 (2006.01)

(52) **U.S. Cl.** **455/575.7; 455/575.3; 455/550.1**

(58) **Field of Classification Search** **455/129, 455/575.1, 575.3, 575.7, 550.1, 562.1, 575.5, 455/90.3**

See application file for complete search history.

U.S. PATENT DOCUMENTS

4,471,493	A *	9/1984	Schober	455/575.7
5,014,346	A	5/1991	Phillips et al.	
5,170,173	A	12/1992	Krenz et al.	
5,337,061	A *	8/1994	Pye et al.	455/575.7
5,542,106	A *	7/1996	Krenz et al.	455/575.7
5,554,996	A *	9/1996	Chatzipetros	455/575.7
5,561,437	A	10/1996	Phillips et al.	
5,649,306	A *	7/1997	Vannatta et al.	455/575.7
6,011,699	A *	1/2000	Murray et al.	361/814
6,067,449	A *	5/2000	Jager	455/277.2

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0 643 436 A1 3/1995

(Continued)

OTHER PUBLICATIONS

European Search Report.

(Continued)


Primary Examiner — Ping Hsieh

(74) Attorney, Agent, or Firm — Pearne & Gordon LLP

(57) **ABSTRACT**

An upper case (1) is connected to a lower case (2) in a hinge portion (3) so as to freely rotate. A plate shaped conductor (4) and a plate shaped conductor (5) are disposed along the surface of the case in the upper case (1). A ground plate (6) is formed in a ground pattern of a circuit board disposed in the lower case (2). The plate shaped conductor (4) and the plate shaped conductor (5) are selected by a high frequency switch (14) and connected to one end of a feeding portion (15). The other end of the feeding portion (15) is connected to the ground plate (6) to form a dipole antenna.

27 Claims, 28 Drawing Sheets

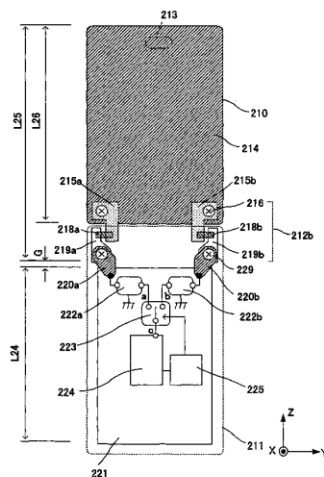

Acrobat Document



US008061621B2

(12) **United States Patent**
Mio et al.

(10) **Patent No.:** **US 8,061,621 B2**
(45) **Date of Patent:** **Nov. 22, 2011**

(54) **INTEGRATED CIRCUIT DEVICE
INCLUDING TUNABLE SUBSTRATE
CAPACITORS**

(75) Inventors: **Hannes Mio**, Taufkirchen (DE);
Thomas Beer, Mauerstetten (DE)

(73) Assignee: **Infineon Technologies AG**, Neubiberg
(DE)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 828 days.

(21) Appl. No.: **12/044,329**

(22) Filed: **Mar. 7, 2008**

(65) **Prior Publication Data**
US 2009/0224055 A1 Sep. 10, 2009

(51) **Int. Cl.**
G06K 19/06 (2006.01)

(52) **U.S. Cl.** **235/492**; 235/451

(58) **Field of Classification Search** 235/492,
235/451; 340/572.5, 572
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,268,796 B1 7/2001 Gnadinger et al.
6,480,110 B2 * 11/2002 Lee et al. 340/572.5

6,522,308 B1 * 2/2003 Mathieu 343/895
7,301,458 B2 * 11/2007 Carrender et al. 340/572.1
7,551,058 B1 * 6/2009 Johnson et al. 340/10.41
2002/0067602 A1 * 6/2002 Muller 361/782
2007/0095926 A1 5/2007 Zhu et al.
2007/0187804 A1 8/2007 El Rai et al.

FOREIGN PATENT DOCUMENTS

WO 2007051571 5/2007

OTHER PUBLICATIONS

Brunnbauer et al., Embedded Wafer Level Ball Grid Array (eWLB),
Electronics Packaging Technology Conference, 2006, pp. 1-5.

* cited by examiner


Primary Examiner — Ahshik Kim

(74) *Attorney, Agent, or Firm* — Dicke, Billig & Czaja,
PLLC

(57) **ABSTRACT**

An integrated circuit device and method. A substrate having
contacts has a plurality of capacitors thereon. A plurality of
fusable links selectively connect the plurality of capacitors to
one another and selected ones of the capacitors to the con-
tacts. In this manner, for example, the capacitance value can
be adjusted to tune an antenna mounted on the substrate
during testing of the integrated circuit device.

15 Claims, 2 Drawing Sheets

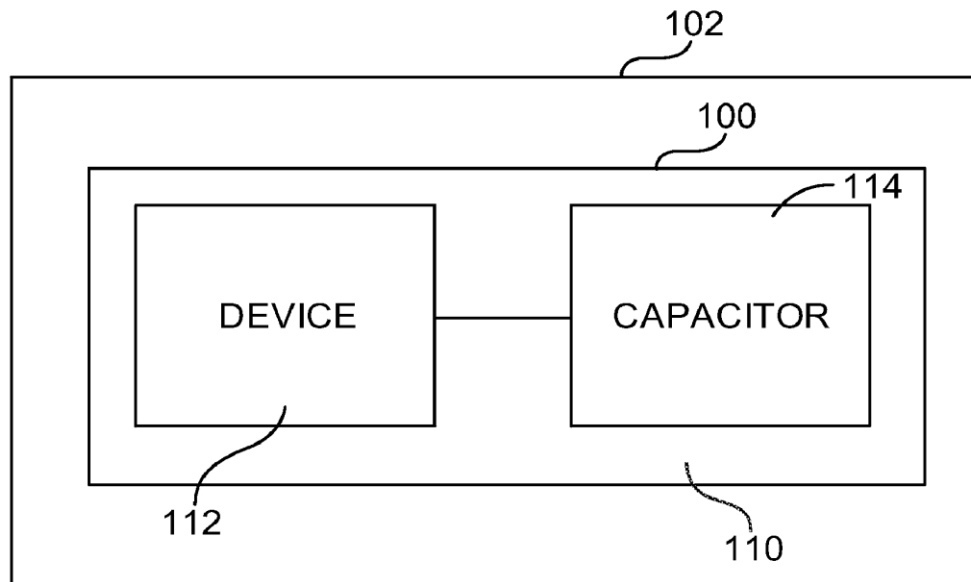

Acrobat Document



US008063827B2

(12) **United States Patent**
Hotta et al.

(10) **Patent No.:** **US 8,063,827 B2**

(45) **Date of Patent:** **Nov. 22, 2011**

(54) **ANTENNA DEVICE AND RADIO APPARATUS
OPERABLE IN MULTIPLE FREQUENCY
BANDS**

(75) Inventors: **Hiroyuki Hotta**, Tokyo (JP); **Masao
Teshima**, Tokyo (JP)

(73) Assignee: **Kabushiki Kaisha TOSHIBA**, Tokyo
(JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 549 days.

(21) Appl. No.: **12/142,050**

(22) Filed: **Jun. 19, 2008**

(65) **Prior Publication Data**
US 2009/0189815 A1 Jul. 30, 2009

(30) **Foreign Application Priority Data**
Jan. 30, 2008 (JP) 2008-019299

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**; 343/702; 343/741;
343/846; 343/895

(58) **Field of Classification Search** 343/700 MS,
343/702, 833, 834, 846, 895
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,326,921 B1 * 12/2001 Egorov et al. 343/700 MS
6,614,400 B2 * 9/2003 Egorov 343/702

6,714,162 B1 * 3/2004 Kadambi et al. 343/700 MS
7,136,022 B2 * 11/2006 Sato et al. 343/702
7,205,942 B2 * 4/2007 Wang et al. 343/700 MS
7,319,432 B2 * 1/2008 Andersson 343/702
7,477,199 B2 * 1/2009 Hotta et al. 343/702
7,495,620 B2 * 2/2009 Wang et al. 343/702
7,619,572 B2 * 11/2009 Su et al. 343/702
7,652,633 B2 * 1/2010 Mai et al. 343/833
7,701,401 B2 * 4/2010 Suzuki et al. 343/702
2007/0057849 A1 * 3/2007 Moon et al. 343/700 MS

FOREIGN PATENT DOCUMENTS

JP 2004-172912 A 6/2004
JP 2004-201278 A 7/2004

* cited by examiner

Primary Examiner — Douglas W Owens


Assistant Examiner — Chuc Tran

(74) *Attorney, Agent, or Firm* — Holtz, Holtz, Goodman &
Chick, PC

(57) **ABSTRACT**

An antenna device usable in a radio apparatus including a printed board includes a ground conductor of the printed board, a first partial element, a second partial element and a parasitic element. The first partial element is shaped into an area having a first side facing a side of the ground conductor and a second side directed to cross the side of the ground conductor, and is provided with a feed portion around a first end of the first side being closer to the second side. The second partial element branches off from the first partial element around one of two ends of the second side being farther from the feed portion, and is directed almost against a direction from the feed portion to a second end of the first side being farther from the second side. The parasitic element has an end grounded around the second end.

18 Claims, 11 Drawing Sheets

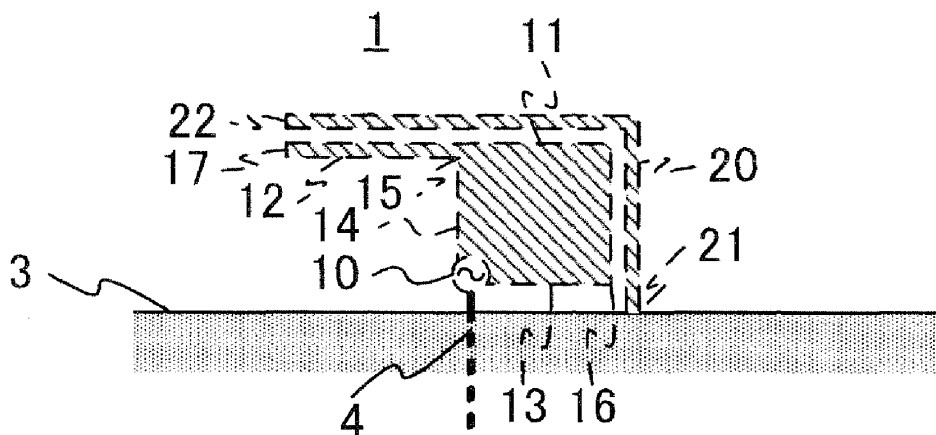

Acrobat Document



US008063828B2

(12) **United States Patent**
Xu et al.

(10) **Patent No.:** **US 8,063,828 B2**

(45) **Date of Patent:** **Nov. 22, 2011**

(54) **SOLID ANTENNA**

(75) Inventors: **Su Xu**, Shenzhen (CN); **Mao-Hsiu Hsu**,
Taipei Hsien (TW)

(73) Assignees: **Hong Fu Jin Precision Industry**
(ShenZhen) Co., Ltd., Shenzhen,
Guangdong Province (CN); **Hon Hai**
Precision Industry Co., Ltd., Tu-Cheng,
New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 594 days.

(21) Appl. No.: **12/211,038**

(22) Filed: **Sep. 15, 2008**

(65) **Prior Publication Data**

US 2009/0267840 A1 Oct. 29, 2009

(30) **Foreign Application Priority Data**

Apr. 28, 2008 (CN) 2008 1 0301380

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** 343/700 MS; 343/702; 343/895

(58) **Field of Classification Search** 343/700 MS,
343/702, 895

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,363,114 A 11/1994 Shoemaker
6,124,831 A * 9/2000 Rutkowski et al. 343/700 MS

6,198,442 B1 * 3/2001 Rutkowski et al. 343/702
6,639,559 B2 * 10/2003 Okabe et al. 343/700 MS
6,707,427 B2 * 3/2004 Konishi et al. 343/700 MS
6,806,832 B2 * 10/2004 Sato et al. 343/700 MS
7,136,021 B2 * 11/2006 Huang et al. 343/702
7,215,288 B2 5/2007 Park et al.

FOREIGN PATENT DOCUMENTS

CN 1226808 C 11/2005
TW I285455 8/2007

* cited by examiner

Primary Examiner — Douglas W Owens


Assistant Examiner — Chuc Tran

(74) *Attorney, Agent, or Firm* — Altis Law Group, Inc.

(57) **ABSTRACT**

A solid antenna positioned on a substrate, includes a feeding portion for feeding electromagnetic signals and a radiating portion for transceiving the electromagnetic signals. The radiating portion includes a first radiator, a second radiator, a third radiator, a fourth radiator, a first connecting section, and a second connecting section. The first radiator and the second radiator are positioned on a first plane, and respectively comprise a first inverted-U-shaped radiating section and a second inverted-U-shaped radiating section. The third U-shaped radiator is positioned on a second plane perpendicular to the first plane. The first connecting section connects the first radiator to the third radiator. The second connecting section connects the second radiator to the third radiator. The fourth radiator is connected to the second radiator. The first connecting section, the second connecting section, and the fourth radiator comprise one radiating section positioned on a third plane.

18 Claims, 5 Drawing Sheets

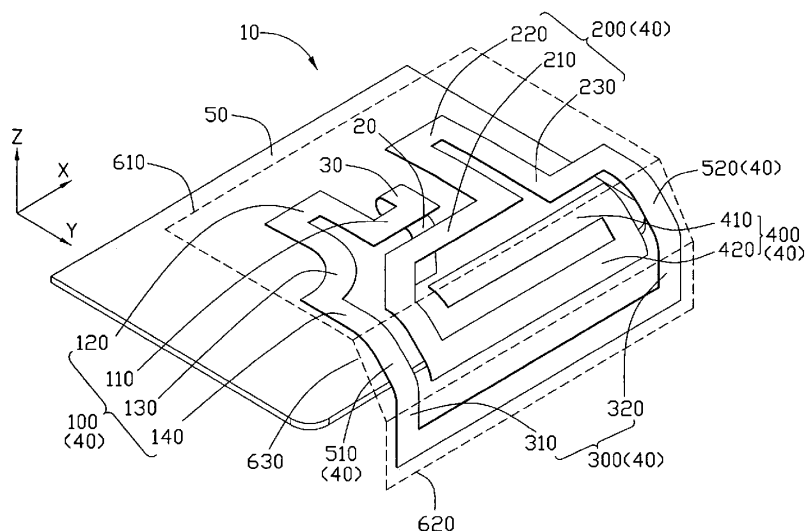

Acrobat Document



US008063829B2

(12) **United States Patent**
Hung et al.

(10) **Patent No.:** **US 8,063,829 B2**

(45) **Date of Patent:** ***Nov. 22, 2011**

(54) **COMPLEX ANTENNA**

(56) **References Cited**

(75) Inventors: **Chen-Ta Hung**, Tu-cheng (TW);
Po-Kang Ku, Tu-cheng (TW);
Shu-Yean Wang, Tu-cheng (TW)

U.S. PATENT DOCUMENTS

7,602,343 B2 * 10/2009 Takada et al. 343/702
7,911,387 B2 * 3/2011 Hill et al. 343/700 MS
2004/0257283 A1 * 12/2004 Asano et al. 343/702
2007/0030204 A1 * 2/2007 Heng et al. 343/702
2008/0316116 A1 * 12/2008 Hobson et al. 343/702

* cited by examiner

(73) Assignee: **Hon Hai Precision Ind. Co., Ltd.**, New
Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 525 days.

This patent is subject to a terminal dis-
claimer.

Primary Examiner — Huedung Mancuso

(74) *Attorney, Agent, or Firm* — Wei Te Chung; Andrew C.
Cheng; Ming Chieh Chang

(21) Appl. No.: **12/287,932**

(22) Filed: **Oct. 14, 2008**

(65) **Prior Publication Data**

US 2009/0135070 A1 May 28, 2009

(30) **Foreign Application Priority Data**

Nov. 26, 2007 (TW) 96144713 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**


(58) **Field of Classification Search** 343/700 MS,
343/702, 846

See application file for complete search history.

ABSTRACT

A complex antenna (100) comprises a grounding patch (3) extending in a longitudinal direction and having opposite first and second sides; a first antenna (1) comprising a first radiating element (11), a second radiating element (12), a third radiating element (13), and a first connecting element (14); a second antenna (2) comprising a fourth radiating element (21), a fifth radiating element (22), and a second connecting element (23). A gap is formed in the middle portion of the second side of the grounding patch. The first connecting element extends from an end of the gap and comprises a first connecting arm coplanar with the grounding patch and a second connecting arm vertical to the grounding patch. The first connecting arm and the grounding patch is formed a slot. The second connecting element extends from an end of the grounding patch.

20 Claims, 6 Drawing Sheets

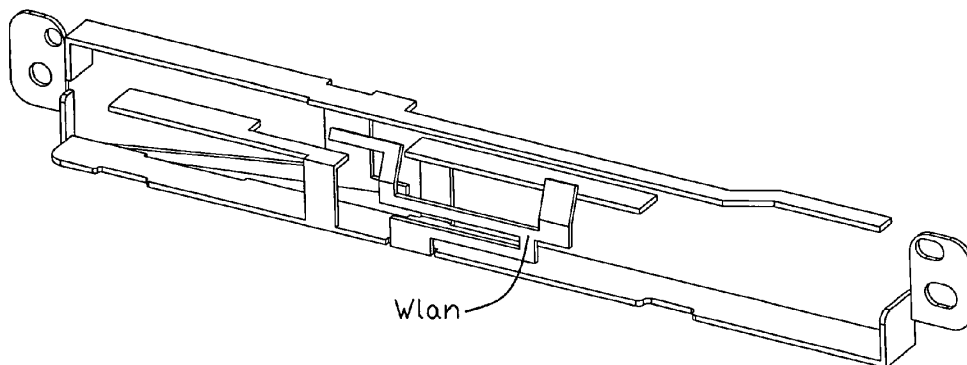

Acrobat Document



US008063830B2

(12) **United States Patent**
Yoshioka et al.

(10) **Patent No.:** **US 8,063,830 B2**

(45) **Date of Patent:** **Nov. 22, 2011**

(54) **ANTENNA DEVICE**

(56) **References Cited**

(75) Inventors: **Masahiro Yoshioka**, Tokyo (JP); **Masato Kikuchi**, Tokyo (JP); **Shunsuke Mochizuki**, Tokyo (JP); **Ryosuke Araki**, Tokyo (JP); **Masaki Handa**, Kanagawa (JP); **Takashi Nakanishi**, Tokyo (JP); **Hiroto Kimura**, Tokyo (JP); **Seiji Wada**, Kanagawa (JP); **Hiroshi Ichiki**, Kanagawa (JP); **Tetsujiro Kondo**, Tokyo (JP)

(73) Assignee: **Sony Corporation**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 394 days.

(21) Appl. No.: **12/324,980**

(22) Filed: **Nov. 28, 2008**

(65) **Prior Publication Data**

US 2009/0146886 A1 Jun. 11, 2009

(30) **Foreign Application Priority Data**

Dec. 11, 2007 (JP) 2007-319568

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**; 343/829; 343/846;
343/893

(58) **Field of Classification Search** 343/700 MS;
343/846, 893

See application file for complete search history.

U.S. PATENT DOCUMENTS
6,809,687 B2 * 10/2004 Yuanzhu 343/700 MS
7,450,072 B2 * 11/2008 Kim et al. 343/700 MS
7,817,094 B2 * 10/2010 Adachi et al. 343/702
2005/0253756 A1 11/2005 Kuroda et al.

FOREIGN PATENT DOCUMENTS
JP 2001-168629 6/2001
JP 2003-347828 12/2003
JP 2005-72675 3/2005
JP 2005-278067 10/2005
JP 2007-288649 11/2007
WO WO 00/03453 1/2000
WO WO 02/054536 A1 7/2002

OTHER PUBLICATIONS

U.S. Appl. No. 12/273,038, filed Nov. 18, 2008, Kikuchi, et al.
Japanese Office Action issued Sep. 6, 2011 in Japanese Patent Application No. 2007-319568 filed Dec. 11, 2007.

* cited by examiner


Primary Examiner — Trinh Dinh

(74) *Attorney, Agent, or Firm* — Oblon, Spivak, McClelland, Maier & Neustadt, L.L.P.

(57) **ABSTRACT**

A planar antenna device is mounted on a board including a dielectric layer and two conductor layers vertically sandwiching the dielectric layer. The upper conductor layer includes a first radiating element having an end portion connected through a via hole to a ground formed by the lower conductor layer, a second radiating element having an open end portion, first and second ground conductors connected to respective base portions of the first and second radiating elements via resistors, and a feeder line configured to feed power to the first and second radiating elements.

3 Claims, 8 Drawing Sheets

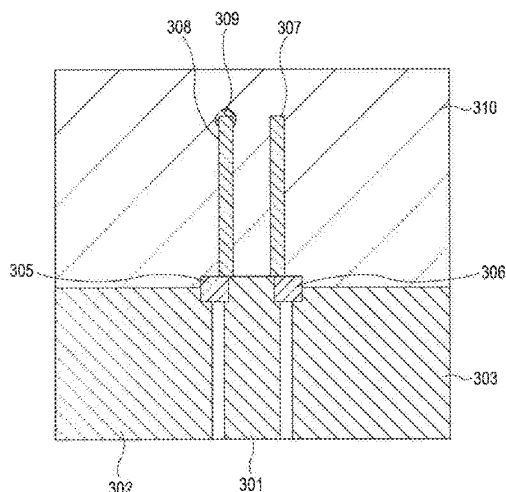

Acrobat Document



US008063831B2

(12) **United States Patent**
Tsai et al.

(10) **Patent No.:** **US 8,063,831 B2**

(45) **Date of Patent:** **Nov. 22, 2011**

(54) **BROADBAND ANTENNA**

(75) Inventors: **Tiao-Hsing Tsai**, Yungho (TW);
Chih-Wei Liao, Yilan Shien (TW);
Chao-Hsu Wu, Tao Yuan Shien (TW)

(73) Assignee: **Quanta Computer Inc.** (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 326 days.

(21) Appl. No.: **12/348,613**

(22) Filed: **Jan. 5, 2009**

(65) **Prior Publication Data**
US 2010/0045534 A1 Feb. 25, 2010

(30) **Foreign Application Priority Data**
Aug. 22, 2008 (TW) 97132206 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/846**

(58) **Field of Classification Search** 343/700 MS,
343/702, 846, 767
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,714,162 B1 * 3/2004 Kadambi et al. 343/700 MS
7,102,573 B2 * 9/2006 Morrow et al. 343/700 MS
7,742,003 B2 * 6/2010 Tseng et al. 343/702

* cited by examiner


Primary Examiner — Tan Ho

(74) *Attorney, Agent, or Firm* — Sunstein Kann Murphy & Timbers LLP

(57) **ABSTRACT**

An antenna includes: a grounding element extending along a first plane; a radiating element having a first side and extending along a second plane substantially parallel to the first plane, the radiating element being aligned with the grounding element in a normal direction transverse to the first and second planes; a bridging element interconnecting the grounding and radiating elements; and a feeding element extending and tapered from the first side of the radiating element toward the grounding element.

9 Claims, 6 Drawing Sheets

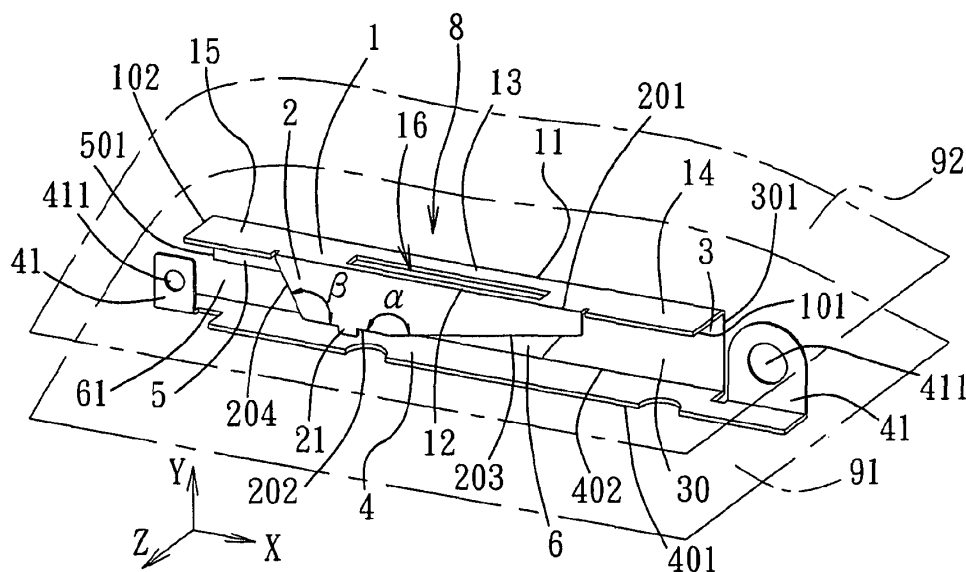

Acrobat Document



US008063834B2

(12) **United States Patent**
Boyle

(10) **Patent No.:** **US 8,063,834 B2**

(45) **Date of Patent:** **Nov. 22, 2011**

(54) **MOBILE TELEPHONE WITH A BUILT-IN PLANAR TELEVISION ANTENNA ADAPTED FOR RADIOTELEPHONE SIGNAL REJECTIONS**

(75) Inventor: **Kevin R. Boyle**, Horsham (GB)

(73) Assignee: **NXP B.V.**, Eindhoven (NL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 536 days.

(21) Appl. No.: **11/720,833**

(22) PCT Filed: **Nov. 30, 2005**

(86) PCT No.: **PCT/IB2005/053962**

§ 371 (c)(1),

(2), (4) Date: **Aug. 25, 2009**

(87) PCT Pub. No.: **WO2006/059279**

PCT Pub. Date: **Jun. 8, 2006**

(65) **Prior Publication Data**

US 2009/0305738 A1 Dec. 10, 2009

(30) **Foreign Application Priority Data**

Dec. 2, 2004 (EP) 04257502

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

50,643	A	10/1865	Thacker	
7,236,137	B2	6/2007	Yoshino et al.	
7,521,463	B2 *	4/2009	Hayashi et al.	514/345
7,848,771	B2 *	12/2010	Boyle	455/550.1
2004/0072589	A1	4/2004	Hamamura et al.	
2005/0093749	A1 *	5/2005	Purr et al.	343/702
2007/0040751	A1 *	2/2007	Boyle	343/702
2008/0096604	A1 *	4/2008	Yamazaki et al.	455/553.1
2009/0131129	A1 *	5/2009	Yamazaki et al.	455/575.7

FOREIGN PATENT DOCUMENTS

JP	10-107533	4/1998
JP	2003-133844	5/2003
JP	2003-179426	6/2003



* cited by examiner

Primary Examiner — Trinh Dinh

(57) **ABSTRACT**

A mobile telephone comprises a casing housing a telephone set to receive and transmit radiotelephone signals and a television set comprising a main television antenna (MAN) to receive radiotelevision signals, a television receiver arranged to process the received radiotelevision signals to output television signals to be displayed, and a display means display the outputted television signals. The main television antenna (MAN) is made in planar technology, is built-in inside the casing and comprises a filtering slot (FS) having chosen dimensions (D1, D2) to be resonant around the frequency of the radiotelephone signals to reject them at least partly.

19 Claims, 4 Drawing Sheets

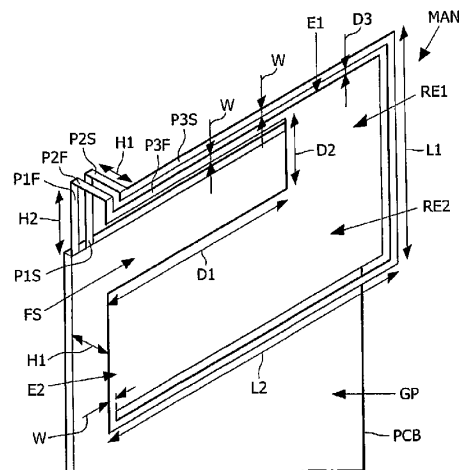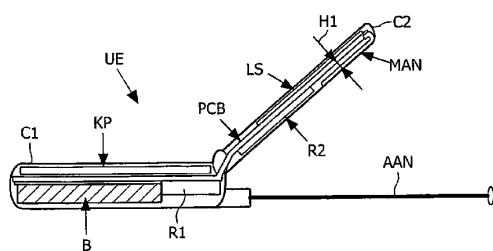

Acrobat Document



US008063835B2

(12) **United States Patent**
Sjöberg et al.

(10) **Patent No.:** **US 8,063,835 B2**

(45) **Date of Patent:** **Nov. 22, 2011**

(54) **ANTENNA ARRANGEMENT AND A
PORTABLE RADIO COMMUNICATION
DEVICE FOR SUCH AN ANTENNA
ARRANGEMENT**

(75) Inventors: **Johan Sjöberg**, Sollentuna (SE); **Jerry
Nilsson**, Hågersten (SE)

(73) Assignee: **Laird Technologies AB**, Kista (SE)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 453 days.

(21) Appl. No.: **12/282,109**

(22) PCT Filed: **Mar. 5, 2007**

(86) PCT No.: **PCT/SE2007/000211**

§ 371 (c)(1),
(2), (4) Date: **Nov. 12, 2008**

(87) PCT Pub. No.: **WO2007/106012**

PCT Pub. Date: **Sep. 20, 2007**

(65) **Prior Publication Data**

US 2009/0066591 A1 Mar. 12, 2009

(30) **Foreign Application Priority Data**

Mar. 13, 2006 (SE) 0600548

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/700 MS; 455/575.1;
455/575.7

(58) **Field of Classification Search** 343/911 R,
343/702, 700 MS; 204/192.22

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,245,745	A *	9/1993	Jensen et al.	29/600
5,802,699	A *	9/1998	Fjelstad et al.	29/593
6,078,259	A	6/2000	Brady et al.	
6,456,499	B1 *	9/2002	Nakajima et al.	361/752
6,501,016	B1 *	12/2002	Sosnowski	174/382
7,107,016	B2 *	9/2006	Dufosse et al.	455/90.1
2004/0075612	A1 *	4/2004	Spiropoulos	343/702
2004/0253845	A1 *	12/2004	Brown et al.	439/66
2005/0099340	A1	5/2005	Suzuki	

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1445823 8/2004

(Continued)

OTHER PUBLICATIONS

International Searching Authority, Written Opinion of International
Searching Authority, May 29, 2007.

Primary Examiner — Jacob Y Choi


Assistant Examiner — Amal Patel

(74) *Attorney, Agent, or Firm* — Harness, Dickey & Pierce,
P.L.C.

(57) **ABSTRACT**

The present invention relates to an antenna arrangement comprising a flexible film (1) having a radiating element (8) mounted to a first side of a dielectric carrier (3). The dielectric carrier (3) has a through hole (5) from the first side thereof to a second side, opposite the first side, thereof. The flexible film (1) is dielectric and comprises a cut linear pattern providing a flip (2) positioned over said through hole (5), wherein said flip (2) is flush with said flexible film (1).

20 Claims, 2 Drawing Sheets

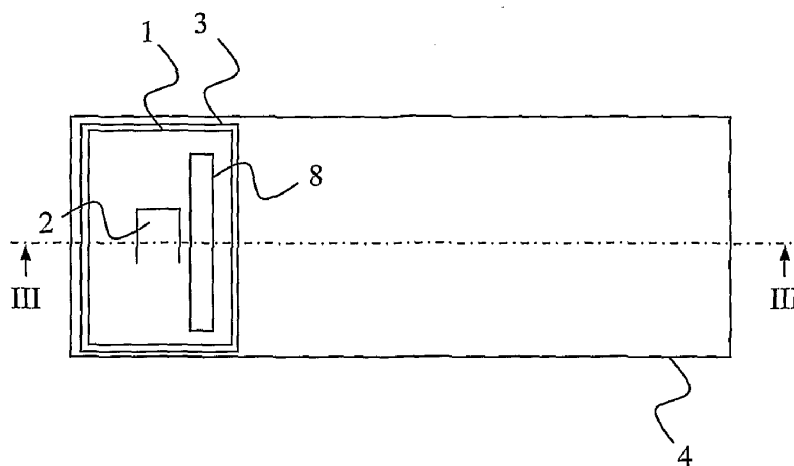

Acrobat Document



US008063837B1

(12) **United States Patent**
Jennings et al.

(10) **Patent No.:** **US 8,063,837 B1**

(45) **Date of Patent:** **Nov. 22, 2011**

(54) **SYSTEM FOR PROVIDING A PRESSURE VESSEL, RADOME, RF SUB-SYSTEM BOX AND ELECTRICALLY SMALL, WIDEBAND OMNI AND/OR ADAPTABLE BEAM ANTENNA**

(75) Inventors: **William C. Jennings**, Iowa City, IA (US); **James B. West**, Cedar Rapids, IA (US); **John Mather**, Cedar Rapids, IA (US); **Ross K. Wilcoxon**, Cedar Rapids, IA (US)

(73) Assignee: **Rockwell Collins, Inc.**, Cedar Rapids, IA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 665 days.

(21) Appl. No.: **12/284,558**

(22) Filed: **Sep. 23, 2008**

(51) **Int. Cl.**
H01Q 1/28 (2006.01)

(52) **U.S. Cl.** **343/705; 343/708**

(58) **Field of Classification Search** **343/705**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,198,445	B1 *	3/2001	Alt et al.	343/705
6,919,846	B2 *	7/2005	Koch et al.	343/705
7,642,975	B2 *	1/2010	Brunks et al.	343/705
2005/0200526	A1 *	9/2005	Crain et al.	343/700 MS

* cited by examiner


Primary Examiner — Trinh Dinh

(74) *Attorney, Agent, or Firm* — Daniel M. Barbieri

(57) **ABSTRACT**

The present invention is a system which includes an interposer. The interposer may include a mounting plate for mounting the interposer to a fuselage of an aircraft. The interposer may interface with the fuselage to form a seal for maintaining pressure within the aircraft. The system may further include an antenna module. The antenna module may include a ground plane, an aircraft antenna, and a radome. The ground plane may be connected to the aircraft antenna and may be configured for allowing the antenna module to be mounted to the interposer. The radome may be connected to the ground plane to form an enclosure for housing the antenna. The antenna module may be removably connected to the interposer. The system may further include an interconnect for electrically connecting the antenna module to electronics located within the aircraft. The antenna module may be disconnected from the interposer without breaking the seal formed between the interposer and the fuselage.

20 Claims, 2 Drawing Sheets

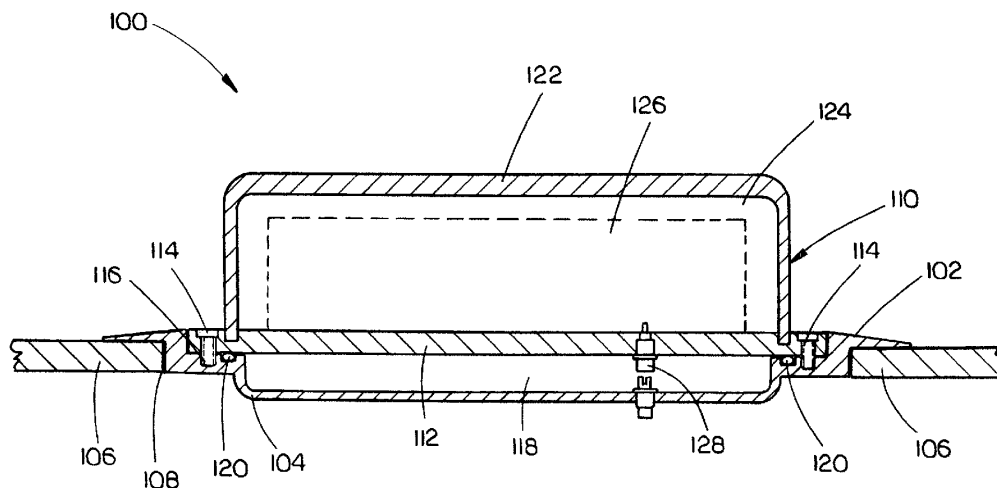

Acrobat Document



US008063839B2

(12) **United States Patent**
Ansari et al.

(10) **Patent No.:** **US 8,063,839 B2**
(45) **Date of Patent:** **Nov. 22, 2011**

(54) **TUNABLE ANTENNA SYSTEM**

(75) Inventors: **Saied Ansari**, Oakland, CA (US);
Behrooz Rezvani, San Ramon, CA (US)

(73) Assignee: **Quantenna Communications, Inc.**,
Fremont, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 832 days.

(21) Appl. No.: **11/872,700**

(22) Filed: **Oct. 15, 2007**

(65) **Prior Publication Data**

US 2008/0088517 A1 Apr. 17, 2008

Related U.S. Application Data

(60) Provisional application No. 60/852,911, filed on Oct.
17, 2006.

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H04B 1/18 (2006.01)

(52) **U.S. Cl.** **343/745**; 343/861; 343/895; 455/193.3

(58) **Field of Classification Search** 343/700 MS,
343/745, 750, 828, 852, 861, 868, 895, 703;
455/193.1, 193.3, 269, 280, 281
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,268,695 A 12/1993 Dentinger et al.
5,729,558 A 3/1998 Mobin
6,035,007 A 3/2000 Khayrallah et al.
6,081,700 A * 6/2000 Salvi et al. 455/193.3

6,351,499 B1 2/2002 Paulraj et al.
6,470,047 B1 10/2002 Kleinerman et al.
6,477,208 B1 11/2002 Huff
6,477,213 B1 11/2002 Miyoshi et al.
6,484,285 B1 11/2002 Dent
6,642,904 B2 * 11/2003 Yokoshima et al. 343/829
6,807,404 B2 10/2004 Meijer
6,967,598 B2 11/2005 Mills
7,035,343 B2 4/2006 Chi et al.
7,058,422 B2 6/2006 Learned et al.
7,076,263 B2 7/2006 Medvedev et al.
7,194,237 B2 3/2007 Sugar et al.
7,224,743 B2 5/2007 Holmes et al.
7,298,798 B1 11/2007 Chao et al.
7,321,636 B2 1/2008 Harel et al.
7,400,872 B2 7/2008 Kogure
7,450,657 B2 11/2008 Paulraj et al.
7,564,931 B2 7/2009 Venkataramani et al.

(Continued)

FOREIGN PATENT DOCUMENTS

WO WO-2007021159 2/2007

(Continued)

OTHER PUBLICATIONS

Co-pending U.S. Appl. No. 11/653,135, filed Jan. 11, 2007.

(Continued)

Primary Examiner — Michael Wimer


(74) *Attorney, Agent, or Firm* — Sheppard Mullin Richter &
Hampton LLP

(57) **ABSTRACT**

A technique for tuning an antenna may include one or more of
the following: working against a ground plane, utilizing the
third dimension by alternating layers on a substrate, integrat-
ing an inductive short stub in the substrate to improve port
matching, and making a tuning port available for capacitive
loading and resonance modification.

18 Claims, 11 Drawing Sheets

100

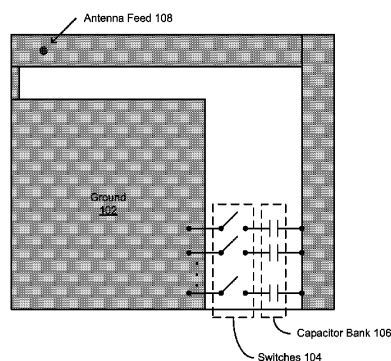

Acrobat Document



US008063843B2

(12) **United States Patent**
Choi et al.

(10) **Patent No.:** **US 8,063,843 B2**
(45) **Date of Patent:** **Nov. 22, 2011**

(54) **ANTENNA STRUCTURES MADE OF
BULK-SOLIDIFYING AMORPHOUS ALLOYS**

(75) Inventors: **Yun-Seung Choi**, Irvine, CA (US);
James Kang, Laguna Hills, CA (US)

(73) Assignee: **Crucible Intellectual Property, LLC**,
Rancho Santa Margarita, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 498 days.

(21) Appl. No.: **11/884,431**

(22) PCT Filed: **Feb. 17, 2006**

(86) PCT No.: **PCT/US2006/005815**

§ 371 (c)(1),
(2), (4) Date: **Nov. 24, 2008**

(87) PCT Pub. No.: **WO2006/089213**

PCT Pub. Date: **Aug. 24, 2006**

(65) **Prior Publication Data**

US 2009/0207081 A1 Aug. 20, 2009

(51) **Int. Cl.**
H01Q 1/00 (2006.01)

(52) **U.S. Cl.** **343/787; 343/788**

(58) **Field of Classification Search** **343/787,**
343/788

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,989,517 A 11/1976 Tanner et al.
4,050,931 A 9/1977 Tanner et al.
4,064,757 A 12/1977 Hasegawa

4,067,732 A 1/1978 Ray
4,113,478 A 9/1978 Tanner et al.
4,116,682 A 9/1978 Polk et al.
4,116,687 A 9/1978 Hasegawa
4,126,449 A 11/1978 Tanner et al.
4,135,924 A 1/1979 Tanner et al.
4,148,669 A 4/1979 Tanner et al.
4,623,387 A 11/1986 Masumoto et al.
4,648,609 A 3/1987 Deike
4,721,154 A 1/1988 Christ et al.
4,743,513 A 5/1988 Scruggs
4,976,417 A 12/1990 Smith
4,978,590 A 12/1990 Granata, Jr. et al.
4,987,033 A 1/1991 Abkowitz et al.
4,990,198 A 2/1991 Masumoto et al.
5,032,196 A 7/1991 Masumoto et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0554581 A1 8/1993

(Continued)

OTHER PUBLICATIONS

Hasegawa et al., "Superconducting Properties of Be-Zr Glassy
Alloys Obtained by Liquid Quenching", May 9, 1977, vol. 12, pp.
703-708.

(Continued)


Primary Examiner — Tho G Phan

(74) Attorney, Agent, or Firm — Pillsbury Winthrop Shaw
Pittman LLP

(57) **ABSTRACT**

Antenna structures made of bulk-solidifying amorphous
alloys and methods of making antenna structures from such
bulk-solidifying amorphous alloys are described. The bulk-
solidifying amorphous alloys providing form and shape dura-
bility, excellent resistance to chemical and environmental
effects, and low-cost net-shape fabrication for the highly
intricate antenna shapes.

20 Claims, 2 Drawing Sheets



Schematic forms of antenna structures in wire form (circular cross-section). For
illustrative purposes only.



Acrobat Document



US008063845B2

(12) **United States Patent**
Rabinovich

(10) **Patent No.:** **US 8,063,845 B2**

(45) **Date of Patent:** **Nov. 22, 2011**

(54) **SYMMETRICAL PRINTED MEANDER
DIPOLE ANTENNA**

(75) Inventor: **Victor Rabinovich**, Richmond Hill (CA)

(73) Assignee: **Flextronics Automotive Inc.**, Milpitas,
CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 296 days.

(21) Appl. No.: **12/232,197**

(22) Filed: **Sep. 12, 2008**

(65) **Prior Publication Data**

US 2009/0066600 A1 Mar. 12, 2009

Related U.S. Application Data

(60) Provisional application No. 60/960,034, filed on Sep.
12, 2007.

(51) **Int. Cl.**
H01Q 9/16 (2006.01)

(52) **U.S. Cl.** **343/793; 343/795; 343/820; 343/713**

(58) **Field of Classification Search** **343/793,**
343/795, 803, 806, 850, 852, 865, 711, 713,
343/820, 700 MS

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,590,543 B1 7/2003 Apostolos
7,190,322 B2 3/2007 Apostolos et al.
2001/0011964 A1 8/2001 Sadler et al.

2005/0030245 A1* 2/2005 Croswell et al. 343/795
2006/0170610 A1* 8/2006 Rabinovich et al. 343/895
2006/0250250 A1 11/2006 Youn
2006/0281423 A1 12/2006 Caimi et al.
2007/0164921 A1* 7/2007 Hu et al. 343/895

OTHER PUBLICATIONS

Rabinovich et al., Small Printed Meander Symmetrical and Asym-
metrical Antenna Performances, Including the RF Cable Effect, in the
315 MHZ Frequency Band, Microwave and Optical Technology Let-
ters/ vol. 48, No. 9, Sep. 2006, pp. 1828-1833.*

* cited by examiner


Primary Examiner — Dieu H Duong

(74) *Attorney, Agent, or Firm* — Patton Boggs LLP

(57) **ABSTRACT**

A symmetrical printed meander dipole antenna includes a
dielectric board including a ground plane; a first antenna trace
line disposed on a first portion of the dielectric board and in
electrical contact with the dielectric board, the first antenna
trace line including a plurality of first vertical meandered
traces; a second antenna trace line disposed on a second
portion of the dielectric board and in electrical contact with
the dielectric board, the second antenna trace line including a
plurality second vertical meandered traces, wherein the first
and second plurality of vertical meandered traces are sym-
metrical to each other; and an inductor in contact with the first
and second antenna trace lines for tuning the impedance of the
symmetrical printed meander dipole antenna.

12 Claims, 18 Drawing Sheets

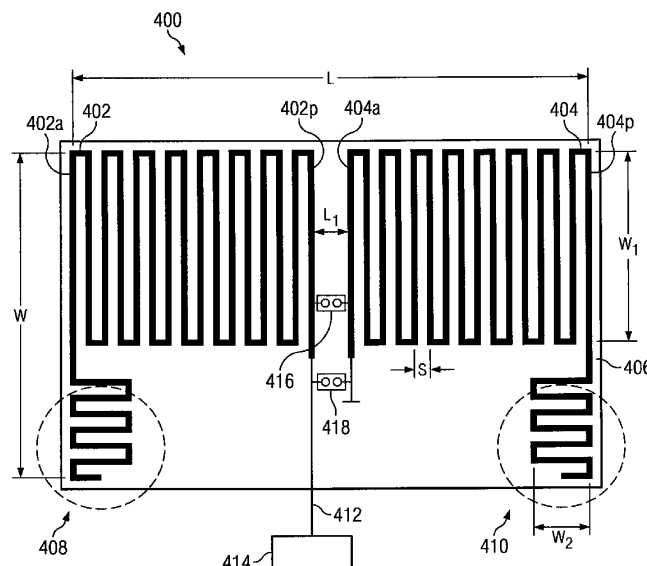

Acrobat Document