



US007990319B2

(12) **United States Patent**
Boyle

(10) **Patent No.:** **US 7,990,319 B2**

(45) **Date of Patent:** **Aug. 2, 2011**

(54) **RADIO DEVICE HAVING ANTENNA
ARRANGEMENT SUITED FOR OPERATING
OVER A PLURALITY OF BANDS**

(75) Inventor: **Kevin Boyle**, Horsham (GB)

(73) Assignee: **EPCOS AG**, Munich (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 113 days.

(21) Appl. No.: **11/912,837**

(22) PCT Filed: **Apr. 26, 2006**

(86) PCT No.: **PCT/IB2006/051302**

§ 371 (c)(1),

(2), (4) Date: **Jul. 22, 2008**

(87) PCT Pub. No.: **WO2006/114771**

PCT Pub. Date: **Nov. 2, 2006**

(65) **Prior Publication Data**

US 2009/0201209 A1 Aug. 13, 2009

(30) **Foreign Application Priority Data**

Apr. 27, 2005 (EP) 05300328

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 3/24 (2006.01)
H01Q 21/00 (2006.01)

(52) **U.S. Cl.** **343/700 MS**; 343/876; 343/893

(58) **Field of Classification Search** 343/700 MS,
343/702, 846, 876, 893

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,040,806 A * 3/2000 Kushihi et al. 343/853

6,295,030 B1 9/2001 Kozakai et al.
6,300,909 B1 * 10/2001 Tsubaki et al. 343/700 MS
6,476,769 B1 11/2002 Lehtola
6,674,411 B2 1/2004 Boyle
6,693,594 B2 * 2/2004 Pankinaho et al. 343/700 MS
7,136,020 B2 * 11/2006 Yamaki 343/702
2003/0142022 A1 7/2003 Ollikainen et al.
2004/0257285 A1 12/2004 Quintero et al.

FOREIGN PATENT DOCUMENTS

EP 1256998 A2 11/2002
JP 11-317612 A 11/1999
JP 2001-119238 A 4/2001
JP 2003-124730 A 4/2003
WO 03094290 A1 11/2003
WO 03096474 A1 11/2003
WO 2004102744 A1 11/2004
WO 2005018045 A1 2/2005

* cited by examiner


Primary Examiner — Shih-Chao Chen

(74) *Attorney, Agent, or Firm* — Slater & Matsil, L.L.P.

(57) **ABSTRACT**

This radio device operating over a plurality of bands comprises a casing having a front cover and a back cover, an antenna arrangement, a radio frequency circuit set and a matching unit for connecting the antenna arrangement to the radio frequency circuit set. The following measures are proposed: —the antenna arrangement is formed by at least two antenna parts, each of which being related to a set of bands, —the antenna parts are placed close together, —the arrangement comprises a part that is normal to the front cover and another one that is near the back cover and feeding points, —the matching unit comprises control switching means for tuning the arrangement to each band. Thanks to these measures, the coverage of the band is obtained with satisfactory performance.

9 Claims, 4 Drawing Sheets

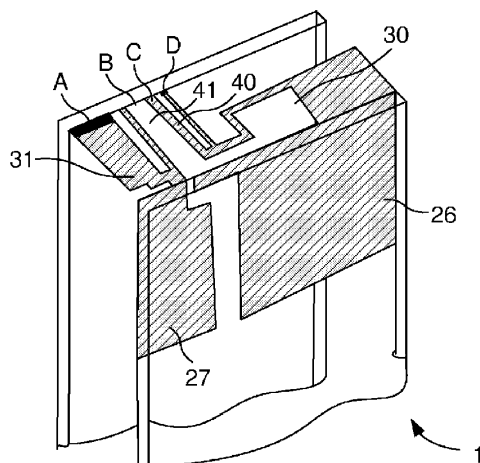

Acrobat Document



US007990320B2

(12) **United States Patent**
Pros et al.

(10) **Patent No.:** **US 7,990,320 B2**

(45) **Date of Patent:** **Aug. 2, 2011**

(54) **ANTENNA WITH INNER SPRING CONTACT**

(56)

References Cited

(75) Inventors: **Jaume Anguera Pros**, Vinaros (ES);
Juan Ignacio Ortigosa Vallejo,
Barcelona (ES); **Alfonso Sanz**,
Barcelona (ES)

U.S. PATENT DOCUMENTS

6,414,641 B1 7/2002 Carlson et al.
6,542,122 B1 4/2003 Bolin et al.
6,600,448 B2 7/2003 Ikegaya et al.
6,603,432 B2 8/2003 Hill et al.

(Continued)

(73) Assignee: **Fractus, S.A.**, Barcelona (ES)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 323 days.

FOREIGN PATENT DOCUMENTS

EP 1657785 A1 5/2006

(Continued)

(21) Appl. No.: **11/989,435**

(22) PCT Filed: **Jul. 31, 2006**

(86) PCT No.: **PCT/EP2006/007565**

§ 371 (c)(1),

(2), (4) Date: **Apr. 8, 2008**

OTHER PUBLICATIONS

Yokowo, Spring-connector applications for mobile phone, www.yokowo.co.jp (Technical brochure), Jul. 2005 .

(Continued)

(87) PCT Pub. No.: **WO2007/014737**

PCT Pub. Date: **Feb. 8, 2007**

Primary Examiner — HoangAnh T Le

(74) *Attorney, Agent, or Firm* — Winstead PC

(65) **Prior Publication Data**

US 2009/0146906 A1 Jun. 11, 2009

Related U.S. Application Data

(60) Provisional application No. 60/704,542, filed on Aug. 2, 2005.

(30) **Foreign Application Priority Data**

Aug. 1, 2005 (EP) 05107095

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** 343/700 MS; 343/702

(58) **Field of Classification Search** 843/700 MS,
843/846, 702


See application file for complete search history.

(57)

ABSTRACT

One aspect of the invention relates to an antenna for a wireless device having spring contact elements based on strips (301, 302; 403; 503, 504; 602, 603; 612, 613; 622, 623; 632; 642; 652, 653; 682; 703, 704; 753, 754; 756; 802, 803; 1412, 1413; 1422, 1423) that, before bending, are housed in at least one gap (303, 601, 681, 804, 1411, 1421) in a main body (300, 402, 502, 600, 700, 750, 800 1400) of the antenna. The invention provides for a reduced stamping area overhead while allowing the spring contacts embodied by the strips to be placed close to the perimeter of the smallest possible rectangle that can house the main body. This can be helpful for mounting the antenna close to an edge of a printed circuit board (401, 501, 701, 801) while not extending beyond said edge.

58 Claims, 13 Drawing Sheets

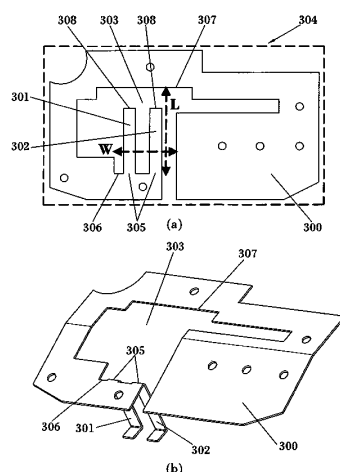

Acrobat Document



US007990321B2

(12) **United States Patent**
Shih

(10) **Patent No.:** **US 7,990,321 B2**
(45) **Date of Patent:** **Aug. 2, 2011**

(54) **MULTIBAND ANTENNA**

(75) Inventor: **Yen-Yi Shih**, Taipei Hsien (TW)

(73) Assignee: **Hon Hai Precision Industry Co., Ltd.**,
Tu-Cheng, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 312 days.

(21) Appl. No.: **12/422,211**

(22) Filed: **Apr. 10, 2009**

(65) **Prior Publication Data**
US 2010/0182202 A1 Jul. 22, 2010

(30) **Foreign Application Priority Data**
Jan. 16, 2009 (CN) 2009 1 0300236

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702; 343/846**

(58) **Field of Classification Search** 343/700 MS,
343/702, 846, 833, 834
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,552,686 B2 * 4/2003 Ollikainen et al. 343/700 MS
7,602,341 B2 * 10/2009 Wei-Shan et al. 343/700 MS
2007/0279289 A1 12/2007 Baliarda et al.

* cited by examiner


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — Frank R. Niranjan

(57) **ABSTRACT**

A multiband antenna is located on a substrate and comprises a first radiator, a second radiator, a feeding portion, a grounding portion and a third radiation. The first radiator transmits at least two frequency band signals. The second radiator is connected to the first radiator, and is arranged so as to surround the first radiator. The feeding portion feeds electromagnetic signals to the first radiator and the second radiator. The third radiator is located between the grounding portion and the second radiator, and electrically connected to the grounding portion.

15 Claims, 3 Drawing Sheets

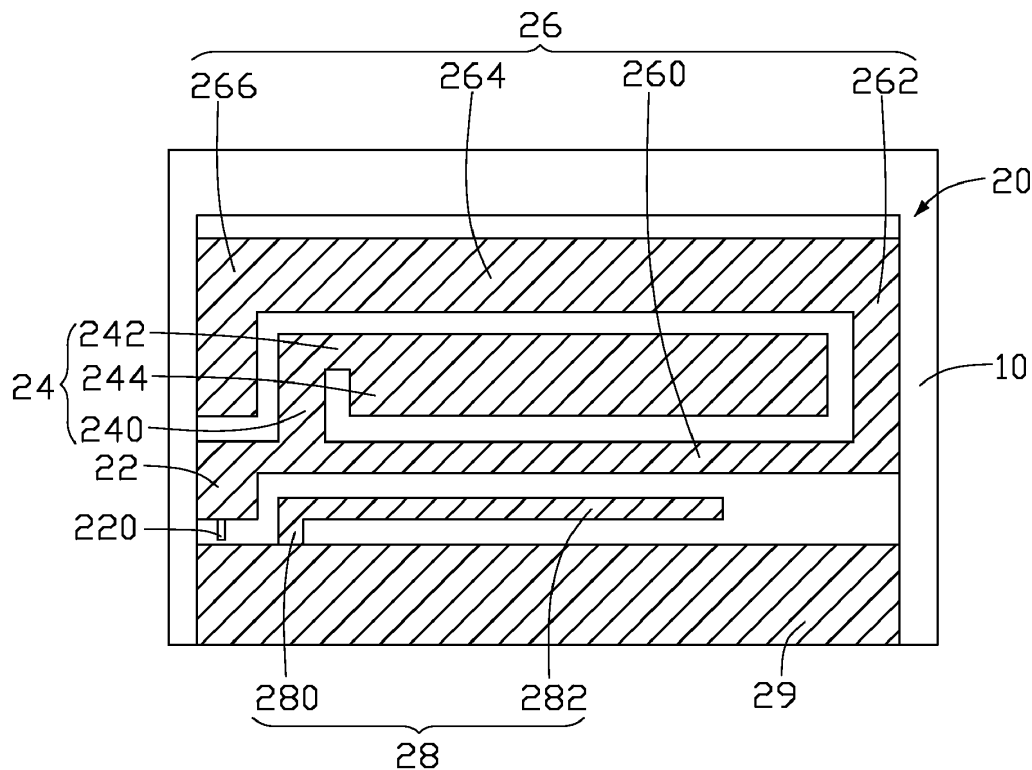

Acrobat Document



US007990330B2

(12) **United States Patent**
Wu

(10) **Patent No.:** **US 7,990,330 B2**
(45) **Date of Patent:** **Aug. 2, 2011**

(54) **SLOT ANTENNA**

(75) Inventor: **Sueng-Chien Wu**, Taipei Hsien (TW)

(73) Assignee: **Hon Hai Precision Industry Co., Ltd.**,
Tu-Cheng, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 386 days.

(21) Appl. No.: **12/233,598**

(22) Filed: **Sep. 19, 2008**

(65) **Prior Publication Data**

US 2009/0303146 A1 Dec. 10, 2009

(30) **Foreign Application Priority Data**

Jun. 10, 2008 (CN) 2008 2 0301090 U

(51) **Int. Cl.**
H01Q 13/10 (2006.01)

(52) **U.S. Cl.** **343/770; 343/767; 343/846**

(58) **Field of Classification Search** **343/770,**
343/795, 702, 846, 786, 715, 705

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,917,454	A *	6/1999	Hill et al.	343/769
2005/0116868	A1 *	6/2005	Shikata et al.	343/745
2005/0116875	A1 *	6/2005	Yuanzhu et al.	343/846
2007/0241983	A1 *	10/2007	Cao et al.	343/797
2009/0237314	A1 *	9/2009	Lalezari	343/721

FOREIGN PATENT DOCUMENTS

CN 1528090 A 9/2004

* cited by examiner

Primary Examiner — Douglas W Owens


Assistant Examiner — Jae K Kim

(74) *Attorney, Agent, or Firm* — Frank R. Niranjan

(57) **ABSTRACT**

A slot antenna is located on a substrate and includes a grounding portion, a radiating portion, and a feeding portion. The grounding portion is positioned on the substrate. The radiating portion is symmetrically octagonal-shaped and defines four trapezoidal-shaped slots on opposite sides. The radiating portion is parallel to the grounding portion. The feeding portion electrically connects the radiating portion to the grounding portion for feeding electromagnetic signals to the slot antenna.

10 Claims, 6 Drawing Sheets

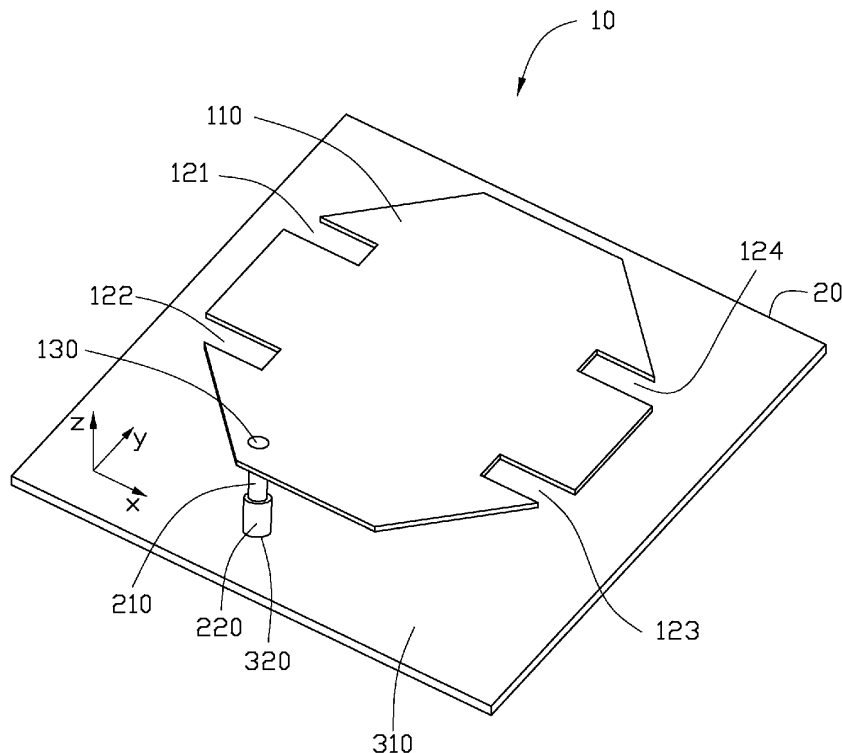

Acrobat Document



US007994986B2

(12) **United States Patent**
Desclos et al.

(10) **Patent No.:** **US 7,994,986 B2**

(45) **Date of Patent:** **Aug. 9, 2011**

(54) **ANTENNA WITH NEAR FIELD DEFLECTOR**

(75) Inventors: **Laurent Desclos**, San Diego, CA (US);
Sebastian Rowson, San Diego, CA (US)

(73) Assignee: **Ethertronics, Inc.**, San Diego, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 544 days.

(21) Appl. No.: **11/840,617**

(22) Filed: **Aug. 17, 2007**

(65) **Prior Publication Data**

US 2009/0046022 A1 Feb. 19, 2009

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/52 (2006.01)

(52) **U.S. Cl.** 343/702; 343/841

(58) **Field of Classification Search** 343/702,
343/833, 834, 841, 846; 455/575.7
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,410,890 A * 10/1983 Davis et al. 342/419
4,528,566 A * 7/1985 Tyler 342/419
7,158,820 B2 * 1/2007 Suzuki et al. 455/575.7

* cited by examiner


Primary Examiner — Michael C Wimer

(74) *Attorney, Agent, or Firm* — Coastal Patent Agency

(57) **ABSTRACT**

A mobile communication device having primary resonator coupled to a near field deflector. The near field deflector forms a false edge for near field deflection wherein the primary resonator couples with the false edge instead of to metallic portions of the device or the user.

2 Claims, 19 Drawing Sheets

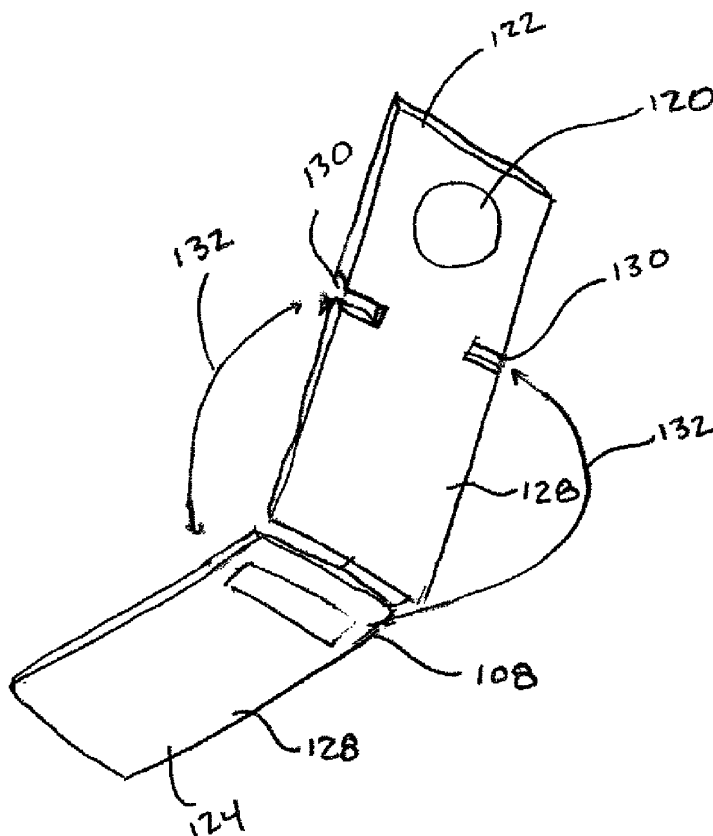

Acrobat Document



US007994987B2

(12) **United States Patent**
Berezin et al.

(10) **Patent No.:** **US 7,994,987 B2**
(45) **Date of Patent:** **Aug. 9, 2011**

(54) **NOTCHED ANTENNA STRUCTURE WITH A STEPPED SHAPED ELEMENT**

7,116,937 B2 * 10/2006 Kinzler 455/41.2
2002/0021250 A1 2/2002 Asamo et al.
2007/0103367 A1 5/2007 Wang

(75) Inventors: **Maksim Berezin**, Natanya (IL); **Moshe Ben Ayun**, Shoham (IL); **Ovadia Grossman**, Tel Aviv (IL); **Mark Rozental**, Gedera (IL)

OTHER PUBLICATIONS

International Application No. PCT/US2009/044782 with Search Report and Written Opinion, mailed May 21, 2009—11 pages.
International Preliminary Report on Patentability—PCT/US2009/044782, Issued Nov. 23, 2010—5 pages.

* cited by examiner

(73) Assignee: **Motorola Solutions, Inc.**, Schaumburg, IL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 605 days.

Primary Examiner — Douglas W Owens

Assistant Examiner — Dieu Hien T Duong

(21) Appl. No.: **12/124,378**

(22) Filed: **May 21, 2008**

(65) **Prior Publication Data**

US 2009/0289854 A1 Nov. 26, 2009

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/767; 343/829

(58) **Field of Classification Search** 343/767,
343/702, 829, 830

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS


5,276,454 A * 1/1994 Gonzalez et al. 343/702
5,572,190 A * 11/1996 Ross et al. 340/541

(57) **ABSTRACT**

An antenna assembly (10) includes a ground plane formed on a chassis (12) of the radio and the functional knob forming an antenna element (11). The antenna assembly further includes a slot or notch element (14) in the ground plane substantially adjacent to the functional knob and having a length less than $\frac{1}{4}$ wavelength, and a coaxial cable (13) feeding the antenna element. A shield of the coaxial cable can be directly connected to the ground plane and a center conductor of the coaxial cable can be directly coupled to the functional knob to provide a galvanic connection for narrowband performance or the center conductor can be electromagnetically coupled to the functional knob for wideband performance or both. The antenna assembly can create a zero volume notch type ground excitation.

19 Claims, 6 Drawing Sheets

10

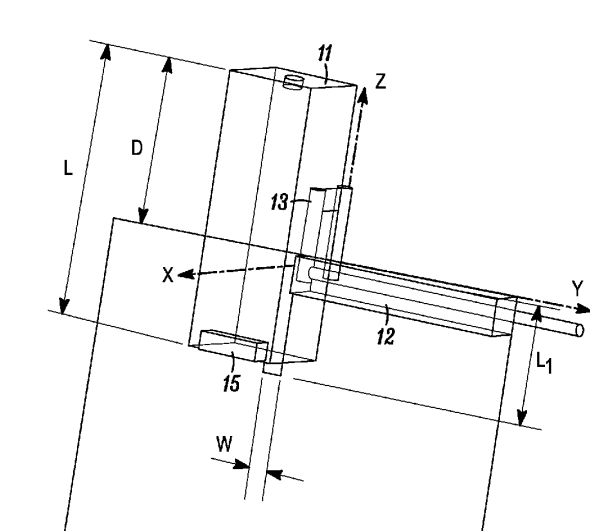

Acrobat Document



US007994988B2

(12) **United States Patent**
Wu et al.

(10) **Patent No.:** **US 7,994,988 B2**
(45) **Date of Patent:** **Aug. 9, 2011**

(54) **DUAL-BAND ANTENNA**

- (75) Inventors: **Hsin-Tsung Wu**, Tu-Cheng (TW); **Kai Shih**, Tu-Cheng (TW); **Yu-Yuan Wu**, Tu-Cheng (TW)
- (73) Assignee: **Cheng Uei Precision Industry Co., Ltd.**, Tu-Cheng, Taipei Hsien (TW)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 380 days.

(21) Appl. No.: **12/267,930**

(22) Filed: **Nov. 10, 2008**

(65) **Prior Publication Data**

US 2010/0117918 A1 May 13, 2010

- (51) **Int. Cl.**
H01Q 1/24 (2006.01)
- (52) **U.S. Cl.** **343/702**; 343/700 MS; 343/846
- (58) **Field of Classification Search** 343/845, 343/700 MS, 702, 770, 846, 860
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,839,342 B2 * 11/2010 Su et al. 343/702
2005/0134509 A1 * 6/2005 Lin 343/702
2007/0247372 A1 * 10/2007 Huang 343/700 MS

OTHER PUBLICATIONS

Colin, Robert E., Foundations for Microwave Engineering, 2001, Wiley-IEEE Press, 2nd Edition, p. 73.*

* cited by examiner

Primary Examiner — Jacob Y Choi

Assistant Examiner — Shawn Buchanan


(74) *Attorney, Agent, or Firm* — Muncy, Geissler, Olds, & Lowe, PLLC

(57) **ABSTRACT**

A dual-band antenna adapted for an Ultra-mobile Personal Computer has a grounding element including a first grounding portion of elongated plate shape and a second grounding portion extending substantially perpendicular to the first grounding portion from a long edge of the first grounding portion. A connecting element is connected with the second grounding portion. An installing element is connected with the second grounding portion and spaced away from the connecting portion. A radiating element includes a low frequency resonator extending from the connecting element, a high frequency resonator extending opposite to the low frequency resonator and towards the installing element from the connecting element, and an enhancing frequency resonator extending from an edge of the installing element back to the high frequency resonator. The low, high and enhancing frequency resonators are substantially aligned with each other and parallel to the second grounding portion.

5 Claims, 4 Drawing Sheets

100
~

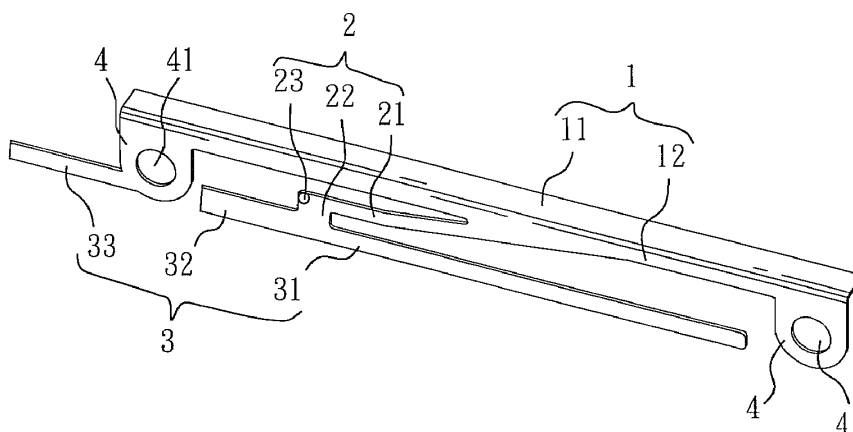

Acrobat Document



US007994989B2

(12) **United States Patent**
Young

(10) **Patent No.:** **US 7,994,989 B2**
(45) **Date of Patent:** **Aug. 9, 2011**

(54) **HANDHELD DEVICE WITH SWITCHABLE
SIGNAL RECEIVING MODES**

(75) Inventor: **Sea-Weng Young**, Taipei County (TW)

(73) Assignee: **Inventec Appliances Corp.**, Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 309 days.

(21) Appl. No.: **12/418,171**

(22) Filed: **Apr. 3, 2009**

(65) **Prior Publication Data**

US 2009/0256761 A1 Oct. 15, 2009

(30) **Foreign Application Priority Data**

Apr. 9, 2008 (TW) 97112918 A

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 1/10 (2006.01)

(52) **U.S. Cl.** **343/702; 343/901**

(58) **Field of Classification Search** 343/702,
343/900, 901, 876; 455/73, 11.1, 13.3, 78,
455/456.1

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,054,959 A * 4/2000 Amos et al. 343/702
6,865,376 B2 * 3/2005 Forrester 455/73

* cited by examiner


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — Muncy, Geissler, Olds & Lowe, PLLC

(57) **ABSTRACT**

A handheld device with switchable signal receiving modes includes a telescopic antenna, a telecommunication transceiver module, a satellite signal module, and a switch circuit. Upon receiving a switch signal, the switch circuit couples the telescopic antenna to the telecommunication transceiver module, and adjusts the telescopic antenna to a first length, so that the telecommunication transceiver module transmits and receives a signal of a first frequency, or the switch circuit adjusts the telescopic antenna to a second length, so that the telecommunication transceiver module transmits and receives a signal of a second frequency. Alternatively, the switch circuit couples the telescopic antenna to the satellite signal module, and adjusts the telescopic antenna to the second length, so that the satellite signal module receives a satellite signal. Thereby, the handheld device can receive signals of various frequencies via one antenna, so that different functional modules transmit and receive signals of different frequencies.

12 Claims, 5 Drawing Sheets

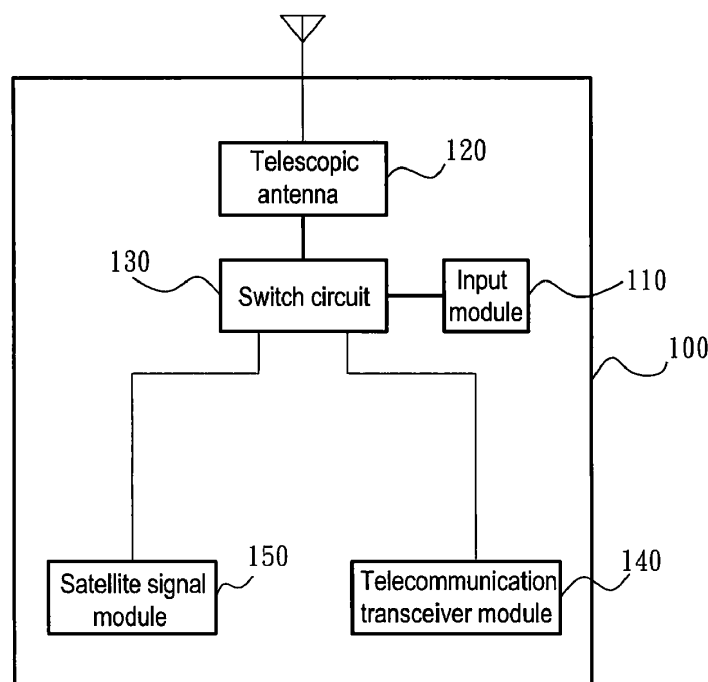

Acrobat Document



US007994999B2

(12) **United States Patent**
Maeda et al.

(10) **Patent No.:** **US 7,994,999 B2**
(45) **Date of Patent:** **Aug. 9, 2011**

(54) **MICROSTRIP ANTENNA**

(75) Inventors: **Hiroyuki Maeda**, Novi, MI (US);
Yingcheng Dai, Novi, MI (US)

(73) Assignee: **Harada Industry Of America, Inc.**,
Novi, MI (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 921 days.

(21) Appl. No.: **11/948,628**

(22) Filed: **Nov. 30, 2007**

(65) **Prior Publication Data**

US 2009/0140927 A1 Jun. 4, 2009

(51) **Int. Cl.**
H01Q 13/10 (2006.01)
H01Q 1/38 (2006.01)
H01Q 5/00 (2006.01)

(52) **U.S. Cl.** **343/853**; 343/700 MS; 343/855;
343/769

(58) **Field of Classification Search** 343/700 MS,
343/749, 751, 767, 769, 770, 797, 850, 853,
343/857, 860, 862, 893

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,006,481 A * 2/1977 Young et al. 343/770
4,070,676 A 1/1978 Sanford
4,873,529 A 10/1989 Gibson
5,313,216 A 5/1994 Wang et al.
5,444,452 A * 8/1995 Itoh et al. 343/700 MS
5,815,119 A 9/1998 Helms et al.
6,140,968 A * 10/2000 Kawahata et al. 343/700 MS
6,225,959 B1 * 5/2001 Gordon 343/769

6,407,707 B2 6/2002 Nakamura et al.
6,567,048 B2 5/2003 McKinzie, III et al.
6,624,786 B2 9/2003 Boyle
6,861,988 B2 3/2005 Gabriel et al.
6,876,328 B2 4/2005 Adachi et al.
6,891,508 B2 5/2005 Inoue
6,999,038 B2 2/2006 Louzir et al.

(Continued)

FOREIGN PATENT DOCUMENTS

FR 2821503 A1 8/2002

OTHER PUBLICATIONS

Amjad A Omar et al: "Design and Measurement of Self-Matched
Dual-Frequency Coplanar Waveguide-Fed-Slot Antennas", IEEE
Transactions on Antennas and Propagation, IEEE Service Center,
vol. 55, No. 1, Jan. 1, 2007, pp. 223-226.

(Continued)

Primary Examiner — Jacob Y Choi

Assistant Examiner — Robert Karacsony


(74) *Attorney, Agent, or Firm* — Dickinson Wright PLLC

(57)

ABSTRACT

A microstrip antenna that can be linear, co-circular, or dual-circularly polarized having co-planar radiating elements and operating at dual frequency bands wherein an inner radiating element is surrounded by and spaced from an outer radiating element. Each radiating element resonates at a different frequency. In one embodiment of the invention a feed network has a single, cross-shaped, feed line that is positioned between the inner and outer radiating elements and capacitively coupled to the inner and outer radiating elements. In another embodiment of the present invention, the radiating elements are fed separately by first and second feed networks each having a plurality of feed points. The radiating elements each have one active feed point that is either directly or indirectly coupled to its respective feed network.

20 Claims, 4 Drawing Sheets

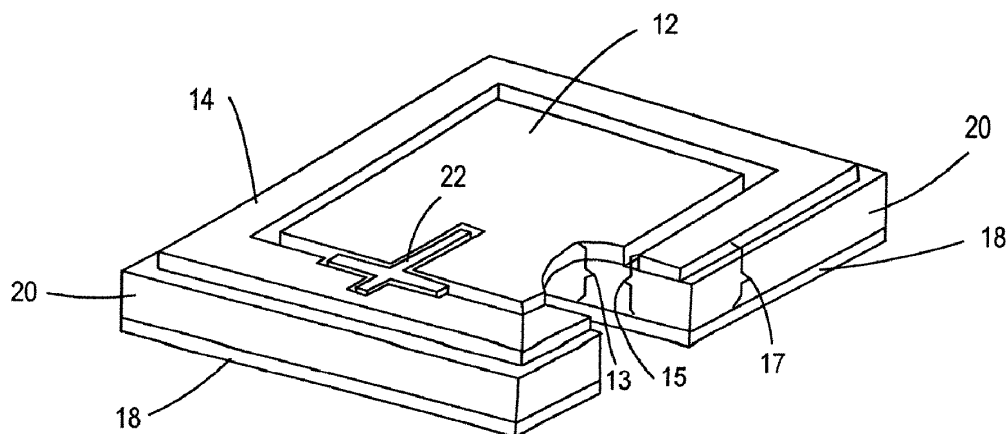

Acrobat Document



US007995001B2

(12) **United States Patent**
Ohmi et al.

(10) **Patent No.:** **US 7,995,001 B2**
(45) **Date of Patent:** **Aug. 9, 2011**

(54) **ANTENNA FOR PORTABLE TERMINAL AND
PORTABLE TERMINAL USING SAME**

- (75) Inventors: **Tadahiro Ohmi**, Miyagi (JP); **Akihiro Morimoto**, Miyagi (JP); **Fumiaki Nakamura**, Miyagi (JP)
- (73) Assignee: **Tadahiro Ohmi**, Sendai-shi, Miyagi (JP)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/546,191**

(22) PCT Filed: **Feb. 17, 2004**

(86) PCT No.: **PCT/JP2004/001677**

§ 371 (c)(1),
(2), (4) Date: **Oct. 27, 2005**

(87) PCT Pub. No.: **WO2004/075343**

PCT Pub. Date: **Sep. 2, 2004**

(65) **Prior Publication Data**

US 2006/0119518 A1 Jun. 8, 2006

(30) **Foreign Application Priority Data**

Feb. 18, 2003 (JP) 2003-040167

- (51) **Int. Cl.**
H01Q 15/00 (2006.01)
- (52) **U.S. Cl.** **343/911 R; 343/787**
- (58) **Field of Classification Search** **343/700 MS,**
343/911 R, 787

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,870,065	A	2/1999	Kanaba et al.
5,933,116	A	8/1999	Suesada et al.
6,033,782	A *	3/2000	Hubbard et al. 428/407
6,147,647	A	11/2000	Tassoudji et al.
6,198,450	B1	3/2001	Adachi et al.
6,323,824	B1	11/2001	Heinrichs et al.
6,337,125	B1 *	1/2002	Diaz et al. 428/218
6,407,718	B2	6/2002	Adachi et al.
6,442,399	B1 *	8/2002	Tsuru et al. 455/575.7
6,452,565	B1	9/2002	Kingsley et al.
6,531,991	B2	3/2003	Adachi et al.

(Continued)

FOREIGN PATENT DOCUMENTS

DE 198 37 266 A1 2/2000

(Continued)

OTHER PUBLICATIONS

J. R. James et al., "Investigation of properties of electrical-small spherical ceramic antennas," Electronics Letters, IEE Stevenage, GB, vol. 38:20, Sep. 26, 2002, pp. 1160-1162, XP006018894.

(Continued)

Primary Examiner — Jacob Y Choi


Assistant Examiner — Robert Karacsony

(74) *Attorney, Agent, or Firm* — Foley & Lardner LLP

(57) **ABSTRACT**

A dielectric resonator antenna which emits an electric wave by having a dielectric body resonate is disclosed. A magnetic material is contained in the electric body, thereby increasing the relative permeability to more than 1 and lowering the relative permittivity. Consequently, the Q-value of the resonance can be lowered while maintaining the rate of wavelength shortening. With this technique, a broadband dielectric resonator antenna can be realized.

18 Claims, 10 Drawing Sheets

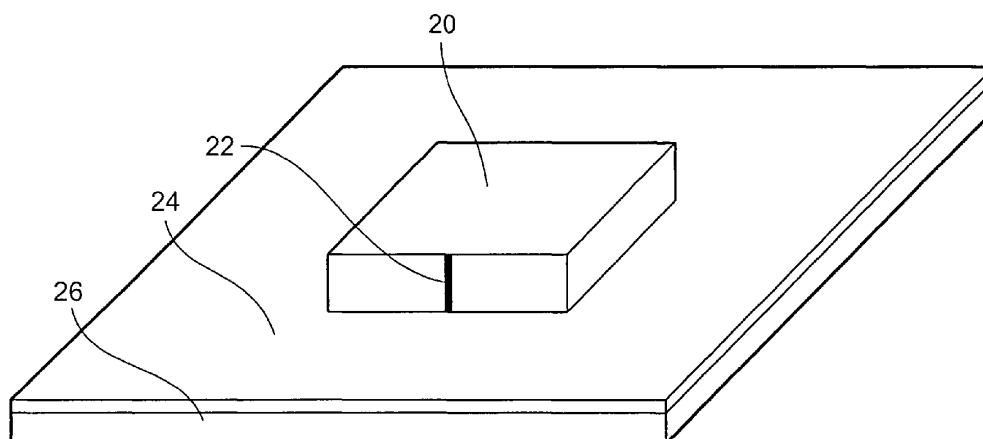

Acrobat Document



US007999736B2

(12) **United States Patent**
Albrecht

(10) **Patent No.:** **US 7,999,736 B2**
(45) **Date of Patent:** **Aug. 16, 2011**

(54) **SLOT ANTENNA AND METHOD FOR ITS OPERATION**

(75) Inventor: **Stefan Albrecht**, Mauchenheim (DE)

(73) Assignee: **Pepperl + Fuchs GmbH**, Mannheim (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

5,955,998 A	9/1999	Roberts et al.	
2002/0044098 A1 *	4/2002	Von Stein et al.	343/770
2004/0201533 A1 *	10/2004	Sievenpiper et al.	343/770
2006/0125638 A1 *	6/2006	Marino	340/572.7

FOREIGN PATENT DOCUMENTS

EP	0 149 922 A2	7/1985
EP	0 669 672 A1	8/1995
EP	1 158 606 A1	11/2001
EP	1 602 148 A1	12/2005
WO	WO 2004/062035 A1	7/2004
WO	WO 2009/012796 A1	1/2009

OTHER PUBLICATIONS

PCT International Search Report, International Application No. PCT/EP2007/006582, pp. 1-3, Date of Mailing International Search Report, Apr. 25, 2008.

Tanaka et al., "Circularly Polarized Printed Antenna Combining Slots and Patch", XP-001541881, IEICE Transactions on Communications, vol. E90 -B, No. 3, pp. 621-629, Mar. 2007.

* cited by examiner

Primary Examiner — Harry Liu

(74) *Attorney, Agent, or Firm* — John A. Merecki; Hoffman Warnick LLC

(21) Appl. No.: **12/446,814**

(22) PCT Filed: **Jul. 24, 2007**

(86) PCT No.: **PCT/EP2007/006582**

§ 371 (c)(1),

(2), (4) Date: **May 14, 2009**

(87) PCT Pub. No.: **WO2009/012796**

PCT Pub. Date: **Jan. 29, 2009**

(65) **Prior Publication Data**

US 2010/0117902 A1 May 13, 2010

(51) **Int. Cl.**
H01Q 3/00 (2006.01)

(52) **U.S. Cl.** **342/372**

(58) **Field of Classification Search** 342/372
See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

3,340,534 A *	9/1967	Fee	343/738
5,347,287 A *	9/1994	Speciale	342/375
5,596,336 A *	1/1997	Liu	343/770
5,940,041 A	8/1999	Koyama et al.	

(57) **ABSTRACT**

The invention relates to a slot antenna, more particularly to a transmitting antenna for RFID, comprising an antenna contour board having a plurality of antenna slots and at least one control circuit for enabling the antenna contour board to transmit and/or receive electromagnetic radiation. The slot antenna is characterized in that in at least one antenna slot of the antenna contour board there is inserted a circuit board carrying a control circuit. The invention further relates to an RFID method involving the use of the slot antenna of the invention.

13 Claims, 2 Drawing Sheets

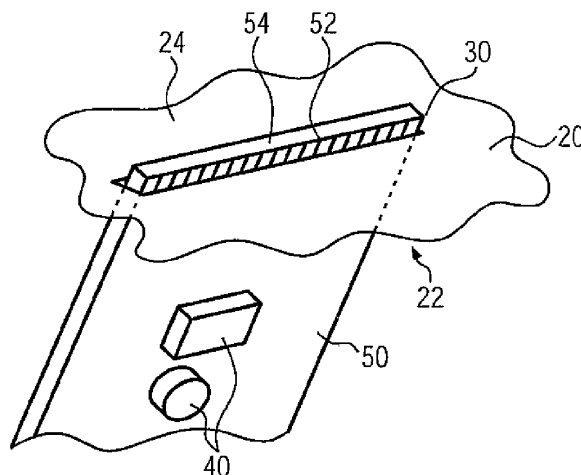

Acrobat Document



US007999743B2

(12) **United States Patent**
Huber et al.

(10) **Patent No.:** **US 7,999,743 B2**
(45) **Date of Patent:** **Aug. 16, 2011**

(54) **MULTIBAND ANTENNA ARRAY FOR
MOBILE RADIO EQUIPMENT**

(75) Inventors: **Stefan Huber**, München (DE);
Thorsten Kowalski, München (DE);
Michael Schreiber, Aying-Göggenhofen
(DE)

(73) Assignee: **Hewlett-Packard Development
Company, L.P.**, Houston, TX (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/543,008**

(22) PCT Filed: **Aug. 8, 2003**

(86) PCT No.: **PCT/DE03/02672**

§ 371 (c)(1),
(2), (4) Date: **Jul. 21, 2005**

(87) PCT Pub. No.: **WO2004/070875**

PCT Pub. Date: **Aug. 19, 2004**

(65) **Prior Publication Data**

US 2006/0055602 A1 Mar. 16, 2006

(30) **Foreign Application Priority Data**

Jan. 24, 2003 (DE) 103 02 805

(51) **Int. Cl.**
H01Q 19/00 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/833**

(58) **Field of Classification Search** **343/700 MS,**
343/702, 833, 834, 837, 893

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,966,097	A	10/1999	Fukasawa et al.	
6,323,810	B1 *	11/2001	Poilasne et al.	343/700 MS
6,456,249	B1 *	9/2002	Johnson et al.	343/702
6,657,593	B2 *	12/2003	Nagumo et al.	343/700 MS
6,680,705	B2 *	1/2004	Tan et al.	343/702
6,788,257	B2 *	9/2004	Fang et al.	343/700 MS
6,958,730	B2 *	10/2005	Nagumo et al.	343/702
7,046,196	B1 *	5/2006	Langley et al.	343/700 MS
2001/0050636	A1 *	12/2001	Weinberger	343/700 MS
2001/0050643	A1	12/2001	Egorow et al.	
2002/0019247	A1	2/2002	Egorow	
2002/0163470	A1	11/2002	Nagumo et al.	
2003/0210188	A1 *	11/2003	Hebron et al.	343/700 MS

FOREIGN PATENT DOCUMENTS

DE	102 19 654	12/2002
EP	0 831 547	3/1998
EP	1 024 552	8/2000
EP	1 026 774	8/2000
EP	1 067 627	1/2001
WO	WO 00/52784	9/2000
WO	WO 00/57511	9/2000
WO	WO 01/33665	5/2001
WO	WO 02/078124	10/2002

* cited by examiner


Primary Examiner — Jacob Y Choi

Assistant Examiner — Robert Karacsony

(57) **ABSTRACT**

A multiband antenna array for mobile radio equipment that includes a planar patch antenna having at least two resonances and is provided with a connection to ground and a high-frequency interface and at least two parasitic transmitters which are located marginal to the planar patch antenna and are embodied so as to be free of a high-frequency interface. A particularly compact multiband antenna for several frequency bands is created as a result of the special arrangement of the planar patch antenna and the parasitic transmitters.

10 Claims, 4 Drawing Sheets

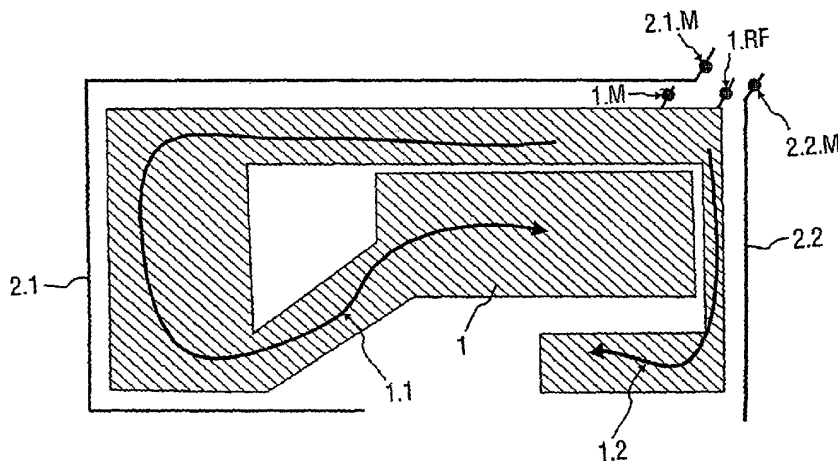

Acrobat Document



US007999744B2

(12) **United States Patent**
Chin et al.

(10) **Patent No.:** **US 7,999,744 B2**

(45) **Date of Patent:** **Aug. 16, 2011**

(54) **WIDEBAND PATCH ANTENNA**

(75) Inventors: **Ching Hong Chin**, Hong Kong (CN);
Quan Xue, Hong Kong (CN); **Hang**
Wong, Hong Kong (CN); **Xiu Yin**
Zhang, Hong Kong (CN)

(73) Assignee: **City University of Hong Kong**,
Kowloon (HK)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/953,210**

(22) Filed: **Dec. 10, 2007**

(65) **Prior Publication Data**

US 2009/0146883 A1 Jun. 11, 2009

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**; 343/846

(58) **Field of Classification Search** 343/700 MS,
343/846, 850

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,907,006 A * 3/1990 Nishikawa et al. 343/700 MS
4,973,972 A * 11/1990 Huang 343/700 MS

6,317,084 B1 * 11/2001 Chen et al. 343/700 MS
6,883,227 B2 * 4/2005 Lebaric et al. 29/600
7,148,847 B2 * 12/2006 Yuanzhu 343/700 MS
7,304,611 B2 * 12/2007 Yuanzhu 343/700 MS
2003/0122716 A1 * 7/2003 Ellis et al. 343/702
2004/0150566 A1 * 8/2004 Yuanzhu 343/700 MS
2005/0052323 A1 * 3/2005 Shikata 343/700 MS
2006/0170593 A1 * 8/2006 Watts 343/700 MS
2006/0176233 A1 * 8/2006 Tang et al. 343/850
2008/0122717 A1 * 5/2008 Su et al. 343/787

OTHER PUBLICATIONS

Vandenbosch, Guy A. E., et al., "Study of the capacitively fed
microstrip antenna element", IEEE Transactions on Antennas and
Propagation, 42(12): 1648-1652 (1994).

Zharig, Xiu Yin, et al., "A wideband antenna with dual printed
L-probes for cross-polarization suppression", IEEE Antennas and
Wireless Propagation Letters, 5:388-390 (2006).

Lee, K. F., et al., "Experimental and simulation studies of the coaxially fed U-slot rectangular patch antenna", IEE Proc.—Micro. Antennas Propag., 144(5):354-358 (1997).

* cited by examiner


Primary Examiner — HoangAnh T Le

(74) Attorney, Agent, or Firm — Leydig, Voit & Mayer, Ltd.

(57) **ABSTRACT**

A patch antenna has a ground plane and a planar antenna plate that are parallel to and spaced from each other. A pair of planar feed plates have feed edges electrically contacting a surface of the antenna plate to couple electromagnetic energy into and/or out of the antenna plate.

5 Claims, 9 Drawing Sheets

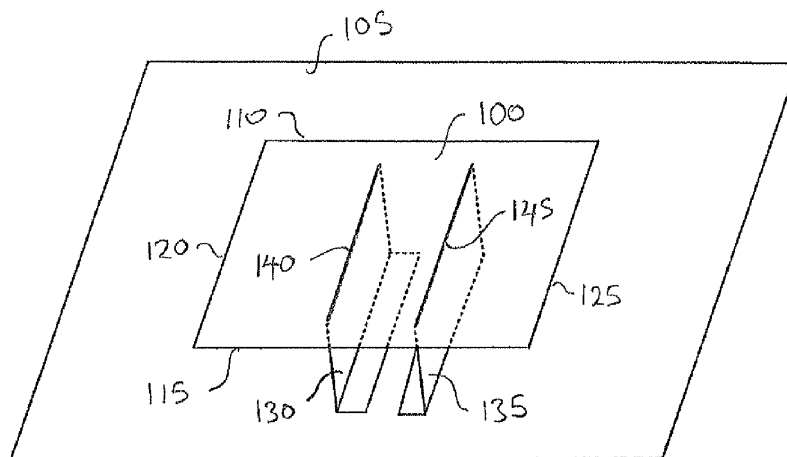

Acrobat Document



US008004465B2

(12) **United States Patent**
Schano

(10) **Patent No.:** **US 8,004,465 B2**

(45) **Date of Patent:** **Aug. 23, 2011**

(54) **MULTIBAND OMNIDIRECTIONAL ANTENNA**

(75) Inventor: **Thomas Schano**, Giesen (DE)

(73) Assignee: **Robert Bosch GmbH**, Stuttgart (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 226 days.

(21) Appl. No.: **12/084,936**

(22) PCT Filed: **Oct. 31, 2006**

(86) PCT No.: **PCT/EP2006/067981**

§ 371 (c)(1),

(2), (4) Date: **Mar. 10, 2009**

(87) PCT Pub. No.: **WO2007/057300**

PCT Pub. Date: **May 24, 2007**

(65) **Prior Publication Data**

US 2009/0303131 A1 Dec. 10, 2009

(30) **Foreign Application Priority Data**

Nov. 21, 2005 (DE) 10 2005 055 345

(51) **Int. Cl.**

H01Q 1/38 (2006.01)

(52) **U.S. Cl.** 343/700 MS; 343/713

(58) **Field of Classification Search** 343/700 MS,
343/711, 712, 713
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,821,040	A *	4/1989	Johnson et al.	343/700 MS
6,597,316	B2 *	7/2003	Rao et al.	343/700 MS
7,158,086	B2 *	1/2007	Inatsugu et al.	343/711
7,495,621	B2 *	2/2009	Li et al.	343/702
7,733,279	B2 *	6/2010	Hozouri	343/702
2004/0004572	A1 *	1/2004	Ma	343/700 MS
2005/0195111	A1	9/2005	Inatsugu	

FOREIGN PATENT DOCUMENTS

EP	1 445 828	8/2004
FR	2 826 185	12/2002

* cited by examiner


Primary Examiner — HoangAnh T Le

(74) *Attorney, Agent, or Firm* — Kenyon & Kenyon LLP

(57) **ABSTRACT**

A multiband omnidirectional antenna which includes a grounded face and an antenna element situated parallel to the grounded face, the antenna element having a first planar emitter, which has a planar design and extends parallel to the grounded face, a second planar emitter, which surrounds the first planar emitter at a distance, and at least two connection elements for connecting the first and the second planar emitters to each other.

7 Claims, 2 Drawing Sheets

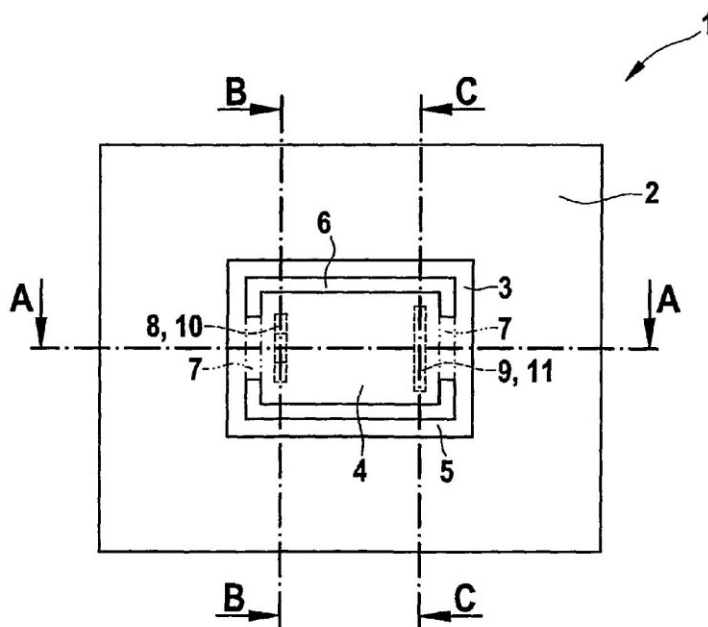

Acrobat Document



US008004466B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 8,004,466 B2**
(45) **Date of Patent:** **Aug. 23, 2011**

(54) **ANTENNA**

(75) Inventors: **Hyun Hak Kim**, Gyeonggi-do (KR);
Jong Kweon Park, Daejeon (KR); **Jung**
Nam Lee, Daejeon (KR); **Seok Min**
Woo, Gyeonggi-do (KR)

(73) Assignee: **Samsung Electro-Mechanics Co., Ltd.**,
Gyeonggi-do (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 335 days.

(21) Appl. No.: **12/257,556**

(22) Filed: **Oct. 24, 2008**

(65) **Prior Publication Data**

US 2009/0284419 A1 Nov. 19, 2009

(30) **Foreign Application Priority Data**

May 13, 2008 (KR) 10-2008-0044110

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 1/48 (2006.01)
(52) **U.S. Cl.** **343/700 MS; 343/846; 343/850**
(58) **Field of Classification Search** **343/343,**
343/700 MS, 702, 907, 911 R, 767, 770,
343/846, 850

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,063,246	A *	12/1977	Greiser	343/700 MS
5,327,148	A *	7/1994	How et al.	343/700 MS
6,774,853	B2 *	8/2004	Wong et al.	343/700 MS
6,992,637	B2 *	1/2006	Hwang et al.	343/770
7,116,276	B2 *	10/2006	Lee	343/700 MS
7,183,979	B1 *	2/2007	Liu et al.	343/700 MS
7,324,049	B2 *	1/2008	Myoung et al.	343/700 MS
7,468,698	B2 *	12/2008	Fujii et al.	343/700 MS
7,609,219	B2 *	10/2009	Hashimoto	343/767
2002/0180644	A1 *	12/2002	Carson et al.	343/700 MS
2003/0058173	A1 *	3/2003	Yoon	343/702
2003/0189523	A1 *	10/2003	Ojantakanen et al.	343/702
2007/0279290	A1	12/2007	Shih	

FOREIGN PATENT DOCUMENTS

KR	1020050117638	A	12/2005
KR	1020060089081	A	8/2006
KR	1020060095359	A	8/2006
KR	102070082457	A	8/2007

* cited by examiner


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — Lowe, Hauptman, Ham &
Berner, LLP

(57) **ABSTRACT**

An antenna includes a dielectric substrate, a radiator disposed on one surface of the dielectric substrate, a feeding conductive pattern having one end connected with the radiator and the other end connected with an external feed line, a first slot disposed in the feeding conductive pattern, a ground plane disposed on the other surface of the dielectric substrate, and a second slot disposed on the ground plane.

20 Claims, 5 Drawing Sheets

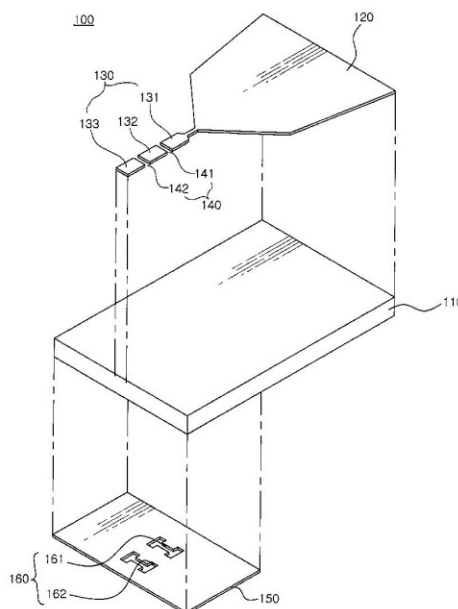

Acrobat Document



US008004469B2

(12) **United States Patent**
Qi et al.

(10) **Patent No.:** **US 8,004,469 B2**
(45) **Date of Patent:** ***Aug. 23, 2011**

(54) **MOBILE WIRELESS COMMUNICATIONS
DEVICE COMPRISING MULTI-FREQUENCY
BAND ANTENNA AND RELATED METHODS**

(75) Inventors: **Yihong Qi**, Waterloo (CA); **Ying Tong
Man**, Kitchener (CA); **Perry
Jarmuszewski**, Waterloo (CA)

(73) Assignee: **Motorola Mobility, Inc.**, Libertyville, IL
(US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **12/749,556**

(22) Filed: **Mar. 30, 2010**

(65) **Prior Publication Data**

US 2010/0184388 A1 Jul. 22, 2010

Related U.S. Application Data

(63) Continuation of application No. 12/173,087, filed on
Jul. 15, 2008, now Pat. No. 7,696,935, which is a
continuation of application No. 11/769,844, filed on
Jun. 28, 2007, now Pat. No. 7,482,985, which is a
continuation of application No. 11/422,158, filed on
Jun. 5, 2006, now Pat. No. 7,271,772, which is a
continuation of application No. 11/042,693, filed on
Jan. 25, 2005, now Pat. No. 7,068,230.

(60) Provisional application No. 60/576,159, filed on Jun.
2, 2004, provisional application No. 60/576,637, filed
on Jun. 3, 2004.

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS,**
343/702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,571,595 A	2/1986	Phillips et al.	343/745
4,723,305 A	2/1988	Phillips et al.	455/89
5,337,061 A	8/1994	Pye et al.	343/702
5,451,965 A	9/1995	Matsumoto	343/702
5,557,293 A	9/1996	McCoy et al.	343/867
5,929,825 A	7/1999	Niu et al.	343/895
5,973,650 A	10/1999	Nakanishi	343/742

(Continued)

FOREIGN PATENT DOCUMENTS

CA 2489837 12/2003

(Continued)

OTHER PUBLICATIONS

Film type inverted F antenna, Honda Tsushin Kogyo Co., Ltd., Jun.
17, 2003.


(Continued)

Primary Examiner — Hoang V Nguyen

(57) **ABSTRACT**

A mobile wireless communications device may include a housing and a multi-frequency band antenna carried within the housing. The multi-frequency band antenna may include a main loop conductor having a gap therein defining first and second ends of the main loop conductor, a first branch conductor having a first end connected adjacent the first end of the main loop conductor and having a second end defining a first feed point, and a second branch conductor having a first end connected adjacent the second end of the main loop conductor and a second end defining a second feed point. The antenna may further include a tuning branch conductor having a first end connected to the main loop conductor between the respective first ends of the first and second branches.

23 Claims, 11 Drawing Sheets

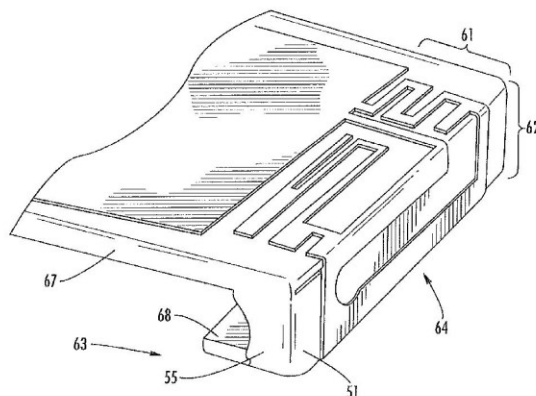

Acrobat Document



US008004470B2

(12) **United States Patent**
Sorvala et al.

(10) **Patent No.:** **US 8,004,470 B2**

(45) **Date of Patent:** ***Aug. 23, 2011**

(54) **ANTENNA, COMPONENT AND METHODS**

(75) Inventors: **Juha Sorvala**, Oulu (FI); **Petteri Annamaa**, Oulunsalo (FI); **Kimmo Koskineniemi**, Oulu (FI)

(73) Assignee: **Pulse Finland Oy**, Kempele (FI)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **12/871,841**

(22) Filed: **Aug. 30, 2010**

(65) **Prior Publication Data**

US 2010/0321250 A1 Dec. 23, 2010

Related U.S. Application Data

(63) Continuation of application No. 11/648,429, filed on Dec. 28, 2006, now Pat. No. 7,786,938, which is a continuation of application No. PCT/FI2005/050247, filed on Jun. 28, 2005.

(30) **Foreign Application Priority Data**

Jun. 28, 2004 (FI) 20040892
Aug. 18, 2004 (FI) 20041088
Mar. 16, 2005 (WO) PCT/FI2005/050089

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700, 343/702, 829, 846**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,069,483 A 1/1978 Kaloi
4,401,988 A * 8/1983 Kaloi 343/700 MS
5,001,492 A * 3/1991 Shapiro et al. 343/700 MS

(Continued)

FOREIGN PATENT DOCUMENTS

DE 101 50 149 A1 4/2003

(Continued)

OTHER PUBLICATIONS

"A Novel Approach of a Planar Multi-Band Hybrid Series Feed Network for Use in Antenna Systems Operating at Millimeter Wave Frequencies," by M.W. Elsallal and B.L. Hauck, Rockwell Collins, Inc., pp. 15-24, waecisall@rockwellcollins.com and blhauck@rockwellcollins.com.

(Continued)


Primary Examiner — David G Phan

(74) *Attorney, Agent, or Firm* — Gazdzinski & Associates, PC

(57) **ABSTRACT**

An antenna component (and antenna) with a dielectric substrate and a plurality of radiating antenna elements on the surface of the substrate. In one embodiment, the plurality comprises two (2) elements, each of them covering one of the opposite heads and part of the upper surface of the device. The upper surface between the elements comprises a slot. The lower edge of one of the antenna elements is galvanically coupled to the antenna feed conductor on a circuit board, and at another point to the ground plane, while the lower edge of the opposite antenna element, or the parasitic element, is galvanically coupled only to the ground plane. The parasitic element obtains its feed through the electromagnetic coupling over the slot, and both elements resonate at the operating frequency. Omni-directionality is also achieved. Losses associated with the substrate are low due to the simple field image in the substrate.

23 Claims, 5 Drawing Sheets

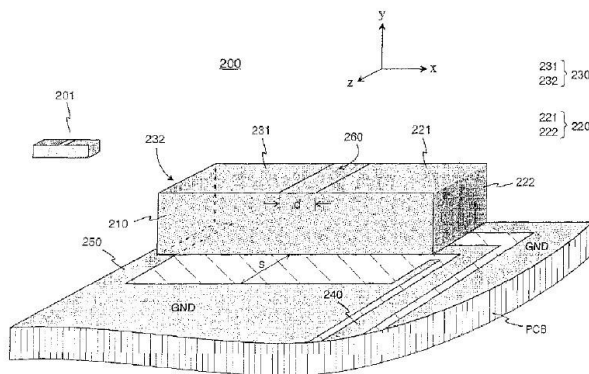



US008004473B2

(12) **United States Patent**
Chung et al.

(10) **Patent No.:** **US 8,004,473 B2**

(45) **Date of Patent:** **Aug. 23, 2011**

(54) **ANTENNA DEVICE WITH AN ISOLATING UNIT**

(75) Inventors: **Shyh-Jong Chung**, Hsinchu (TW);
Ming Ta Lin, Yunlin County (TW);
Chih Hung Tsai, Koahsiung (TW)

(73) Assignee: **Realtek Semiconductor Corp.**, Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 334 days.

(21) Appl. No.: **12/244,562**

(22) Filed: **Oct. 2, 2008**

(65) **Prior Publication Data**

US 2009/0091507 A1 Apr. 9, 2009

(30) **Foreign Application Priority Data**

Oct. 4, 2007 (TW) 96137262 A

(51) **Int. Cl.**
H01Q 1/52 (2006.01)

(52) **U.S. Cl.** **343/841; 343/851**

(58) **Field of Classification Search** 343/835,
343/841, 893, 850, 851
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,297,711 B1 * 10/2001 Seward et al. 333/129
2008/0062058 A1 * 3/2008 Bishop 343/835

OTHER PUBLICATIONS

Chi-Yuk Chiu et al., "Reduction of Mutual Coupling Between Closely Packed Antenna Elements", IEEE Transactions on Antennas and Propagation, vol. 55, No. 6, Jun. 2007, pp. 1732-1738.

* cited by examiner


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — Stephen A. Bent; Foley & Lardner LLP

(57) **ABSTRACT**

An antenna device includes a pair of antennas and an isolating unit. The antennas have the same operating frequency. The isolating unit is disposed between the antennas, and includes an LC circuit that has a resonant frequency, which is the same as the operating frequency of the antennas, thereby improving isolation between the antennas.

20 Claims, 5 Drawing Sheets

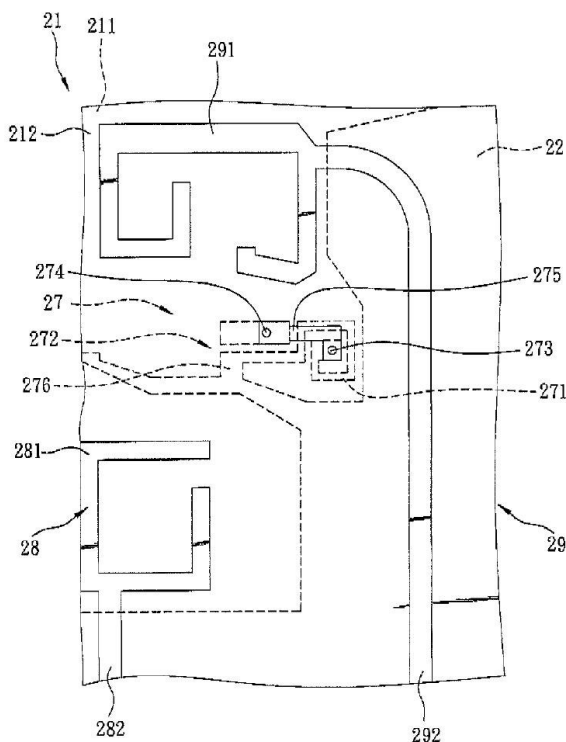



US008009102B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 8,009,102 B2**
(45) **Date of Patent:** **Aug. 30, 2011**

(54) **MULTI-BAND ANTENNA AND MULTI-BAND ANTENNA SYSTEM WITH ENHANCED ISOLATION CHARACTERISTIC**

(75) Inventors: **Il-kyu Kim**, Seongnam-si (KR);
Chang-won Jung, Hwaseong-si (KR);
Young-eil Kim, Suwon-si (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 573 days.

(21) Appl. No.: **12/105,614**

(22) Filed: **Apr. 18, 2008**

(65) **Prior Publication Data**
US 2009/0079655 A1 Mar. 26, 2009

(30) **Foreign Application Priority Data**
Sep. 21, 2007 (KR) 10-2007-0096985

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702; 343/846**
(58) **Field of Classification Search** None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,476,769	B1 *	11/2002	Lehtola		343/702
6,791,498	B2 *	9/2004	Boyle et al.		343/702
7,109,923	B2 *	9/2006	Ollikainen et al.		343/700 MS
7,439,916	B2 *	10/2008	Wang et al.		343/700 MS
7,482,984	B2 *	1/2009	Rosengren et al.		343/702
7,782,261	B2 *	8/2010	An et al.		343/702
2004/0130494	A1 *	7/2004	Fukushima et al.		343/702
2007/0285334	A1 *	12/2007	Tsutsumi et al.		343/893
2008/0068273	A1 *	3/2008	Schneider et al.		343/742

* cited by examiner


Primary Examiner — Trinh V Dinh

(74) *Attorney, Agent, or Firm* — NSIP Law, PC

(57) **ABSTRACT**

A Multi-Band antenna system includes an antenna which resonates in a plurality of frequency bands and a controller which drives the antenna. The antenna includes a ground plate and a plurality of radiators which are formed on both sides of the ground plate in directions perpendicular to a surface of the ground plate in a space at an edge of the ground plate, wherein each radiator is connected to the edge of the ground plate.

16 Claims, 10 Drawing Sheets

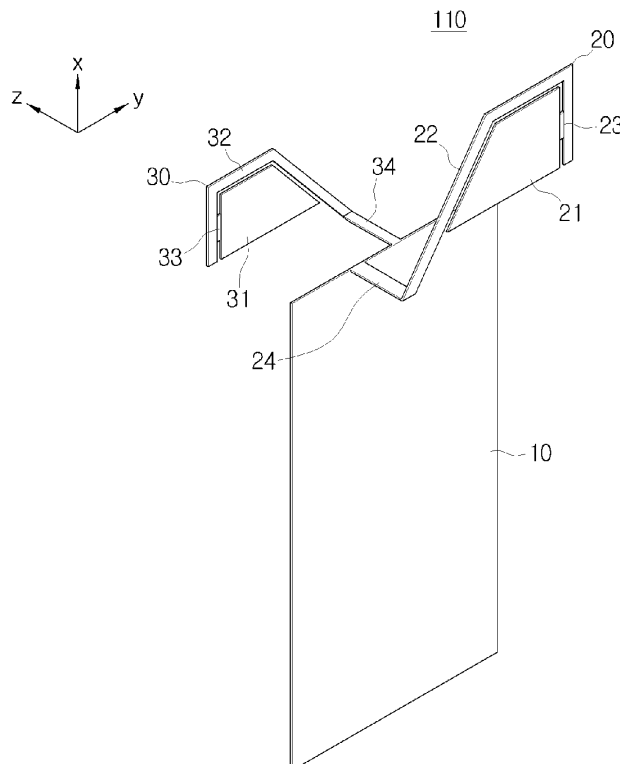

Acrobat Document



US008009103B2

(12) **United States Patent**
Chang

(10) **Patent No.:** **US 8,009,103 B2**
(45) **Date of Patent:** **Aug. 30, 2011**

(54) **TRIPLE-BAND ANTENNA**

(75) Inventor: **Yu-Min Chang**, Tu-Cheng (TW)

(73) Assignee: **Chi Mei Communication Systems, Inc.**, Tu-Cheng, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 398 days.

(21) Appl. No.: **12/401,727**

(22) Filed: **Mar. 11, 2009**

(65) **Prior Publication Data**

US 2010/0039344 A1 Feb. 18, 2010

(30) **Foreign Application Priority Data**

Aug. 13, 2008 (CN) 2008 1 030751

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/702, 343/700 MS**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,940,219 B2 *	5/2011	Soekawa et al.	343/702
2003/0052824 A1 *	3/2003	Ollikainen et al.	343/700 MS
2005/0122267 A1 *	6/2005	Sim et al.	343/702
2008/0180333 A1 *	7/2008	Martiskainen et al.	343/722

* cited by examiner


Primary Examiner — Hoanganh Le

(74) *Attorney, Agent, or Firm* — Altis Law Group, Inc.

(57) **ABSTRACT**

The disclosure discloses a triple-band antenna including a feed line, a first radiating body, a second radiating body and a grounding sheet. The first radiating body is a rectangular sheet. One end of the first radiating body is electrically connected with the end of the feed line. The second radiating body includes three parallel bar shape sheets extending from the first radiating body and surrounded by the first radiating body, and both share the feed line. The grounding sheet is disposed beside the feed line. The first radiating body and the second radiating body of the triple-band antenna generate three resonance frequencies according to the radio frequency received by the feed line to allow the triple-band antenna work under three different operating frequencies.

19 Claims, 14 Drawing Sheets

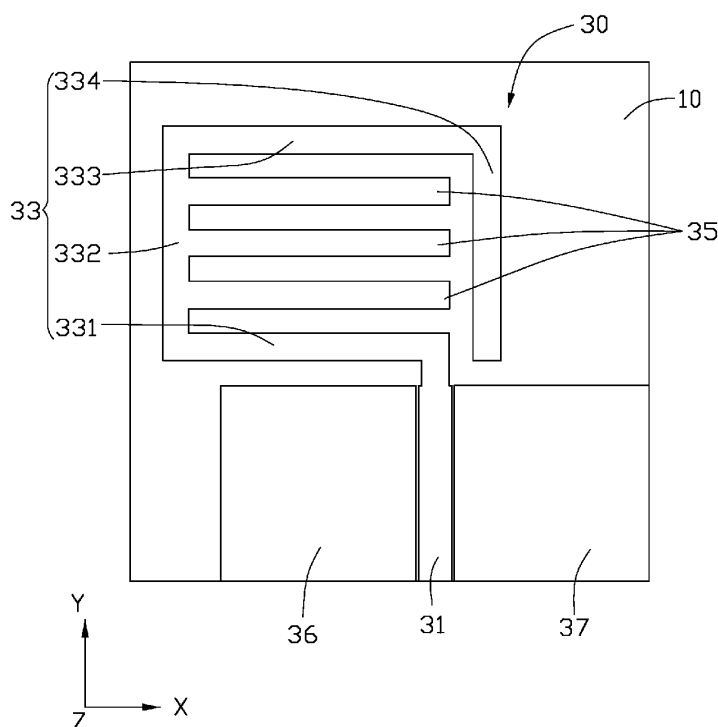

Acrobat Document



US008009106B2

(12) **United States Patent**
Yang et al.

(10) **Patent No.:** **US 8,009,106 B2**

(45) **Date of Patent:** **Aug. 30, 2011**

(54) **DUAL FREQUENCY ANTENNA AND COMMUNICATION SYSTEM**

(75) Inventors: **Chih-Yuan Yang**, Taipei Hsien (TW);
Po-Wei Kuo, Taipei Hsien (TW);
Suo-Bing Su, Taipei Hsien (TW);
Hung-Chang Ko, Taipei Hsien (TW);
Wen-Chun Chen, Taipei Hsien (TW)

(73) Assignee: **Hon Hai Precision Industry Co., Ltd.**,
Tu-Cheng, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 361 days.

(21) Appl. No.: **12/423,016**

(22) Filed: **Apr. 14, 2009**

(65) **Prior Publication Data**

US 2009/0256756 A1 Oct. 15, 2009

(30) **Foreign Application Priority Data**

Apr. 14, 2008 (CN) 2008 1 0301132

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** 343/700 MS,
343/702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,788,257 B2 9/2004 Fang et al.

7,079,079 B2 * 7/2006 Jo et al. 343/700 MS

* cited by examiner


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — Altis Law Group, Inc.

(57) **ABSTRACT**

A dual frequency antenna includes a first scythe-shaped arm and a second scythe-shaped arm. The first scythe-shaped arm is configured for operating in a first band. The second scythe-shaped arm is configured for operating in a second band and includes an inverted-T-shaped strip with a foot of the inverted-T-shaped strip connected to the second scythe-shaped arm. The first scythe-shaped arm is attached to the second scythe-shaped arm at an apex. A head of the inverted-T-shaped strip is closer to the apex than the foot. A communication system is also provided.

20 Claims, 4 Drawing Sheets

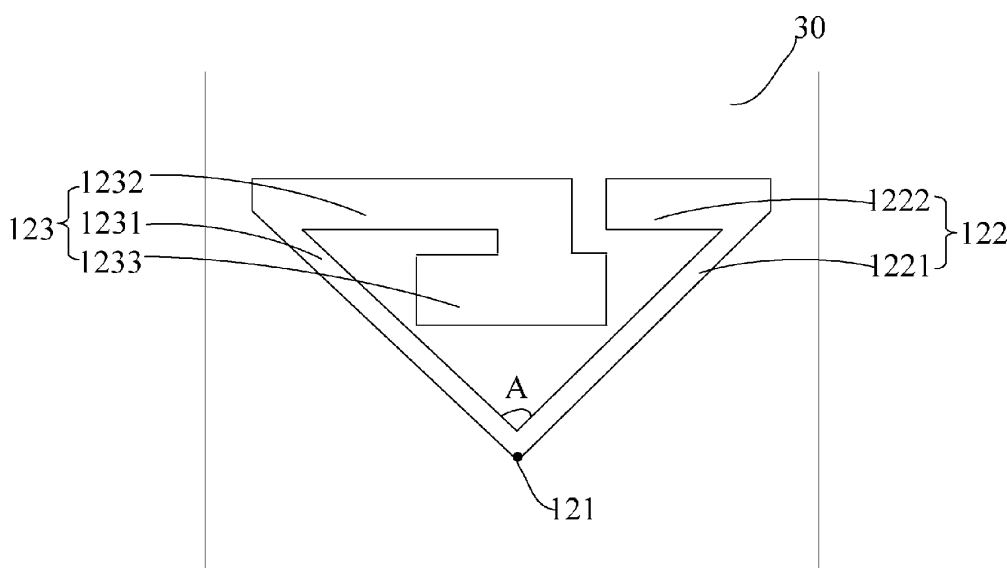

Acrobat Document



US008009109B2

(12) **United States Patent**
So et al.

(10) **Patent No.:** **US 8,009,109 B2**
(45) **Date of Patent:** **Aug. 30, 2011**

(54) **INTERNAL ANTENNA HAVING
SURFACE-MOUNTED RECEPTACLE**

(75) Inventors: **Soon-Jong So**, Gyeonggi-do (KR);
Sang-Hyuk Mun, Incheon (KR);
Suk-Hwan Seo, Gyeonggi-do (KR);
Ji-Soo Han, Gyeonggi-do (KR)

(73) Assignee: **Ace Antenna Corp.**, Incheon-Shi (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 418 days.

(21) Appl. No.: **12/240,984**

(22) Filed: **Sep. 29, 2008**

(65) **Prior Publication Data**

US 2009/0085816 A1 Apr. 2, 2009

(30) **Foreign Application Priority Data**

Sep. 28, 2007 (KR) 10-2007-0097710

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/906**

(58) **Field of Classification Search** 343/700 MS,
343/702, 906
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,295,197 B1 *	9/2001	Watts et al.	361/679.4
7,471,253 B2 *	12/2008	Kinney et al.	343/702
7,626,551 B2 *	12/2009	Chien et al.	343/700 MS
2002/0098456 A1 *	7/2002	Freeman et al.	431/291
2007/0146213 A1 *	6/2007	Soekawa et al.	343/702

* cited by examiner


Primary Examiner — Hoanganh Le

(74) *Attorney, Agent, or Firm* — LRK Patent Law Firm

(57) **ABSTRACT**

Disclosed herein is an internal antenna having a surface-mounted receptacle. The internal antenna includes a printed circuit board, a radiator, and a frame. The printed circuit board is configured such that a receptacle is surface-mounted thereon. The radiator is connected to the printed circuit board. The frame is configured such that the printed circuit board and the radiator are mounted thereto.

9 Claims, 9 Drawing Sheets

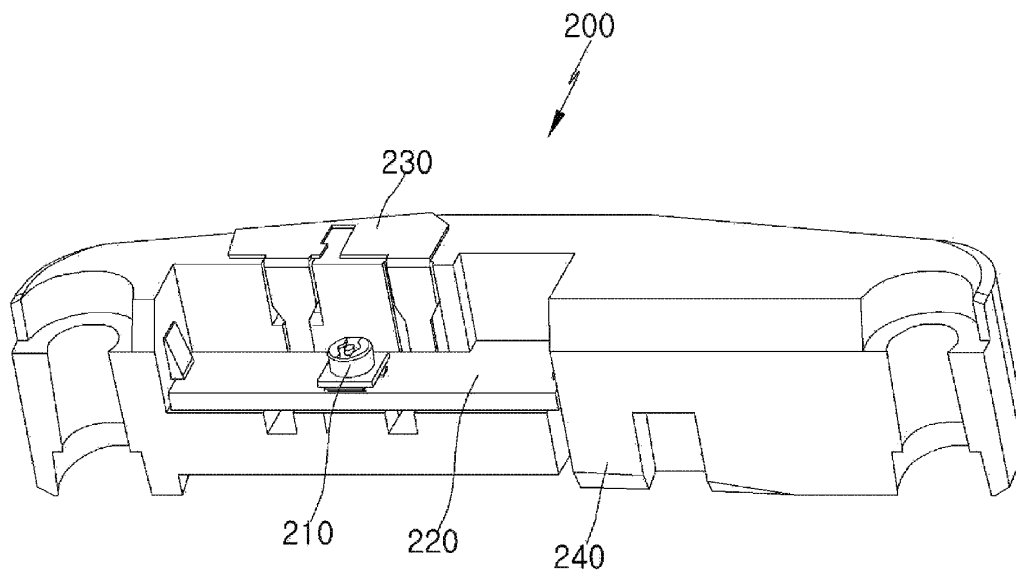

Acrobat Document



US008009110B2

(12) **United States Patent**
Teng et al.

(10) **Patent No.:** **US 8,009,110 B2**
(45) **Date of Patent:** **Aug. 30, 2011**

(54) **ELECTRONIC APPARATUS WITH HIDDEN ANTENNA**

(75) Inventors: **Pei-Ling Teng**, Taoyuan County (TW);
Kuo-Cheng Chen, Taoyuan County (TW)

(73) Assignee: **HTC Corporation**, Taoyuan County (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 535 days.

(21) Appl. No.: **12/251,380**

(22) Filed: **Oct. 14, 2008**

(65) **Prior Publication Data**

US 2009/0167615 A1 Jul. 2, 2009

(30) **Foreign Application Priority Data**

Dec. 31, 2007 (TW) 96151567 A

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** 343/702,
343/700 MS, 767, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,808,586	A *	9/1998	Phillips et al.	343/895
6,339,400	B1 *	1/2002	Flint et al.	343/702
6,950,069	B2 *	9/2005	Gaucher et al.	343/702
7,889,139	B2 *	2/2011	Hobson et al.	343/702
7,911,387	B2 *	3/2011	Hill et al.	343/700 MS
2001/0052877	A1	12/2001	Honda et al.	
2005/0093752	A1	5/2005	Cheng et al.	

* cited by examiner


Primary Examiner — Huedung Mancuso

(74) *Attorney, Agent, or Firm* — Jianq Chyun IP Office

(57) **ABSTRACT**

An electronic apparatus with a hidden antenna comprises a metal frame and a substrate. The metal frame comprises a plurality of side walls and a notch is passed through at least one side wall. A feeding terminal is configured at a bottom side of the notch. A first shorting terminal and a second shorting terminal are configured at two lateral sides of the notch. A metal surface of the substrate is electrically connected to the first shorting terminal, the second shorting terminal and the side walls, and the notch is faced to the substrate. The metal frame receives or transmits an electromagnetic signal, and delivers the electromagnetic signal over the feeding terminal, and a length of the bottom side of the notch is one half of a wavelength of the electromagnetic signal.

16 Claims, 8 Drawing Sheets

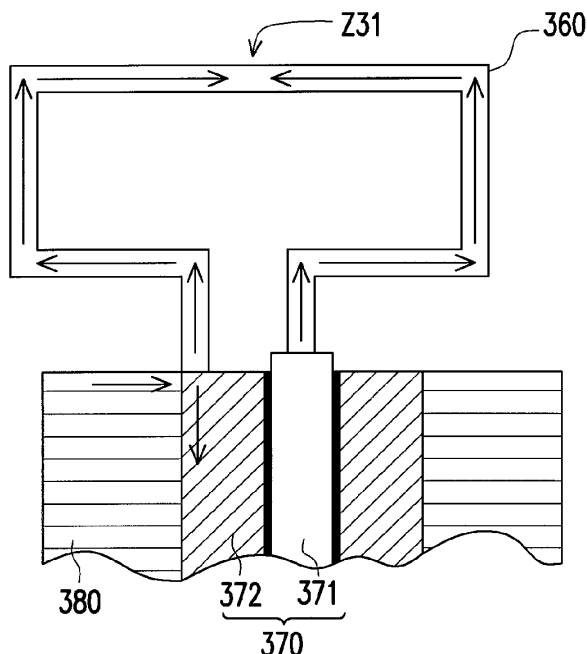

Acrobat Document



US008009119B2

(12) **United States Patent**
Hung

(10) **Patent No.:** **US 8,009,119 B2**
(45) **Date of Patent:** **Aug. 30, 2011**

(54) **MULTIBAND ANTENNA**

(75) Inventor: **Chung-Yu Hung**, Tu-Cheng (TW)

(73) Assignee: **Chi Mei Communication Systems, Inc.**, Tu-Cheng, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 216 days.

(21) Appl. No.: **12/486,020**

(22) Filed: **Jun. 17, 2009**

(65) **Prior Publication Data**

US 2010/0123641 A1 May 20, 2010

(30) **Foreign Application Priority Data**

Nov. 14, 2008 (CN) 2008 1 0305561

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 21/30 (2006.01)

(52) **U.S. Cl.** **343/893; 343/702; 343/846; 343/828**

(58) **Field of Classification Search** **343/700 MS, 343/702, 893, 828, 846**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,094,179 A * 7/2000 Davidson 343/895

7,598,921 B2 *	10/2009	Ge et al.	343/806
7,659,866 B1 *	2/2010	Peng et al.	343/893
7,728,776 B2 *	6/2010	Lin et al.	343/702
7,911,391 B2 *	3/2011	Tsai et al.	343/700 MS
7,924,230 B2 *	4/2011	Hung et al.	343/702

* cited by examiner

Primary Examiner — Douglas W Owens


Assistant Examiner — Jennifer F Hu

(74) *Attorney, Agent, or Firm* — Altis Law Group, Inc.

(57) **ABSTRACT**

A multiband antenna includes a first antenna unit for receiving/sending wireless signals having higher frequencies and a second antenna unit for receiving/sending wireless signals having lower frequencies than those frequencies received/sent by the first antenna unit. The first antenna unit includes a first main portion, a first resonating portion and a first connecting portion connected in order and positioned in a same plane. The second antenna unit includes a second connecting portion, a second resonating portion and a second main portion connected in order. The second connecting portion is coplanar with the first connecting portion, the second resonating portion is perpendicular to the second connecting portion, and the second main portion is perpendicular to both the first connecting portion and the second connecting portion.

12 Claims, 3 Drawing Sheets

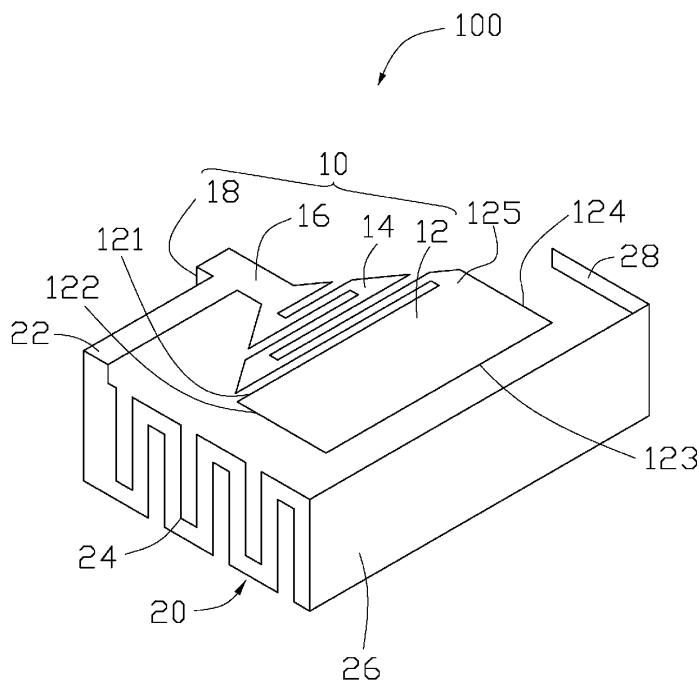

Acrobat Document