



US008279121B2

(12) **United States Patent**
Ishizuka et al.

(10) **Patent No.:** **US 8,279,121 B2**
(45) **Date of Patent:** **Oct. 2, 2012**

(54) **ANTENNA DEVICE AND WIRELESS COMMUNICATION APPARATUS**

6,600,449 B2 7/2003 Onaka et al.
6,606,069 B2 * 8/2003 Kitamura et al. 343/745
7,180,463 B2 * 2/2007 Chung 343/824

(Continued)

(75) Inventors: **Kenichi Ishizuka**, Yokohama (JP);
Kazunari Kawahata, Yokohama (JP);
Nobuhito Tsubaki, Yokohama (JP);
Shigeyuki Fujieda, Hakusan (JP);
Shinichi Nakano, Sagamihara (JP)

FOREIGN PATENT DOCUMENTS

JP 02-016476 A 1/1990

(Continued)

(73) Assignee: **Murata Manufacturing Co., Ltd.**,
Kyoto (JP)

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 446 days.

Official Communication issued in corresponding Japanese Patent Application No. 2008-528266, mailed on Jul. 21, 2010.

(Continued)

(21) Appl. No.: **12/504,367**

Primary Examiner — Tho G Phan

(22) Filed: **Jul. 16, 2009**

(74) Attorney, Agent, or Firm — Keating & Bennett, LLP

(65) **Prior Publication Data**

US 2009/0273531 A1 Nov. 5, 2009

(57) **ABSTRACT**

Related U.S. Application Data

(63) Continuation of application No. PCT/JP2007/071427, filed on Nov. 2, 2007.

A compact and low-cost antenna device in which no interference occurs even when many antenna units corresponding to various systems are mounted close together in a small area, and a wireless communication apparatus including the antenna device. An antenna device includes plural antenna units mounted on a single dielectric base. A first antenna unit having a lowest fundamental frequency is disposed at a left end of a non-ground region, a second antenna unit having a highest fundamental frequency of the plurality of the antenna units is disposed at a right end of the non-ground region, and a third antenna unit having a fundamental frequency between those of the first antenna unit and the second antenna unit is disposed between the first and second antenna units. A current-density control coil is connected between a first radiation electrode and a power feeder of the first antenna unit, while a reactance circuit is disposed in the middle of the first radiation electrode. Notches may be disposed between the first radiation electrode and a second radiation electrode and between the first radiation electrode and a third radiation electrode.

(30) **Foreign Application Priority Data**

Jan. 19, 2007 (JP) 2007-010139

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**; 343/750; 343/751


(58) **Field of Classification Search** 343/722–723,
343/750–752, 852, 861, 702, 700 MS
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,281,850 B1 8/2001 Klostermann
6,501,425 B1 * 12/2002 Nagumo et al. 343/700 MS

8 Claims, 10 Drawing Sheets

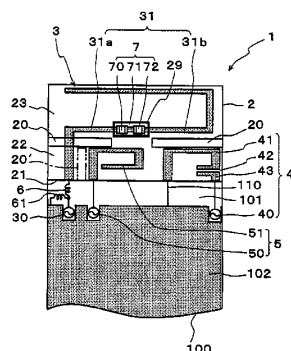

Acrobat 文件



US008279125B2

(12) **United States Patent**
Bellows

(10) **Patent No.:** **US 8,279,125 B2**
(45) **Date of Patent:** **Oct. 2, 2012**

(54) **COMPACT CIRCULAR POLARIZED
MONOPOLE AND SLOT UHF RFID
ANTENNA SYSTEMS AND METHODS**

(75) Inventor: **David E. Bellows**, Wantagh, NY (US)

(73) Assignee: **Symbol Technologies, Inc.**, Holtsville,
NY (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 403 days.

(21) Appl. No.: **12/643,206**

(22) Filed: **Dec. 21, 2009**

(65) **Prior Publication Data**

US 2011/0148722 A1 Jun. 23, 2011

(51) **Int. Cl.**
H01Q 21/00 (2006.01)

(52) **U.S. Cl.** **343/725; 343/767**

(58) **Field of Classification Search** **343/725,**
343/729, 767, 770

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,130,647	A *	10/2000	Zurcher et al.	343/767
6,424,309	B1	7/2002	Johnston et al.	
6,653,983	B2 *	11/2003	Masuda et al.	343/767
7,187,337	B2 *	3/2007	Aikawa et al.	343/767
7,327,324	B2	2/2008	Wang et al.	
8,018,389	B2 *	9/2011	Chiang et al.	343/745
2007/0085742	A1	4/2007	Kikin	
2009/0096680	A1	4/2009	Bellows	
2009/0295567	A1	12/2009	Bellows	
2011/0140977	A1 *	6/2011	Yang et al.	343/725

* cited by examiner


Primary Examiner — Tan Ho

(74) *Attorney, Agent, or Firm* — Terri Hughes Smith;
Kenneth A. Haas

(57) **ABSTRACT**

The present disclosure relates to a combined and compact monopole and slot antenna providing circular polarization for various applications, such as ultra high frequency (UHF) radio frequency identification (RFID). The antenna of the present invention combines a slot antenna with a monopole antenna using a single feed to drive both, effectively resulting in a circular polarized antenna. In an exemplary embodiment, the antenna may be integrated internally to a mobile device and printed on a flex or a printed circuit board (PCB), made from sheet metal, etc. Advantageously, the design of the antenna provides performance similar to circular polarized patch antennas while avoiding the size, weight, and cost.

14 Claims, 4 Drawing Sheets

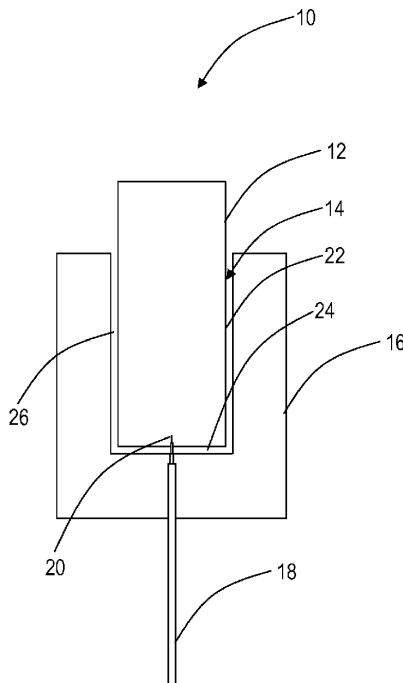

Acrobat 文件



US008279126B2

(12) **United States Patent**
Yanagi et al.

(10) **Patent No.:** **US 8,279,126 B2**
(45) **Date of Patent:** **Oct. 2, 2012**

(54) **COMMUNICATION DEVICE AND SYSTEM INCLUDING THE SAME**

(56) **References Cited**

(75) Inventors: **Masahiro Yanagi**, Shinagawa (JP);
Shigemi Kurashima, Shinagawa (JP);
Takashi Arita, Shinagawa (JP)

(73) Assignee: **Fujitsu Component Limited**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 383 days.

(21) Appl. No.: **12/422,331**

(22) Filed: **Apr. 13, 2009**

(65) **Prior Publication Data**
US 2010/0053000 A1 Mar. 4, 2010

(30) **Foreign Application Priority Data**
Aug. 27, 2008 (JP) 2008-217587

(51) **Int. Cl.**
H01Q 11/12 (2006.01)
H01Q 7/00 (2006.01)
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/741**; 343/866; 343/702

(58) **Field of Classification Search** 343/741,
343/744, 866, 732, 702
See application file for complete search history.

U.S. PATENT DOCUMENTS

2,235,163	A *	3/1941	Peterson	343/732
4,083,006	A *	4/1978	Yokoshima	455/115.1
6,243,045	B1 *	6/2001	Ishibashi	343/741
6,359,594	B1 *	3/2002	Junod	343/744
6,864,849	B2 *	3/2005	Hart	343/773
7,209,281	B2 *	4/2007	Takei	359/296
7,917,226	B2 *	3/2011	Nghiem et al.	607/60

FOREIGN PATENT DOCUMENTS

GB	1 507 674	4/1978
GB	1 515 533	6/1978
JP	2006-19979 A	1/2006
JP	2006-031473	2/2006
JP	2006-333069	12/2006


* cited by examiner

Primary Examiner — Hoang V Nguyen
(74) *Attorney, Agent, or Firm* — IPUSA, PLLC

(57) **ABSTRACT**

A communication device is disclosed that includes an antenna apparatus including: a feeding portion, a looped antenna element connected to the feeding portion, and a resistor inserted into the looped antenna element; and a communication circuit configured to process data that is transmitted and received via the antenna apparatus.

13 Claims, 11 Drawing Sheets

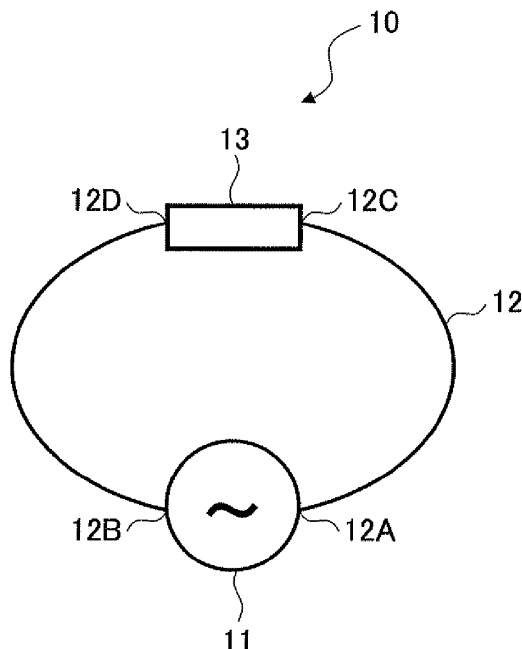

Acrobat 文件



US008279128B2

(12) **United States Patent**
McQuaid et al.

(10) **Patent No.:** **US 8,279,128 B2**
(45) **Date of Patent:** **Oct. 2, 2012**

(54) **TAPERED SLOT ANTENNA**

(56) **References Cited**

(75) Inventors: **Matthew M. McQuaid**, Hudson, NH (US); **Michael J. O'Brien**, Nashua, NH (US)

U.S. PATENT DOCUMENTS

4,853,704	A	8/1989	Diaz et al.	
6,075,493	A	6/2000	Sugawara et al.	
6,642,898	B2	11/2003	Eason	
6,850,203	B1 *	2/2005	Schuneman et al.	343/767
2005/0012672	A1 *	1/2005	Fisher	343/767

* cited by examiner

(73) Assignee: **BAE Systems Information and Electronic Systems Integration Inc.**, Nashua, NH (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 328 days.

Primary Examiner — Hoanganh Le

(74) Attorney, Agent, or Firm — Sand & Sebolt; Rodney E. Haven

(21) Appl. No.: **12/775,894**

(57) **ABSTRACT**

(22) Filed: **May 7, 2010**

Methods, antennas and other embodiments associated with impedance matching an antenna feed slot are based on a fractal shape. A slot antenna includes a planar metal sheet. A feed slot opening is formed in the metal sheet. The feed slot has a first end and a second end. A tapered opening is formed in the metal sheet. Adjacent sides of the tapered opening touch the first end of the feed slot. An impedance matching fractal shaped opening is formed in the metal. The impedance matching fractal shaped opening touches the second end of the feed slot.

(65) **Prior Publication Data**

US 2011/0273349 A1 Nov. 10, 2011


(51) **Int. Cl.**
H01Q 13/10 (2006.01)

(52) **U.S. Cl.** **343/767; 343/700 MS**

(58) **Field of Classification Search** **343/767, 343/768, 769, 700 MS**

See application file for complete search history.

20 Claims, 8 Drawing Sheets

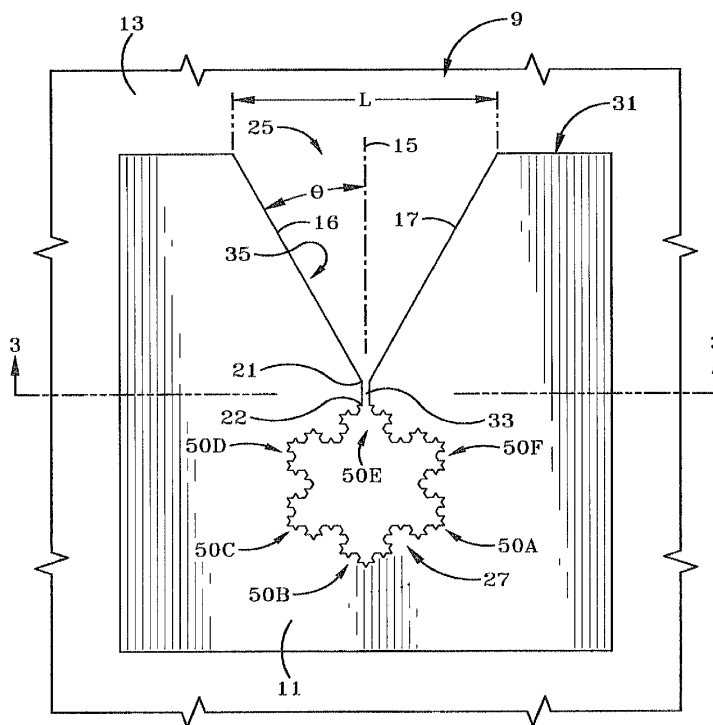

Acrobat 文件



US008280525B2

(12) **United States Patent**
Rusin et al.

(10) **Patent No.:** **US 8,280,525 B2**

(45) **Date of Patent:** **Oct. 2, 2012**

(54) **DYNAMICALLY MATCHED MICROWAVE
ANTENNA FOR TISSUE ABLATION**

(75) Inventors: **Christopher T. Rusin**, Golden, CO
(US); **Joseph Brannan**, Boulder, CO
(US)

(73) Assignee: **Vivant Medical, Inc.**, Boulder, CO (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 931 days.

(21) Appl. No.: **12/265,024**

(22) Filed: **Nov. 5, 2008**

(65) **Prior Publication Data**

US 2009/0131926 A1 May 21, 2009

Related U.S. Application Data

(60) Provisional application No. 60/988,699, filed on Nov.
16, 2007.

(51) **Int. Cl.**
A61F 2/00 (2006.01)
A61N 1/06 (2006.01)

(52) **U.S. Cl.** **607/101**; 607/154; 607/156

(58) **Field of Classification Search** 606/27-28;
607/101, 154, 156

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,631,363 A 12/1971 Miller
4,397,313 A 8/1983 Vaguine
4,462,412 A 7/1984 Turner
4,572,190 A 2/1986 Azam et al.
4,798,215 A 1/1989 Turner
5,057,106 A 10/1991 Kasevich et al.
5,097,844 A 3/1992 Turner

5,188,122 A 2/1993 Phipps et al.
5,246,438 A 9/1993 Langberg
5,248,312 A 9/1993 Langberg
5,275,597 A 1/1994 Higgins et al.
5,300,068 A 4/1994 Rosar et al.
5,364,392 A 11/1994 Warner et al.
5,370,644 A 12/1994 Langberg
5,405,346 A 4/1995 Grundy et al.
5,417,210 A 5/1995 Funda et al.
5,558,672 A 9/1996 Edwards et al.
5,662,647 A * 9/1997 Crow et al. 606/41
5,683,382 A 11/1997 Lenihan et al.
5,688,269 A * 11/1997 Newton et al. 606/46
5,693,082 A 12/1997 Warner et al.
5,776,176 A 7/1998 Rudie
5,800,494 A 9/1998 Campbell et al.
5,861,021 A 1/1999 Thome et al.

(Continued)

FOREIGN PATENT DOCUMENTS

DE 390937 3/1924

(Continued)

OTHER PUBLICATIONS

International Search Report EP08/019920 dated Mar. 27, 2009.


(Continued)

Primary Examiner — Linda Dvorak
Assistant Examiner — Jaymi Della

(57) **ABSTRACT**

A microwave ablation probe for providing microwave energy to tissue is disclosed. The probe includes a feedline having an inner conductor, a secondary inner conductor, an insulating spacer, and an outer conductor. The inner conductor is slidably disposed within the secondary inner conductor. The feedline also includes a radiating portion having an extruded portion of the inner conductor centrally disposed therein, wherein longitudinal movement of the inner conductor relative to the feedline tunes the radiating portion.

11 Claims, 2 Drawing Sheets

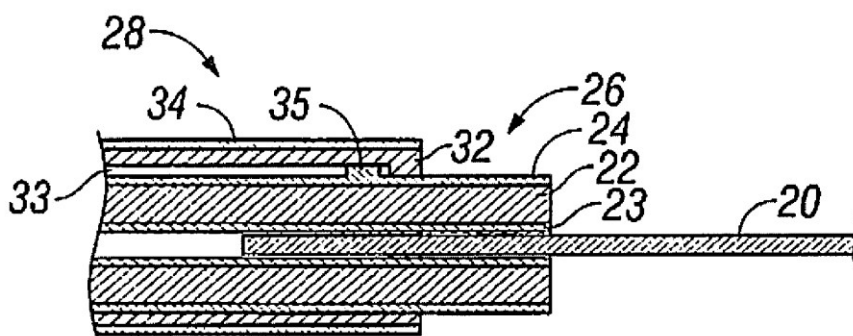

Acrobat 文件



US008284001B2

(12) **United States Patent**
Bourtoutian

(10) **Patent No.:** **US 8,284,001 B2**
(45) **Date of Patent:** **Oct. 9, 2012**

(54) **DIFFERENTIAL FILTERING DEVICE WITH COPLANAR COUPLED RESONATORS AND FILTERING ANTENNA FURNISHED WITH SUCH A DEVICE**

(75) Inventor: **Raffi Bourtoutian**, Rueil-Malmaison (FR)

(73) Assignee: **Commissariat à l'Energie Atomique**, Paris (FR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 439 days.

(21) Appl. No.: **12/610,742**

(22) Filed: **Nov. 2, 2009**

(65) **Prior Publication Data**
US 2010/0117765 A1 May 13, 2010

(30) **Foreign Application Priority Data**
Nov. 7, 2008 (FR) 08 06219

(51) **Int. Cl.**
H01P 1/20 (2006.01)
(52) **U.S. Cl.** **333/204; 333/161; 343/895**
(58) **Field of Classification Search** **343/741, 343/742, 816, 895; 333/161, 204, 205**
See application file for complete search history.

(56) **References Cited**
U.S. PATENT DOCUMENTS
6,326,866 B1 * 12/2001 Sasaki et al. 333/203
6,356,168 B1 * 3/2002 Barnett et al. 333/202
6,356,244 B1 * 3/2002 Mizuno et al. 343/895

7,408,512 B1 * 8/2008 Rodenbeck et al. ... 343/700 MS
7,982,559 B2 * 7/2011 Mori et al. 333/204
2008/0012780 A1 * 1/2008 Harada et al. 343/859

FOREIGN PATENT DOCUMENTS

EP 1 328 039 A2 7/2003
EP 1 562 256 A1 8/2005
GB 2 260 651 A 4/1993
JP 2005-333392 12/2005
JP 2007-201764 8/2007
WO WO 98/00880 1/1998

* cited by examiner


Primary Examiner — Tho G Phan

(74) *Attorney, Agent, or Firm* — Oblon, Spivak, McClelland, Maier & Neustadt, L.L.P.

(57) **ABSTRACT**

A differential filtering device with coupled resonators, including: a pair of coupled resonators disposed on one and the same face of a dielectric substrate, each resonator including two conducting strips positioned in a symmetric manner with respect to a plane perpendicular to the face on which the resonator is disposed, these two conducting strips being joined respectively to two conductors of a bi-strip port for connection to a line for transmitting a differential signal, wherein each conducting strip of each resonator is folded back on itself so as to form a capacitive coupling between its two ends, and wherein the two resonators of the pair are coupled by the disposition opposite one another of their respective conducting strips disposed on the same side with respect to the symmetry plane, over respective portions of length of these folded-back conducting strips.

9 Claims, 5 Drawing Sheets

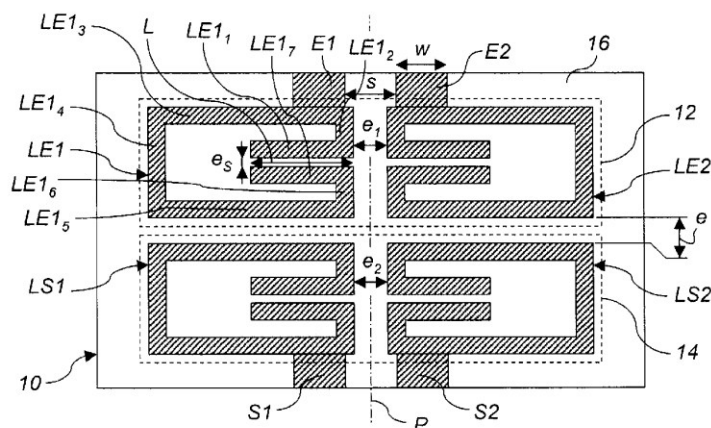



US008284104B2

(12) **United States Patent**
Carr

(10) **Patent No.:** **US 8,284,104 B2**
(45) **Date of Patent:** **Oct. 9, 2012**

(54) **MULTIPLE-RESONATOR ANTENNA**

(76) Inventor: **William N. Carr**, Montclair, NJ (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 537 days.

(21) Appl. No.: **12/535,768**

(22) Filed: **Aug. 5, 2009**

(65) **Prior Publication Data**

US 2010/0207841 A1 Aug. 19, 2010

Related U.S. Application Data

(60) Provisional application No. 61/207,467, filed on Feb. 13, 2009, provisional application No. 61/207,909, filed on Feb. 19, 2009, provisional application No. 61/214,200, filed on Apr. 22, 2009.

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 9/00 (2006.01)
H01Q 9/04 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/749; 343/825**

(58) **Field of Classification Search** **343/700 MS, 343/853, 857, 858, 893, 749, 825**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,128,840 A 12/1978 Tucker
4,259,670 A 3/1981 Schiavone
4,356,492 A * 10/1982 Kaloi 343/700 MS
4,704,581 A 11/1987 Clark
4,783,661 A * 11/1988 Smith 343/700 MS
5,283,589 A 2/1994 Blevins
5,341,148 A 8/1994 Walter et al.

5,471,180 A 11/1995 Brommer et al.
5,995,048 A 11/1999 Smithgall et al.
6,342,864 B1 1/2002 Muramoto et al.
6,552,693 B1 4/2003 Leisten
6,975,276 B2 12/2005 Brown
7,019,711 B2 3/2006 Johnson et al.
7,034,752 B2 4/2006 Sekiguchi et al.
7,088,290 B2 8/2006 Ohno et al.
7,173,577 B2 2/2007 Brown et al.
7,388,550 B2 6/2008 McLean
7,471,247 B2 12/2008 Saily et al.

(Continued)

FOREIGN PATENT DOCUMENTS

WO 2004093249 A1 10/2004

OTHER PUBLICATIONS

Young, Lee W., "PCT Application No. PCT/US 10/00441 International Search Report Apr. 7, 2010", , Publisher: PCT, Published in: PCT.

(Continued)

Primary Examiner — Jacob Y Choi

Assistant Examiner — Hasan Islam


(74) *Attorney, Agent, or Firm* — Kaplan Breyer Schwarz & Ottesen LLP

(57) **ABSTRACT**

A Radio-Frequency IDentification (RFID) receiver is disclosed that comprises a plurality of resonant structures arranged to form an antenna. The resonant structures are interconnected in series and are arranged, relative to one another, so as to achieve a received electrical signal with an increased voltage, when the antenna is exposed to an incident electromagnetic signal. This occurs for a majority of all possible incident electromagnetic signals and, therefore, an RFID receiver based on such an antenna provides, in a majority of cases, an improved performance.

16 Claims, 4 Drawing Sheets

Multiple-resonator antenna with load element 800

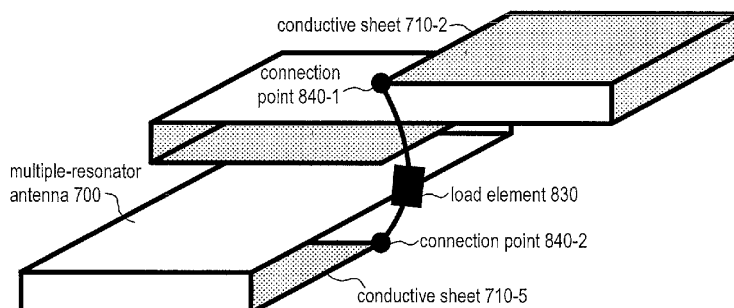

Acrobat 文件



US008284105B2

(12) **United States Patent**
Mao et al.

(10) **Patent No.:** **US 8,284,105 B2**
(45) **Date of Patent:** **Oct. 9, 2012**

(54) **MULTI-BAND MICROSTRIP
MEANDER-LINE ANTENNA**

(75) Inventors: **Shau-Gang Mao**, Taipei (TW);
Wei-Kung Deng, Taipei (TW)

(73) Assignee: **RichWave Technology Corp.**, NeiHu
District, Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 430 days.

(21) Appl. No.: **12/606,168**

(22) Filed: **Oct. 26, 2009**

(65) **Prior Publication Data**

US 2011/0025576 A1 Feb. 3, 2011

(30) **Foreign Application Priority Data**

Jul. 30, 2009 (TW) 98125670 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/895**

(58) **Field of Classification Search** **343/700,**
343/843, 895

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,475,107	A *	10/1984	Makimoto et al.	343/700 MS
4,477,815	A *	10/1984	Brunner et al.	343/756
6,417,816	B2 *	7/2002	Sadler et al.	343/795
6,791,497	B2 *	9/2004	Winebrand et al.	343/702
7,365,688	B2 *	4/2008	Tseng et al.	343/700 MS
7,456,798	B2 *	11/2008	Wong et al.	343/742
2002/0080088	A1 *	6/2002	Boyle	343/895

* cited by examiner


Primary Examiner — Tho G Phan

(74) *Attorney, Agent, or Firm* — Winston Hsu; Scott Margo

(57) **ABSTRACT**

A multi-band microstrip meander-line antenna includes a substrate, two meander-shaped conductors, and two feed lines. The first meander-shaped conductor is disposed on the substrate in a first reciprocating bend manner for providing a resonant frequency band corresponding to a first operating frequency. The second meander-shaped conductor is disposed on the substrate in a second reciprocating bend manner for providing a resonant frequency band corresponding to a second operating frequency. The first feed line includes the first end electrically connected to a first feed point of the antenna and the second end electrically connected to the end of the first meander-shaped conductor. The second feed line includes the first end electrically connected to the second feed point of the antenna and the second end electrically connected to the end of the second meander-shaped conductor.

55 Claims, 14 Drawing Sheets

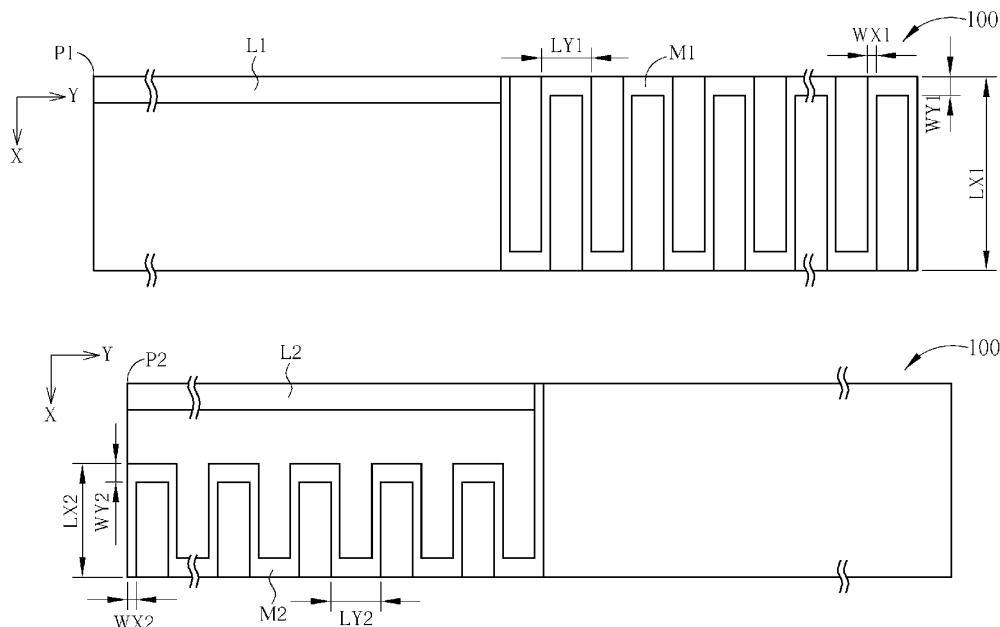

Acrobat 文件



US008284106B2

(12) **United States Patent**
Guan

(10) **Patent No.:** **US 8,284,106 B2**
(45) **Date of Patent:** **Oct. 9, 2012**

(54) **ANTENNA AND WIRELESS
COMMUNICATION DEVICE**

(75) Inventor: **Ning Guan**, Chiba (JP)

(73) Assignee: **Fujikura Ltd.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 226 days.

(21) Appl. No.: **12/812,680**

(22) PCT Filed: **Jan. 21, 2009**

(86) PCT No.: **PCT/JP2009/050816**

§ 371 (c)(1),
(2), (4) Date: **Jul. 13, 2010**

(87) PCT Pub. No.: **WO2009/093591**

PCT Pub. Date: **Jul. 30, 2009**

(65) **Prior Publication Data**

US 2010/0289709 A1 Nov. 18, 2010

(30) **Foreign Application Priority Data**

Jan. 21, 2008 (JP) 2008-010471

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 1/36 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/895; 343/702**

(58) **Field of Classification Search** None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,147,652 A 11/2000 Sekine
6,930,641 B2 8/2005 Ohara et al.
7,733,271 B2 * 6/2010 Moon et al. 343/700 MS

2005/0104783 A1 5/2005 Kojima
2005/0259031 A1 * 11/2005 Sanz et al. 343/895
2006/0038722 A1 * 2/2006 Tseng et al. 343/700 MS
2006/0170610 A1 * 8/2006 Rabinovich et al. 343/895
2007/0103371 A1 * 5/2007 Kim et al. 343/702
2007/0103374 A1 * 5/2007 Lindackers et al. 343/713

(Continued)

FOREIGN PATENT DOCUMENTS

JP 11-154815 A 6/1999

(Continued)

OTHER PUBLICATIONS

Wu, Chih-Hsien et al.; "Low-Profile Printed Monopole Antenna for Penta-Band Operation in the Mobile Phone," IEEE AP-S Int. Symp., pp. 3540-3543, 2007.

Lin, Chun I. et al.; "Printed Monopole Slot Antenna for Multiband Operation in the Mobile Phone"; IEEE AP-S Int. Symp., pp. 629-632, 2007.

(Continued)


Primary Examiner — Trinh Dinh

(74) *Attorney, Agent, or Firm* — Westerman, Hattori, Daniels & Adrian, LLP

(57) **ABSTRACT**

An antenna that is small in size, has such input characteristics as to secure consistency in each band, and is capable of maintaining omnidirectionality. An antenna includes a grounded conductor, a shorting pin that is formed with a conductor, and a radiation conductor that has one end connected to the grounded conductor via the shorting pin, has the other end left open, and receives power supplied from a feeding point located at the one end. The radiation conductor is folded at a portion between the one end and the other end, and forms a lower arm closer to the grounded conductor and a folded upper arm, with at least part of the lower arm and the upper arm having a meandered portion.

7 Claims, 17 Drawing Sheets

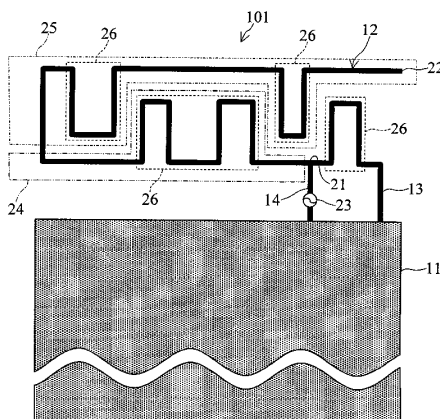

Acrobat 文件



US008284111B2

(12) **United States Patent**
Chakam et al.

(10) **Patent No.:** **US 8,284,111 B2**
(45) **Date of Patent:** **Oct. 9, 2012**

(54) **MULTIPART ANTENNA WITH CIRCULAR POLARIZATION**

(75) Inventors: **Guy-Aymar Chakam**, Regensburg (DE); **Andreas Schäfer**, München (DE); **Martin Weinberger**, München (DE)

(73) Assignee: **Continental Automotive GmbH**, Hannover (DE)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 354 days.

(21) Appl. No.: **12/672,716**

(22) PCT Filed: **Jul. 30, 2008**

(86) PCT No.: **PCT/EP2008/059987**

§ 371 (c)(1),
(2), (4) Date: **Mar. 12, 2010**

(87) PCT Pub. No.: **WO2009/019177**

PCT Pub. Date: **Feb. 12, 2009**

(65) **Prior Publication Data**

US 2010/0194659 A1 Aug. 5, 2010

(30) **Foreign Application Priority Data**

Aug. 9, 2007 (DE) 10 2007 037 614

(51) **Int. Cl.**

H01Q 11/12 (2006.01)

H01Q 21/00 (2006.01)

(52) **U.S. Cl.** **343/742; 343/867; 343/895**

(58) **Field of Classification Search** **343/741, 343/742, 866, 867, 895**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,611,398 A	10/1971	Schnetzer	
4,502,053 A	2/1985	Dupressoir et al.	
5,136,303 A *	8/1992	Cho et al.	343/718
5,798,737 A	8/1998	Kanaba et al.	
5,990,849 A	11/1999	Salvail et al.	
6,710,752 B2	3/2004	Saito et al.	
6,950,074 B2 *	9/2005	Arisawa et al.	343/748
2002/0190906 A1	12/2002	Kim et al.	

FOREIGN PATENT DOCUMENTS

EP	0443491 A1	8/1991
EP	0743699 A1	11/1996
EP	1263081 A2	12/2002
GB	2393855 A	4/2004
WO	9952178 A1	10/1999
WO	0106596 A1	1/2001
WO	03044892 A1	5/2003

* cited by examiner


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — Laurence A. Greenberg; Werner H. Stemer; Ralph E. Locher

(57) **ABSTRACT**

An antenna apparatus has a first antenna branch and a second antenna branch. Both the first and the second antenna branch are in the form of a conductor loop which is not closed, and the first antenna branch is arranged at a distance from the second antenna branch in a direction which is substantially at right angles to the surface bounded by the respective conductor loop, such that the first loop direction, which is defined from the foot point to the free end of the first antenna branch, is arranged in the opposite direction to the second loop direction, which is defined from the foot point to the free end of the second antenna branch.

21 Claims, 5 Drawing Sheets

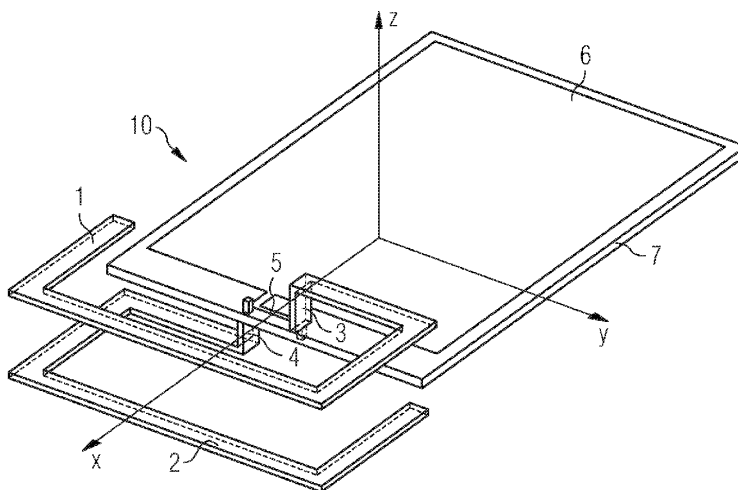

Acrobat 文件



US008284113B2

(12) **United States Patent**
Pintos et al.

(10) **Patent No.:** **US 8,284,113 B2**
(45) **Date of Patent:** **Oct. 9, 2012**

(54) **WIDEBAND ANTENNAS**

(56) **References Cited**

(75) Inventors: **Jean-François Pintos**, Bourgarre (FR);
Philippe Chambelin, Chateaugiron
(FR); **Ali Louzir**, Rennes (FR)

(73) Assignee: **Thomson Licensing**, Boulogne,
Billancourt (FR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 331 days.

(21) Appl. No.: **12/156,882**

(22) Filed: **Jun. 5, 2008**

(65) **Prior Publication Data**

US 2009/0002251 A1 Jan. 1, 2009

(30) **Foreign Application Priority Data**

Jun. 6, 2007 (FR) 07 55502

(51) **Int. Cl.**
H01Q 9/28 (2006.01)
H01Q 9/16 (2006.01)

(52) **U.S. Cl.** **343/795; 343/793**

(58) **Field of Classification Search** **343/795,**
343/793, 794, 700 MS, 767

See application file for complete search history.

U.S. PATENT DOCUMENTS

4,825,220	A	4/1989	Edward et al.	
6,018,324	A	1/2000	Kitchener	
6,342,866	B1 *	1/2002	Ho et al.	343/795
7,271,779	B2 *	9/2007	Hertel	343/795
7,397,439	B2 *	7/2008	Kanno et al.	343/767
2003/0034932	A1 *	2/2003	Huebner et al.	343/795
2004/0217912	A1 *	11/2004	Mohammadian	343/795

FOREIGN PATENT DOCUMENTS

EP	0516440	8/1992
WO	WO 2005/122332	12/2005
WO	WO 2006/018567	A1 * 2/2006

OTHER PUBLICATIONS

Schantz, Hans Gregory, Glenn Woleneec and Edward Mickel Myszk
III, Frequency Notched UWB Antennas, The Proceedings of the 2003
IEEE UWBST Conference, IEEE, 2003.*
French Search Report dated Jan. 10, 2008.

* cited by examiner

Primary Examiner — Douglas W Owens


Assistant Examiner — Jennifer F Hu

(74) *Attorney, Agent, or Firm* — Jeffrey D. Carter

(57) **ABSTRACT**

The invention relates to a dipole type wideband antenna com-
prising a substrate presenting two faces, a first conductive
arm, a second conductive arm placed on the substrate, a
feeder line supplying the second arm passing under the first
arm. In this case, the feeder line extending by a line element
placed under the second arm, this element being dimensioned to
filter a given frequency.

8 Claims, 2 Drawing Sheets

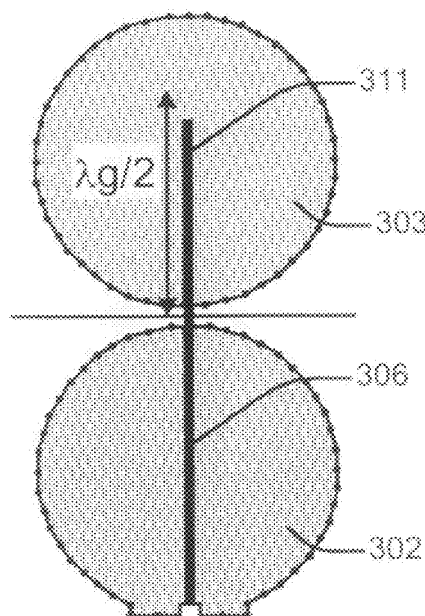

Acrobat 文件



US008284116B2

(12) **United States Patent**
Hwang et al.

(10) **Patent No.:** **US 8,284,116 B2**
(45) **Date of Patent:** **Oct. 9, 2012**

(54) **ANTENNA APPARATUS FOR INTERNAL IMPEDANCE MATCHING**

(75) Inventors: **Soon Ho Hwang**, Seoul (KR); **Joon Ho Byun**, Yongin-si (KR); **Tae Sik Yang**, Suwon-si (KR); **Sung Koo Park**, Suwon-si (KR); **Austin Kim**, Seongnam-si (KR); **Kyung Kyun Kang**, Suwon-si (KR)

(73) Assignee: **Samsung Electronics Co., Ltd** (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 370 days.

(21) Appl. No.: **12/647,128**

(22) Filed: **Dec. 24, 2009**

(65) **Prior Publication Data**

US 2010/0156748 A1 Jun. 24, 2010

(30) **Foreign Application Priority Data**

Dec. 24, 2008 (KR) 10-2008-0132997

(51) **Int. Cl.**
H01Q 1/50 (2006.01)

(52) **U.S. Cl.** 343/860; 343/700 MS

(58) **Field of Classification Search** 343/700 MS,
343/702, 850, 860
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,079,268 A * 3/1978 Fletcher et al. 307/151
7,505,001 B2 * 3/2009 Deavours et al. 343/700 MS
8,094,076 B2 * 1/2012 Zhang et al. 343/700 MS

* cited by examiner


Primary Examiner — Tan Ho

(74) *Attorney, Agent, or Firm* — The Farrell Law Firm, P.C.

(57) **ABSTRACT**

An antenna apparatus allows for internal impedance matching by employing an internal matching device therein. The antenna apparatus includes a board body formed of a dielectric material and having a flat structure. The antenna apparatus also includes an antenna device disposed on an upper surface of the board body, and the internal matching device disposed on a lower surface of the board body. The antenna device extends from a feed point and has a first impedance. The internal matching device is connected to the antenna device and has a second impedance used for matching the first impedance with a reference impedance. The antenna device and the internal matching device resonate at the reference impedance in a specific frequency band when a voltage is supplied through the feed point.

14 Claims, 12 Drawing Sheets

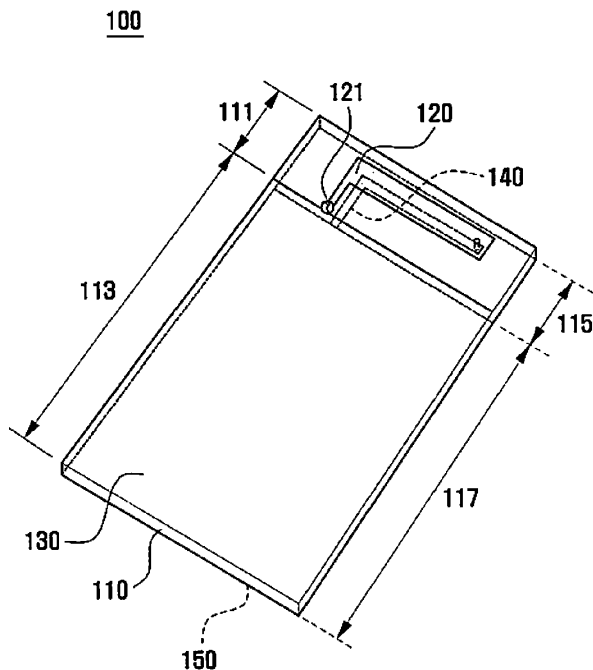

Acrobat 文件



US008289215B2

(12) **United States Patent**
Hsu et al.

(10) **Patent No.:** **US 8,289,215 B2**
(45) **Date of Patent:** **Oct. 16, 2012**

(54) **RECEIVING DEVICE FOR GLOBAL POSITIONING SYSTEM AND ANTENNA STRUCTURE THEREOF**

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,892,483	A *	4/1999	Hayes et al.	343/729
5,986,607	A *	11/1999	Rudisill	343/702
6,215,671	B1 *	4/2001	Kalis	361/784
6,469,673	B2 *	10/2002	Kaiponen	343/703
6,522,291	B1 *	2/2003	Noguchi et al.	342/357.06
6,573,869	B2 *	6/2003	Moore	343/702
6,650,294	B2 *	11/2003	Ying et al.	343/700 MS
6,788,255	B2 *	9/2004	Sakamoto et al.	343/700 MS
6,812,898	B2 *	11/2004	Doub et al.	343/702
6,903,695	B2 *	6/2005	Sjoblom et al.	343/702
7,256,742	B2 *	8/2007	Chen et al.	343/702
2006/0142072	A1 *	6/2006	Krenz et al.	455/575.3

* cited by examiner

Primary Examiner — Michael C Wimer

(74) *Attorney, Agent, or Firm* — Thomas Kayden

(75) Inventors: **Hsi-Hsing Hsu**, Taoyuan County (TW);
Kai-Ta Wang, Taoyuan County (TW);
Chin-Lin Chang, Taoyuan County (TW);
Chuan-Ku Liu, Taoyuan County (TW);
Kuei-Chiang Huang, Taoyuan County (TW);
Kuo-Cheng Chen, Taoyuan County (TW)

(73) Assignee: **HTC Corporation**, Taoyuan, Taoyuan County (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 37 days.

(21) Appl. No.: **12/176,483**

(22) Filed: **Jul. 21, 2008**

(65) **Prior Publication Data**

US 2009/0033551 A1 Feb. 5, 2009

(30) **Foreign Application Priority Data**

Jul. 30, 2007 (TW) 96127852 A

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/828**


(58) **Field of Classification Search** **343/700 MS, 343/702, 846, 825, 828**

See application file for complete search history.

(57) **ABSTRACT**

A receiving device for a global positioning system and an antenna structure thereof. The receiving device includes a housing, a circuit board and the antenna structure. The circuit board is disposed inside the housing and has a ground portion and a signal feeding portion. The antenna structure is disposed inside the housing and includes a metal plate, a first electric conducting element and a second electric conducting element. The metal plate is used for receiving a GPS signal. The first electric conducting element has one end coupled to the metal plate, and the other end coupled to the ground portion of the circuit board. The second electric conducting element for feeding the GPS signal to the circuit board has one end coupled to the metal plate, and the other end coupled to the signal feeding portion of the circuit board.

8 Claims, 11 Drawing Sheets

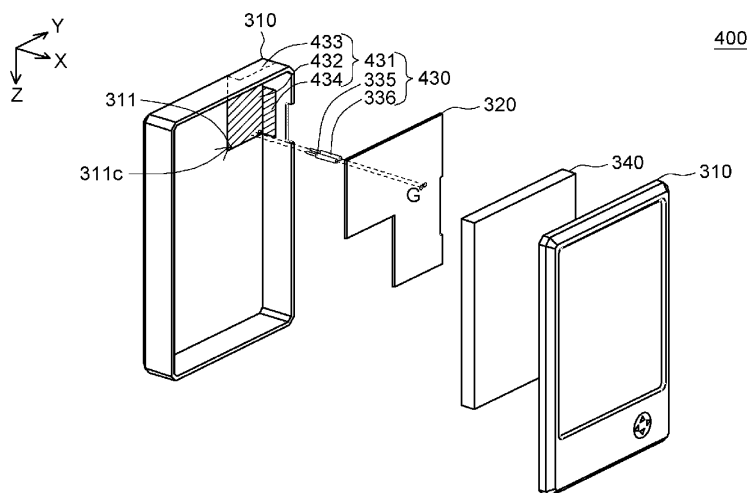

Acrobat 文件



US008289216B2

(12) **United States Patent**
Cho et al.

(10) **Patent No.:** **US 8,289,216 B2**
(45) **Date of Patent:** **Oct. 16, 2012**

(54) **ANTENNA-EMBEDDED CASE FOR MOBILE COMMUNICATIONS TERMINAL, METHOD OF MANUFACTURING THE SAME, AND MOBILE COMMUNICATIONS TERMINAL**

(75) Inventors: **Sung Eun Cho**, Gyunggi-do (KR); **Jae Gyu Go**, Gyunggi-do (KR); **Yong Shik Na**, Gyunggi-do (KR); **Dae Kyu Lee**, Gyunggi-do (KR); **Chan Gwang An**, Gyunggi-do (KR); **Hyun Kil Nam**, Seoul (KR); **Byung Hwa Lee**, Gyunggi-do (KR); **Dae Seong Jeon**, Gyunggi-do (KR); **Ha Ryong Hong**, Gyunggi-do (KR); **Jae Suk Sung**, Gyunggi-do (KR)

(73) Assignee: **Samsung Electro-Mechanics Co., Ltd.**, Gyunggi-do (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 395 days.

(21) Appl. No.: **12/608,874**

(22) Filed: **Oct. 29, 2009**

(65) **Prior Publication Data**
US 2010/0220028 A1 Sep. 2, 2010

(30) **Foreign Application Priority Data**
Feb. 27, 2009 (KR) 10-2009-0016644

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
(52) **U.S. Cl.** **343/702; 343/873**
(58) **Field of Classification Search** **343/702, 343/872, 873**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,648,788	A *	7/1997	Bumsted	343/895
6,396,444	B1	5/2002	Goward et al.	
6,639,557	B2 *	10/2003	Kamei et al.	343/700 MS
6,975,273	B1 *	12/2005	Choi	343/702
2001/0054780	A1	12/2001	Ogura	
2002/0093457	A1	7/2002	Hamada et al.	
2007/0216580	A1	9/2007	Lin et al.	
2007/0216583	A1	9/2007	Hou	
2008/0067715	A1	3/2008	Sung	
2008/0129638	A1	6/2008	Ong	

(Continued)

FOREIGN PATENT DOCUMENTS

CN 201038311 3/2008

(Continued)

OTHER PUBLICATIONS

German Office Action for German Patent Application No. 102009046679.7, issued Sep. 29, 2011.

(Continued)


Primary Examiner — Tho G Phan

(74) *Attorney, Agent, or Firm* — Lowe, Hauptman, Ham & Berner, LLP

(57) **ABSTRACT**

A method of manufacturing an antenna-embedded case for a mobile communications terminal includes providing an antenna pattern, forming a first injection-molded member covering one surface of the antenna pattern, and disposing the first injection-molded member, provided with the antenna pattern on one surface thereof, in a second mold with the antenna pattern disposed in a space inside the second mold, and injection-molding a second injection-molded member covering the other surface of the antenna pattern to embed the antenna pattern between the first injection-molded member and the second injection-molded member.

10 Claims, 4 Drawing Sheets

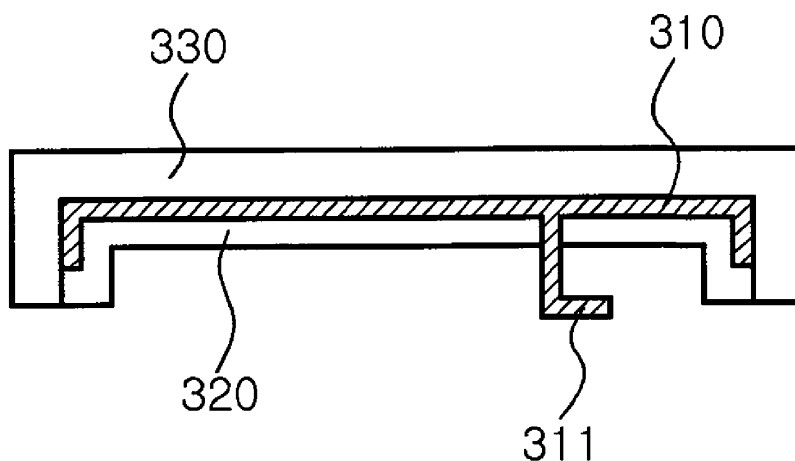

Acrobat 文件



US008289219B2

(12) **United States Patent**
Breiter

(10) **Patent No.:** **US 8,289,219 B2**
(45) **Date of Patent:** **Oct. 16, 2012**

(54) **ANTENNA ARRANGEMENT**

(75) Inventor: **Richard Breiter**, Frederiksberg C (DK)

(73) Assignee: **Nokia Corporation**, Espoo (FI)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/597,923**

(22) PCT Filed: **May 2, 2007**

(86) PCT No.: **PCT/IB2007/001821**

§ 371 (c)(1),

(2), (4) Date: **Jan. 11, 2010**

(87) PCT Pub. No.: **WO2008/135802**

PCT Pub. Date: **Nov. 13, 2008**

(65) **Prior Publication Data**

US 2010/0127944 A1 May 27, 2010

(51) **Int. Cl.**
H01Q 1/00 (2006.01)

(52) **U.S. Cl.** **343/729; 343/853**

(58) **Field of Classification Search** **343/700 MS,**
343/852, 729, 725, 771, 722, 768, 802, 778,
343/872, 749, 753, 719, 713, 703, 846, 702,
343/727, 730, 742, 795, 829, 770, 895, 844,
343/708, 715, 792.5, 754, 850, 853, 860
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,353,170 B1 3/2002 Eyzaguirre et al. 84/603
6,400,963 B1* 6/2002 Glockler et al. 455/553.1
6,476,769 B1 11/2002 Lehtola 343/702

6,759,991 B2* 7/2004 Boyle 343/702
2003/0016179 A1 1/2003 Boyle 343/702
2003/0112185 A1 6/2003 Fang et al. 343/700
2003/0201939 A1 10/2003 Reece et al. 343/700
2004/0227675 A1 11/2004 Harano 343/702
2005/0041624 A1 2/2005 Hui et al. 370/335
2005/0190107 A1* 9/2005 Takagi et al. 343/702
2006/0227052 A1* 10/2006 Hozouri 343/700 MS

FOREIGN PATENT DOCUMENTS

CN 1 569 300 8/2005
CN 1661855 8/2005
CN 101189756 5/2008
EP 1 128 466 A2 8/2001
EP 1 128 466 A3 8/2001
EP 1 475 889 A2 11/2004
EP 1 475 889 A3 11/2004
WO WO 01/37370 A1 5/2001
WO WO 02/078124 A1 10/2002
WO WO 2006/078513 A2 7/2006
WO WO 2006/078513 A3 7/2006

OTHER PUBLICATIONS

Song, C.T.P., et al., "Multiband Multiple Ring Monopole Antennas", IEEE Transactions on Antennas and Propagation, vol. 51, No. 4, Apr. 2003, pp. 722-729.

(Continued)

Primary Examiner — Jacob Y Choi


Assistant Examiner — Robert Karacsony

(74) Attorney, Agent, or Firm — Harrington & Smith

(57) **ABSTRACT**

An antenna arrangement including a first element operable in a first resonant mode at a first resonant frequency band; and a second element arranged to couple with the first element to enable the first element to resonate in a second resonant mode having a second resonant frequency band, the second element having an impedance at the first resonant frequency band which substantially suppresses coupling between the first element and the second element.

19 Claims, 7 Drawing Sheets

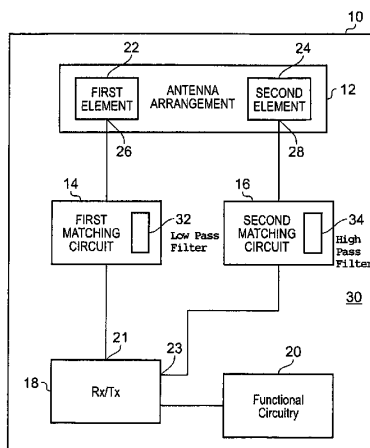

Acrobat 文件



US008289225B2

(12) **United States Patent**
Shimizu et al.

(10) **Patent No.:** **US 8,289,225 B2**
(45) **Date of Patent:** **Oct. 16, 2012**

(54) **MULTI-RESONANT ANTENNA HAVING
DIELECTRIC BODY**

(75) Inventors: **Mie Shimizu**, Kanagawa-ken (JP);
Kazuhiko Kubota, Kyoto-fu (JP)

(73) Assignee: **Murata Manufacturing Co., Ltd.** (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 37 days.

(21) Appl. No.: **12/838,050**

(22) Filed: **Jul. 16, 2010**

(65) **Prior Publication Data**

US 2010/0277378 A1 Nov. 4, 2010

Related U.S. Application Data

(63) Continuation of application No. PCT/JP2009/050465,
filed on Jan. 15, 2009.

(30) **Foreign Application Priority Data**

Jan. 17, 2008 (JP) 2008-008193

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/895**; 343/702

(58) **Field of Classification Search** 343/700 MS,
343/702, 741-742, 846, 866-867, 873, 895,
343/700 M

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,329,961 B1 * 12/2001 Mandai et al. 343/873
7,057,576 B2 * 6/2006 Mukoyama 343/895

7,161,555 B2 * 1/2007 Ohno et al. 343/911 R
7,471,252 B2 * 12/2008 Onaka et al. 343/702
7,538,732 B2 * 5/2009 Ishihara et al. 343/702

(Continued)

FOREIGN PATENT DOCUMENTS

CN 1469412 A 1/2004

(Continued)

OTHER PUBLICATIONS

International Search Report; PCT/JP2009/050465; Apr. 28, 2009.

(Continued)


Primary Examiner — Michael C Wimer

(74) *Attorney, Agent, or Firm* — Studebaker & Brackett PC;
Tim L. Brackett, Jr.; John E. Guay

(57) **ABSTRACT**

The antenna includes a power-feeding radiation electrode and a non-power-feeding radiation electrode are provided adjacent to each other with a gap therebetween on the flexible substrate, which also is bendable. The power-feeding radiation electrode is used to perform antenna operation in a basic mode in which resonant operation is performed at a basic frequency and antenna operation in a high-order mode in which resonant operation is performed at a frequency higher than the basic frequency. The power-feeding radiation electrode includes a loop path configured such that the power-feeding radiation electrode first extends in a direction away from a power-feeding end and an open end is bent toward the power-feeding end. The non-power-feeding radiation electrode has one end serving as a ground-side end and the other end serving as an open end. A dielectric body having permittivity higher than the bendable, flexible substrate is provided on a front surface or a back surface of the power-feeding radiation electrode provided in a region including a portion in which voltage of a resonant frequency in the high-order mode is zero potential and a region in the vicinity of that portion.

17 Claims, 9 Drawing Sheets

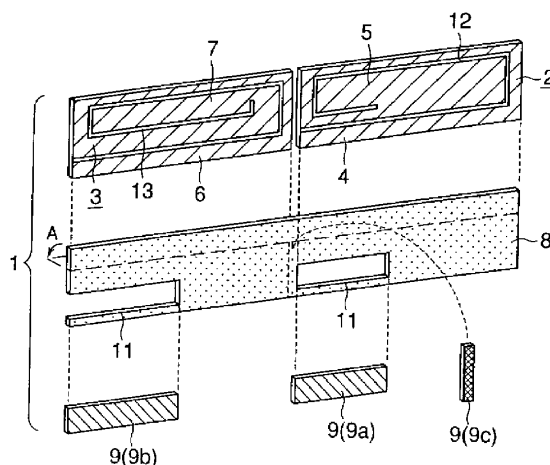

Acrobat 文件



US008290548B2

(12) **United States Patent**
Takahashi

(10) **Patent No.:** **US 8,290,548 B2**
(45) **Date of Patent:** **Oct. 16, 2012**

(54) **MOBILE ELECTRONIC DEVICE**

(56) **References Cited**

(75) Inventor: **Shin Takahashi**, Yokohama (JP)

U.S. PATENT DOCUMENTS

(73) Assignee: **Kyocera Corporation**, Kyoto (JP)

6,839,577 B2 * 1/2005 Krenz et al. 455/575.7
8,060,052 B2 * 11/2011 Kurokawa 455/343.1

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 115 days.

FOREIGN PATENT DOCUMENTS

JP 10-084406 3/1998

* cited by examiner

(21) Appl. No.: **12/748,344**

Primary Examiner — Tuan H Nguyen

(22) Filed: **Mar. 26, 2010**

(74) *Attorney, Agent, or Firm* — Duane Morris LLP;
Richard C. Kim

(65) **Prior Publication Data**

US 2010/0248621 A1 Sep. 30, 2010

(57) **ABSTRACT**

(30) **Foreign Application Priority Data**

Mar. 26, 2009 (JP) 2009-77458

A system and method for a mobile electronic device operable to receive signals having a plurality of frequencies using an antenna comprising a plurality of conductors is disclosed. A first conductor operable to resonant with a first frequency band is coupled to a second conductor operable to resonant with a second frequency band. The second conductor is coupled to a ground, if the first conductor is coupled to a power supply. The second conductor is coupled to the power supply, if the first conductor is coupled to the ground.


(51) **Int. Cl.**
H04M 1/00 (2006.01)

(52) **U.S. Cl.** **455/575.3; 455/571; 455/572**

(58) **Field of Classification Search** **455/13.4, 455/39, 127.1, 343.1, 571, 572, 575.3**

See application file for complete search history.

20 Claims, 5 Drawing Sheets

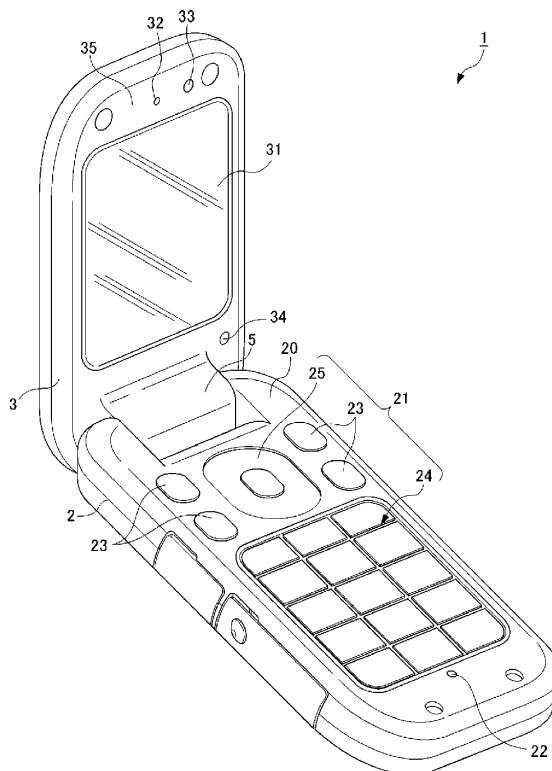

Acrobat 文件