



US008191230B2

(12) **United States Patent**
Coleman et al.

(10) **Patent No.:** **US 8,191,230 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **METHOD FOR MAKING RADIO
FREQUENCY (RF) ANTENNA CONTAINING
ELEMENT**

(75) Inventors: **James P. Coleman**, Maryland Heights,
MO (US); **Jay Akhave**, Claremont, CA
(US); **Eric Dimalanta**, Medina, OH
(US)

(73) Assignee: **Avery Dennison Corporation**,
Pasadena, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 109 days.

(21) Appl. No.: **12/426,307**

(22) Filed: **Apr. 20, 2009**

(65) **Prior Publication Data**

US 2009/0199966 A1 Aug. 13, 2009

Related U.S. Application Data

(62) Division of application No. 11/338,590, filed on Jan.
24, 2006.

(51) **Int. Cl.**
H01Q 1/12 (2006.01)

(52) **U.S. Cl.** **29/600; 343/700 MS**

(58) **Field of Classification Search** 29/600,
29/564.2-564.4; 235/487-488, 492;
340/572.2-572.7; 343/700 MS, 886; 156/238,
156/247, 268

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,645,932 A 7/1997 Uchibori
5,656,115 A * 8/1997 Tanno et al. 156/270

5,708,419 A 1/1998 Isaacson et al.
5,751,256 A 5/1998 McDonough et al.
5,759,422 A 6/1998 Schmelzer et al.
6,072,383 A 6/2000 Gallagher, III et al.
6,147,662 A 11/2000 Grabau et al.
6,164,551 A 12/2000 Altwasser
6,191,382 B1 2/2001 Damikolas
6,313,747 B2 11/2001 Imaichi et al.
6,320,556 B1 11/2001 Cyman et al.
6,333,721 B1 12/2001 Altwasser
6,400,323 B2 6/2002 Yasukawa et al.
6,424,315 B1 7/2002 Glenn et al.
6,940,408 B2 9/2005 Ferguson et al.
6,988,666 B2 * 1/2006 Appalucci et al. 235/488
7,650,683 B2 * 1/2010 Forster et al. 29/600
2003/0051806 A1 * 3/2003 Appalucci et al. 156/270

(Continued)

FOREIGN PATENT DOCUMENTS

WO 03/024708 3/2003

(Continued)

OTHER PUBLICATIONS

International Search Report and Written Opinion issued in PCT/
US2007/01048 dated Sep. 28, 2007.

(Continued)



Primary Examiner — Minh Trinh

(74) *Attorney, Agent, or Firm* — Avery Dennison
Corporation

(57) **ABSTRACT**

Methods of making an radio frequency (RF) antenna contain-
ing element are provided. The methods comprise providing a
metal foil laminate bonded to a carrier layer. The metal foil
laminate can have a metal foil layer bonded to a reinforce-
ment layer. The methods further comprise cutting an antenna
pattern through the metal foil laminate to the carrier layer,
and removing an undesired matrix portion of the reinforced metal
foil laminate to provide a metal foil laminate antenna dis-
posed on the carrier layer.

13 Claims, 5 Drawing Sheets

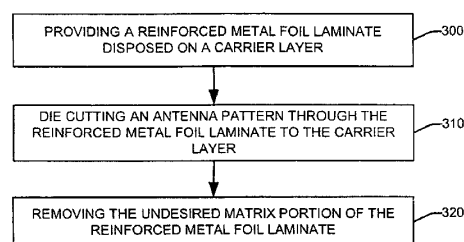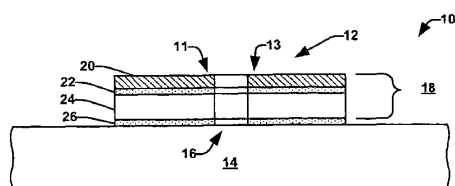

Acrobat 文件



US008193988B2

(12) **United States Patent**
Thudor et al.

(10) **Patent No.:** **US 8,193,988 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **VERSATILE ANTENNA SYSTEM**

(56) **References Cited**

(75) Inventors: **Franck Thudor**, Rennes (FR);
Françoise Le Bolzer, Rennes (FR);
Corinne Nicolas, La Chapelle des
Fougeretz (FR)

(73) Assignee: **Thomson Licensing**,
Boulogne-Billancourt (FR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 213 days.

(21) Appl. No.: **11/919,770**

(22) PCT Filed: **May 3, 2006**

(86) PCT No.: **PCT/FR2006/050409**
§ 371 (c)(1),
(2), (4) Date: **Nov. 1, 2007**

(87) PCT Pub. No.: **WO2007/000520**
PCT Pub. Date: **Jan. 4, 2007**

(65) **Prior Publication Data**
US 2009/0085821 A1 Apr. 2, 2009

(30) **Foreign Application Priority Data**
May 3, 2005 (FR) 05 51166

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
(52) **U.S. Cl.** **343/700 MS; 343/893**
(58) **Field of Classification Search** **343/700 MS,**
343/767, 795, 819, 893
See application file for complete search history.

U.S. PATENT DOCUMENTS
6,031,503 A * 2/2000 Preiss et al. 343/770
6,583,765 B1 * 6/2003 Schamberger et al. 343/770
6,873,293 B2 * 3/2005 Proctor et al. 343/702
7,034,761 B2 * 4/2006 Chiang et al. 343/745
2003/0043078 A1 * 3/2003 Deng et al. 343/700 MS
2010/0029197 A1 * 2/2010 Judd et al. 455/11.1


FOREIGN PATENT DOCUMENTS
GB 841335 7/1960
JP 10-004313 A 1/1998
JP 2002-152076 5/2002
JP 2003-087022 A 3/2003
JP 2003-124728 4/2003
JP 2004-015460 A 1/2004
WO 01/024407 * 5/2001

OTHER PUBLICATIONS
Patent Abstracts of Japan, vol. 2003, No. 8, Aug. 6, 2003 & JP
2003-124728.
Patent Abstracts of Japan, vol. 2002, No. 9, Sep. 4, 2002 & JP
2002-152076.
Search Report Dated Dec. 18, 2006.
* cited by examiner

Primary Examiner — Kyana R McCain
(74) *Attorney, Agent, or Firm* — Tutunjian & Bitetto, P.C.

(57) **ABSTRACT**
The present invention relates to an antenna system designed
to be used in a wireless link, having polarization directions,
respectively for reception and emission, identical to the polar-
ization directions, respectively for emission and reception,
presented by a similar system placed in a geometric configura-
tion of use that is different from that of the said first system.
The invention enables identical devices to be implemented in
separate items of equipment and in distinct positions while
enabling the antenna pair to function correctly.

13 Claims, 4 Drawing Sheets

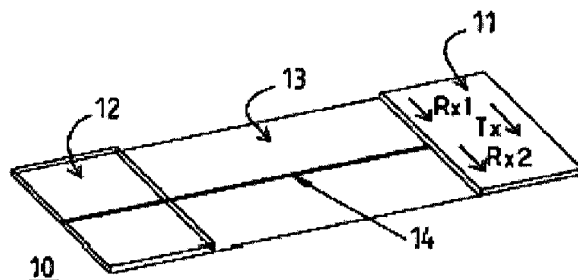

Acrobat 文件



US008193989B2

(12) **United States Patent**
Fujita et al.

(10) **Patent No.:** **US 8,193,989 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **ANTENNA APPARATUS**

(75) Inventors: **Seiken Fujita**, Saitama (JP); **Hisamatsu Nakano**, Kodaira (JP); **Iichi Wako**, Saitama (JP); **Ken Tanaka**, Saitama (JP); **Toshihito Umegaki**, Inagi (JP)

(73) Assignees: **Hitachi Kokusai Electric Inc.**, Tokyo (JP); **Yagi Antenna Inc.**, Saitama-Shi (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 555 days.

(21) Appl. No.: **12/354,227**

(22) Filed: **Jan. 15, 2009**

(65) **Prior Publication Data**

US 2009/0128442 A1 May 21, 2009

Related U.S. Application Data

(63) Continuation of application No. PCT/JP2007/066480, filed on Aug. 24, 2007.

(30) **Foreign Application Priority Data**

Aug. 24, 2006 (JP) 2006-228197
Feb. 8, 2007 (JP) 2007-029438

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/846**

(58) **Field of Classification Search** **343/700 MS, 343/829, 833, 834, 846**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,746,040 A * 5/1956 Martin 343/830
3,680,135 A * 7/1972 Boyer 343/742
4,672,386 A * 6/1987 Wood 343/770

4,864,320 A * 9/1989 Munson et al. 343/833
4,924,237 A * 5/1990 Honda et al. 343/702
5,014,070 A * 5/1991 Stock et al. 343/700 MS
5,539,418 A * 7/1996 Egashira et al. 343/712
5,784,032 A 7/1998 Johnston et al.
5,912,647 A * 6/1999 Tsuru et al. 343/700 MS
5,926,150 A 7/1999 McLean et al.
6,064,347 A * 5/2000 Fordham 343/749
6,339,402 B1 * 1/2002 McKivergan 343/702
6,456,249 B1 * 9/2002 Johnson et al. 343/702
6,542,128 B1 * 4/2003 Johnson et al. 343/742
6,650,294 B2 * 11/2003 Ying et al. 343/700 MS
6,670,925 B2 * 12/2003 Iwai et al. 343/702
6,750,825 B1 * 6/2004 Delaveaud et al. 343/749

(Continued)

FOREIGN PATENT DOCUMENTS

JP 62-131610 A 6/1987

(Continued)

OTHER PUBLICATIONS

English translation of International Search Report for PCT/JP2007/066480, Nov. 27, 2007.

(Continued)


Primary Examiner — Tho G Phan

(74) *Attorney, Agent, or Firm* — Bacon & Thomas, PLLC

(57) **ABSTRACT**

An aspect of an antenna apparatus according to the present invention is provided with a conductor plate, radiating elements disposed to face the conductor plate and partially short-circuited to the conductor plate, a feeding terminal provided on the conductor plate, and a feeding path connecting the feeding terminal and a feeding portion of the radiating elements to each other.

12 Claims, 54 Drawing Sheets

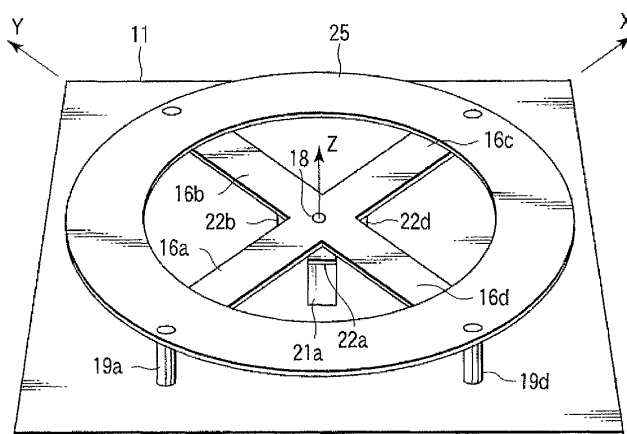

Acrobat 文件



US008193990B2

(12) **United States Patent**
Nakabayashi et al.

(10) **Patent No.:** **US 8,193,990 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **MICROSTRIP ARRAY ANTENNA**

(75) Inventors: **Kento Nakabayashi**, Anjo (JP); **Kunio Sakakibara**, Nagoya (JP)

(73) Assignees: **Denso Corporation**, Kariya (JP);
National University Corporation
Nagoya Institute of Technology,
Nagoya (JP)

EP	1253669	10/2002
JP	8-065038	3/1996
JP	11-312922	11/1999
JP	2001-044752	2/2001
JP	2001-111332	4/2001
JP	2001-196816	7/2001
JP	2002-271131	9/2002
JP	2007-053656	3/2007
WO	WO 2006/029936	3/2006

OTHER PUBLICATIONS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 386 days.

Office action dated Mar. 25, 2010 in corresponding German Application No. 10 2009 035359.3.

Office action dated Feb. 7, 2012 in corresponding Japanese Application No. 2008-198297.

Office action dated Mar. 26, 2012 in corresponding Chinese Application No. 2009 10165544.2.

* cited by examiner

(21) Appl. No.: **12/462,112**

(22) Filed: **Jul. 29, 2009**

(65) **Prior Publication Data**

US 2010/0026584 A1 Feb. 4, 2010

(30) **Foreign Application Priority Data**

Jul. 31, 2008 (JP) 2008-198297

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/853**

(58) **Field of Classification Search** **343/700 MS, 343/846, 850, 853, 824**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,422,649 A *	6/1995	Huang	343/700 MS
5,594,455 A	1/1997	Hori et al.	
6,424,298 B1	7/2002	Nishikawa et al.	
7,109,929 B1 *	9/2006	Ryken et al.	343/700 MS
2007/0279303 A1 *	12/2007	Schoebel	343/713

FOREIGN PATENT DOCUMENTS

CN	1116779	2/1996
CN	101019274	8/2007
DE	101 20 533	11/2002


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — Harness, Dickey & Pierce, PLC

(57) **ABSTRACT**

The microstrip array antenna includes a dielectric substrate formed with a conductive ground plate at a back surface thereof, and strip conductors formed on a front surface of the dielectric substrate. The strip conductors includes a linear main feeding strip line, and a plurality of array elements connected to the main feeding strip line, the array elements being disposed at least one of both sides of the main feeding strip line at a predetermined interval along a longitudinal direction of the main feeding strip line. Each of the array elements includes a sub-feeding strip line connected to the main feeding strip line, a rectangular radiating antenna element connected to a terminal end of the sub-feeding strip line, and a stub connected to the sub-feeding strip line. The stub is disposed between the main feeding strip line and the radiating antenna element.

19 Claims, 11 Drawing Sheets

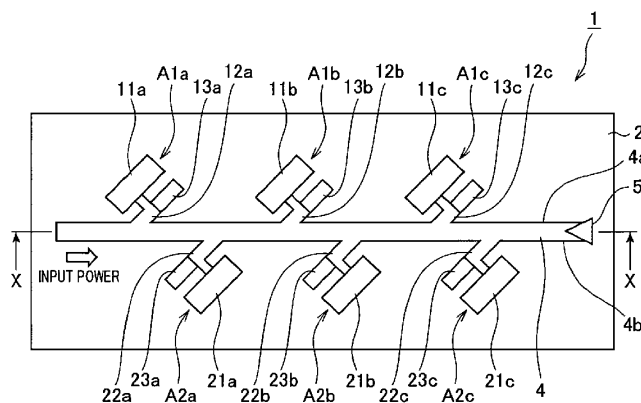

Acrobat 文件



US008193991B2

(12) **United States Patent**
Rofougaran

(10) **Patent No.:** **US 8,193,991 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **INTEGRATED CIRCUIT MEMS ANTENNA STRUCTURE**

(75) Inventor: **Ahmadreza (Reza) Rofougaran**,
Newport Coast, CA (US)

(73) Assignee: **Broadcom Corporation**, Irvine, CA
(US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **12/763,161**

(22) Filed: **Apr. 19, 2010**

(65) **Prior Publication Data**

US 2010/0201587 A1 Aug. 12, 2010

Related U.S. Application Data

(62) Division of application No. 11/648,828, filed on Dec. 29, 2006.

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**; 343/767; 343/772;
343/909; 343/793; 343/773

(58) **Field of Classification Search** 343/700 MS,
343/767, 909, 773, 753, 772, 793
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,700,196 A * 10/1987 Campbell et al. 343/797
4,786,910 A * 11/1988 Dragone 343/753
6,718,163 B2 * 4/2004 Tandy 455/90.2
7,372,408 B2 * 5/2008 Gaucher et al. 343/700 MS
7,615,856 B2 11/2009 Sakai et al.

2003/0201930 A1 * 10/2003 Nagasaku et al. 342/175
2004/0061948 A1 * 4/2004 Strickland 359/664
2005/0186986 A1 * 8/2005 Hansen et al. 455/553.1
2006/0049995 A1 3/2006 Sakai et al.

FOREIGN PATENT DOCUMENTS

EP 1010543 A1 6/2000
JP 2000307322 A * 11/2000
WO 2005074124 A1 8/2005
WO 2006022350 A1 3/2006

OTHER PUBLICATIONS

Partial EP Search Report dated Jan. 13, 2010; EP Application No. 07019211.

Fuller; Microelectromechanical Systems (MEMs) Applications—Microphones; Rochester Institute of Microelectronic Engineering; Apr. 25, 2005; pp. 1-43.

Blyler; 60 GHz Transceiver Flaunts Low Cost and Compact Size; Jun. 2003; Wireless Systems Design Magazine; Copyright 2004 Penton Media Inc.; 2 pgs.

Gale, RF, Electrical, and Magnetic Microsystems; date unknown; 8 pages.

* cited by examiner


Primary Examiner — Dieu H Duong

(74) *Attorney, Agent, or Firm* — Garlick & Markison; Holly L. Rudnick

(57) **ABSTRACT**

An integrated circuit (IC) antenna structure includes a micro-electromechanical (MEM) area, a feed point, and a transmission line. The micro-electromechanical (MEM) area includes a three-dimensional shape, wherein the three dimensional-shape provides an antenna structure. The feed point is coupled to provide an outbound radio frequency (RF) signal to the antenna structure for transmission and to receive an inbound RF signal from the antenna structure. The transmission line electrically coupled to the feed point.

20 Claims, 38 Drawing Sheets

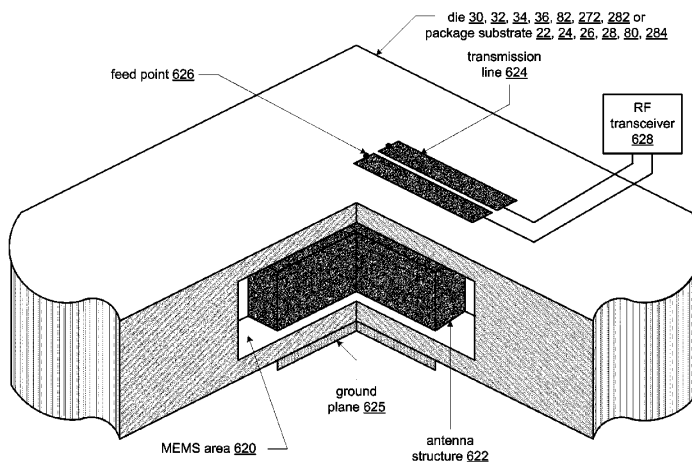

Acrobat 文件



US008193992B2

(12) **United States Patent**
Ikonen

(10) **Patent No.:** **US 8,193,992 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **RADIO COMMUNICATION APPARATUS AND AN ASSOCIATED METHOD**

FOREIGN PATENT DOCUMENTS

JP 2000101338 12/2001

(75) Inventor: **Pekka Martti Tapio Ikonen**, Helsinki (FI)

OTHER PUBLICATIONS

(73) Assignee: **Nokia Corporation**, Espoo (FI)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1048 days.

Vainikainen et al., "Resonator-based analysis of the combination of mobile handset antenna and chassis", IEEE transactions on Antennas and Propagation, vol. 50 No. 10 pp. 1433-1444, 2002.

Ikonen et al., "Magnetodielectric substrates in antenna miniaturization: Potential and limitations", IEEE transactions on antennas and propagation, vol. 54 No. 11, pp. 3991-3999, 2006.

Wang et al., "Effects of ferrite sheet attachment to portable telephone in reducing electromagnetic absorption in human head", IEEE International symposium on electromagnetic compatibility, vol. 2 pp. 822-825, 1999.

(21) Appl. No.: **11/998,696**

* cited by examiner

(22) Filed: **Nov. 30, 2007**

(65) **Prior Publication Data**

US 2009/0140945 A1 Jun. 4, 2009

Primary Examiner — Dieu H Duong

(74) *Attorney, Agent, or Firm* — Harrington & Smith

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(57) **ABSTRACT**

(52) **U.S. Cl.** **343/702**; 343/787; 343/700 MS

An apparatus including: a conductive antenna; a conductive object; a connection having a complex electrical impedance between the antenna and the conductive object; and an element having a complex magnetic permeability located adjacent the conductive antenna, wherein, when the conductive antenna is energized, the connection and the element substantially reduce a phase difference between an electric current flowing in the conductive antenna and an induced electric current flowing in the conductive object. Methods and other apparatus are described and claimed.


(58) **Field of Classification Search** 343/787, 343/793, 795, 700 MS, 702
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2005/0270237 A1* 12/2005 Iguchi et al. 343/702
2007/0097008 A1* 5/2007 Chen 343/795
2007/0273600 A1* 11/2007 Tsujimura et al. 343/787

31 Claims, 3 Drawing Sheets

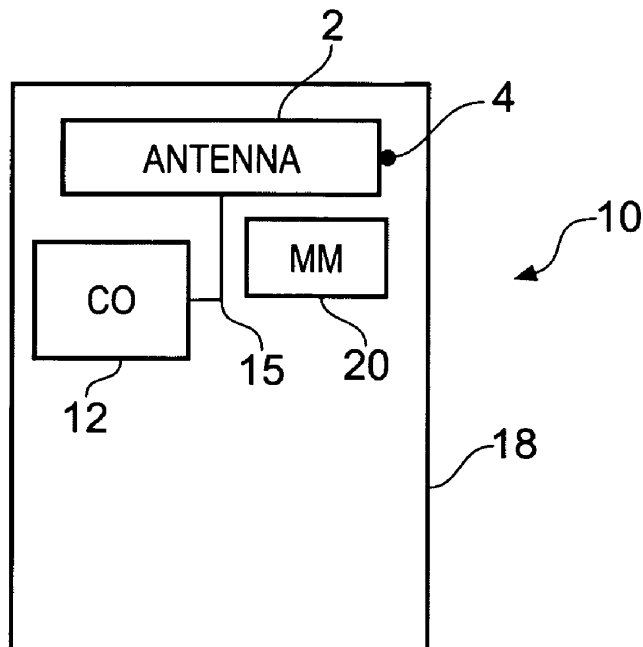

Acrobat 文件



US008193993B2

(12) **United States Patent**
Maddaleno

(10) **Patent No.:** **US 8,193,993 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

- (54) **ANTENNA SUB-ASSEMBLY FOR ELECTRONIC DEVICE**
- (75) Inventor: **Marco Maddaleno**, Turin (IT)
- (73) Assignee: **Motorola Mobility, Inc.**, Libertyville, IL (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 272 days.

(21) Appl. No.: **12/463,603**

(22) Filed: **May 11, 2009**

(65) **Prior Publication Data**
US 2009/0224987 A1 Sep. 10, 2009

- (51) **Int. Cl.**
H01Q 1/24 (2006.01)
- (52) **U.S. Cl.** **343/702; 343/700 MS**
- (58) **Field of Classification Search** **343/700 MS, 343/702**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,625,212 A	11/1986	Oda et al.
4,862,181 A	8/1989	Ponce De Leon et al.
4,955,084 A	9/1990	Umetsu et al.
5,300,937 A	4/1994	Capp et al.
5,808,584 A	9/1998	Skahill
5,861,854 A	1/1999	Kawahata et al.
5,940,041 A	8/1999	Koyama et al.
6,177,908 B1	1/2001	Kawahata et al.
6,195,048 B1	2/2001	Chiba et al.

6,646,610 B2	11/2003	Troelsen
6,650,295 B2	11/2003	Ollikainen et al.
6,762,723 B2	7/2004	Nallo et al.
6,762,763 B1	7/2004	Migdal et al.
6,950,072 B2	9/2005	Miyata et al.
7,068,230 B2 *	6/2006	Qi et al. 343/702
7,136,020 B2	11/2006	Yamaki
7,196,667 B2	3/2007	Watada et al.
7,339,528 B2	3/2008	Wang et al.
7,403,161 B2	7/2008	DiNallo et al.
7,423,598 B2	9/2008	Bit-Babik et al.
7,605,764 B2 *	10/2009	Ishimiya 343/702
2004/0090373 A1	5/2004	Faraone et al.
2004/0169606 A1	9/2004	Sato et al.
2004/0252063 A1	12/2004	Sadamori et al.
2005/0024271 A1	2/2005	Ying et al.
2006/0244665 A1	11/2006	Tung
2007/0085747 A1	4/2007	DiNallo et al.
2008/0012774 A1 *	1/2008	Wang 343/702
2008/0100516 A1	5/2008	DiNallo et al.

FOREIGN PATENT DOCUMENTS

GB	2366916 A	3/2002
WO	8910012 A1	10/1989
WO	9913528 A1	3/1999
WO	2008063788 A2	5/2008


* cited by examiner

Primary Examiner — Tan Ho

(57) **ABSTRACT**

A portable electronic device (100) having an antenna sub-assembly (204) including a conductor with a first portion (216) along a first surface of a circuit board, a second portion (218) connected to the first portion along an edge of the circuit board, and a third portion (220) connected to the second portion. The third portion is along a second surface of the circuit board. A feed leg (222) couples to the conductor to radio circuitry.

16 Claims, 5 Drawing Sheets

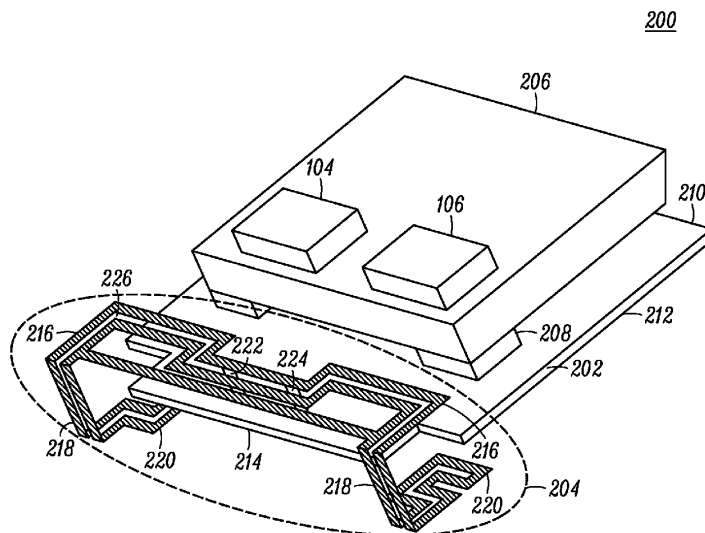

Acrobat 文件



US008193996B2

(12) **United States Patent**
Wu et al.

(10) **Patent No.:** **US 8,193,996 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **ANTENNA RADOME**

(75) Inventors: **Chun-Yih Wu**, Taichung (TW);
Hung-Hsuan Lin, Taipei (TW);
Ken-Huang Lin, Kaohsiung (TW);
Kun-Hsien Lin, Tainan County (TW);
Yu-Feng Yeh, Taipei (TW)

(73) Assignees: **Industrial Technology Research Institute**, Hsinchu (TW); **National Sun Yat-Sen University**, Kaohsiung (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 531 days.

(21) Appl. No.: **12/335,585**

(22) Filed: **Dec. 16, 2008**

(65) **Prior Publication Data**
US 2009/0315803 A1 Dec. 24, 2009

(30) **Foreign Application Priority Data**
Jun. 23, 2008 (TW) 97123319 A

(51) **Int. Cl.**
H01Q 1/42 (2006.01)
(52) **U.S. Cl.** **343/872**; 343/909; 343/700 MS
(58) **Field of Classification Search** 343/909,
343/872, 873, 700 MS
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,791,432 B2 9/2004 Smith et al.
2006/0044189 A1* 3/2006 Livingston et al. 343/700 MS
2006/0125681 A1* 6/2006 Smith et al. 342/120

2007/0107827 A1 5/2007 Takahashi et al.
2007/0109023 A1 5/2007 Beausoliel et al.
2007/0138402 A1 6/2007 Hyde et al.
2007/0146097 A1 6/2007 Lapin et al.
2007/0160096 A1 7/2007 Tanaka
2007/0176827 A1 8/2007 Itoh et al.
2007/0237478 A1 10/2007 D'Aguzzo et al.
2007/0254455 A1 11/2007 Yamaguchi et al.
2007/0285315 A1 12/2007 Davis et al.
2007/0285324 A1 12/2007 Waterhouse et al.
2008/0001843 A1 1/2008 Wu et al.
2008/0013170 A1 1/2008 Tanaka
2008/0048917 A1 2/2008 Achour et al.
2008/0073647 A1 3/2008 Arasawa et al.
2008/0079638 A1 4/2008 Choi et al.
2008/0081298 A1 4/2008 Tanaka
2008/0094300 A1 4/2008 Lee
2008/0316140 A1* 12/2008 Wu et al. 343/872

OTHER PUBLICATIONS


"Planar High Gain Antenna for 5.8-GHz WiMAX Operation" Chun-Yih Wu et al., Industrial Technology Research Institute, 2007 IEEE.
"Novel High Gain Metamaterial Antenna Radome for WiMAX Operation in the 5.8-GHz Band" Chun-Yih Wu et al., Industrial Technology Research Institute.
"Use of Conjugate Dielectric and Metamaterial Slabs as Radomes" H. Cory et al., Special Issue on Metamaterials LHM, IET Microw. Antennas Propag. 2007.

(Continued)

Primary Examiner — Dieu H Duong
(74) *Attorney, Agent, or Firm* — Thomas|Kayden

(57) **ABSTRACT**
An antenna radome is provided. The antenna radome comprises an antenna radome substrate and a unit cell. The unit cell is formed on a surface of the antenna radome substrate, and the unit cell is perpendicular to a magnetic field direction of an antenna. The unit cell comprises a plurality of conductors.

19 Claims, 6 Drawing Sheets

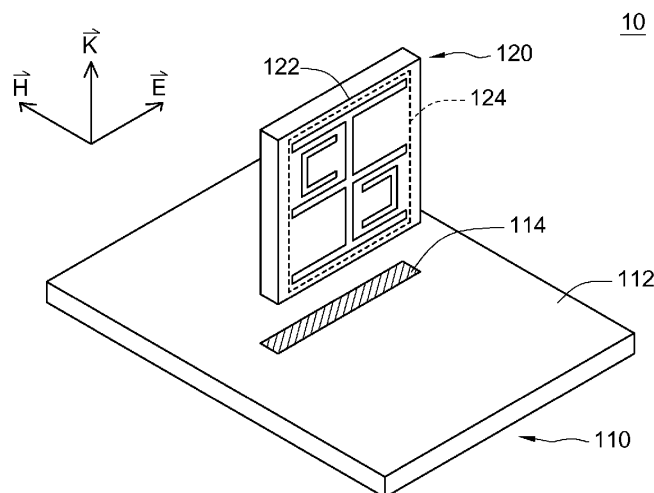

Acrobat 文件



US008193997B2

(12) **United States Patent
Webb**

(10) **Patent No.:** **US 8,193,997 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **DIRECTIONAL PLANAR LOG-SPIRAL SLOT
ANTENNA**

(75) Inventor: **Spencer Webb**, Pelham, NH (US)

(73) Assignee: **Antennasys, Inc.**, Pelham, NH (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 445 days.

(21) Appl. No.: **12/544,838**

(22) Filed: **Aug. 20, 2009**

(65) **Prior Publication Data**

US 2011/0043414 A1 Feb. 24, 2011

(51) **Int. Cl.**
H01Q 1/36 (2006.01)

(52) **U.S. Cl.** **343/895**; 343/767; 343/792.5

(58) **Field of Classification Search** 343/767,
343/792.5, 895

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,618,114	A	11/1971	Dietrich	
4,095,230	A *	6/1978	Salmond et al.	343/729
4,114,164	A *	9/1978	Greiser	343/895
4,319,248	A *	3/1982	Flam	343/701
5,053,786	A	10/1991	Silverman	
5,313,216	A *	5/1994	Wang et al.	343/700 MS
6,191,756	B1 *	2/2001	Newham	343/895
6,407,721	B1 *	6/2002	Mehen et al.	343/895
6,853,351	B1	2/2005	Mohuchy	

OTHER PUBLICATIONS

RFspin s.r.o. "SCSA-27 Electrical specification", retrieved from <http://www.rfspin.cz/anteny/scsa-27.php> on Sep. 14, 2009, 5 pages.

Piksa, "Log-Spiral antenna from 2 to 40 GHz with impedance matching", 4 pages.

Johnson, "Antenna Engineering Handbook", Third edition, DuHamel et al. Frequency-Independent Antennas, 20 pages.

VDAR-1 Antenna, "Single 5dBic "Hybrid-Patch" Antenna with mounting option", 1 page.

Lo et al. "Antenna Handbook" vol. II, "Antenna Theory", "Frequency-Independent Antennas", 4. Log-Spiral Antennas, 1993, 11 pages.

International Search Report and Written Opinion for corresponding PCT application, dated Dec. 21, 2010, 8 pages.

Notification Concerning Transmittal of Copy of International Preliminary Report on Patentability dated Mar. 1, 2012, 6 page.

* cited by examiner


Primary Examiner — Tho G Phan

(74) *Attorney, Agent, or Firm* — ARC IP Law, PC; Joseph J. Mayo

(57) **ABSTRACT**

Directional wide band antenna that may be utilized to enhance cell phone coverage within a building, or for signals intelligence collection (SIGINT). Includes a log-spiral slot antenna with feed-point configured to transfer energy to/from the antenna. Includes an energy absorbent backing and an energy absorbent siding coupled with the log-spiral slot antenna. Includes a cavity behind the log-spiral slot antenna and in front of the energy absorbent backing. Includes a cable connector coupled to a tapered microstrip line coupled to the feed-point wherein the tapered microstrip line is configured to transform the input impedance to the antenna impedance. Housed in a container configured to hold the above listed components. Energy absorbent siding, cavity and energy absorbent backing greatly reduces back lobes. Another embodiment has log-spiral shaped slots at an outer portion of the log-spiral slot antenna overlap with the energy absorbent siding and wherein the feed-point overlaps the cavity.

20 Claims, 64 Drawing Sheets

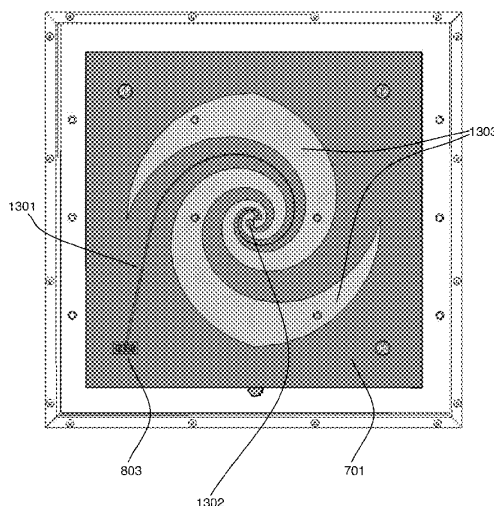

Acrobat 文件



US008193998B2

(12) **United States Patent**
Puente Baliarda et al.

(10) **Patent No.:** **US 8,193,998 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **ANTENNA CONTACTING ASSEMBLY**

(75) Inventors: **Carles Puente Baliarda**, Barcelona (ES); **Eloy Hinojo**, Barcelona (ES)

(73) Assignee: **Fractus, S.A.**, Barcelona (ES)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 728 days.

(21) Appl. No.: **11/886,980**

(22) PCT Filed: **Apr. 12, 2006**

(86) PCT No.: **PCT/EP2006/061564**

§ 371 (c)(1),

(2), (4) Date: **Mar. 13, 2009**

(87) PCT Pub. No.: **WO2007/098810**

PCT Pub. Date: **Sep. 7, 2007**

(65) **Prior Publication Data**

US 2009/0213029 A1 Aug. 27, 2009

Related U.S. Application Data

(60) Provisional application No. 60/678,571, filed on May 6, 2005.

(30) **Foreign Application Priority Data**

Apr. 14, 2005 (EP) 05102942

(51) **Int. Cl.**
H01Q 1/50 (2006.01)

(52) **U.S. Cl.** **343/906; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702, 906; 439/66, 862**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,839,660 A	6/1989	Hadzoglou	
5,092,783 A *	3/1992	Suarez et al.	439/71
5,462,443 A	10/1995	Kurbjuhn et al.	
5,936,583 A	8/1999	Sekine	
6,031,499 A	2/2000	Dichter	
6,039,583 A	3/2000	Korsunsky	
6,157,348 A	12/2000	Openlander	
6,215,446 B1	4/2001	Sullivan	
6,423,915 B1 *	7/2002	Winter	200/292

(Continued)

FOREIGN PATENT DOCUMENTS

DE 20306921 9/2003

(Continued)

OTHER PUBLICATIONS

Jaggard, D. L. Rebuttal expert report of Dr. Dwight L. Jaggard (redacted version). Fractus. Feb. 16, 2011.

(Continued)


Primary Examiner — Tan Ho

(74) *Attorney, Agent, or Firm* — Winstead PC

(57) **ABSTRACT**

This invention refers to an antenna contacting assembly which allows electrical connection of an antenna element to the RF module of a wireless device when very little space is available on the side of the PCB underneath the antenna element. The antenna contacting assembly provides electrical contact between a first conducting surface and a second conducting surface by engaging in traction mode said first conducting surface with said second conducting surface. Further the invention refers to an antenna system provided with such antenna contacting assembly and the corresponding wireless device with an antenna system provided with such antenna contacting assembly.

24 Claims, 12 Drawing Sheets

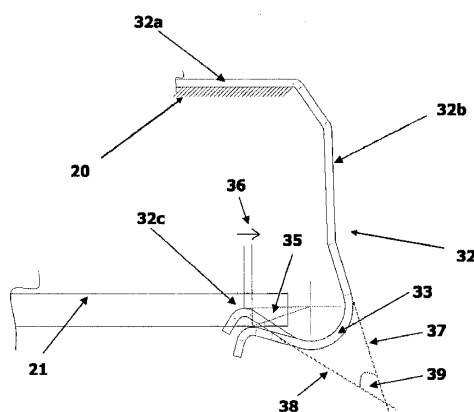

Acrobat 文件



US008194416B2

(12) **United States Patent**
Park et al.

(10) **Patent No.:** **US 8,194,416 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **MULTILAYER PRINTED CIRCUIT BOARD
HAVING ELECTROMAGNETIC WAVE
REDUCTION MEMBER**

(75) Inventors: **Hark Byeong Park**, Suwon-si (KR);
Byong Su Seol, Yongin-si (KR); **Hyung
Geun Kim**, Yongin-si (KR); **Hyun Ho
Park**, Daedeok-gu (KR); **Jong Sung
Lee**, Seoul (KR); **Hyung Seok Lee**,
Suwon-si (KR); **Young Jun Moon**,
Suwon-si (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 1012 days.

(21) Appl. No.: **11/970,051**

(22) Filed: **Jan. 7, 2008**

(65) **Prior Publication Data**
US 2008/0198567 A1 Aug. 21, 2008

(30) **Foreign Application Priority Data**
Feb. 16, 2007 (KR) 10-2007-0016854

(51) **Int. Cl.**
H05K 9/00 (2006.01)
(52) **U.S. Cl.** **361/818**
(58) **Field of Classification Search** 361/818,
361/780, 793, 794; 174/255
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,981,869 A 11/1999 Kroger
6,617,509 B1 9/2003 Bergstedt et al.
6,686,808 B1 2/2004 Sugawara et al.

6,870,436 B2 3/2005 Grebenkemper
7,519,328 B2 * 4/2009 Dokai et al. 455/41.2
2002/0015293 A1 * 2/2002 Akiba et al. 361/793
2002/0105083 A1 8/2002 Sun et al.
2007/0236518 A1 * 10/2007 Oto et al. 345/691

FOREIGN PATENT DOCUMENTS

JP 62-128597 6/1987
JP 7-10979 2/1995
JP 10-190237 7/1998
KR 2006-93519 8/2006
WO 03/041463 5/2003

OTHER PUBLICATIONS

European Search Report issued Sep. 16, 2009 in EP Application No.
08100555.5.

Japanese Office Action issued May 25, 2010 in JP Application No.
2008-023642.

* cited by examiner

Primary Examiner — Jeremy Norris


Assistant Examiner — Tremesha S Willis

(74) *Attorney, Agent, or Firm* — Stanzione & Kim, LLP

(57) **ABSTRACT**

Disclosed is a multilayer printed circuit board. The multilayer printed circuit board includes a power source surface to provide power to each component disposed on the power source surface, a ground surface having a reference voltage, a strip line which passes through the power source surface and/or the ground surface so as to transmit signals between components, an antenna installed in proximity to a sectional region of the power source surface and the ground surface, and an electromagnetic wave reduction member which is provided between the power source surface and the ground surface to effectively reduce an electromagnetic wave generated from the strip line.

17 Claims, 5 Drawing Sheets

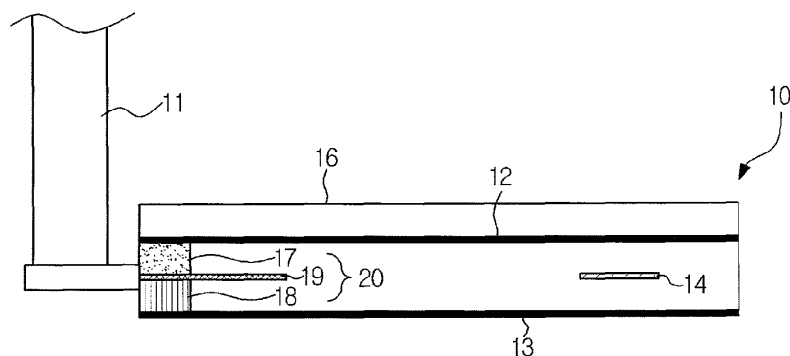

Acrobat 文件



US008195236B2

(12) **United States Patent**
Itay et al.

(10) **Patent No.:** **US 8,195,236 B2**
(45) **Date of Patent:** **Jun. 5, 2012**

(54) **RETROFIT CONTACTLESS SMART SIM
FUNCTIONALITY IN MOBILE
COMMUNICATORS**

(75) Inventors: **Nehemya Itay**, Beit Hillel (IL); **Yaacov
Haroosh**, Migdal HaEmek (IL); **Oded
Bashan**, Rosh Pina (IL)

(73) Assignee: **On Track Innovations Ltd.**, Rosh Pina
(IL)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 171 days.

(21) Appl. No.: **12/816,669**

(22) Filed: **Jun. 16, 2010**

(65) **Prior Publication Data**

US 2011/0312382 A1 Dec. 22, 2011

(51) **Int. Cl.**
H04M 1/00 (2006.01)

(52) **U.S. Cl.** **455/558**

(58) **Field of Classification Search** None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,395,353 A	7/1968	King
3,674,914 A	7/1972	Burr
3,823,403 A	7/1974	Walter et al.
3,981,076 A	9/1976	Nicolas et al.
4,065,850 A	1/1978	Burr et al.
4,417,413 A	11/1983	Hoppe et al.
4,450,623 A	5/1984	Burr
4,497,068 A	1/1985	Fischer
4,776,509 A	10/1988	Pitts et al.
4,857,760 A	8/1989	Stuebing
4,951,044 A	8/1990	Nelson et al.
5,025,550 A	6/1991	Zirbes et al.

5,186,378 A	2/1993	Alfaro
5,223,851 A	6/1993	Hadden et al.
5,240,166 A	8/1993	Fontana et al.
5,241,160 A	8/1993	Bashan et al.
5,250,759 A	10/1993	Watson
5,285,191 A	2/1994	Reeb
5,349,173 A	9/1994	Scheckel et al.
5,357,091 A	10/1994	Ozawa et al.
5,378,857 A	1/1995	Swailes
5,448,110 A	9/1995	Tuttle et al.
5,539,188 A	7/1996	Fallah et al.
5,572,410 A	11/1996	Gustafson

(Continued)

FOREIGN PATENT DOCUMENTS

CN 101303746 11/2008

(Continued)

OTHER PUBLICATIONS

A Press Release by Zenius Solutions: "Zenius Solutions enables
interactive NFC on current GSM phones", Oct. 19, 2009.

(Continued)


Primary Examiner — Ajit Patel

(74) Attorney, Agent, or Firm — Sughrue Mion, PLLC

(57) **ABSTRACT**

A mobile communicator including a main housing portion,
defining a SIM card socket, a battery located at a battery
location defined by the main housing portion, a cover over the
battery and a retrofit contactless smart SIM functionality
assembly, having a SIM card shaped portion which is
mounted in the SIM card socket, a contactless smart card
antenna portion located between the battery and the cover and
an antenna tail portion which interconnects the contactless
smart card antenna portion with the SIM card shaped portion,
the antenna tail portion being attached and electrically con-
nected to the SIM card shaped portion by means of an elec-
trically conductive adhesive.

22 Claims, 2 Drawing Sheets

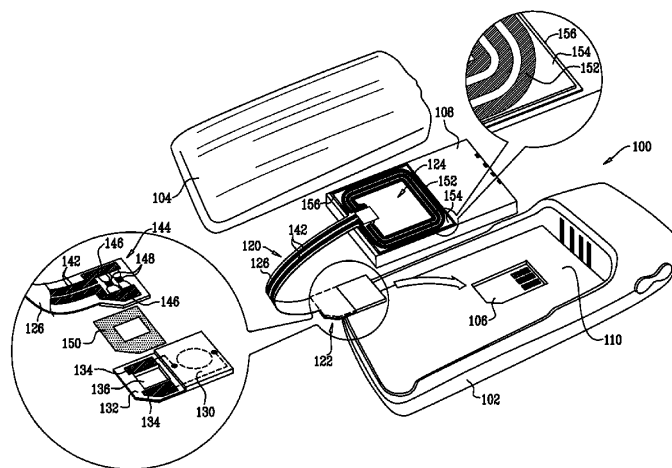

Acrobat 文件



US008199056B2

(12) **United States Patent**
Pohjonen

(10) **Patent No.:** **US 8,199,056 B2**
(45) **Date of Patent:** **Jun. 12, 2012**

(54) **ANTENNA ARRANGEMENT**

(56) **References Cited**

(75) Inventor: **Helena Pohjonen**, Espoo (FI)

(73) Assignee: **Nokia Corporation**, Espoo (FI)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 659 days.

(21) Appl. No.: **11/992,792**

(22) PCT Filed: **Oct. 13, 2005**

(86) PCT No.: **PCT/IB2005/003180**

§ 371 (c)(1),
(2), (4) Date: **Jun. 23, 2009**

(87) PCT Pub. No.: **WO2007/042856**

PCT Pub. Date: **Apr. 19, 2007**

(65) **Prior Publication Data**

US 2009/0309795 A1 Dec. 17, 2009

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/722**

(58) **Field of Classification Search** **343/700 MS,**
343/722, 846, 850, 893

See application file for complete search history.

U.S. PATENT DOCUMENTS

3,806,928	A *	4/1974	Costanza	342/4
5,448,209	A	9/1995	Hirai et al.	333/204
5,627,541	A *	5/1997	Haley et al.	342/1
5,773,917	A	6/1998	Satoh et al.	310/364
6,515,558	B1	2/2003	Ylilammi	333/189
7,132,984	B2 *	11/2006	Kameda et al.	343/700 MS

FOREIGN PATENT DOCUMENTS

EP	1 378 959	1/2004
EP	1 475 744	11/2004
EP	1 548 872	6/2005
JP	2004 129016	4/2004
WO	WO 00/11747	3/2000

OTHER PUBLICATIONS

Dubois, M.-A., "Thin Film Bulk Acoustic Wave Resonators: a Technology Overview", MEMSWAVE 03, Toulouse, France, Jul. 2-4, 2003, 4 pgs.

Kim, B.C., et al., "Design of a Compact PIFA for Mobile Phones", Radio & Broadcasting Technology Laboratory, pp. 809-812.

* cited by examiner

Primary Examiner — Hoang V Nguyen


(74) *Attorney, Agent, or Firm* — Harrington & Smith

(57)

ABSTRACT

An antenna arrangement including a first antenna element having one or more surfaces; and a laminate attenuator, positioned adjacent a portion of at least one surface of the first antenna element, wherein the laminate attenuator is arranged or attenuating predetermined radio frequency electromagnetic waves.

20 Claims, 5 Drawing Sheets

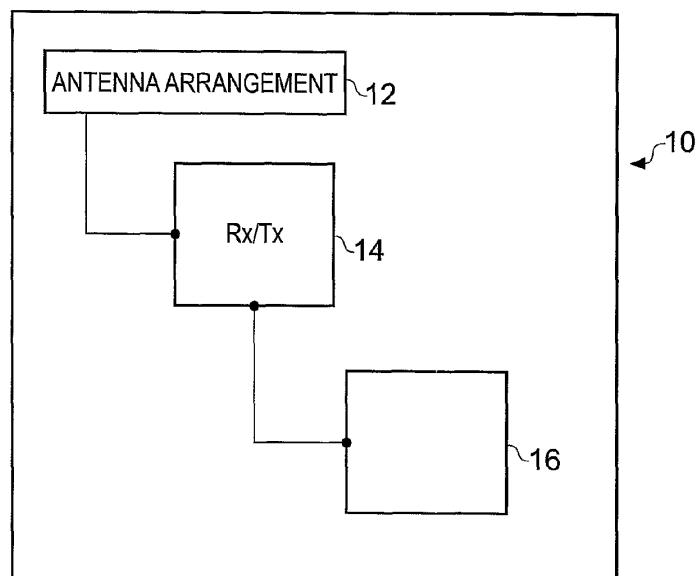

Acrobat 文件



US008199058B2

(12) **United States Patent**
Johnson

(10) **Patent No.:** **US 8,199,058 B2**

(45) **Date of Patent:** **Jun. 12, 2012**

(54) **ANTENNA SYSTEM WITH PIFA-FED CONDUCTOR**

(76) Inventor: **Greg F. Johnson**, Aptos, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 349 days.

(21) Appl. No.: **12/576,779**

(22) Filed: **Oct. 9, 2009**

(65) **Prior Publication Data**

US 2010/0090904 A1 Apr. 15, 2010

Related U.S. Application Data

(60) Provisional application No. 61/104,242, filed on Oct. 9, 2008.

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,452,558 B1 * 9/2002 Saitou et al. 343/725
7,230,574 B2 6/2007 Johnson

7,298,339 B1 11/2007 Ollikainen
2002/0044091 A1 4/2002 Mikkola
2006/0284770 A1 * 12/2006 Jo et al. 343/700 MS
2007/0069956 A1 3/2007 Ozkar

FOREIGN PATENT DOCUMENTS

WO 2005010157 A1 10/2005

OTHER PUBLICATIONS

PCT Search Report and Written Opinion mailed Dec. 4, 2009.

* cited by examiner


Primary Examiner — Dieu H Duong

(74) *Attorney, Agent, or Firm* — Briggs and Morgan, P.A.;
John F. Klos

(57) **ABSTRACT**

A high efficiency antenna for the 824-960 MHz and/or 1710-2170 MHz frequency ranges including world cellular and ISM bands, for use primarily on wireless communications devices such as handsets. An antenna system may be integrated within a handset as a “pull-out” whip or as an internal antenna. The antenna uses an oriented PIFA-fed resonator working in conjunction with a ground plane conductor, which can be realized as the ground traces of the PCB printed circuit board and/or an extension of the ground plane of a wireless communication device. The antenna system when installed on a handset as a pull-out whip, requires approximately one-half the extended length of current pull-out antennas, thus improving the device’s aesthetic and mechanical durability.

18 Claims, 7 Drawing Sheets

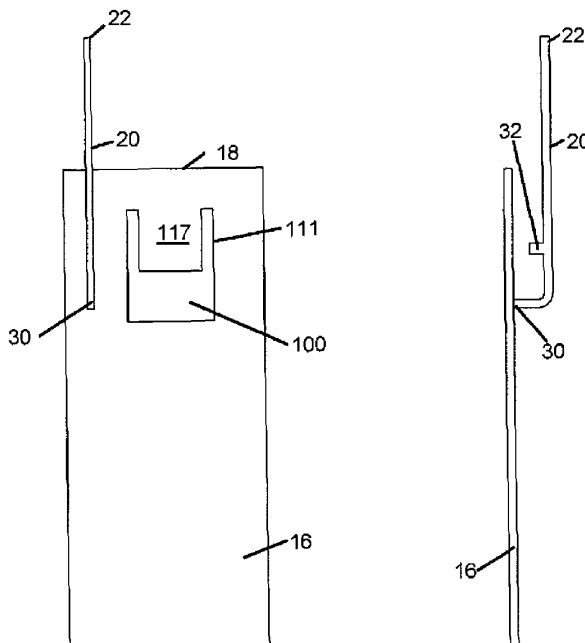

Acrobat 文件



US008199065B2

(12) **United States Patent**
Shachar et al.

(10) **Patent No.:** **US 8,199,065 B2**

(45) **Date of Patent:** **Jun. 12, 2012**

(54) **H-J ANTENNA**

(75) Inventors: **Aviv Shachar**, Ramat-Gan (IL); **Yiu K. Chan**, Vernon Hills, IL (US); **Motti Elkobi**, Natanya (IL)

(73) Assignee: **Motorola Solutions, Inc.**, Schaumburg, IL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1196 days.

(21) Appl. No.: **11/965,780**

(22) Filed: **Dec. 28, 2007**

(65) **Prior Publication Data**

US 2011/0181485 A1 Jul. 28, 2011

(51) **Int. Cl.**
H01Q 21/30 (2006.01)

(52) **U.S. Cl.** **343/848**; 343/893; 343/702

(58) **Field of Classification Search** 343/702, 343/700 MS, 848, 893
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,911,944 B2 * 6/2005 Sekine et al. 343/702
7,119,748 B2 * 10/2006 Autti 343/702

7,696,932 B2 * 4/2010 Desclos et al. 343/702
2005/0057407 A1 3/2005 Imaizumi
2007/0030198 A1 2/2007 Wei
2008/0136727 A1 * 6/2008 Bit-Babik et al. 343/848

FOREIGN PATENT DOCUMENTS

EP 1079463 A 2/2001
EP 1193797 A 4/2002
EP 1530258 A 5/2005

* cited by examiner

Primary Examiner — Jacob Y Choi


Assistant Examiner — Amal Patel

(74) *Attorney, Agent, or Firm* — Jeffrey K. Jacobs; Anthony P. Curtis; Daniel R. Bestor

(57) **ABSTRACT**

A dual-band antenna includes a first antenna element having a generally “J” shaped element, and a second antenna element having a generally “h” shaped element. The first antenna element and the second antenna element share a common feed point and each antenna element is oriented substantially perpendicular to the other. The first antenna element and the second antenna element, in one implementation, are adapted to efficiently operate the dual-band antenna at approximately 1575 MHz and approximately 850 MHz, respectively.

11 Claims, 12 Drawing Sheets

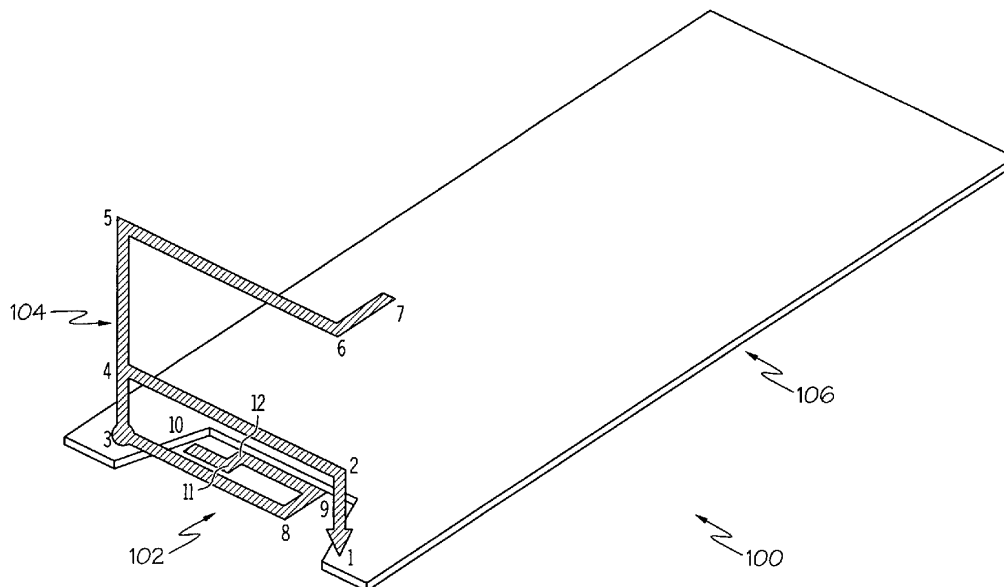

Acrobat 文件



US008199066B2

(12) **United States Patent**
Kubo et al.

(10) **Patent No.:** **US 8,199,066 B2**
(45) **Date of Patent:** **Jun. 12, 2012**

(54) **MAGNETIC ANTENNA AND ANTENNA DEVICE**

(75) Inventors: **Hiroyuki Kubo**, Ishikawa-ken (JP);
Hiromitsu Ito, Ishikawa-ken (JP);
Kuniaki Yosui, Ishikawa-ken (JP)

(73) Assignee: **Murata Manufacturing Co., Ltd.** (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 345 days.

(21) Appl. No.: **12/646,468**

(22) Filed: **Dec. 23, 2009**

(65) **Prior Publication Data**

US 2010/0156729 A1 Jun. 24, 2010

(30) **Foreign Application Priority Data**

Dec. 24, 2008 (JP) 2008-327416

(51) **Int. Cl.**
H01Q 1/36 (2006.01)

(52) **U.S. Cl.** 343/895; 343/702; 343/788

(58) **Field of Classification Search** 343/702,
343/787, 788, 895

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,710,341 B2 * 5/2010 Kubo et al. 343/788
7,812,777 B2 * 10/2010 Yosui et al. 343/788
7,990,331 B2 * 8/2011 Yosui et al. 343/788

FOREIGN PATENT DOCUMENTS

EP 1 439 608 A1 7/2004
EP 1 477 927 A1 11/2007
JP 2002 324221 A 11/2002
JP 2002-325013 A 11/2002
JP 2004 348497 A 12/2004
WO 2008 019157 A1 2/2008

OTHER PUBLICATIONS

Extended European Search Report dated Feb. 18, 2010; Application No. 09179111.1-1248.

* cited by examiner



Primary Examiner — Tan Ho

(74) *Attorney, Agent, or Firm* — Studebaker & Brackett PC; Tim L. Brackett, Jr.; John F. Guay

(57) **ABSTRACT**

There is provided a magnetic antenna and an antenna device that increase the packaging density of a portion where the magnetic antenna is mounted in an electronic apparatus, and suppresses degradation of antenna performance. A flexible substrate has first and second substantially spiral-shaped coil conductors formed thereon. Conductor-opening-side through holes are formed in the respective conductor openings of the coil conductors, and non-coil-conductor-forming-area through holes are formed in areas in which the coil conductors are not formed. First and second magnetic cores are arranged so as to extend through the respective conductor-opening-side through holes from a first main surface of the flexible substrate and to extend through the respective non-coil-conductor-forming-area through holes in a direction from a second main surface side to the first main surface of the flexible substrate.

11 Claims, 6 Drawing Sheets

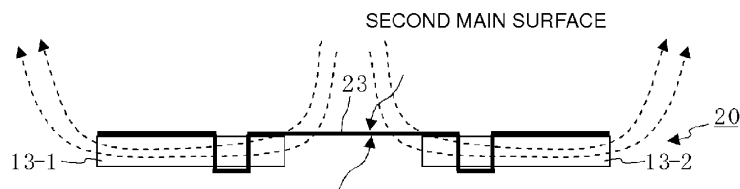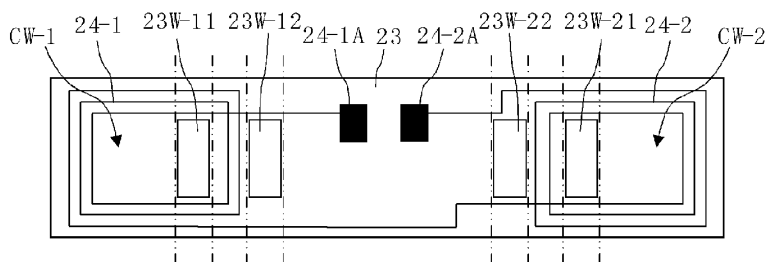

FIRST MAIN SURFACE



Acrobat 文件



US008199855B2

(12) **United States Patent**
Collier et al.

(10) **Patent No.:** **US 8,199,855 B2**
(45) **Date of Patent:** **Jun. 12, 2012**

(54) **ANTENNA DIVERSITY**

(56) **References Cited**

(75) Inventors: **James Digby Yarlet Collier**, Suffolk (GB); **Steven Mark Singer**, Cambridge (GB)

(73) Assignee: **Cambridge Silicon Radio Limited**, Cambridge (GB)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 816 days.

(21) Appl. No.: **12/088,077**

(22) PCT Filed: **Sep. 4, 2006**

(86) PCT No.: **PCT/GB2006/003272**

§ 371 (c)(1),

(2), (4) Date: **Jul. 11, 2008**

(87) PCT Pub. No.: **WO2007/034133**

PCT Pub. Date: **Mar. 29, 2007**

(65) **Prior Publication Data**

US 2009/0010311 A1 Jan. 8, 2009

(30) **Foreign Application Priority Data**

Sep. 26, 2005 (GB) 0519582.1

(51) **Int. Cl.**
H03K 9/00 (2006.01)
H04L 27/00 (2006.01)

(52) **U.S. Cl.** **375/316; 375/267; 375/347; 455/277.1; 455/277.2**

(58) **Field of Classification Search** **375/267; 375/316, 347; 455/277.1, 277.2**

See application file for complete search history.

U.S. PATENT DOCUMENTS

5,561,673	A *	10/1996	Takai et al.	714/708
5,689,502	A	11/1997	Scott	
5,692,019	A *	11/1997	Chang et al.	375/347
5,748,669	A	5/1998	Yada	
6,366,764	B1	4/2002	Yang	
6,449,499	B1	9/2002	Ishikura	
7,933,363	B2	4/2011	Hammersley	
2002/0183087	A1 *	12/2002	Spencer et al.	455/550
2005/0053039	A1 *	3/2005	Dewan et al.	370/334

FOREIGN PATENT DOCUMENTS

EP	0454585	A1	10/1991
EP	1239609	A2	9/2002
JP	8195704	A	7/1996
JP	2002101028	A	4/2002
WO	WO 01/41329	A1	6/2001
WO	WO 02/098018		12/2002
WO	WO 02/098018	A	12/2002
WO	2007034133		3/2007

OTHER PUBLICATIONS

International Search Report corresponding to PCT/GB2006/003272, filed Sep. 4, 2006. Written Opinion of the International Searching Authority corresponding to PCT/GB2006/003272, filed Sep. 4, 2006. Examination Report dated May 3, 2010 for Application No. 06779292.9.

Machine Translation of Japanese Patent No. 8195704A.

Machine Translation of Japanese Patent Application 2002101028A.

* cited by examiner


Primary Examiner — Curtis Odom

(74) *Attorney, Agent, or Firm* — Greenberg Traurig, LLP

(57) **ABSTRACT**

A communication device for receiving a signal in the form of a series of bursts, each burst being at one of a plurality of different available transmission modes, the communication device comprising: two antennas; a receiver unit coupled to the antennas for preferentially receiving signals from a selected one of the antennas; and an antenna selection unit for selecting for each received burst with which of the antennas the receiver unit is to preferentially receive signals.

22 Claims, 5 Drawing Sheets

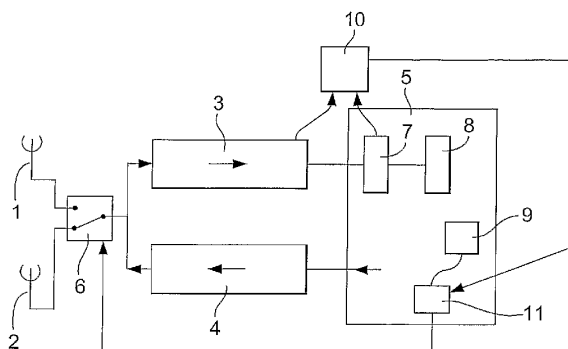

Acrobat 文件



US008200301B2

(12) **United States Patent**
Yamamoto et al.

(10) **Patent No.:** **US 8,200,301 B2**
(45) **Date of Patent:** **Jun. 12, 2012**

(54) **MOBILE WIRELESS COMMUNICATION
APPARATUS HAVING A PLURALITY OF
ANTENNA ELEMENTS**

(75) Inventors: **Atsushi Yamamoto**, Kyoto (JP); **Hiroshi Iwai**, Osaka (JP); **Tsutomu Sakata**, Osaka (JP); **Yoshio Koyanagi**, Ishikawa (JP); **Toshiteru Hayashi**, Kanagawa (JP)

(73) Assignee: **Panasonic Corporation**, Osaka (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 450 days.

(21) Appl. No.: **12/516,611**

(22) PCT Filed: **Sep. 30, 2008**

(86) PCT No.: **PCT/JP2008/002753**

§ 371 (c)(1),

(2), (4) Date: **Jul. 14, 2009**

(87) PCT Pub. No.: **WO2009/044541**

PCT Pub. Date: **Apr. 9, 2009**

(65) **Prior Publication Data**

US 2010/0056234 A1 Mar. 4, 2010

(30) **Foreign Application Priority Data**

Oct. 2, 2007 (JP) 2007-258655

(51) **Int. Cl.**
H04M 1/00 (2006.01)

(52) **U.S. Cl.** **455/575.7; 455/575.5; 370/339**

(58) **Field of Classification Search** **455/575.1-575.8**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,999,793	B2 *	2/2006	Jinushi	455/558
2004/0106428	A1 *	6/2004	Shoji	455/550.1
2005/0181847	A1 *	8/2005	Boyle	455/575.7

FOREIGN PATENT DOCUMENTS

EP	1 763 145	3/2007
JP	57-103406	6/1982
JP	62-154902	7/1987
JP	2004-129234	4/2004
JP	2004-274730	9/2004
JP	2004-312381	11/2004
JP	2005-354322	12/2005
JP	3830773	7/2006
JP	2006-319864	11/2006
WO	2007/004499	1/2007

OTHER PUBLICATIONS

International Search Report mailed Jan. 20, 2009 for International Application No. PCT/JP2008/002753.

* cited by examiner

Primary Examiner — Rafael Pérez-Gutiérrez


Assistant Examiner — Keith Fang

(74) *Attorney, Agent, or Firm* — Wenderoth, Lind & Ponack, L.L.P.

(57) **ABSTRACT**

A housing antenna is small enough in size so as to be accommodated in a mobile device. The antenna has a number of feeding points that allow the antenna to operate as a number of antennal elements. The antenna is capable of realizing high-speed communication by increasing communication capacity.

24 Claims, 20 Drawing Sheets

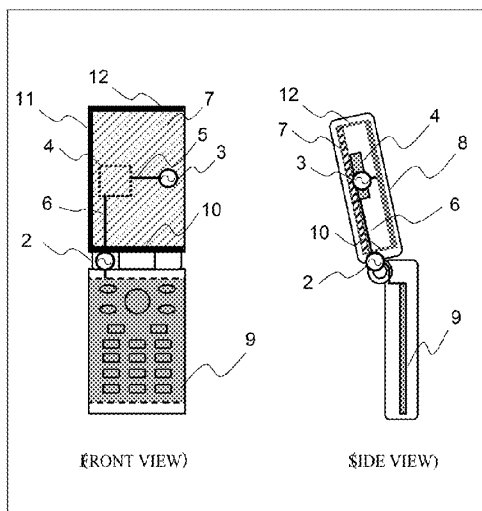

Acrobat 文件



US008200302B2

(12) **United States Patent**
Yamamoto et al.

(10) **Patent No.:** **US 8,200,302 B2**
(45) **Date of Patent:** **Jun. 12, 2012**

(54) **MOBILE WIRELESS COMMUNICATION
APPARATUS HAVING A PLURALITY OF
ANTENNA ELEMENTS**

(75) Inventors: **Atsushi Yamamoto**, Kyoto (JP); **Hiroshi Iwai**, Osaka (JP); **Tsutomu Sakata**, Osaka (JP); **Yoshio Koyanagi**, Ishikawa (JP); **Toshiteru Hayashi**, Kanagawa (JP)

(73) Assignee: **Panasonic Corporation**, Osaka (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 448 days.

(21) Appl. No.: **12/517,316**

(22) PCT Filed: **Sep. 30, 2008**

(86) PCT No.: **PCT/JP2008/002752**

§ 371 (c)(1),

(2), (4) Date: **Jul. 16, 2009**

(87) PCT Pub. No.: **WO2009/044540**

PCT Pub. Date: **Apr. 9, 2009**

(65) **Prior Publication Data**

US 2010/0069017 A1 Mar. 18, 2010

(30) **Foreign Application Priority Data**

Oct. 2, 2007 (JP) 2007-258654

(51) **Int. Cl.**
H04M 1/00 (2006.01)

(52) **U.S. Cl.** **455/575.7; 455/575.5; 370/339**

(58) **Field of Classification Search** **455/575.1-575.8**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,999,793	B2 *	2/2006	Jinushi	455/558
2004/0106428	A1 *	6/2004	Shoji	455/550.1
2005/0181847	A1 *	8/2005	Boyle	455/575.7

FOREIGN PATENT DOCUMENTS

EP	1 763 145	3/2007
JP	62-154902	7/1987
JP	3-113516	11/1991
JP	6-1848	1/1994
JP	11-150415	6/1999
JP	2004-274223	9/2004
JP	2004-274730	9/2004
JP	2004-312381	11/2004
JP	2005-354322	12/2005
JP	3830773	7/2006
JP	2006-319864	11/2006
WO	2007/004499	1/2007

OTHER PUBLICATIONS

International Search Report issued Jan. 20, 2009 in the International (PCT) Application of which the present application is the U.S. National Stage.

* cited by examiner

Primary Examiner — Rafael Pérez-Gutiérrez



Assistant Examiner — Keith Fang

(74) *Attorney, Agent, or Firm* — Wenderoth, Lind & Ponack, L.L.P.

(57) **ABSTRACT**

A housing antenna is small enough in size so as to be accommodated in a mobile device. The antenna has a number of feeding points that allow the antenna to operate as a number of antenna elements. The antenna is capable of realizing high speed communication by increasing communication capacity.

17 Claims, 23 Drawing Sheets

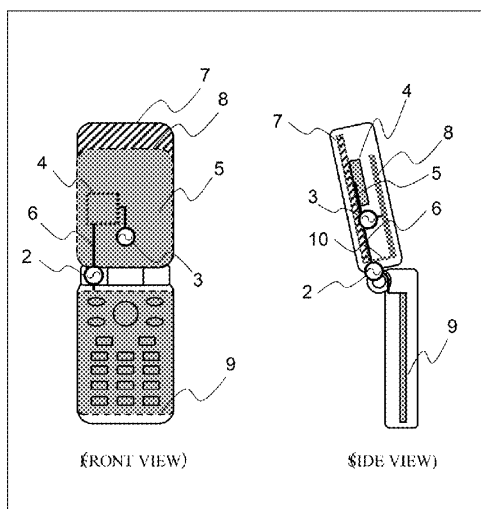

Acrobat 文件



US008200303B2

(12) **United States Patent**
Morishita

(10) **Patent No.:** **US 8,200,303 B2**
(45) **Date of Patent:** **Jun. 12, 2012**

(54) **PORTABLE TERMINAL ANTENNA
ARRANGEMENT TO SUPPRESS
DETERIORATION OF ANTENNA
SENSITIVITY**

FOREIGN PATENT DOCUMENTS

JP	2006-166225	A	6/2006
JP	2007-74366	A	3/2007
JP	2007-104468	A	4/2007
JP	2008-177730	A	7/2008

(75) Inventor: **Katsuji Morishita**, Kanagawa (JP)

(73) Assignee: **KYOCERA Corporation**, Kyoto (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS
International Search Report for PCT/JP2010/057221, mailed Jul. 27, 2010.

* cited by examiner

(21) Appl. No.: **13/265,397**

(22) PCT Filed: **Apr. 23, 2010**

(86) PCT No.: **PCT/JP2010/057221**

§ 371 (c)(1),
(2), (4) Date: **Oct. 20, 2011**

Primary Examiner — Vladimir Magloire
(74) Attorney, Agent, or Firm — Hoffmann & Baron, LLP

(87) PCT Pub. No.: **WO2010/123092**

PCT Pub. Date: **Oct. 28, 2010**

(65) **Prior Publication Data**

US 2012/0040726 A1 Feb. 16, 2012

(30) **Foreign Application Priority Data**

Apr. 24, 2009 (JP) 2009-107183

(51) **Int. Cl.**
H04M 1/00 (2006.01)

(52) **U.S. Cl.** **455/575.7**; 455/550.1; 455/575.3;
343/893

(58) **Field of Classification Search** 455/575.5,
455/575.3, 575.1, 575.7; 343/893
See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

6,728,559	B2 *	4/2004	Masaki		455/575.5
2009/0170570	A1 *	7/2009	Uejima et al.		455/575.3
2010/0285851	A1 *	11/2010	Horiata et al.		455/575.3

(57) **ABSTRACT**

Provided is a portable terminal which is provided with a first case, a second case, and a connecting section which connects together the first case and the second case, and has less deterioration of antenna sensitivity. The portable terminal has the first case (2), the second case (3), the connecting section (4), a first circuit section (32) disposed in the first case (2), a first conductive section (31) disposed in the first case (2), a second conductive section (33) disposed in the second case (3), a third conductive section (34) disposed in the connecting section (4), and a first electronic component (61) disposed adjacent to the first conductive section (31) in the length direction of the first case (2) in the first case (2). The first length (X1), which is obtained from the sum of the path length of the signals in the band of a first frequency (f1) in the first conductive section (31) and the path length of the signals in the band of the first frequency (f1) in the first electronic component (61), is substantially the same as the second length (X2), which is obtained from the sum of the path length of the signals in the band of the first frequency (f1) in the second conductive section (33) and the path length of the signals in the band of the first frequency (f1) in the third conductive section (34).

10 Claims, 7 Drawing Sheets



Acrobat 文件



US008201746B2

(12) **United States Patent**
Guo et al.

(10) **Patent No.:** **US 8,201,746 B2**
(45) **Date of Patent:** **Jun. 19, 2012**

(54) **ON-CHIP ANTENNA AND A METHOD OF FABRICATING THE SAME**

(75) Inventors: **Li Hui Guo**, Singapore (SG); **Hong Yu Li**, Singapore (SG); **Min Tang**, Singapore (SG)

(73) Assignee: **Agency for Science, Technology and Research**, Singapore (SG)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 880 days.

(21) Appl. No.: **12/161,958**

(22) PCT Filed: **Jan. 24, 2007**

(86) PCT No.: **PCT/SG2007/000019**

§ 371 (c)(1),
(2), (4) Date: **Nov. 21, 2008**

(87) PCT Pub. No.: **WO2007/086809**

PCT Pub. Date: **Aug. 2, 2007**

(65) **Prior Publication Data**

US 2011/0036912 A1 Feb. 17, 2011

Related U.S. Application Data

(60) Provisional application No. 60/761,571, filed on Jan. 24, 2006.

(51) **Int. Cl.**
G06K 19/06 (2006.01)

(52) **U.S. Cl.** **235/492; 235/487**

(58) **Field of Classification Search** **235/492, 235/487, 380, 382, 375**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,814,849	A *	3/1989	Schrenk	257/659
6,435,415	B1 *	8/2002	Catte	235/492
6,637,665	B2 *	10/2003	Salzgeber	235/492
6,646,328	B2	11/2003	Tsai	
2006/0049986	A1	3/2006	Dunn et al.	
2006/0049995	A1	3/2006	Imaoka et al.	

FOREIGN PATENT DOCUMENTS

WO WO0161644 8/2001

OTHER PUBLICATIONS

A. Aerial, et al., A New Contactless Smart Card IC Using an On-Chip Antenna and as Asynchronous Microcontroller, IEEE Journal of Solid-State Circuits, vol. 36, No. 7, 2001, pp. 1101-1107.

(Continued)


Primary Examiner — Karl D Frech

(74) *Attorney, Agent, or Firm* — K. David Crockett, Esq.; Niky Economy Syrengelas, Esq.; Crockett & Crockett, PC

(57) **ABSTRACT**

An on-chip antenna fabricated on a chip for wireless communication is disclosed. The on-chip antenna includes a first dielectric layer arranged on a surface of the chip of the radio frequency identification tag, a grounded shielding layer arranged on the first dielectric layer, a second dielectric layer arranged on the grounded shielding layer, and a planar antenna arranged on the second dielectric layer above the grounded shielding layer. A radio frequency identification tag with an on-chip antenna and a method of fabricating an on-chip antenna on a chip for wireless communication are also disclosed.

44 Claims, 3 Drawing Sheets

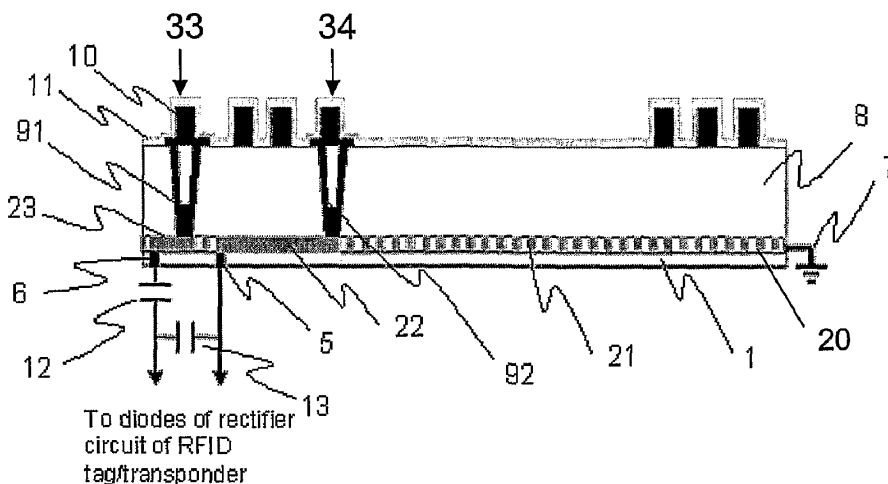

Acrobat 文件



US008201748B2

(12) **United States Patent**
Koepp et al.

(10) **Patent No.:** **US 8,201,748 B2**
(45) **Date of Patent:** **Jun. 19, 2012**

(54) **PACKAGED RFID IC WITH INTEGRATED ANTENNA**

(75) Inventors: **Ronald L. Koepp**, Seattle, WA (US);
Ronald A. Oliver, Seattle, WA (US);
Jay Fassett, Edmonds, WA (US);
Christopher J. Diorio, Shoreline, WA (US)

(73) Assignee: **Impinj, Inc.**, Seattle, WA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 96 days.

(21) Appl. No.: **12/767,220**

(22) Filed: **Apr. 26, 2010**

(65) **Prior Publication Data**
US 2010/0270382 A1 Oct. 28, 2010

Related U.S. Application Data

(60) Provisional application No. 61/173,107, filed on Apr. 27, 2009.

(51) **Int. Cl.**
G06K 5/00 (2006.01)

(52) **U.S. Cl.** **235/492; 235/472.02; 235/487**
(58) **Field of Classification Search** **235/492, 235/487, 462.46, 472.02; 343/895**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2005/0007296 A1 * 1/2005 Endo et al. 343/895
2007/0169336 A1 * 7/2007 Luch 29/601
2008/0315992 A1 * 12/2008 Forster 340/10.1
* cited by examiner

Primary Examiner — Daniel StCyr


(74) *Attorney, Agent, or Firm* — Turk IP Law, LLC

(57) **ABSTRACT**

A precursor for a Radio Frequency Identification (RFID) tag includes a conductive lead frame with at least three segments, an RFID Integrated Circuit (IC) with at least two antenna terminals, and at least two jumpers. The RFID IC is mounted on at least one of the segments. The antenna terminals are electrically coupled to at least two of the segments, and the jumpers electrically couple the segments such that the coupled segments form a two-turn coil between the antenna terminals of the RFID IC.

20 Claims, 15 Drawing Sheets

800

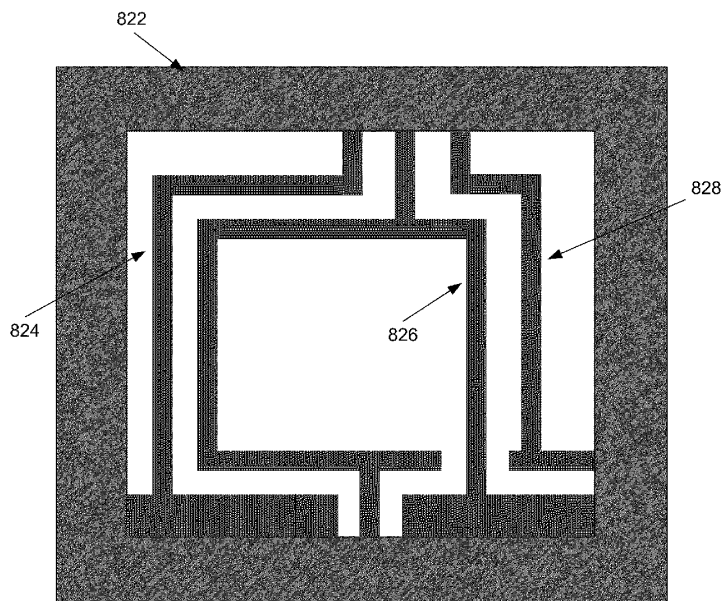

EXAMPLE LEADFRAME FOR
2-LOOP RFID PRECURSOR



Acrobat 文件



US008203489B2

(12) **United States Patent**
Li et al.

(10) **Patent No.:** **US 8,203,489 B2**
(45) **Date of Patent:** **Jun. 19, 2012**

(54) **DUAL-BAND ANTENNA**

(75) Inventors: **Chia-Tien Li**, Hsichih (TW); **Li-Jean Yen**, Hsichih (TW)

(73) Assignee: **Wistron Neweb Corp.**, Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 344 days.

(21) Appl. No.: **12/579,041**

(22) Filed: **Oct. 14, 2009**

(65) **Prior Publication Data**
US 2010/0271264 A1 Oct. 28, 2010

(30) **Foreign Application Priority Data**
Apr. 22, 2009 (TW) 98206683 U

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2004/0135729 A1 * 7/2004 Talvitie et al. 343/702
2005/0264455 A1 * 12/2005 Talvitie et al. 343/702
2007/0139270 A1 * 6/2007 Takei et al. 343/700 MS
2009/0289859 A1 * 11/2009 Pan 343/702

FOREIGN PATENT DOCUMENTS

EP 1950833 A1 * 7/2008
* cited by examiner


Primary Examiner — Dieu H Duong

(74) *Attorney, Agent, or Firm* — Merchant & Gould P.C.

(57) **ABSTRACT**

A dual-band antenna includes a ground plane, a loop antenna, and a monopole antenna. The loop antenna is connected to the ground plane, and has a radiator that forms a loop. The radiator has a first end and a second end adjacent to the first end, and is capable of resonating at a first frequency band. The monopole antenna has one end connected to the first end of the radiator of the loop antenna, and is capable of resonating at a second frequency band. A feed point is disposed at a connection between the first end of the radiator of the loop antenna and the monopole antenna. A ground point is disposed at the radiator of the loop antenna proximate to the second end of the radiator.

6 Claims, 5 Drawing Sheets

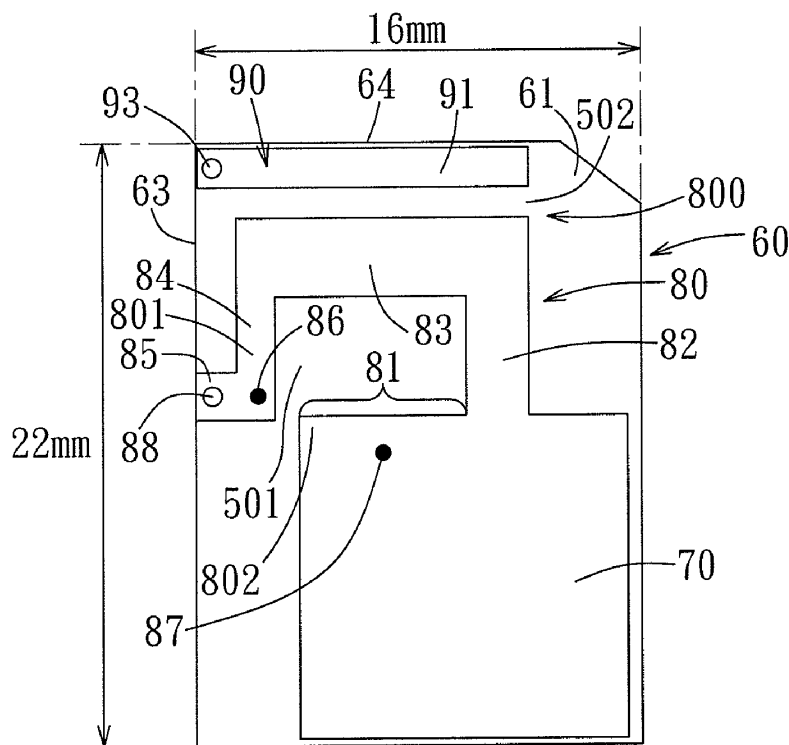

Acrobat 文件



US008203490B2

(12) **United States Patent**
Kwak et al.

(10) **Patent No.:** **US 8,203,490 B2**
(45) **Date of Patent:** **Jun. 19, 2012**

(54) **MULTI-BAND ANTENNA APPARATUS**

(56) **References Cited**

(75) Inventors: **Yong Soo Kwak**, Suwon-si (KR); **Bum Jin Cho**, Hwaseong-si (KR); **Joon Ho Byun**, Yongin-si (KR); **Seong Tae Jeong**, Yongin-si (KR); **Austin Kim**, Seongnam-si (KR); **Sung Koo Park**, Suwon-si (KR)

U.S. PATENT DOCUMENTS

6,157,344 A * 12/2000 Bateman et al. 343/700 MS
6,603,429 B1 * 8/2003 Bancroft et al. 343/700 MS
6,636,179 B1 * 10/2003 Woo et al. 343/700 MS
6,657,592 B2 * 12/2003 Dening et al. 343/700 MS
6,661,380 B1 * 12/2003 Bancroft et al. 343/700 MS
6,897,817 B2 * 5/2005 Jo et al. 343/702

* cited by examiner

(73) Assignee: **Samsung Electronics Co., Ltd.**, Suwon-si (KR)

Primary Examiner — Tho G Phan

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 337 days.

(74) *Attorney, Agent, or Firm* — Jefferson IP Law, LLP

(21) Appl. No.: **12/755,780**

(57) **ABSTRACT**

(22) Filed: **Apr. 7, 2010**

A multi-band antenna apparatus using a multiple frequency band is provided. The apparatus includes a substrate body formed in a flat plate structure having a preset thickness and in which at least one dielectric plate is stacked, a power supply line, disposed at the substrate body and connected to an external power source, for forming an electromagnetic field when power is supplied from the external power source, a radiation line, separated from the power supply line using the dielectric plate as the boundary in the substrate body, for forming an overlapping area overlapped with the power supply line along one axis through at least a portion, and for resonating in a frequency band determined according to the overlapping area when the electromagnetic field is formed, and a ground plate disposed in at least one an upper ground area and a lower ground area of the substrate body, for grounding the radiation line by contacting with the radiation line.

(65) **Prior Publication Data**

US 2010/0265152 A1 Oct. 21, 2010

(30) **Foreign Application Priority Data**

Apr. 15, 2009 (KR) 10-2009-0032766


(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS**; 343/848

(58) **Field of Classification Search** 343/700 MS, 343/846, 848

See application file for complete search history.

20 Claims, 12 Drawing Sheets

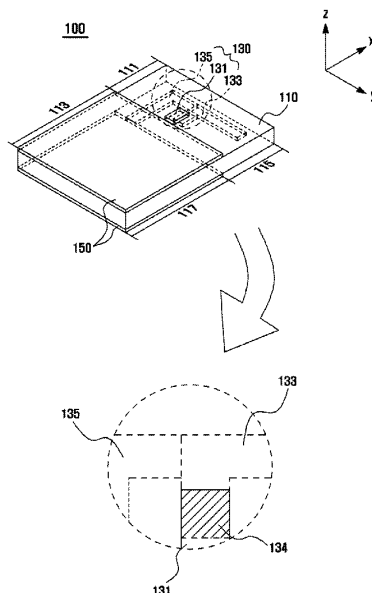

Acrobat 文件



US008203491B2

(12) **United States Patent**
Yang et al.

(10) **Patent No.:** **US 8,203,491 B2**
(45) **Date of Patent:** **Jun. 19, 2012**

(54) **HOUSING, WIRELESS COMMUNICATION
DEVICE USING THE HOUSING, AND
MANUFACTURING METHOD THEREOF**

(75) Inventors: **Fu-Keng Yang**, Taipei Hsien (TW);
Bing Zhang, Shenzhen (CN); **Yi-Ping
Zeng**, Shenzhen (CN); **Jian-Jun Zhan**,
Shenzhen (CN)

(73) Assignees: **Shenzhen Futaihong Precision
Industry Co., Ltd.**, ShenZhen,
Guangdong Province (CN); **FIH (Hong
Kong) Limited**, Kowloon (HK)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 580 days.

(21) Appl. No.: **12/354,081**

(22) Filed: **Jan. 15, 2009**

(65) **Prior Publication Data**

US 2009/0189818 A1 Jul. 30, 2009

(30) **Foreign Application Priority Data**

Jan. 30, 2008 (CN) 2008 1 0300274

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/700 MS**

(58) **Field of Classification Search** **343/700 MS,**
343/702, 841, 846, 872, 906

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,396,444	B1 *	5/2002	Goward et al.	343/702
6,764,626	B2 *	7/2004	Phu et al.	264/129
6,937,196	B2 *	8/2005	Korva	343/702
6,940,459	B2 *	9/2005	Sullivan et al.	343/702
7,847,753	B2 *	12/2010	Ishibashi et al.	343/897
2002/0109641	A1 *	8/2002	Goward et al.	343/873
2007/0216580	A1	9/2007	Lin et al.	

FOREIGN PATENT DOCUMENTS

CN	1336020	A	2/2002
DE	202006019045	U1	3/2007
EP	1855514	A1	11/2007
EP	1868263	A1	12/2007
GB	2345196	A	6/2000
WO	2007/094494	A1	8/2007
WO	2007/101902	A1	9/2007

* cited by examiner


Primary Examiner — Tan Ho

(74) Attorney, Agent, or Firm — Altis Law Group, Inc.

(57) **ABSTRACT**

A housing for a wireless communication device includes a decorative film having an antenna pattern formed thereon, a protective coating covering the antenna pattern, and a substrate moldingly attached to the decorative film and the protective coating. The antenna pattern is a conductive ink coating. The antenna pattern and the protective coating are sandwiched between the decorative film and the substrate.

6 Claims, 2 Drawing Sheets

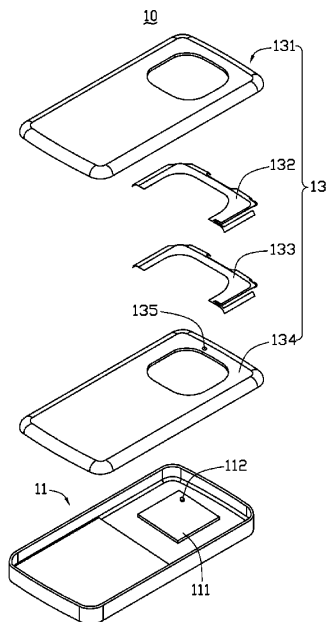

Acrobat 文件



US008203493B2

(12) **United States Patent**
Sato et al.

(10) **Patent No.:** **US 8,203,493 B2**
(45) **Date of Patent:** **Jun. 19, 2012**

(54) **PORTABLE WIRELESS DEVICE**

(56) **References Cited**

(75) Inventors: **Kenichi Sato**, Miyagi (JP); **Daigo Imano**, Miyagi (JP); **Hironori Kikuchi**, Miyagi (JP); **Yasuhiro Katajima**, Kanagawa (JP); **Tatsuya Sano**, Miyagi (JP); **Nobuhiro Iwai**, Kanagawa (JP)

U.S. PATENT DOCUMENTS

6,078,292 A 6/2000 Koyanagi et al.
6,636,725 B1 * 10/2003 Yoshimoto 455/575.7
6,943,739 B1 * 9/2005 Rousu et al. 343/702
2006/0028380 A1 2/2006 Harano

FOREIGN PATENT DOCUMENTS

JP 10126304 A 5/1998
JP 2006050496 A 2/2006
JP 2006166072 A 6/2006
JP 2007201762 A 8/2007
WO 2004042947 A1 5/2004

OTHER PUBLICATIONS

(73) Assignee: **Panasonic Corporation**, Osaka (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 234 days.

International Search Report relating to International Application No. PCT/JP2008/003998, mailed Apr. 7, 2009, 2 pages.

* cited by examiner

Primary Examiner — Trinh Dinh

(74) Attorney, Agent, or Firm — Seed IP Law Group PLLC

(21) Appl. No.: **12/812,452**

(22) PCT Filed: **Dec. 26, 2008**

(86) PCT No.: **PCT/JP2008/003998**

§ 371 (c)(1),

(2), (4) Date: **Jul. 9, 2010**

(87) PCT Pub. No.: **WO2009/090721**

PCT Pub. Date: **Jul. 23, 2009**

(65) **Prior Publication Data**

US 2010/0277377 A1 Nov. 4, 2010

(30) **Foreign Application Priority Data**

Jan. 15, 2008 (JP) 2008-006314

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 1/42 (2006.01)


(52) **U.S. Cl.** **343/702; 343/872**

(58) **Field of Classification Search** None
See application file for complete search history.

(57) **ABSTRACT**

Provided is a portable communication device, specifically a portable wireless device which is thin while maintaining excellent reception sensitivity even when the device is laid on a metal top panel. As such device (100), a foldable portable cellular phone (100) is provided with a battery box (117) opened on the side of a rear surface (115), and a circuit board (121) having an antenna power feed point (124) is arranged inside a lower case (114). The battery box (117) is covered with a battery cover section (140) removably attached to the lower case (114). The battery cover section (140) is formed of a member having conductivity, and attached to the lower case (114) by having contact point members (151, 152) in between for carrying a current to a reinforcing conductive plate (125) which is to be a GND layer of the circuit board (121). The battery cover section (140) attached to the lower case (114) is electrically connected to the reinforcing conductive plate (125) by making the battery cover section abut to contact point members (151, 152).

15 Claims, 8 Drawing Sheets

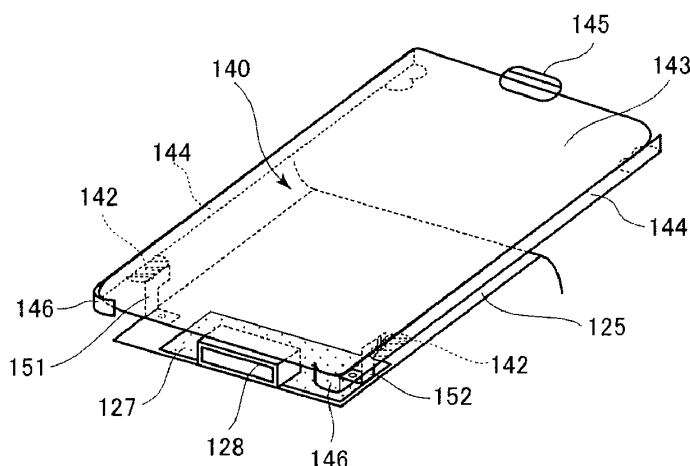

Acrobat 文件



US008203499B2

(12) **United States Patent**
Cozzolino et al.

(10) **Patent No.:** **US 8,203,499 B2**
(45) **Date of Patent:** **Jun. 19, 2012**

(54) **CONFORMABLE ANTENNA**

(75) Inventors: **Randell Cozzolino**, Phoenix, AZ (US);
Gary Wannagot, Gilbert, AZ (US); **Snir Azulay**, Tiberias (IL)

(73) Assignee: **Galtronics Corporation Ltd.**, Tiberias (IL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 277 days.

(21) Appl. No.: **12/468,579**

(22) Filed: **May 19, 2009**

(65) **Prior Publication Data**

US 2009/0284432 A1 Nov. 19, 2009

Related U.S. Application Data

(60) Provisional application No. 61/128,284, filed on May 19, 2008.

(51) **Int. Cl.**

H01Q 9/16 (2006.01)

H01P 11/00 (2006.01)

(52) **U.S. Cl.** **343/821**; 29/601

(58) **Field of Classification Search** 343/821,
343/850, 865, 856; 29/601

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,445,297	B1 *	9/2002	Nicholson	340/572.7
6,549,169	B1 *	4/2003	Matsuyoshi et al.	343/702
7,161,548	B2 *	1/2007	Tsukamoto	343/767
7,205,953	B2 *	4/2007	Knadle et al.	343/792.5
7,427,964	B2 *	9/2008	Sergi	343/793
7,463,211	B2 *	12/2008	Mertel et al.	343/815
2002/0040466	A1 *	4/2002	Khazei	716/9
2002/0175877	A1 *	11/2002	Schantz	343/850
2004/0060162	A1 *	4/2004	Moren	29/601

OTHER PUBLICATIONS

An International Search Report dated Aug. 18, 2009, which issued during the prosecution of Applicant's PCT/IL2009/000494.

An International Preliminary Report on Patentability dated Dec. 2, 2010, which issued during the prosecution of Applicant's PCT/IL2009/000494.

* cited by examiner

Primary Examiner — Huedung Mancuso


(74) *Attorney, Agent, or Firm* — Sughrue Mion, PLLC

(57)

ABSTRACT

A polymorphic antenna, including a metallic template configurable in at least first and second possible different three-dimensional shapes, the antenna, when configured in the at least first and second different three-dimensional shapes, having a common antenna feed point, a common balun coupled to the common antenna feed point; and a common dipole coupled to the common antenna feed point and to the common balun. The antenna operates in a common frequency band when configured in either of the at least first and second different three-dimensional shapes when fed via the common antenna feed point.

23 Claims, 16 Drawing Sheets

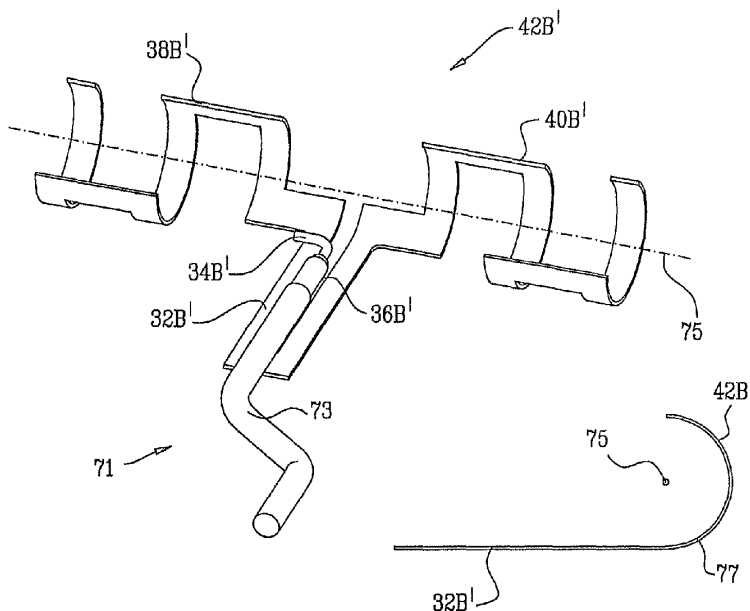

Acrobat 文件



US008203500B2

(12) **United States Patent**
Honda et al.

(10) **Patent No.:** **US 8,203,500 B2**
(45) **Date of Patent:** **Jun. 19, 2012**

(54) **COMPACT CIRCULARLY POLARIZED
OMNI-DIRECTIONAL ANTENNA**

(75) Inventors: **Royden M. Honda**, Post Falls, ID (US);
Robert J. Conley, Liberty Lake, WA
(US)

(73) Assignee: **LHC2 Inc.**, Liberty Lake, WA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 336 days.

4,131,892 A	12/1978	Munson et al.
4,204,212 A	5/1980	Sindoris et al.
4,233,607 A	11/1980	Sanford et al.
4,451,829 A	5/1984	Stuckey, Jr. et al.
4,527,163 A	7/1985	Stanton
4,546,459 A *	10/1985	Congdon 367/155
4,613,868 A	9/1986	Weiss
4,710,775 A	12/1987	Coe
4,839,663 A	6/1989	Kurtz
4,899,165 A	2/1990	Schadler
4,907,008 A	3/1990	Dienes
5,021,797 A	6/1991	Dienes

(Continued)

(21) Appl. No.: **12/692,556**

(22) Filed: **Jan. 22, 2010**

(65) **Prior Publication Data**

US 2010/0188308 A1 Jul. 29, 2010

Related U.S. Application Data

(60) Provisional application No. 61/147,058, filed on Jan.
23, 2009.

(51) **Int. Cl.**
H01Q 21/08 (2006.01)

(52) **U.S. Cl.** **343/824**; 343/853; 343/895

(58) **Field of Classification Search** 343/700 MS,
343/824, 850, 853, 857, 858, 895
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,625,654 A	1/1953	Alford
2,812,514 A	11/1957	Smith
3,474,452 A	10/1969	Bogner
3,555,552 A	1/1971	Alford
3,618,114 A	11/1971	Dietrich
3,665,479 A	5/1972	Silliman
3,810,183 A	5/1974	Krutsinger et al.

FOREIGN PATENT DOCUMENTS

EP 1959518 A2 8/2008

(Continued)

OTHER PUBLICATIONS

Brown, et al., "Circularly-Polarized Omnidirectional Antenna" RCA
Review, pp. 259-269, Jun. 1947.

(Continued)


Primary Examiner — Hoanganh Le

(74) *Attorney, Agent, or Firm* — Lee & Hayes, PLLC

(57) **ABSTRACT**

Antennas that can transceive signals in an elliptically-polarized, omni-directional manner are described. In an example embodiment, an antenna comprises two elements proximally located to each other at a predetermined distance, such that two orthogonally-polarized omni-directional electromagnetic waves are transceived. In a further example, the two elements are supported by an internal printed circuit, the printed circuit including conductors configured to supply a feed to the elements, which may be contained within a radome. Alternate embodiments comprise a plurality of elements of varying lengths.

19 Claims, 22 Drawing Sheets

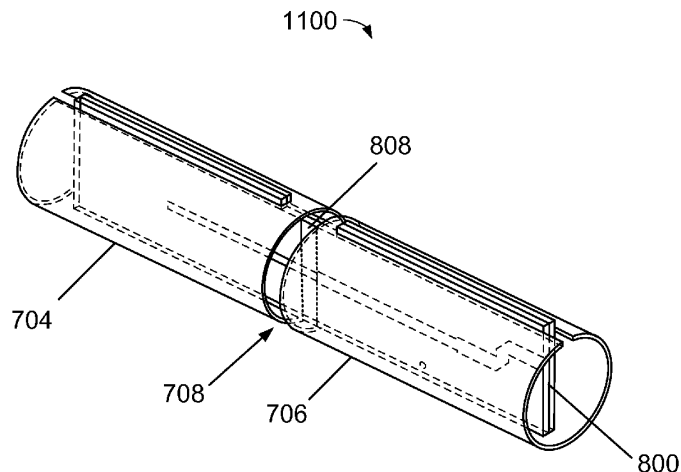

Acrobat 文件



US008207894B2

(12) **United States Patent**
Betts-LaCroix

(10) **Patent No.:** **US 8,207,894 B2**
(45) **Date of Patent:** **Jun. 26, 2012**

(54) **MULTILAYER COMPACT ANTENNA**

(75) Inventor: **Jonathan Betts-LaCroix**, San Francisco, CA (US)

(73) Assignee: **Google Inc.**, Mountain View, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 472 days.

(21) Appl. No.: **12/554,813**

(22) Filed: **Sep. 4, 2009**

(65) **Prior Publication Data**

US 2010/0141360 A1 Jun. 10, 2010

Related U.S. Application Data

(60) Provisional application No. 61/096,064, filed on Sep. 11, 2008.

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702; 343/745**

(58) **Field of Classification Search** **343/700 MS, 343/702, 745**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,463,474 B2 * 12/2008 Ritter et al. 361/306.1
7,605,683 B2 * 10/2009 Sawada et al. 338/2
7,630,208 B2 * 12/2009 Lee et al. 361/766

* cited by examiner


Primary Examiner — Hoang V Nguyen

(74) *Attorney, Agent, or Firm* — Morris & Kamlay LLP

(57) **ABSTRACT**

An antenna is provided. The antenna includes a dielectric material including a plurality of layers defined a first set of electrodes of a first polarity and a second set of electrodes of a second polarity, wherein the first set of electrodes and second set of electrodes alternate in position to form the plurality of layers; a first interconnect coupled to the first set of electrodes, the first interconnect coupled to a ground; a second interconnect coupled to the second set of electrodes, the second interconnect coupled to a voltage source, wherein a voltage is applied to the second interconnect to generate an electric field.

12 Claims, 2 Drawing Sheets

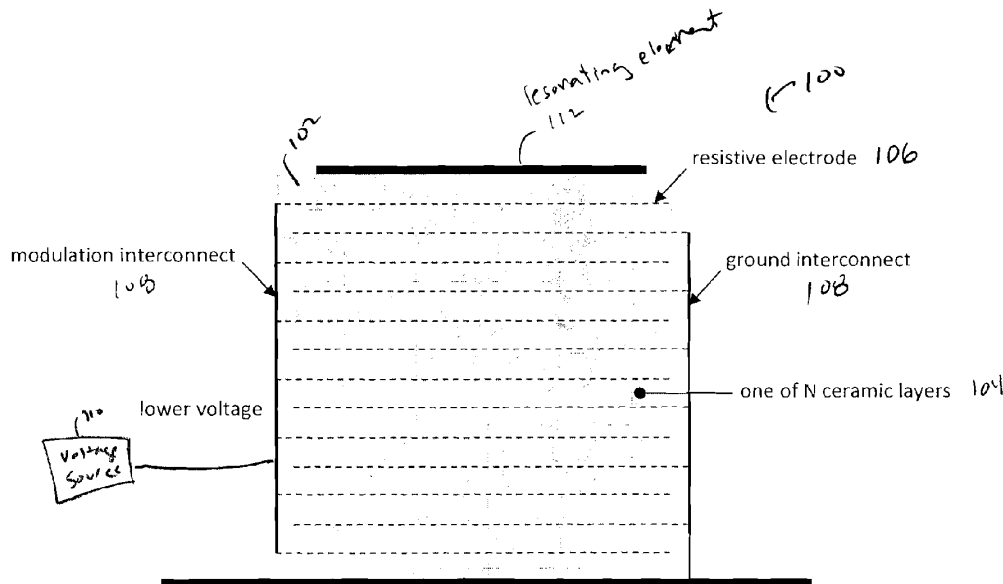

Acrobat 文件



US008207895B2

(12) **United States Patent**
Wong et al.

(10) **Patent No.:** **US 8,207,895 B2**
(45) **Date of Patent:** **Jun. 26, 2012**

(54) **SHORTED MONOPOLE ANTENNA**

(56) **References Cited**

(75) Inventors: **Kin-Lu Wong**, Tapei Hsien (TW);
Shu-Chuan Chen, Tapei Hsien (TW)

(73) Assignee: **Acer Inc.**, Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 432 days.

(21) Appl. No.: **12/605,493**

(22) Filed: **Oct. 26, 2009**

(65) **Prior Publication Data**
US 2011/0018783 A1 Jan. 27, 2011

(30) **Foreign Application Priority Data**
Jul. 24, 2009 (TW) 98125107 A

(51) **Int. Cl.**
H01Q 1/12 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702; 343/848**

(58) **Field of Classification Search** **343/700 MS, 343/702, 829, 846, 848**
See application file for complete search history.

U.S. PATENT DOCUMENTS
4,571,595 A * 2/1986 Phillips et al. 343/745
5,402,136 A * 3/1995 Goto et al. 343/729
6,304,219 B1 * 10/2001 Rothe 343/700 MS
6,853,341 B1 * 2/2005 Hellgren et al. 343/742
7,193,565 B2 * 3/2007 Caimi et al. 343/700 MS
7,425,924 B2 * 9/2008 Chung et al. 343/702

FOREIGN PATENT DOCUMENTS
TW 254493 5/2006
TW 276248 3/2007

* cited by examiner


Primary Examiner — Tho G Phan

(74) *Attorney, Agent, or Firm* — Alan Kamrath; Kamrath IP Lawfirm, PA

(57) **ABSTRACT**

The present invention discloses a shorted monopole antenna comprising a radiating portion comprising a first metal portion and a second metal portion and is located on the dielectric substrate, without overlapping with the ground plane. The first metal portion comprises a coupling section formed by bending the front portion of the first metal portion into two adjacent sections with a coupling gap. A first end of the feeding portion is electrically connected to the first metal portion. A second end of the feeding portion is the antenna's feeding point. The shorting portion is disposed on the dielectric substrate, without overlapping with the ground plane. A first end of the capacitive element is electrically connected to the antenna's feeding point. A second end of the capacitive element is electrically connected to a source.

9 Claims, 4 Drawing Sheets

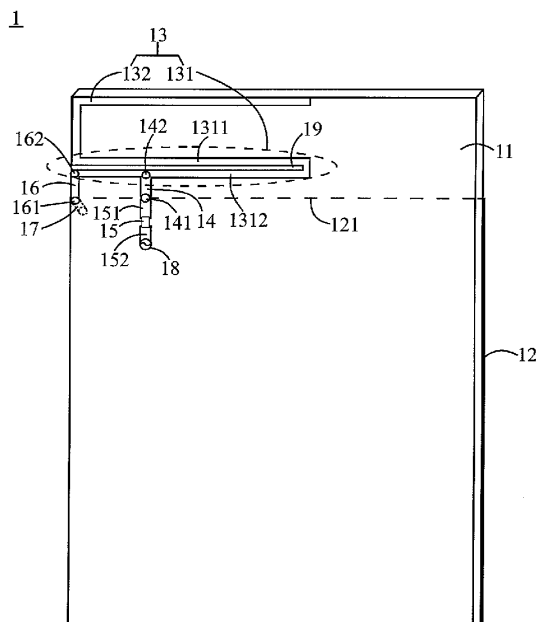

Acrobat 文件



US008207896B2

(12) **United States Patent**
Wen et al.

(10) **Patent No.:** **US 8,207,896 B2**
(45) **Date of Patent:** ***Jun. 26, 2012**

(54) **MULTIPLE-BAND ANTENNA WITH PATCH AND SLOT STRUCTURES**

(75) Inventors: **Geyi Wen**, Waterloo (CA); **Perry Jarmuszewski**, Waterloo (CA); **Adam D. Stevenson**, Waterloo (CA)

(73) Assignee: **Research In Motion Limited**, Waterloo, Ontario (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **13/038,540**

(22) Filed: **Mar. 2, 2011**

(65) **Prior Publication Data**

US 2011/0151949 A1 Jun. 23, 2011

Related U.S. Application Data

(63) Continuation of application No. 12/331,518, filed on Dec. 10, 2008, now Pat. No. 7,916,087, which is a continuation of application No. 11/838,751, filed on Aug. 14, 2007, now Pat. No. 7,466,271, which is a continuation of application No. 11/456,025, filed on Jul. 6, 2006, now Pat. No. 7,283,097, which is a continuation of application No. 10/723,840, filed on Nov. 26, 2003, now Pat. No. 7,224,312.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702, 725, 745, 770**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,692,769 A 9/1987 Gegan 343/700 MS
(Continued)

FOREIGN PATENT DOCUMENTS

CN 1338796 A 3/2002
(Continued)

OTHER PUBLICATIONS

Sittironnarit Et Al., A dual-band vehicular planar inverted-F antenna for ultra high frequency (UHF) application, VTC Spring 2002, IEEE 55th, Vehicular Technology Conference, May 6-9, 2002, vol. 1, pp. 345-349.


Primary Examiner — Tan Ho

(74) *Attorney, Agent, or Firm* — Allen, Dyer, Doppelt, Milbrath & Gilchrist, P.A. Attorneys at Law

(57) **ABSTRACT**

A multiple-band antenna having first and second operating frequency bands is provided. The antenna includes a first patch structure associated primarily with the first operating frequency band, a second patch structure electrically coupled to the first patch structure and associated primarily with the second operating frequency band, a first slot structure disposed between a first portion of the first patch structure and the second patch structure and associated primarily with the first operating frequency band, and a second slot structure disposed between a second portion of the first patch structure and the second patch structure and associated primarily with the second operating frequency band. A mounting structure for the multiple-band antenna is also provided. The mounting structure includes a first surface and a second surface opposite to and overlapping the first surface. The first and second patch structures are mounted to the first surface, and a feeding point and ground point, respectively connected to the first and second patch structures, are mounted to the second surface.

27 Claims, 7 Drawing Sheets

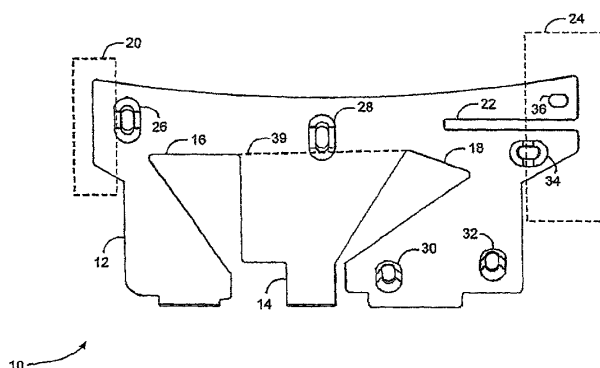

Acrobat 文件



US008207897B2

(12) **United States Patent**
Alvey et al.

(10) **Patent No.:** **US 8,207,897 B2**
(45) **Date of Patent:** **Jun. 26, 2012**

(54) **RADIO DEVICE AND SLOT ANTENNA WHICH FACILITATES OPERATION OF A USER INTERFACE ELEMENT**

(75) Inventors: **Graham R. Alvey**, Skokie, IL (US);
Paul R. Steuer, Hawthorn Woods, IL (US); **James A. Van Bosch**, Crystal Lake, IL (US); **Louis J. Vannatta**, Crystal Lake, IL (US)

(73) Assignee: **Motorola Mobility, Inc.**, Libertyville, IL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 588 days.

(21) Appl. No.: **12/338,637**

(22) Filed: **Dec. 18, 2008**

(65) **Prior Publication Data**
US 2010/0156728 A1 Jun. 24, 2010

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/767**

(58) **Field of Classification Search** 343/700 MS,
343/702, 767
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,757,326 A *	5/1998	Koyama et al.	343/702
6,266,538 B1 *	7/2001	Waldron	455/575.7
6,282,433 B1	8/2001	Holshouser	
7,034,762 B2	4/2006	Huang	
2005/0058280 A1 *	3/2005	Ma	379/430

FOREIGN PATENT DOCUMENTS

EP	0851530 A2	7/1998
WO	2006120250 A2	11/2006

* cited by examiner


Primary Examiner — Dieu H Duong

(74) *Attorney, Agent, or Firm* — Patents on Demand, P.A.;
Scott M. Garrett

(57) **ABSTRACT**

A portable communication device (100, 800, 900) has an antenna element (102, 1206). The antenna element forms a slot (104, 1208) which is used as a slot antenna. The device is configured such that the slot facilitates operation of a user interface element through the slot.

20 Claims, 8 Drawing Sheets

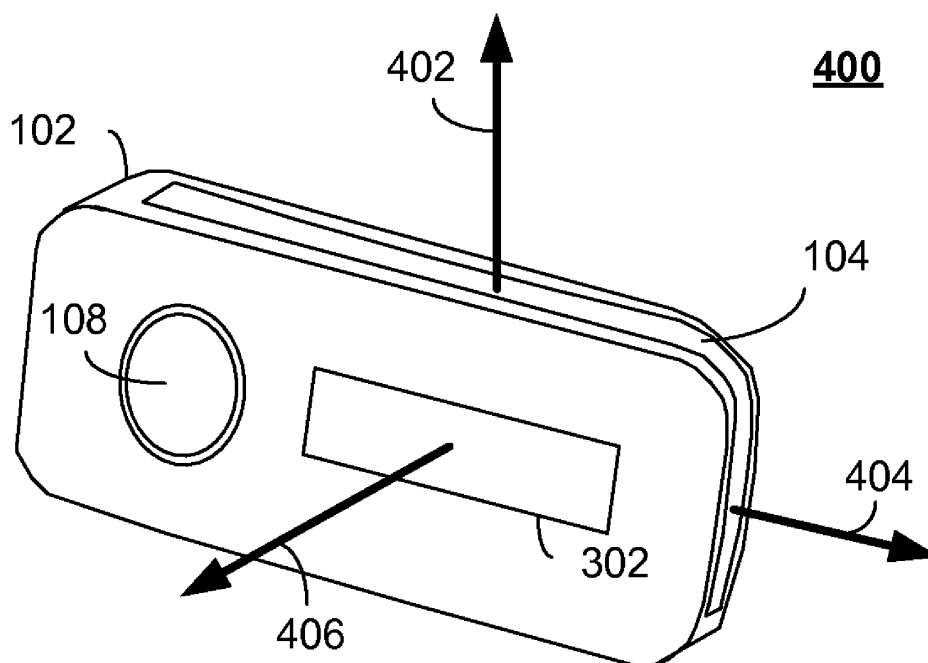

Acrobat 文件



US008207899B2

(12) **United States Patent**
Ishimiya

(10) **Patent No.:** **US 8,207,899 B2**
(45) **Date of Patent:** ***Jun. 26, 2012**

(54) **FOLDED DIPOLE ANTENNA DEVICE AND
MOBILE RADIO TERMINAL**

(75) Inventor: **Katsunori Ishimiya**, Tokyo (JP)

(73) Assignee: **Sony Mobile Communications Japan,
Inc.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **12/585,270**

(22) Filed: **Sep. 10, 2009**

(65) **Prior Publication Data**

US 2010/0066628 A1 Mar. 18, 2010

Related U.S. Application Data

(63) Continuation of application No. 11/588,289, filed on
Oct. 27, 2006, now Pat. No. 7,605,764.

(30) **Foreign Application Priority Data**

Nov. 18, 2005 (JP) 2005-333783

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 9/26 (2006.01)

(52) **U.S. Cl.** **343/702; 343/803**

(58) **Field of Classification Search** **343/702,**
343/741, 803, 804, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,516,127 A 5/1985 Siwiak
4,955,084 A 9/1990 Umetsu et al.

5,030,963 A 7/1991 Tadama
5,365,246 A 11/1994 Rasinger et al.
6,853,341 B1 2/2005 Hellgren et al.
7,136,022 B2 11/2006 Sato et al.
7,307,591 B2 * 12/2007 Zheng 343/702
7,358,906 B2 * 4/2008 Sato et al. 343/702
7,605,764 B2 * 10/2009 Ishimiya 343/702

FOREIGN PATENT DOCUMENTS

EP 1 416 585 5/2004
EP 1 555 715 7/2005
JP 2002-043826 2/2002
JP 2004-023797 1/2004
JP 2004-228917 8/2004
JP 2004-228918 8/2004
WO WO-01/26182 4/2001
WO WO-2006/109184 10/2006

OTHER PUBLICATIONS

EPO Search Report Dated Mar. 7, 2007, 6 pages.

* cited by examiner


Primary Examiner — Michael C Wimer

(74) *Attorney, Agent, or Firm* — Rader Fishman & Grauer,
PLLC

(57) **ABSTRACT**

Disclosed is a folded dipole antenna device which is of an unbalanced feed type and includes an antenna element of approximately plate-like loop structure, connected to an antenna feed point and an antenna ground provided on a base plate. In the folded dipole antenna device, the antenna element of loop structure includes a pair of first element sections which extend approximately parallel to the base plate, a second element section formed by merging element sections that are folded back from both ends of the first element sections and extend approximately parallel to the first element sections, and a third element section which extends from a folded top part of the second element section toward the first element sections and an end part thereof is close to the first element sections.

9 Claims, 11 Drawing Sheets

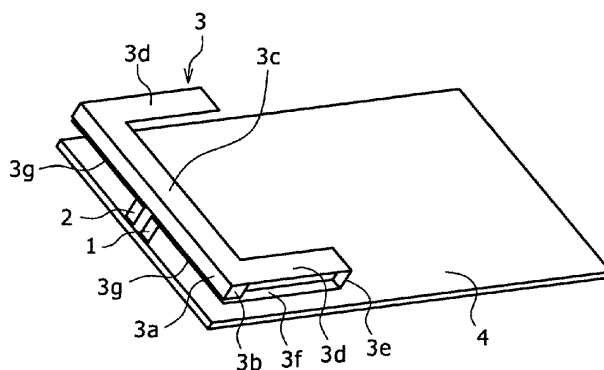

Acrobat 文件



(12) **United States Patent**
Lu et al.

(54) **ANTENNA**

(75) Inventors: **Yi-Fong Lu**, Taipei (TW); **Yi-Cheng Lin**, Taipei (TW); **Kuo-Fong Hung**, Taipei (TW)

(73) Assignee: **National Taiwan University**, Taipei
(TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 547 days.

(21) Appl. No.: 12/259,978

(22) Filed: **Oct. 28, 2008**

(65) **Prior Publication Data**
US 2009/0256765 A1 Oct. 15, 2009

(30) **Foreign Application Priority Data**

Apr. 9, 2008 (TW) 97112781 A

(51) **Int. Cl.**
H01Q 13/00 (2006.01)
H01Q 9/04 (2006.01)

(52) **U.S. Cl.** 343/767; 343/700 MS


(58) **Field of Classification Search** 343/700 MS,
343/767, 768, 770, 771

See application file for complete search history.

(57) **ABSTRACT**

An antenna is provided. The antenna includes a substrate, a feed conductor, a ground layer and a radiation slot. The substrate includes a first surface and a second surface, wherein the first surface is opposite to the second surface. The feed conductor is formed on the first surface. The ground layer is formed on the second surface. The radiation slot is formed on the ground layer, including a first radiation portion, a second radiation portion and a third radiation portion, wherein the second radiation portion connects the first radiation portion and the third radiation portion, the radiation slot is U shaped, and the feed conductor corresponds to a location between the second radiation portion and the third radiation portion.

8 Claims, 5 Drawing Sheets

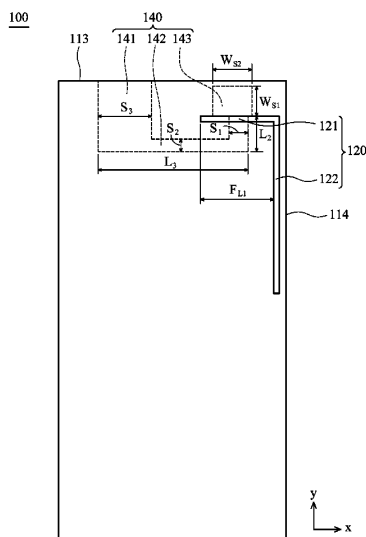



US008207904B2

(12) **United States Patent**
Pan et al.

(10) **Patent No.:** **US 8,207,904 B2**
(45) **Date of Patent:** **Jun. 26, 2012**

(54) **HIGH GAIN MULTIPLE PLANAR REFLECTOR ULTRA-WIDE BAND (UWB) ANTENNA STRUCTURE**

(75) Inventors: **Bo Pan**, Irvine, CA (US); **Frederic Battaglia**, Irvine, CA (US); **KuangYu Li**, Irvine, CA (US); **Ran-Hong Yan**, Irvine, CA (US); **Kuan Leok Sun**, Irvine, CA (US)

(73) Assignee: **Realtek Semiconductor Corp.**, Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 404 days.

(21) Appl. No.: **12/488,509**

(22) Filed: **Jun. 19, 2009**

(65) **Prior Publication Data**
US 2010/0321270 A1 Dec. 23, 2010

(51) **Int. Cl.**
H01Q 9/28 (2006.01)
(52) **U.S. Cl.** **343/795; 343/818**
(58) **Field of Classification Search** **343/795; 343/818, 819, 821**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,061,944 A * 10/1991 Powers et al. 343/795
7,064,728 B1 6/2006 Lin et al.
2003/0160730 A1 * 8/2003 Alsliety 343/818
2003/0231138 A1 * 12/2003 Weinstein 343/795
* cited by examiner


Primary Examiner — Hoanganh Le

(74) *Attorney, Agent, or Firm* — Thomas, Kayden, Horstemeyer & Risley, LLP

(57) **ABSTRACT**

Multiple out-of-plane planar reflectors can be used to build a receive/transmit high-gain directional antenna. The driver portion and the first reflector of the antenna are formed within a metal layer of a PWB. A plurality of sets of reflector plates can be placed on the PWB, on a non-conductive low-dielectric constant material coating both opposing planar surfaces of the PWB, or on the opposing sidewalls of the product housing unit. The metal layer in the PWB is placed between the reflector plates. The plates can have either a parallel or non-parallel orientation to each another. This greatly increase the received power and thus increases the operating range of a low-power UWB system, as well as significantly improves wireless data transmission throughput. This antenna is applicable for USB communications systems.

16 Claims, 12 Drawing Sheets

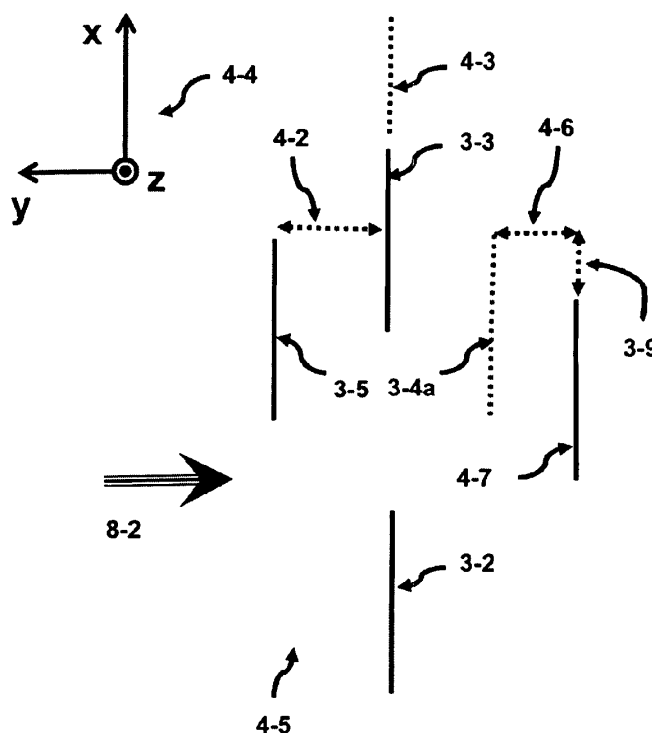

Acrobat 文件



US008207906B2

(12) **United States Patent**
Tiscareno et al.

(10) **Patent No.:** **US 8,207,906 B2**
(45) **Date of Patent:** **Jun. 26, 2012**

(54) **ANTENNA INSERT**

(75) Inventors: **Victor M. Tiscareno**, Issaquah, WA
(US); **John G. Tang**, San Carlos, CA
(US); **Stephen P. Zadesky**, Portola
Valley, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 629 days.

5,668,561 A	9/1997	Perrotta et al.
D388,764 S	1/1998	Bartling et al.
5,898,290 A	4/1999	Beard et al.
D409,987 S	5/1999	Okumura
D411,166 S	6/1999	Uemura et al.
5,920,293 A	7/1999	Perrotta et al.
5,926,005 A	7/1999	Holcomb
D416,536 S	11/1999	Ross et al.
D419,160 S	1/2000	Davidson et al.
6,042,414 A	3/2000	Kunert
D422,556 S	4/2000	Okura et al.
D427,970 S	7/2000	Sage

(Continued)

(21) Appl. No.: **11/970,504**

(22) Filed: **Jan. 7, 2008**

(65) **Prior Publication Data**

US 2008/0165066 A1 Jul. 10, 2008

Related U.S. Application Data

(60) Provisional application No. 60/884,014, filed on Jan.
8, 2007.

(51) **Int. Cl.**
H01Q 1/50 (2006.01)

(52) **U.S. Cl.** **343/906**

(58) **Field of Classification Search** 455/89-90;
343/702, 700 MS, 841, 895, 905-906
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,191,122 A *	6/1965	Hussey	455/7
D328,277 S	7/1992	Leman et al.	
D336,631 S	6/1993	Ivester	
5,233,281 A	8/1993	Chiang et al.	
5,239,669 A *	8/1993	Mason et al.	455/12.1
5,280,229 A	1/1994	Faude et al.	
5,357,185 A	10/1994	Chen	

FOREIGN PATENT DOCUMENTS

EP 0766339 A2 4/1997

(Continued)

OTHER PUBLICATIONS

Hughes, Judie, "Atech Flash Technology iPod iDuo Dock and Card
Reader," Gadgeteer Hands on Review, 9 pages, Nov. 17, 2005.

(Continued)


Primary Examiner — Huedung Mancuso

(74) *Attorney, Agent, or Firm* — Kilpatrick Townsend &
Stockton LLP

(57) **ABSTRACT**

Circuits, methods, and apparatus for adapters and docking
stations that include one or more of the following: reradiating
antennas to enhance wireless signal integrity, inductive
charging circuits, and wireless or optical data links. The
adapters may be inserts for use in a docking station, adapters
for a cable connection, or other type of device. One example
provides an adapter that includes a reradiating antenna. In
other examples, passive coupling is used to charge a recharge-
able battery in the handheld device. Other examples include
wireless or optical circuits for faster data transmission.

13 Claims, 15 Drawing Sheets

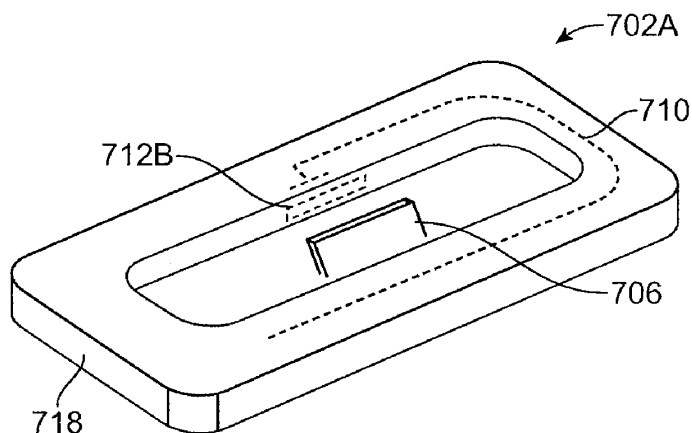

Acrobat 文件



US008208870B2

(12) **United States Patent**
Chuang et al.

(10) **Patent No.:** **US 8,208,870 B2**
(45) **Date of Patent:** **Jun. 26, 2012**

(54) **HAND-HELD WIRELESS COMMUNICATION
DEVICE WITH CERAMIC SCREWS**

(75) Inventors: **I-Cheng Chuang**, Shindian (TW);
Chi-Chieh Chan, Shindian (TW)

(73) Assignee: **HTC Corporation**, Taoyuan County
(TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 1226 days.

(21) Appl. No.: **11/345,496**

(22) Filed: **Feb. 2, 2006**

(65) **Prior Publication Data**

US 2006/0234788 A1 Oct. 19, 2006

(30) **Foreign Application Priority Data**

Apr. 14, 2005 (TW) 94111891 A

(51) **Int. Cl.**
H04M 1/00 (2006.01)

(52) **U.S. Cl.** **455/90.3**; 455/575.5; 455/575.1;
455/296; 343/702; 343/700; 343/895; 333/235;
333/193

(58) **Field of Classification Search** 455/90.3,
455/575.1, 575.3, 575.5, 575.8, 575.2, 550.1;
343/895, 702, 700; 361/814
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,536,117 A * 8/1985 Yamashiro 411/411
5,405,227 A * 4/1995 His et al. 411/366.3
5,728,445 A * 3/1998 Murakami et al. 428/113
5,905,475 A * 5/1999 Annamaa 343/895
5,982,881 A * 11/1999 Mischenko 379/433.11
6,031,494 A * 2/2000 Okabe et al. 343/702

6,420,476 B1 * 7/2002 Yamada et al. 524/575
6,501,945 B1 * 12/2002 Chien 455/296
6,538,536 B1 * 3/2003 Seely et al. 333/235
6,876,724 B2 * 4/2005 Zhou et al. 378/122
7,312,754 B2 * 12/2007 Noro et al. 343/700 MS
2002/0149539 A1 * 10/2002 Noro et al. 343/895
2003/0023417 A1 * 1/2003 Chen et al. 703/3
2003/0174029 A1 * 9/2003 Baier et al. 333/193
2004/0066334 A1 * 4/2004 Fang et al. 343/700 MS
2004/0102229 A1 * 5/2004 Hutchison 455/575.1
2004/0102230 A1 * 5/2004 Nuovo 455/575.1
2005/0026660 A1 * 2/2005 Park et al. 455/575.5
2005/0107137 A1 * 5/2005 Byun et al. 455/575.1
2006/0061552 A1 * 3/2006 Santos et al. 345/168
2007/0102733 A1 * 5/2007 Zhou et al. 257/248

FOREIGN PATENT DOCUMENTS

CN 1493179 A 4/2004
CN 2694511 Y 4/2005
JP 2001331768 * 11/2001
JP 2002-185590 6/2002

OTHER PUBLICATIONS

Uchimura, Hiroshi et al., "Development of a Laminated Waveguide",
1998, IEEE Transactions on Microwave Theory and Techniques, vol.
46, No. 12, Dec. 1998, pp. 2438-2443.*

(Continued)

Primary Examiner — Edward Urban


Assistant Examiner — Ganiyu Hanidu

(74) *Attorney, Agent, or Firm* — Rabin & Berdo, P.C.

(57) **ABSTRACT**

A wireless communication device having an antenna area includes at least a first component, a second component and a connector. The connector is made of ceramic material and is disposed in the antenna area for fixing and connecting the first component and the second component so as to avoid interference with the antenna. Adopting the ceramic connectors enables the wireless communication device to have the advantages of good locking performance, good antennal transmission efficiency and elegant appearance simultaneously and to provide an electrostatic shielding function.

20 Claims, 3 Drawing Sheets

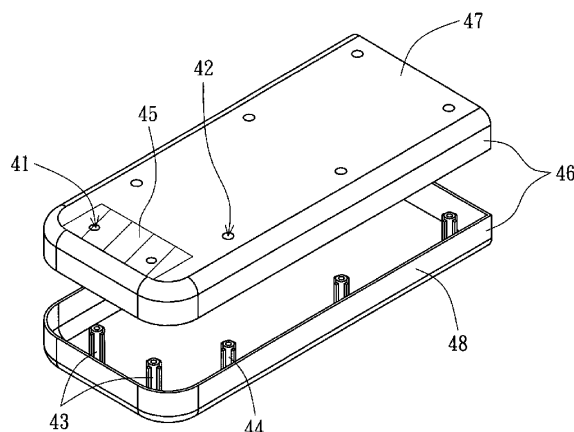

Acrobat 文件



US008208980B2

(12) **United States Patent**
Wong et al.

(10) **Patent No.:** **US 8,208,980 B2**
(45) **Date of Patent:** **Jun. 26, 2012**

(54) **RADIATION REDIRECTING EXTERNAL CASE FOR PORTABLE COMMUNICATION DEVICE AND ANTENNA EMBEDDED IN BATTERY OF PORTABLE COMMUNICATION DEVICE**

(75) Inventors: **Alfred Y. Wong**, Los Angeles, CA (US); **Robert Moreno**, Acton, CA (US); **Karl Richard Shields**, North Hills, CA (US); **Rong Wang**, Sherman Oaks, CA (US)

(73) Assignee: **Pong Research Corporation**, Leesbug, VA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 259 days.

(21) Appl. No.: **12/614,132**

(22) Filed: **Nov. 6, 2009**

(65) **Prior Publication Data**

US 2010/0113111 A1 May 6, 2010

Related U.S. Application Data

(60) Provisional application No. 61/112,141, filed on Nov. 6, 2008, provisional application No. 61/158,551, filed on Mar. 9, 2009.

(51) **Int. Cl.**
H04Q 7/32 (2006.01)

(52) **U.S. Cl.** **455/575.5**; 455/575.1; 455/550.1; 455/67.11; 455/90.3; 455/553.1; 343/702

(58) **Field of Classification Search** 455/575.5, 455/575.1, 550.1, 552.1, 553.1, 422.1, 403, 455/445, 67.11, 426.1, 426.2, 41.1, 41.2, 455/90.3; 343/702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,278,571 A 1/1994 Helfrick
5,338,896 A 8/1994 Danforth
5,550,552 A 8/1996 Oxley
5,711,014 A 1/1998 Crowley et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1 292 042 A2 3/2003

(Continued)

OTHER PUBLICATIONS

Office Action for U.S. Appl. No. 12/724,290, mailed Nov. 9, 2011.


(Continued)

Primary Examiner — Keith Ferguson

(57) **ABSTRACT**

An advanced antenna or set of antennae for a wireless device is provided by embedding the antennae into the battery case or generally the largest surface area of a wireless phone. The antenna connections are made through the battery's connections to the wireless device. The antenna design can be compact and located in any area of the battery. The antenna design can be thin and flat, located at the back surface of the battery or the large rear surface of a wireless phone, facing away from the user. An RF shielding device can be embedded into the battery and configured in relation to the antenna such that the RF field intensity and the consequent specific absorption rate for the user is lowered while the outgoing signals of the wireless device remain fully adequate for the function of the wireless device. This feature is preserved for a multi-band operation because a digital phase shifter is used between two radiating antennae. An external case is used as a complement to the wireless phone to provide additional antennae, power and capability.

20 Claims, 13 Drawing Sheets

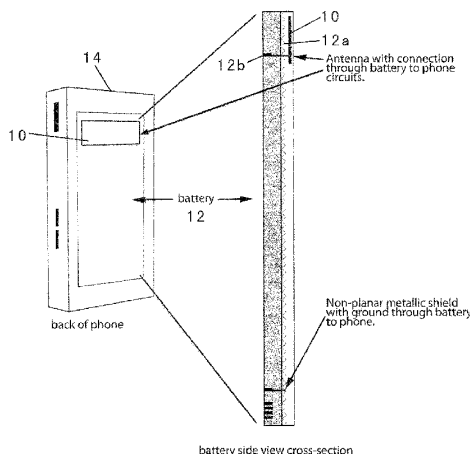

Acrobat 文件