

(12) **United States Patent**
Chih et al.

(10) **Patent No.:** **US 10,236,556 B2**
(45) **Date of Patent:** **Mar. 19, 2019**

(54) **ANTENNA STRUCTURE AND WIRELESS COMMUNICATION DEVICE USING SAME**

(71) Applicant: **Chiun Mai Communication Systems, Inc.**, New Taipei (TW)

(72) Inventors: **Jung-Sheng Chih**, New Taipei (TW);
Te-Chang Lin, New Taipei (TW);
Wen-Chang Hsu, New Taipei (TW)

(73) Assignee: **Chiun Mai Communication Systems, Inc.**, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1 day.

(21) Appl. No.: **15/655,912**

(22) Filed: **Jul. 21, 2017**

(65) **Prior Publication Data**
US 2018/0026339 A1 Jan. 25, 2018

Related U.S. Application Data
(60) Provisional application No. 62/365,391, filed on Jul. 22, 2016, provisional application No. 62/365,342, filed on Jul. 21, 2016.

(30) **Foreign Application Priority Data**
Jul. 20, 2017 (CN) 2017 1 0596080

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/38 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01Q 1/242** (2013.01); **H01Q 1/243** (2013.01); **H01Q 1/48** (2013.01); **H01Q 5/335** (2015.01);
(Continued)


(58) **Field of Classification Search**
CPC H01Q 13/18; H01Q 1/24; H01Q 1/242; H01Q 1/48; H01Q 5/50; H01Q 1/243;
(Continued)

(56) **References Cited**
U.S. PATENT DOCUMENTS
4,023,179 A * 5/1977 Ikrath H01Q 1/44 343/713
6,097,345 A * 8/2000 Walton H01Q 1/1271 343/700 MS
(Continued)

Primary Examiner — Tho G Phan
(74) *Attorney, Agent, or Firm* — ScienBiziP, P.C.

(57) **ABSTRACT**
An antenna structure includes a metallic member. The metallic member includes a front frame, a backboard, and a side frame. The side frame defines a slot. The front frame defines a first gap and a second gap. The front frame between the first gap and the second gap forms a first radiating section, the front frame between the first gap and an end of the slot forms a third radiating section. Current enters the first radiating section from the first feed portion, the current flows through the first radiating section and towards the first gap and the second gap, respectively, thus activating radiating signals in a first frequency band and a second frequency band, the third radiating section obtains current from the first radiating section by coupling, thus activating radiation signals in a fourth different frequency band. A wireless communication device using the antenna structure is provided.

19 Claims, 22 Drawing Sheets

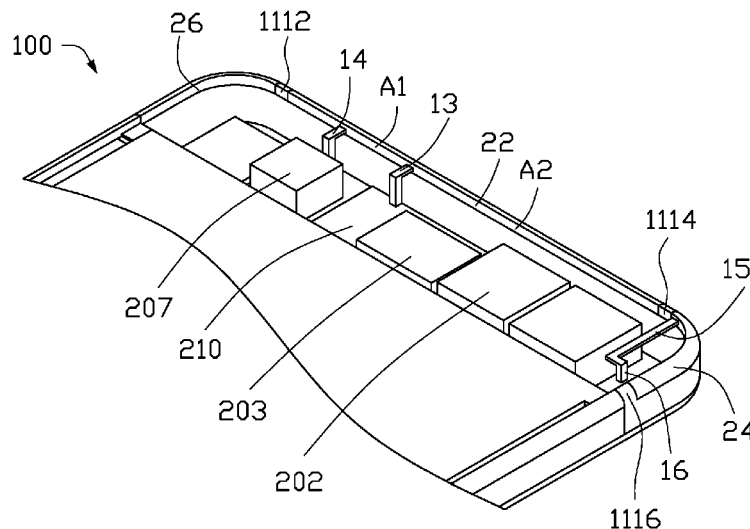

(12) **United States Patent**
Mai

(10) **Patent No.:** **US 10,236,558 B2**
(45) **Date of Patent:** **Mar. 19, 2019**

(54) **LTE FULL-BAND CELLPHONE ANTENNA STRUCTURE**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Jianchun Mai**, Shenzhen (CN)

8,948,827 B2 * 2/2015 Wei H01Q 1/243
343/700 MS

(72) Inventor: **Jianchun Mai**, Shenzhen (CN)

2014/0266922 A1 * 9/2014 Jin H01Q 21/28
343/702

(73) Assignee: **AAC TECHNOLOGIES PTE. LTD.**,
Singapore (SG)

2014/0266938 A1 * 9/2014 Ouyang H01Q 5/321
343/729

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 25 days.

2016/0049720 A1 * 2/2016 Hwang H01Q 1/243
343/702

* cited by examiner

(21) Appl. No.: **15/416,913**

Primary Examiner — Dameon E Levi

(22) Filed: **Jan. 26, 2017**

Assistant Examiner — Hasan Z Islam

(74) *Attorney, Agent, or Firm* — Na Xu; IPro, PLLC

(65) **Prior Publication Data**

US 2017/0324151 A1 Nov. 9, 2017

(30) **Foreign Application Priority Data**

May 3, 2016 (CN) 2016 1 0284245

(57) **ABSTRACT**

Provided is an LTE full-band cellphone antenna structure, including a ground plate, a circuit board having a feeding point, a feeding terminal matching circuit provided on the circuit board and a metal unit surrounding the circuit board and the ground plate. The metal unit includes a grounding portion electrically connected with the ground plate and a non-grounding portion electrically disconnected with the grounding portion. The feeding point is electrically connected with the non-grounding portion so that the non-grounding portion serves as a middle-high frequency radiator. A gap is provided between the non-grounding portion and the ground plate, and the ground plate is excited in a coupling manner so as to generate a current, such that the ground plate serves as a low frequency radiator. The antenna of the present disclosure covers all LTE frequency bands, which has advantages of less tuning difficulty and less influence by processing accuracy.

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 5/50 (2015.01)

H01Q 1/48 (2006.01)

H01Q 3/24 (2006.01)

H01Q 5/328 (2015.01)

H01Q 5/335 (2015.01)

(52) **U.S. Cl.**


CPC **H01Q 1/243** (2013.01); **H01Q 1/48**
(2013.01); **H01Q 3/24** (2013.01); **H01Q 5/328**
(2015.01); **H01Q 5/335** (2015.01); **H01Q 5/50**
(2015.01)

(58) **Field of Classification Search**

CPC . H01Q 1/241–1/243; H01Q 1/48–1/50; H01Q
3/24; H01Q 5/50

See application file for complete search history.

4 Claims, 5 Drawing Sheets

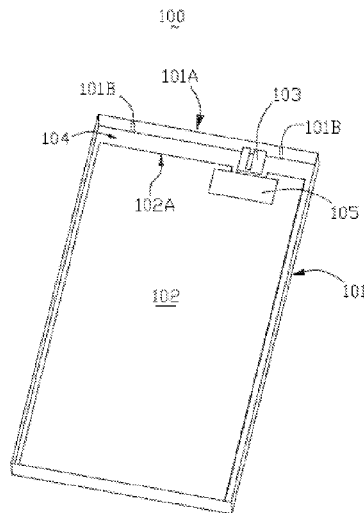

(12) **United States Patent**
Han et al.

(10) **Patent No.:** **US 10,236,559 B2**
(45) **Date of Patent:** **Mar. 19, 2019**

(54) **THREE-SLOTTED ANTENNA APPARATUS AND METHOD**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Futurewei Technologies, Inc.**, Plano, TX (US)

9,564,683 B2 * 2/2017 Won H01Q 5/335
2014/0292590 A1 * 10/2014 Yoo H01Q 1/243
343/702

(72) Inventors: **Chulmin Han**, San Diego, CA (US);
Wee Kian Toh, San Diego, CA (US);
Wei Huang, San Diego, CA (US);
Hongwei Liu, San Diego, CA (US)

(Continued)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Futurewei Technologies, Inc.**, Plano, TX (US)

CN 103390793 A 11/2013
CN 104810622 A 7/2015

(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1 day.

OTHER PUBLICATIONS

Cellular Insight, "Samsung Galaxy S7, the first 4x4 MIMO smartphone," Oct. 7, 2016, pp. 1-10, retrieved from <http://cellularinsights.com/samsung-galaxy-s7-the-first-4x4-mimo-smartphone/>.

(Continued)

(21) Appl. No.: **15/488,308**

(22) Filed: **Apr. 14, 2017**

Primary Examiner — Jean B Jeanglaude

(74) *Attorney, Agent, or Firm* — Daniel Burns

(65) **Prior Publication Data**

US 2018/0301787 A1 Oct. 18, 2018

(57) **ABSTRACT**


(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 5/50 (2015.01)
(Continued)

An apparatus and associated method are provided involving a housing having a periphery configured to operate as a second antenna, a third antenna, and a fourth antenna. The periphery includes a top wall having a first slot formed therein, a first side wall having a second slot formed therein, and a second side wall having a third slot formed therein. The top wall is arranged between the first side wall and the second side wall, and a top portion of the periphery is defined between the second slot and the third slot. The top portion is divided into a first top side portion and a second top side portion via the first slot. Further, the first top side portion operates as the second antenna, and the second top side portion operates as both the third antenna and the fourth antenna.

(52) **U.S. Cl.**
CPC **H01Q 1/243** (2013.01); **H01Q 1/48** (2013.01); **H01Q 5/50** (2015.01); **H01Q 13/18** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H01Q 1/243; H01Q 5/50; H01Q 13/18;
H01Q 1/48; H01Q 1/24; H04B 7/0413;
H04B 7/0404; H04B 7/04
(Continued)

25 Claims, 14 Drawing Sheets

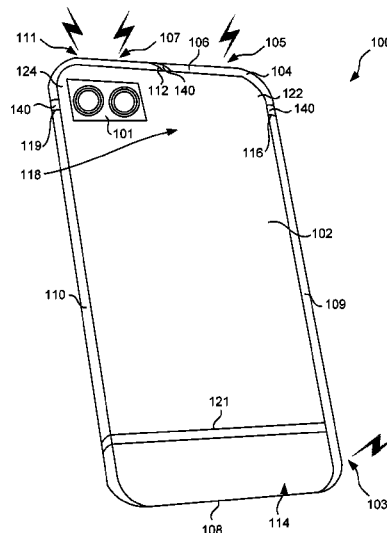



US010236560B2

(12) **United States Patent**
Shin et al.

(10) **Patent No.:** **US 10,236,560 B2**

(45) **Date of Patent:** **Mar. 19, 2019**

(54) **ANTENNA AND ELECTRONIC DEVICE INCLUDING THE SAME**

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**, Suwon-si, Gyeonggi-do (KR)

(72) Inventors: **Yongjoo Shin**, Suwon-si (KR); **Ji-Hyun Park**, Seongnam-si (KR); **Kyung-Hee Lee**, Seoul (KR); **Juyeong Lee**, Seoul (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**, Suwon-si, Gyeonggi-do (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/712,675**

(22) Filed: **Sep. 22, 2017**

(65) **Prior Publication Data**

US 2018/0102586 A1 Apr. 12, 2018

(30) **Foreign Application Priority Data**

Oct. 10, 2016 (KR) 10-2016-0130702

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 5/314 (2015.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01Q 1/243** (2013.01); **H01Q 1/44** (2013.01); **H01Q 5/314** (2015.01); **H01Q 5/328** (2015.01); **H01Q 5/364** (2015.01); **H01Q 7/00** (2013.01); **H04B 1/48** (2013.01); **H04M 1/0202** (2013.01); **H04B 2001/485** (2013.01); **H04M 1/026** (2013.01)

(58) **Field of Classification Search**

CPC H01Q 5/314; H01Q 1/44
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,112,271 B2 8/2015 Mo et al.
9,190,714 B2 11/2015 Eom et al.
(Continued)

FOREIGN PATENT DOCUMENTS

WO 2015/199263 12/2015

OTHER PUBLICATIONS

Search Report and Written Opinion dated Jan. 19, 2018 in counterpart International Patent Application No. PCT/KR2017/010850.


Primary Examiner — Tuan H Nguyen

(74) *Attorney, Agent, or Firm* — Nixon & Vanderhye P.C.

(57) **ABSTRACT**

According to various example embodiments, an electronic device including: a housing; a conductive member formed as a part of the housing or disposed in the housing as at least a part of the housing; a communication circuit electrically connected to a first region of the conductive member; a ground electrically connected to a second region of the conductive member spaced from the first region of the conductive member; a tunable circuit interposed in an electric connection path electrically connected with the ground in a third region of the conductive member, the third region being located between the first region and the second region of the conductive member; and at least one processor configured to generate a control signal based on a current mode of the electronic device and to provide the control signal to the tunable circuit.

20 Claims, 16 Drawing Sheets

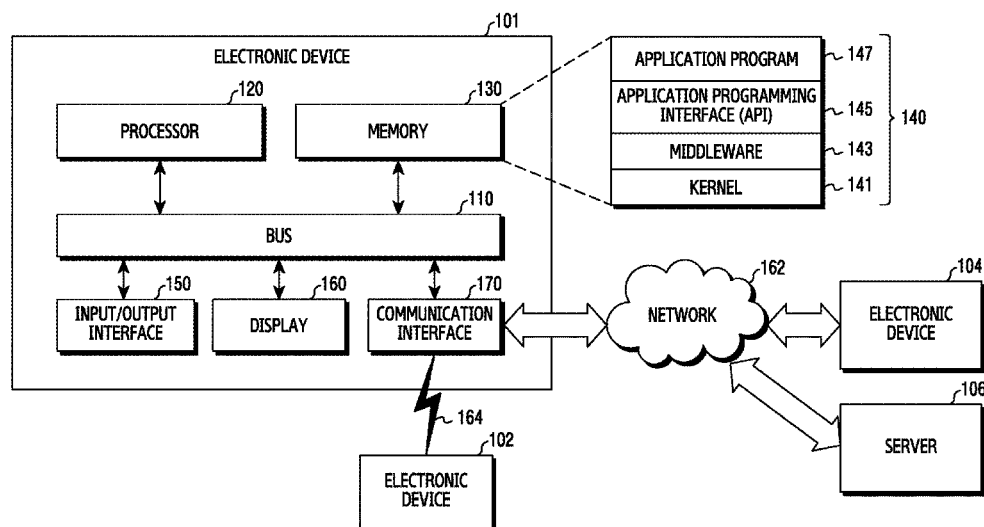



US010236562B2

(12) **United States Patent**
Chang et al.

(10) **Patent No.:** **US 10,236,562 B2**
(45) **Date of Patent:** **Mar. 19, 2019**

(54) **SEPARATED AND OPTIMIZATION SENSOR
PAD DESIGN FOR DUAL MODE LTE
APPLICATION**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Acer Incorporated**, New Taipei (TW)

7,576,698 B2 * 8/2009 Cheng H01Q 1/2291

(72) Inventors: **Kun-Sheng Chang**, New Taipei (TW);
Ching-Chi Lin, New Taipei (TW)

7,825,868 B2 * 11/2010 Sabet H01Q 1/2241
343/700 MS

(Continued)

(73) Assignee: **ACER INCORPORATED**, New Taipei
(TW)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 55 days.

TW M422176 U 1/2012
TW 201307857 A1 2/2013

(Continued)

(21) Appl. No.: **15/426,400**

OTHER PUBLICATIONS

(22) Filed: **Feb. 7, 2017**

European Search Report, EP17163853, dated Sep. 26, 2017, 8
pages.

(65) **Prior Publication Data**

US 2018/0138581 A1 May 17, 2018

(Continued)

(30) **Foreign Application Priority Data**

Nov. 11, 2016 (TW) 105136811 A

Primary Examiner — Dameon E Levi

Assistant Examiner — Ab Salam Alkassim, Jr.

(74) *Attorney, Agent, or Firm* — Edell, Shapiro & Finnan,
LLC

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H04B 1/3827 (2015.01)

(Continued)

(57) **ABSTRACT**


A mobile device includes a dual band T-shaped antenna and
a sensing element. The sensing element includes a first
sensing part extending in first direction, a second sensing
part, and a third sensing part, wherein the second sensing
part and the third sensing part each includes portions that
extend in a second direction that is perpendicular to the first
direction. The sensing element is used to both detect prox-
imity to an object, to meet specific absorption rate (SAR)
criteria, and to affect resonance of the dual band T-shaped
antenna.

(52) **U.S. Cl.**
CPC **H01Q 1/245** (2013.01); **H01Q 1/2266**
(2013.01); **H01Q 1/243** (2013.01); **H01Q 1/44**
(2013.01); **H01Q 5/30** (2015.01); **H01Q 5/371**
(2015.01); **H01Q 5/378** (2015.01); **H01Q 9/42**
(2013.01); **H04B 1/3838** (2013.01)

(58) **Field of Classification Search**
CPC H01Q 1/245; H01Q 1/243; H01Q 5/30;
H04B 1/3838

See application file for complete search history.

19 Claims, 6 Drawing Sheets

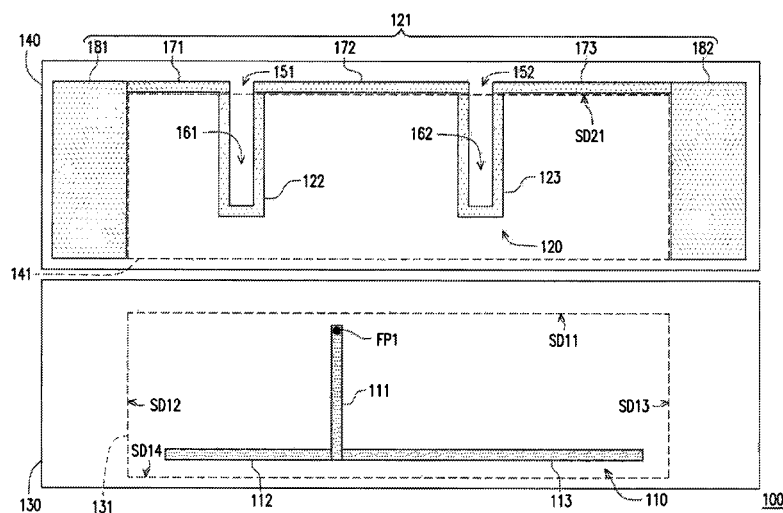

(12) **United States Patent**
Jeong et al.

(10) **Patent No.:** **US 10,243,257 B2**
(45) **Date of Patent:** **Mar. 26, 2019**

(54) **PORTABLE ELECTRONIC DEVICE COVER**

(71) Applicant: **Samsung Electronics Co., Ltd.**,
Gyeonggi-do (KR)

(72) Inventors: **Wonseok Jeong**, Gyeonggi-do (KR);
Donghwan Kim, Gyeonggi-do (KR);
Bumjin Cho, Gyeonggi-do (KR);
Donguk Choi, Gyeonggi-do (KR);
Sangmin Han, Gyeonggi-do (KR)

(73) Assignee: **Samsung Electronics Co., Ltd** (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 88 days.

(21) Appl. No.: **15/038,848**

(22) PCT Filed: **Nov. 27, 2014**

(86) PCT No.: **PCT/KR2014/011457**

§ 371 (c)(1),
(2) Date: **May 24, 2016**

(87) PCT Pub. No.: **WO2015/080479**

PCT Pub. Date: **Jun. 4, 2015**

(65) **Prior Publication Data**

US 2016/0380335 A1 Dec. 29, 2016

(30) **Foreign Application Priority Data**

Nov. 27, 2013 (KR) 10-2013-0145604

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 9/42 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01Q 1/243** (2013.01); **H01Q 1/245**
(2013.01); **H01Q 1/50** (2013.01); **H01Q**
9/0414 (2013.01);
(Continued)

(58) **Field of Classification Search**

CPC H01Q 1/24; H01Q 1/241; H01Q 1/242;
H01Q 1/243; H01Q 1/245; H01Q 1/40;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,648,752 B2 * 2/2014 Ramachandran H01Q 1/24
343/700 MS
8,774,716 B2 * 7/2014 Chan H04B 5/0062
235/492

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1 870 956 12/2007
EP 2 192 652 6/2010

(Continued)

OTHER PUBLICATIONS

PCT/ISA/210 Search Report issued on PCT/KR2014/011457 (pp.
3).

(Continued)

Primary Examiner — Tho G Phan


Assistant Examiner — Patrick Holecek

(74) *Attorney, Agent, or Firm* — The Farrell Law Firm,
P.C.

(57) **ABSTRACT**

A portable electronic device cover, according to the present
invention, comprises a conductive plate which is spaced at
a predetermined distance from an antenna mounted in a
portable electronic device and is arranged at a position
overlapped with at least a part of the antenna when the
portable electronic device is mounted in the portable elec-
tronic device cover.

9 Claims, 6 Drawing Sheets

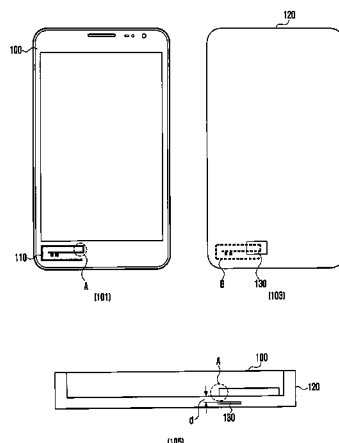



US010243258B2

(12) **United States Patent**
Woo

(10) **Patent No.:** **US 10,243,258 B2**

(45) **Date of Patent:** **Mar. 26, 2019**

(54) **MOBILE TERMINAL**

(56) **References Cited**

(71) Applicant: **LG ELECTRONICS INC.**, Seoul
(KR)

(72) Inventor: **Seungmin Woo**, Seoul (KR)

(73) Assignee: **LG ELECTRONICS INC.**, Seoul
(KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/461,412**

(22) Filed: **Mar. 16, 2017**

(65) **Prior Publication Data**

US 2018/0069298 A1 Mar. 8, 2018

(30) **Foreign Application Priority Data**

Sep. 7, 2016 (KR) 10-2016-0115094

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 5/335 (2015.01)

(Continued)

(52) **U.S. Cl.**

CPC **H01Q 1/243** (2013.01); **H01Q 5/335**
(2015.01); **H01Q 5/35** (2015.01); **H03H 1/00**
(2013.01); **H03H 7/38** (2013.01); **H01Q 1/52**
(2013.01)

(58) **Field of Classification Search**

CPC H01Q 1/243; H01Q 1/38; H01Q 1/52;
H01Q 5/335; H01Q 1/24

(Continued)

U.S. PATENT DOCUMENTS

2003/0176176 A1* 9/2003 Leinonen H04B 7/12

455/277.1

2012/0218723 A1* 8/2012 Kwak H01Q 1/243

361/748

(Continued)

FOREIGN PATENT DOCUMENTS

CN 104901015 9/2015

KR 1020140114691 9/2014

OTHER PUBLICATIONS

PCT International Application No. PCT/KR2017/002453, Notification of Transmittal of the International Search Report and the Written Opinion of the International Searching Authority, or Declaration dated Jun. 16, 2017, 11 pages.



Primary Examiner — Hai V Tran

(74) *Attorney, Agent, or Firm* — Lee Hong Degerman
Kang & Waimey

(57) **ABSTRACT**

A mobile terminal comprises a case; a main board packaged in the case; a signal supply unit packaged on the main board, supplying a radio signal; an antenna radiator packaged in the case, including a conductive material and transmitting and receiving a signal of a first frequency; an antenna tuner packaged in the case, including a conductive material; a feeding line located on the main board, having one end connected with the signal supply unit and the other end connected with the antenna radiator; and a tuning line located on the main board, having one end connected to the feeding line and the other end connected with the antenna tuner, wherein the tuning line and the antenna tuner compensate for impedance of the feeding line and the antenna radiator. The mobile terminal can prevent wireless communication performance from being deteriorated by impedance distorted by an external environment like that a body of a user approaches the antenna radiator.

14 Claims, 14 Drawing Sheets





US010243269B2

(12) **United States Patent**
Gommé et al.

(10) **Patent No.:** **US 10,243,269 B2**
(45) **Date of Patent:** **Mar. 26, 2019**

(54) **ANTENNA**

(71) Applicant: **NXP B.V.**, Eindhoven (NL)

(72) Inventors: **Liesbeth Gommé**, Anderlecht (BE);
Anthony Kerselaers, Herselt (BE)

(73) Assignee: **NXP B.V.**, Eindhoven (NL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/873,714**

(22) Filed: **Jan. 17, 2018**

(65) **Prior Publication Data**

US 2018/0233811 A1 Aug. 16, 2018

(30) **Foreign Application Priority Data**

Feb. 15, 2017 (EP) 17156294.5

(51) **Int. Cl.**

H01Q 1/32 (2006.01)

H01Q 5/40 (2015.01)

H01Q 9/32 (2006.01)

(52) **U.S. Cl.**

CPC **H01Q 5/40** (2015.01); **H01Q 1/3275**
(2013.01); **H01Q 9/32** (2013.01)

(58) **Field of Classification Search**

CPC H01Q 1/3216; H01Q 1/3275; H01Q 1/38;
H01Q 5/35; H01Q 5/40; H01Q 5/42;
H01Q 9/32; H01Q 13/106

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,405,699 B2 7/2008 Qin
9,083,414 B2 7/2015 Basnayake et al.

9,570,810 B2 * 2/2017 Kerselaers H01Q 13/106
2014/0292593 A1 10/2014 Thiam et al.
2014/0347231 A1 11/2014 Kerselaers et al.

FOREIGN PATENT DOCUMENTS

EP 2 8064 97 12/2015
KR 10-2016-0025646 A 3/2016
WO 2004/082072 A1 9/2004

OTHER PUBLICATIONS

Sawaya, T. "Telematics and ITS integrated vehicular antenna with CRLH-TL parasitic element", International Symposium on Antennas and Propagation (ISAP), Nagoys, pp. 1329-1332 (2012).

* cited by examiner


Primary Examiner — Robert Karacsony

(74) *Attorney, Agent, or Firm* — Rajeev Madnawat

(57) **ABSTRACT**

The disclosure relates to an antenna including a substrate and a conductor pattern on the substrate. The conductor pattern comprises first and second conductor areas and the first conductor area is generally at a first end of the substrate and the second conductor area is generally at an opposing second end of the substrate. A first direction extends between the first and second ends of the substrate. The first conductor area has two arms, the two first conductor area arms extend parallel to the first direction and define a first slot between them; wherein the second conductor area has two arms with a second slot defined between them, and the two second conductor area arms extend parallel to the first direction. The two second conductor area arms sit within the first slot with a portion of the first slot at the outer sides of the two second conductor area arms.

15 Claims, 10 Drawing Sheets

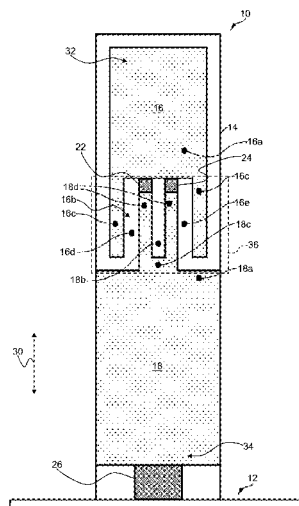

(12) **United States Patent**
Lee

(10) **Patent No.:** **US 10,243,274 B2**
(45) **Date of Patent:** **Mar. 26, 2019**

(54) **SLOT ANTENNA DEVICE**

(71) Applicant: **E Ink Holdings Inc.**, Hsinchu (TW)

(72) Inventor: **Yu-Ming Lee**, Taoyuan (TW)

(73) Assignee: **E Ink Holdings Inc.**, Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 35 days.

(21) Appl. No.: **15/406,801**

(22) Filed: **Jan. 16, 2017**

(65) **Prior Publication Data**

US 2017/0244171 A1 Aug. 24, 2017

Related U.S. Application Data

(60) Provisional application No. 62/296,601, filed on Feb. 18, 2016.

(30) **Foreign Application Priority Data**

Sep. 26, 2016 (CN) 2016 1 0849318

(51) **Int. Cl.**
H01Q 13/10 (2006.01)
H01Q 1/36 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01Q 13/106** (2013.01); **H01Q 1/2291**
(2013.01); **H01Q 1/243** (2013.01);
(Continued)

(58) **Field of Classification Search**
None

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,850,198 A * 12/1998 Lindenmeier H01Q 1/3275
343/713

6,043,786 A 3/2000 Vannatta et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 102738559 10/2012
TW 200908445 2/2009

(Continued)

OTHER PUBLICATIONS

“Office Action of Taiwan Counterpart Application,” dated Sep. 19, 2017, p. 1-p. 5.

(Continued)


Primary Examiner — Trinh Dinh

(74) *Attorney, Agent, or Firm* — JCIPRNET

(57) **ABSTRACT**

A slot antenna device including a substrate, a metal layer and a feeding element is provided. The substrate has a first surface and a second surface opposite to the first surface. The metal layer is disposed on the first surface, and includes a slot extending along a first direction. The feeding element is disposed on the second surface, and extended along a second direction, where the first direction is perpendicular to the second direction. A length of the slot is a sum of each quarter wavelength of at least three frequency bands, so that the slot antenna device is operated at the at least three frequency bands. A projection of the feeding element on the first surface crosses the slot, so that the slot is divided into a first section and a second section, where a length of the first section is equal to a length of the second section.

15 Claims, 7 Drawing Sheets

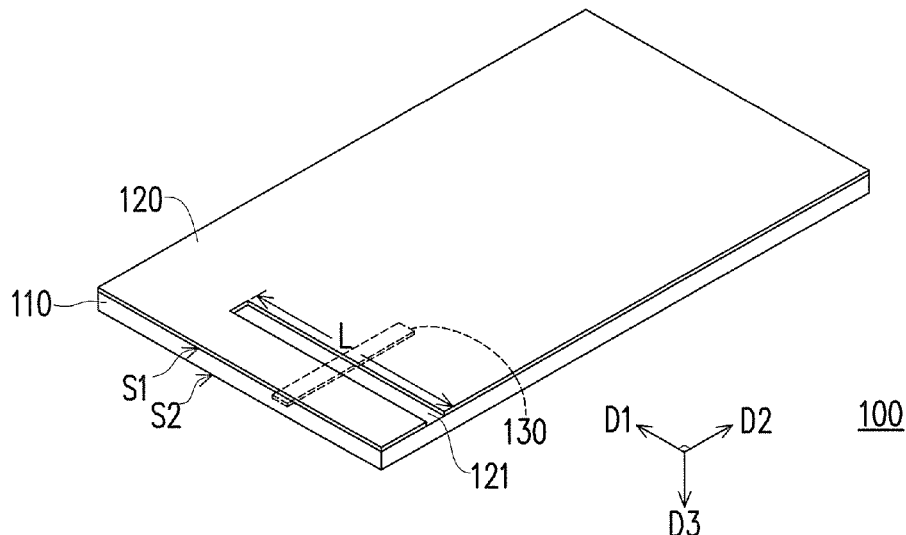



(12) **United States Patent**
Liu

(10) **Patent No.:** **US 10,243,279 B2**
(45) **Date of Patent:** **Mar. 26, 2019**

(54) **SLOT ANTENNA WITH RADIATOR ELEMENT**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Microsoft Technology Licensing, LLC**,
Redmond, WA (US)

6,140,967 A * 10/2000 Kolsrud H01Q 1/38
343/700 MS

(72) Inventor: **Luyi Liu**, Sammamish, WA (US)

8,207,897 B2 6/2012 Alvey et al.
8,390,523 B2 3/2013 Wang et al.
8,648,752 B2 2/2014 Ramachandran et al.
8,872,708 B2 10/2014 Hill et al.

(Continued)

(73) Assignee: **Microsoft Technology Licensing, LLC**,
Redmond, WA (US)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 133 days.

EP 1063721 A1 12/2000
WO 2013107921 A1 7/2013

(Continued)

OTHER PUBLICATIONS

(21) Appl. No.: **15/056,814**

“International Search Report and Written Opinion Issued in PCT
Application No. PCT/US2017/019224”, dated Jun. 8, 2017, 13
Pages.

(22) Filed: **Feb. 29, 2016**

(Continued)

(65) **Prior Publication Data**

US 2017/0250475 A1 Aug. 31, 2017

Primary Examiner — Trinh V Dinh

(74) *Attorney, Agent, or Firm* — Holzer Patel Drennan

(57)

ABSTRACT

(51) **Int. Cl.**

H01Q 1/24 (2006.01)
H01Q 21/30 (2006.01)
H01Q 13/10 (2006.01)
H01Q 1/22 (2006.01)
H01Q 5/371 (2015.01)

(52) **U.S. Cl.**


CPC **H01Q 21/30** (2013.01); **H01Q 1/2266**
(2013.01); **H01Q 1/24** (2013.01); **H01Q 1/243**
(2013.01); **H01Q 5/371** (2015.01); **H01Q**
13/10 (2013.01); **H01Q 13/106** (2013.01)

(58) **Field of Classification Search**

None
See application file for complete search history.

An antenna assembly includes a conductive plate having a slot formed within the conductive plate. A conductive coupling element is positioned within the slot of the conductive plate to form a slot antenna structure with the conductive plate. At least one conductive radiator element is positioned outside of the slot. An antenna feed structure is electrically coupled to the conductive coupling element and the at least one conductive radiator element. The antenna feed structure is configured to simultaneously resonate the slot antenna structure and the at least one conductive radiator element. The slot antenna structure and the conductive radiator element work in combination to resonate at substantially similar (e.g., overlapping) RF communication bands or at different RF communication bands.

19 Claims, 5 Drawing Sheets

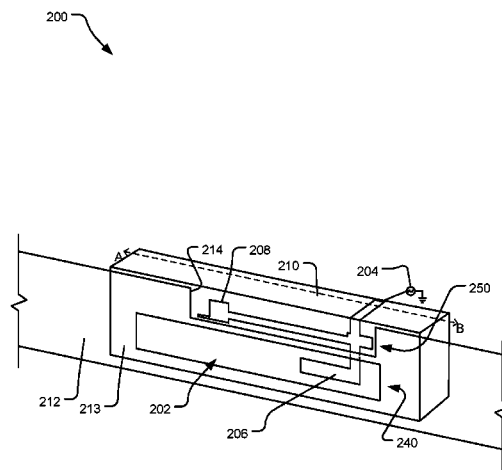

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 10,243,624 B2**
(45) **Date of Patent:** ***Mar. 26, 2019**

(54) **ANTENNA DEVICE AND ELECTRONIC DEVICE INCLUDING THE SAME**

(71) Applicant: **Samsung Electronics Co., Ltd.**,
Gyeonggi-do (KR)

(72) Inventors: **Jaehyung Kim**, Gyeonggi-do (KR);
Jae-Ho Lim, Gyeonggi-do (KR);
Hosaeng Kim, Gyeonggi-do (KR);
Jesun Moon, Gyeonggi-do (KR);
Sungyeul Hong, Gyeonggi-do (KR);
Kyung-Jong Lee, Gyeonggi-do (KR);
Jinkyu Bang, Gyeonggi-do (KR);
Hanbin Lee, Gyeonggi-do (KR);
Kyung-Bae Ko, Gyeonggi-do (KR);
Donghwan Kim, Gyeonggi-do (KR);
Taegyu Kim, Gyeonggi-do (KR);
Jae-Bong Chun, Gyeonggi-do (KR)

(73) Assignee: **Samsung Electronics Co., Ltd** (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **15/792,017**

(22) Filed: **Oct. 24, 2017**

(65) **Prior Publication Data**
US 2018/0048359 A1 Feb. 15, 2018

Related U.S. Application Data

(63) Continuation of application No. 15/351,142, filed on Nov. 14, 2016, now Pat. No. 9,831,928.

(30) Foreign Application Priority Data

Nov. 13, 2015 (KR) 10-2015-0159674
Apr. 8, 2016 (KR) 10-2016-0043135

(51) **Int. Cl.**
H04B 1/38 (2015.01)
H04B 7/0404 (2017.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04B 7/0404** (2013.01); **H01Q 1/2266** (2013.01); **H01Q 1/24** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H04B 7/0404; H04B 1/40; H04M 1/0216; H04M 1/0266
See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

6,246,374 B1 6/2001 Perrotta et al.
7,417,593 B1 8/2008 Hsiao et al.
(Continued)

FOREIGN PATENT DOCUMENTS

KR 10-2013-0122793 11/2013

OTHER PUBLICATIONS

International Search Report dated Feb. 10, 2017 issued in counterpart application No. PCT/KR2016/012956, 9 pages.


Primary Examiner — Tuan Pham

(74) *Attorney, Agent, or Firm* — The Farrell Law Firm, P.C.

(57) ABSTRACT

An electronic device is provided. The electronic device includes a first housing a second housing, a first display disposed on the first housing and a second display disposed on the second housing, a connecting member configured to couple the first housing to the second housing such that the first housing and the second housing are foldable relative to each other, and the second surface and the fourth surface face each other when the first housing and the second housing are folded toward each other, a first conductive

(Continued)

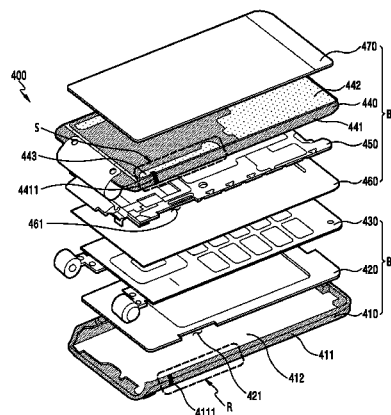



US010249933B2

(12) **United States Patent**
Moon et al.

(10) **Patent No.:** **US 10,249,933 B2**
(45) **Date of Patent:** **Apr. 2, 2019**

(54) **ANTENNA DEVICE AND ELECTRONIC DEVICE INCLUDING THE SAME**

(71) Applicant: **Samsung Electronics Co., Ltd.**,
Gyeonggi-do (KR)

(72) Inventors: **Ji-Hye Moon**, Seoul (KR); **Jang-Sun Yoo**, Seoul (KR); **Myeong-Gil Lee**, Seoul (KR); **Chee-Hwan Yang**, Gyeonggi-do (KR); **Kwang-Yong Lee**, Gyeonggi-do (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**,
Yeongtong-gu, Suwon-si, Gyeonggi-do (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/620,941**

(22) Filed: **Jun. 13, 2017**

(65) **Prior Publication Data**

US 2017/0373374 A1 Dec. 28, 2017

(30) **Foreign Application Priority Data**

Jun. 27, 2016 (KR) 10-2016-0080051

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 1/22 (2006.01)

G06F 1/16 (2006.01)

H01Q 21/28 (2006.01)

(52) **U.S. Cl.**

CPC **H01Q 1/2258** (2013.01); **G06F 1/1698** (2013.01); **H01Q 1/2266** (2013.01); **H01Q 1/24** (2013.01); **H01Q 1/243** (2013.01); **H01Q 21/28** (2013.01)

(58) **Field of Classification Search**

CPC H01Q 1/22; H01Q 1/2258; H01Q 1/2266; H01Q 1/24; H01Q 21/28; H01Q 1/243

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,203,137 B1 12/2015 Guterman et al.
2009/0262029 A1* 10/2009 Chiang H01Q 1/2266 343/702

2011/0273352 A1 11/2011 You
2013/0344907 A1 12/2013 Pan et al.
2014/0097992 A1 4/2014 Cheng et al.
2014/0097993 A1 4/2014 Hotta et al.
2014/0361932 A1 12/2014 Irci et al.
2015/0200443 A1 7/2015 Lo et al.

FOREIGN PATENT DOCUMENTS

JP 2005-175667 A 6/2005

OTHER PUBLICATIONS

International Search Reported dated Sep. 19, 2017.

* cited by examiner

Primary Examiner — Hoang V Nguyen


(74) *Attorney, Agent, or Firm* — Cha & Reiter, LLC.

(57)

ABSTRACT

Disclosed is an antenna device for an electronic device including a first housing and a second housing rotatably coupled to the first housing about a hinge axis. The antenna device may include: a radiation conductor disposed in the first housing; and a reflection member disposed adjacent to the radiation conductor in the first housing. Radio waves transceived by the radiation conductor are radiated via the reflection member. Also disclosed is an electronic device including the antenna device. The antenna device and the electronic device including the same may be variously implemented according to embodiments.

17 Claims, 10 Drawing Sheets

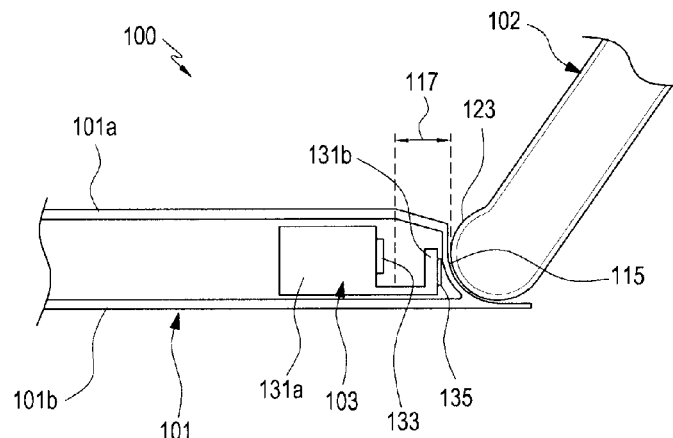



US010249936B2

(12) **United States Patent**
Sayama et al.

(10) **Patent No.:** **US 10,249,936 B2**

(45) **Date of Patent:** **Apr. 2, 2019**

(54) **ANTENNA DEVICE AND WIRELESS APPARATUS**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **AGC Inc.**, Chiyoda-ku (JP)

8,847,828 B1 9/2014 Lee et al.

(72) Inventors: **Toshiki Sayama**, Chiyoda-ku (JP);
Ryuta Sonoda, Chiyoda-ku (JP); **Koji Ikawa**, Chiyoda-ku (JP)

9,048,528 B1 6/2015 Lee et al.

(Continued)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **AGC Inc.**, Chiyoda-ku (JP)

CN 1496595 A 5/2004

CN 1507113 A 6/2004

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(Continued)

OTHER PUBLICATIONS

(21) Appl. No.: **15/468,148**

International Search Report dated Nov. 17, 2015 in PCT/JP2015/078058, filed on Oct. 2, 2015 (with English translation).

(22) Filed: **Mar. 24, 2017**

(Continued)

(65) **Prior Publication Data**

US 2017/0194692 A1 Jul. 6, 2017

Primary Examiner — Dameon E Levi

Related U.S. Application Data

Assistant Examiner — Collin Dawkins

(63) Continuation of application No.
PCT/JP2015/078058, filed on Oct. 2, 2015.

(74) *Attorney, Agent, or Firm* — Oblon, McClelland, Maier & Neustadt, L.L.P.

(30) **Foreign Application Priority Data**

Oct. 2, 2014 (JP) 2014-204100

(57) **ABSTRACT**

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 5/385 (2015.01)

(Continued)

An antenna device includes a ground plane; a first resonator extending in a direction at a distance from the ground plane and connected to a feeding point; and a second resonator arranged at a distance from the first resonator. The ground plane includes an edge portion formed along the second resonator, with a resonance current being formed on the first resonator and the ground plane. The second resonator is configured to function as a radiation conductor by resonance of the first resonator. A tip portion of the first resonator is located near a metallic part. The second resonator has a plurality of electrical lengths of differing resonance frequencies.


(52) **U.S. Cl.**
CPC **H01Q 1/241** (2013.01); **H01Q 1/243**
(2013.01); **H01Q 1/48** (2013.01); **H01Q 5/378**
(2015.01);

(Continued)

(58) **Field of Classification Search**
CPC H01Q 1/243; H01Q 1/38; H01Q 9/0421;
H01Q 1/42; H01Q 1/12

(Continued)

20 Claims, 11 Drawing Sheets

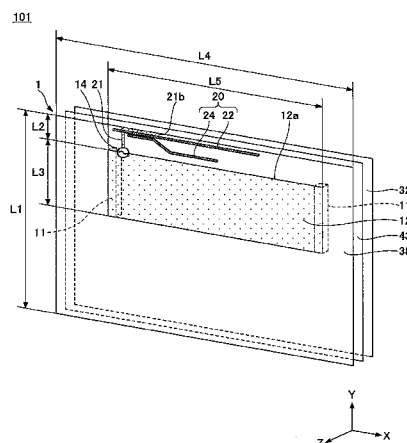

(12) **United States Patent**
Peng et al.

(10) **Patent No.:** **US 10,249,945 B2**
(45) **Date of Patent:** **Apr. 2, 2019**

(54) **ELECTRONIC DEVICE HAVING ANTENNA STRUCTURE**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Wistron NeWeb Corp.**, Hsinchu (TW)

8,577,289 B2 * 11/2013 Schlub G01B 7/023
343/702
9,203,141 B1 * 12/2015 Su H01Q 7/00
9,680,212 B2 * 6/2017 Konu H01Q 1/48
9,819,073 B2 * 11/2017 Park H01Q 1/243
9,882,284 B2 * 1/2018 Eom H01Q 1/243
2002/0022459 A1 * 2/2002 Kobayashi H01Q 1/243
455/575.7
2002/0183032 A1 * 12/2002 Fang G06F 1/1616
455/280
2006/0270472 A1 * 11/2006 Chen H01Q 1/243
455/575.7
2008/0182539 A1 * 7/2008 Hata H01Q 1/22
455/269

(72) Inventors: **Huang-Tse Peng**, Hsinchu (TW);
Kuo-Jen Lai, Hsinchu (TW);
Cheng-Feng Li, Hsinchu (TW)

(73) Assignee: **Wistron NeWeb Corp.**, Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 420 days.

(21) Appl. No.: **14/864,905**

(Continued)

(22) Filed: **Sep. 25, 2015**

OTHER PUBLICATIONS

(65) **Prior Publication Data**

US 2016/0211571 A1 Jul. 21, 2016

“Office Action of Taiwan Counterpart Application,” dated Apr. 11, 2017, p. 1-p. 6.

Primary Examiner — Dameon E Levi

Assistant Examiner — Ab Salam Alkassim, Jr.

(30) **Foreign Application Priority Data**

Jan. 20, 2015 (TW) 104101775 A

(74) *Attorney, Agent, or Firm* — JCIPRNET

(57) **ABSTRACT**


An electronic device has a front side and a rear side opposite to each other and includes a back cover and an antenna structure. The back cover is disposed at the rear side. The antenna structure includes a first radiation portion, a second radiation portion and a ground portion. The first radiation portion is disposed at the front side. The second radiation portion is disposed between the first radiation portion and the back cover and is connected to the first radiation portion. The ground portion is disposed between the first radiation portion and the back cover, wherein the second radiation portion is grounded to the back cover through the ground portion.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/48 (2006.01)
H01Q 13/10 (2006.01)
H01Q 9/04 (2006.01)

(52) **U.S. Cl.**
CPC **H01Q 1/48** (2013.01); **H01Q 1/243** (2013.01); **H01Q 9/0421** (2013.01); **H01Q 13/10** (2013.01)

(58) **Field of Classification Search**
CPC H01Q 1/243; H01Q 1/48; H01Q 13/10
See application file for complete search history.

14 Claims, 3 Drawing Sheets

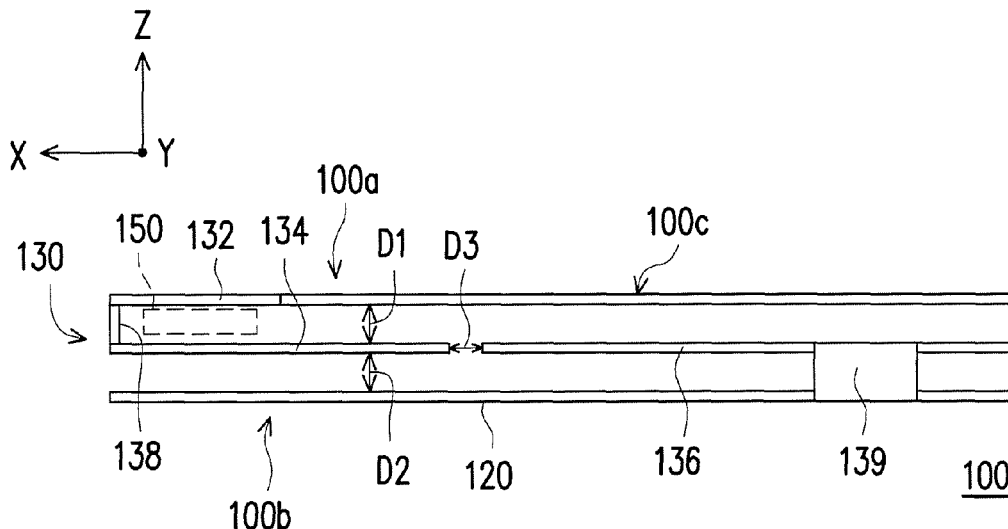



US010249957B2

(12) **United States Patent**
Chang et al.

(10) **Patent No.:** **US 10,249,957 B2**

(45) **Date of Patent:** **Apr. 2, 2019**

(54) **WIRELESS COMMUNICATION DEVICE**

(56) **References Cited**

(71) Applicant: **Wistron NeWeb Corporation**, Hsinchu (TW)

U.S. PATENT DOCUMENTS

(72) Inventors: **Wei-Shan Chang**, Hsinchu (TW);
Guan-Nan Lin, Hsinchu (TW);
Chia-Tien Li, Hsinchu (TW)

7,551,142 B1 *	6/2009	Zhang		H01Q 1/243
				343/700 MS
2008/0165063 A1 *	7/2008	Schlub		H01Q 1/243
				343/702
2012/0068893 A1 *	3/2012	Guterman		H01Q 1/2266
				343/702
2014/0009342 A1 *	1/2014	Wei		H01Q 1/2266
				343/700 MS
2015/0270619 A1 *	9/2015	Zhu		H01Q 13/10
				343/702

(73) Assignee: **Wistron NeWeb Corporation**, Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 245 days.

* cited by examiner

(21) Appl. No.: **14/680,052**

Primary Examiner — Hai V Tran

(22) Filed: **Apr. 6, 2015**

Assistant Examiner — Michael M Bouizza

(74) *Attorney, Agent, or Firm* — Winston Hsu

(65) **Prior Publication Data**

US 2016/0294067 A1 Oct. 6, 2016

(57) **ABSTRACT**

(51) **Int. Cl.**
H01Q 13/18 (2006.01)
H01Q 5/364 (2015.01)
H01Q 1/22 (2006.01)
H01Q 1/24 (2006.01)


A wireless communication device includes a metal cover and an antenna. The metal cover is formed with a slot. The antenna is disposed in the metal cover for resonating a radio-frequency signal via the slot, and includes a feed terminal, a radiator and a ground. The feed terminal is used for feeding the radio-frequency signal. The radiator includes a first arm electrically connected to the feed terminal and extended from the feed terminal along a first direction, and a second arm electrically connected to the first arm and extended from the first arm along a second direction, wherein the second arm is partially overlapped with a first edge of the slot.

(52) **U.S. Cl.**
CPC **H01Q 13/18** (2013.01); **H01Q 5/364** (2015.01); **H01Q 1/2266** (2013.01); **H01Q 1/243** (2013.01)

(58) **Field of Classification Search**
CPC H01Q 13/18; H01Q 5/364; H01Q 1/243; H01Q 1/2266

See application file for complete search history.

8 Claims, 9 Drawing Sheets

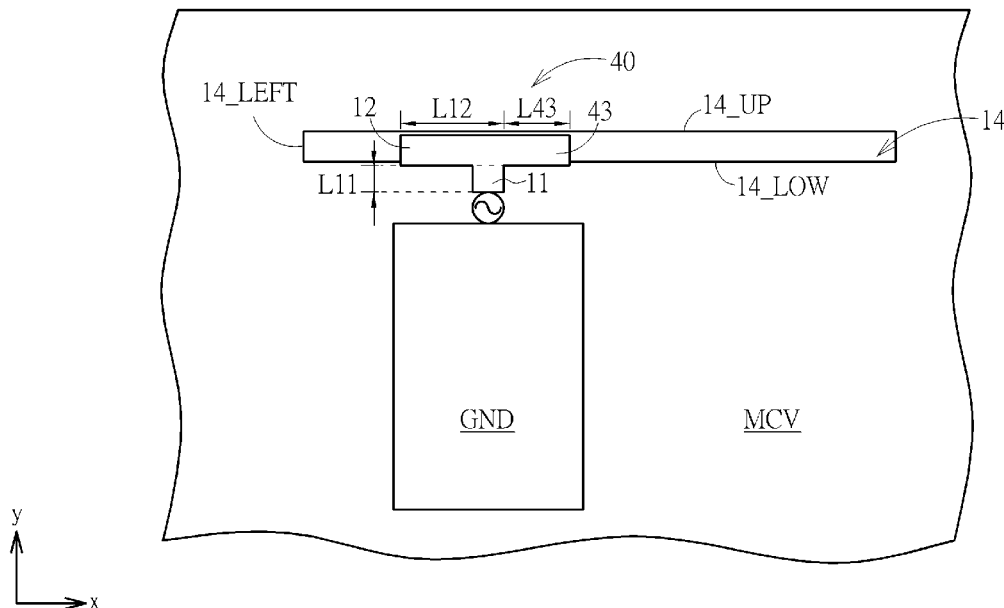

(12) **United States Patent**
Chen et al.

(10) **Patent No.:** **US 10,256,525 B2**
(45) **Date of Patent:** **Apr. 9, 2019**

(54) **ANTENNA STRUCTURE AND WIRELESS COMMUNICATION DEVICE USING SAME**

(71) Applicant: **Chiun Mai Communication Systems, Inc.**, New Taipei (TW)

(72) Inventors: **Yi-Ting Chen**, New Taipei (TW);
Yen-Jung Tseng, New Taipei (TW);
Tze-Hsuan Chang, New Taipei (TW)

(73) Assignee: **Chiun Mai Communication Systems, Inc.**, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/655,899**

(22) Filed: **Jul. 21, 2017**

(65) **Prior Publication Data**

US 2018/0026336 A1 Jan. 25, 2018

Related U.S. Application Data

(60) Provisional application No. 62/365,341, filed on Jul. 21, 2016.

(30) **Foreign Application Priority Data**

Jul. 11, 2017 (CN) 2017 1 0562263

(51) **Int. Cl.**

H01Q 1/24 (2006.01)
H01Q 13/18 (2006.01)
H01Q 5/50 (2015.01)
H04Q 1/48 (2006.01)
H01Q 21/28 (2006.01)

(52) **U.S. Cl.**

CPC **H01Q 1/242** (2013.01); **H01Q 1/243** (2013.01); **H01Q 5/50** (2015.01); **H01Q 13/18** (2013.01); **H01Q 21/28** (2013.01); **H04Q 1/48** (2013.01)

(58) **Field of Classification Search**

CPC H01Q 13/18; H01Q 1/24; H01Q 1/242; H01Q 1/48; H01Q 5/50; H01Q 1/243; H01Q 21/28; H01Q 5/314; H01Q 5/371
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,023,179 A * 5/1977 Ikraht H01Q 1/44 343/713
6,097,345 A * 8/2000 Walton H01Q 1/1271 343/700 MS
9,331,397 B2 * 5/2016 Jin H01Q 21/28
9,379,427 B2 * 6/2016 Xu H01Q 1/243

(Continued)

Primary Examiner — Tho G Phan


(74) Attorney, Agent, or Firm — ScienBiziP, P.C.

(57)

ABSTRACT

An antenna structure includes a metallic member and an extending section. The metallic member includes a front frame, a backboard, and a side frame. The side frame defines a slot. The front frame defines a first gap and a second gap communicating with the slot and extending across the front frame. A portion of the front frame between the first gap and the second gap forms a radiating section. Current enters the first radiating section from the first feed portion and flows through the first radiating section and towards the first gap and the second gap to generate radiation signals in a first frequency band and a second frequency band; the current flows through the extending section to generate radiation signals in a third frequency band. A wireless communication device using the antenna structure is provided.

20 Claims, 26 Drawing Sheets

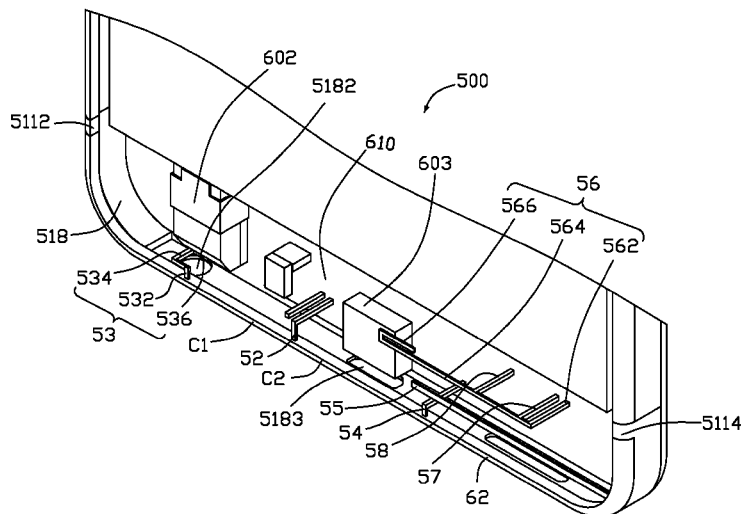



US010256527B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 10,256,527 B2**

(45) **Date of Patent:** **Apr. 9, 2019**

(54) **MOBILE TERMINAL**

(71) Applicant: **LG ELECTRONICS INC.**, Seoul (KR)

(72) Inventors: **Minseok Kim**, Seoul (KR); **Hansu Kim**, Seoul (KR); **Kangjae Jung**, Seoul (KR); **Youngbae Kwon**, Seoul (KR); **Sungjung Rho**, Seoul (KR); **Changwon Yun**, Seoul (KR); **Kyoungwon Jeon**, Seoul (KR); **Duckyun Kim**, Seoul (KR); **Hyoungwook Lim**, Seoul (KR); **Yunmo Kang**, Seoul (KR); **Hayong Kim**, Seoul (KR)

(73) Assignee: **LG ELECTRONICS INC.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 50 days.

(21) Appl. No.: **15/244,963**

(22) Filed: **Aug. 23, 2016**

(65) **Prior Publication Data**

US 2017/0201010 A1 Jul. 13, 2017

(30) **Foreign Application Priority Data**

Jan. 11, 2016 (KR) 10-2016-0003385
Jan. 12, 2016 (KR) 10-2016-0003901

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/38 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01Q 1/243** (2013.01); **H01Q 1/38** (2013.01); **H01Q 7/00** (2013.01); **H01Q 9/42** (2013.01);
(Continued)

(58) **Field of Classification Search**

CPC H01Q 1/243; H01Q 7/00; H01Q 9/045;
H01Q 9/42; H01Q 21/28

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,318,793 B2 * 4/2016 Zhu H01Q 1/243
2013/0076573 A1 * 3/2013 Rappoport H01Q 1/243
343/702

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1258944 A2 11/2002
EP 2629361 A2 8/2013

(Continued)

Primary Examiner — Robert Karacsony

(74) *Attorney, Agent, or Firm* — Birch, Stewart, Kolasch & Birch, LLP

(57) **ABSTRACT**

A mobile terminal includes a window including a transparent region and an opaque region surrounding the transparent region, a metal case provided below the window to accommodate the window, having a rear surface portion facing the window and a side surface portion formed to extend from the rear surface portion toward a front surface, and exposed outwardly, a non-metal member formed in a region formed by cut away a portion of the case and having a slot formation portion spaced apart from the side surface portion at a predetermined interval and a pair of sectioning portions extending from the slot formation portion and traversing the side surface portion to section the side surface portion into first to third members, and first to third antenna patterns formed in the opaque region and electrically connected to the first to third members to form first and third antennas, respectively.

15 Claims, 12 Drawing Sheets

