



US 20200266519A1

(19) **United States**(12) **Patent Application Publication****LEE et al.**(10) **Pub. No.: US 2020/0266519 A1**(43) **Pub. Date: Aug. 20, 2020**

(54) **ANTENNA MODULE INCLUDING FLEXIBLE
PRINTED CIRCUIT BOARD AND
ELECTRONIC DEVICE INCLUDING THE
ANTENNA MODULE**

H01Q 9/04 (2006.01)**H04B 7/06** (2006.01)**H05K 1/18** (2006.01)**H01Q 1/24** (2006.01)

(71) Applicant: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)

(52) **U.S. Cl.**CPC **H01Q 1/2283** (2013.01); **H01Q 9/42**(2013.01); **H01Q 1/243** (2013.01); **H04B****7/0617** (2013.01); **H05K 1/189** (2013.01);**H01Q 9/0435** (2013.01)

(72) Inventors: **Juneseok LEE**, Suwon-si (KR); **Junsig
KUM**, Suwon-si (KR); **Kwanghyun
BAEK**, Suwon-si (KR); **Dohyuk HA**,
Suwon-si (KR); **Jinsu HEO**, Suwon-si
(KR); **Youngju LEE**, Suwon-si (KR);
Jungyub LEE, Suwon-si (KR)

(57)

ABSTRACT(21) Appl. No.: **16/793,360**(22) Filed: **Feb. 18, 2020****Related U.S. Application Data**


(60) Provisional application No. 62/807,903, filed on Feb.
20, 2019.

(30) **Foreign Application Priority Data**

Mar. 29, 2019 (KR) 10-2019-0036901

Publication Classification(51) **Int. Cl.****H01Q 1/22** (2006.01)**H01Q 9/42** (2006.01)

The disclosure relates to a communication method and system for converging a 5th-Generation (5G) communication system for supporting higher data rates beyond a 4th-Generation (4G) system with a technology for Internet of Things (IoT). The disclosure may be applied to intelligent services based on the 5G communication technology and the IoT-related technology, such as smart home, smart building, smart city, smart car, connected car, health care, digital education, smart retail, security and safety services. An antenna module is provided. The antenna module includes a flexible printed circuit board (FPCB) including a first surface directed in a first direction and a second surface directed in a second direction that forms a predetermined first angle with respect to the first direction, a first antenna deployed on one surface of the first surface, and a second antenna deployed on one surface of the second surface.

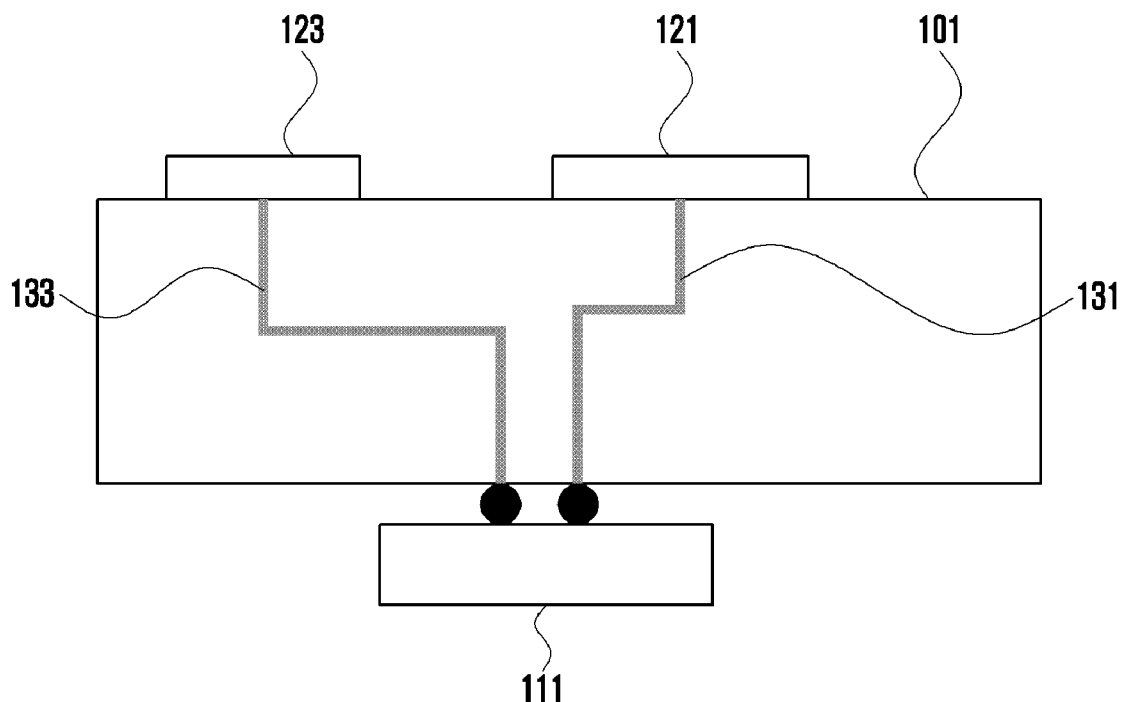100



US 20200266524A1

(19) **United States**(12) **Patent Application Publication**
YOON et al.(10) **Pub. No.: US 2020/0266524 A1**(43) **Pub. Date: Aug. 20, 2020**(54) **ELECTRONIC DEVICE INCLUDING
ANTENNA DEVICE**(71) Applicant: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)(72) Inventors: **Shinho YOON**, Suwon-si (KR);
Dongjun OH, Suwon-si (KR);
Jonghyuck LEE, Suwon-si (KR);
Soonho HWANG, Suwon-si (KR)(21) Appl. No.: **16/794,859**(22) Filed: **Feb. 19, 2020**(30) **Foreign Application Priority Data**

Feb. 19, 2019 (KR) 10-2019-0019551


Jul. 1, 2019 (KR) 10-2019-0078718

Publication Classification(51) **Int. Cl.****H01Q 1/24** (2006.01)**H01Q 1/42** (2006.01)**G06F 1/16** (2006.01)**H01Q 13/16** (2006.01)**H04M 1/02** (2006.01)**H01Q 1/48** (2006.01)(52) **U.S. Cl.**CPC **H01Q 1/243** (2013.01); **H01Q 1/42**
(2013.01); **H01Q 1/48** (2013.01); **H01Q 13/16**
(2013.01); **H04M 1/0216** (2013.01); **G06F**
1/1681 (2013.01)

(57)

ABSTRACT

An electronic device is provided. The electronic device includes a first housing structure including a first side surface member, a second housing structure including a second side surface member, a hinge structure configured to rotatably connect the first housing structure and the second housing structure and configured to provide a folding axis on which the first housing structure and the second housing structure rotate, and at least one printed circuit board, wherein the first side surface member or the second side surface member includes a first side surface portion a second side surface portion, a third side surface portion, a fourth side surface portion, a fifth side surface portion, a first slit a second slit a third slit, and a fourth slit, and wherein at least part of at least one of the second side surface portion, the third side surface portion, and the fourth side surface portion is formed of a radiation conductor and is electrically connected to the at least one printed circuit board.

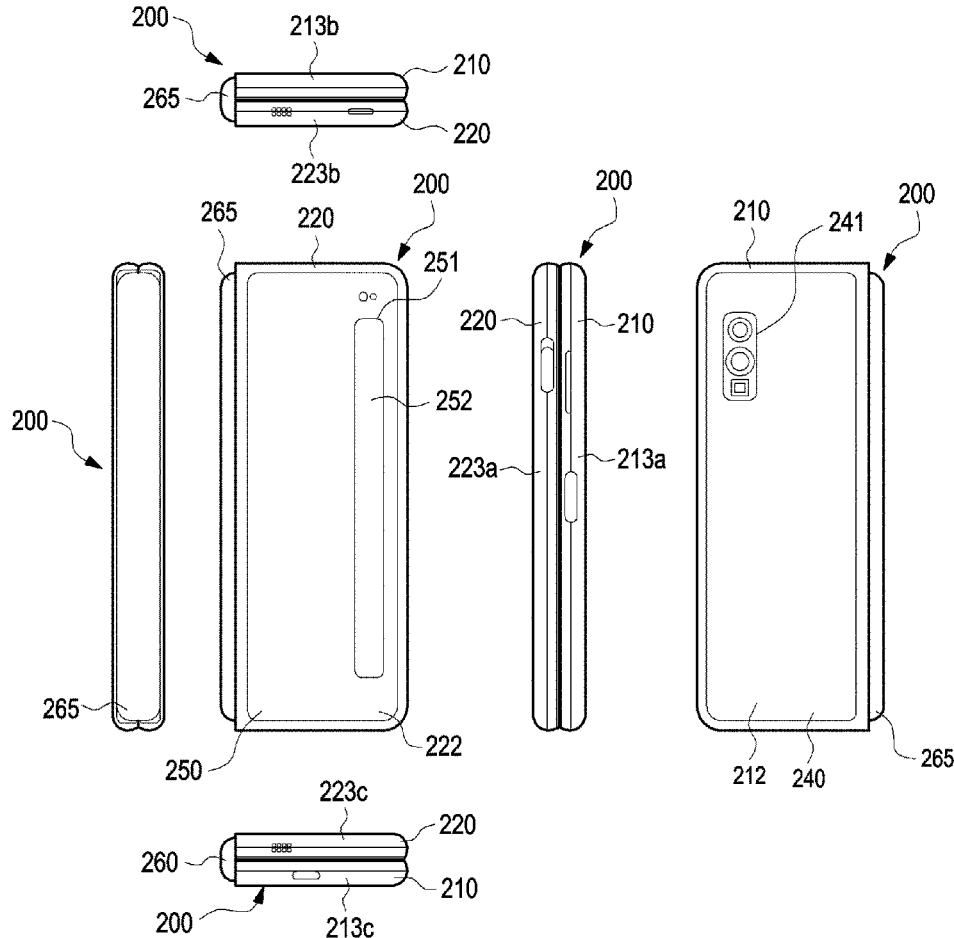




US 20200266541A1

(19) **United States**(12) **Patent Application Publication**
Yang(10) **Pub. No.: US 2020/0266541 A1**(43) **Pub. Date: Aug. 20, 2020**(54) **EIGHT-FREQUENCY BAND ANTENNA**(52) **U.S. Cl.**(71) Applicant: **Taoglas Group Holdings Limited**, San Diego, CA (US)CPC **H01Q 5/371** (2015.01); **H01Q 1/243** (2013.01)(72) Inventor: **Tsai Yi Yang**, Tainan (TW)(57) **ABSTRACT**(21) Appl. No.: **16/685,843**(22) Filed: **Nov. 15, 2019****Related U.S. Application Data**

(63) Continuation of application No. 16/172,098, filed on Oct. 26, 2018, now Pat. No. 10,483,644, which is a continuation of application No. 14/948,237, filed on Nov. 20, 2015, now abandoned.

Publication Classification(51) **Int. Cl.**
H01Q 5/371 (2006.01)
H01Q 1/24 (2006.01)

An eight-frequency band antenna includes a carrier, a high-frequency segment, a low-frequency segment, a printed circuit board (PCB) and an inductor. The high-frequency segment is arranged on left side of the carrier and the low-frequency segment is arranged on right side of the carrier. The radiator on the bottom face of the carrier electrically connects with the micro strip of the PCB and the ground line of the ground metal when the carrier is fixed to the PCB. Moreover, the low-frequency segment is corresponding to a metal face with smaller area such that the low-frequency segment is at a free space to enhance the frequency response of the low-frequency segment and the bandwidth of the high-frequency segment. The area and the volume of blind hole on the carrier can adjust the effective dielectric constant to adjust the resonant frequency and bandwidth of the antenna.

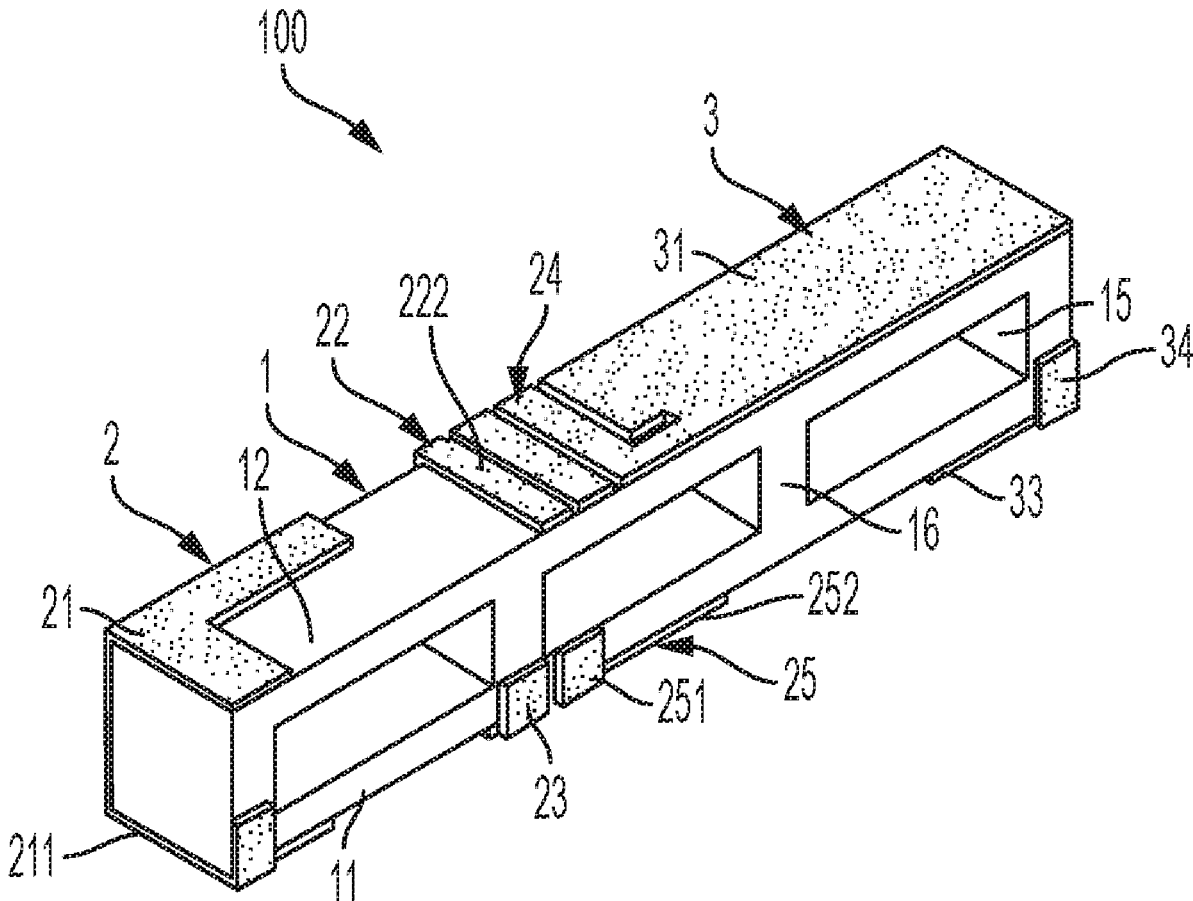



US 20200266553A1

(19) **United States**(12) **Patent Application Publication**
CAO et al.(10) **Pub. No.: US 2020/0266553 A1**(43) **Pub. Date: Aug. 20, 2020**(54) **PHASED-ARRAY ANTENNA, DISPLAY
PANEL, AND DISPLAY DEVICE****Publication Classification**(71) Applicants: **BEIJING BOE
OPTOELECTRONICS
TECHNOLOGY CO., LTD.**, Beijing
(CN); **BOE TECHNOLOGY GROUP
CO., LTD.**, Beijing (CN)(51) **Int. Cl.**
H01Q 21/22 (2006.01)
H01Q 21/06 (2006.01)
H01Q 1/38 (2006.01)
G02F 1/1333 (2006.01)
(52) **U.S. Cl.**
CPC *H01Q 21/22* (2013.01); *G02F 1/1333*
(2013.01); *H01Q 1/38* (2013.01); *H01Q*
21/065 (2013.01)(72) Inventors: **Xue CAO**, Beijing (CN); **Tien-Lun
TING**, Beijing (CN); **Jie WU**, Beijing
(CN); **Ying WANG**, Beijing (CN);
Chuncheng CHE, Beijing (CN); **Hailin
XUE**, Beijing (CN)(57) **ABSTRACT**


Embodiments of the present disclosure relate to a phased-array antenna, a display panel, and a display device. The phased-array antenna includes a first substrate and a second substrate arranged oppositely, and a plurality of phased-array elements located between the first substrate and the second substrate. At least one of the phased-array elements includes a first electrode, a second electrode arranged opposite to the first electrode, a voltage-controlled phase shift material located between the first electrode and the second electrode, wherein the first electrode is configured to receive a bias signal for controlling the voltage-controlled phase shift material, and the second electrode serves as a ground electrode, and a microstrip line located at a side of the first electrode far away from the voltage-controlled phase shift material and electrically insulated from the first electrode, wherein the microstrip line is configured to receive or transmit a transmission signal.


(21) Appl. No.: **16/641,933**(22) PCT Filed: **Dec. 13, 2018**(86) PCT No.: **PCT/CN2018/120833**

§ 371 (c)(1),

(2) Date: **Feb. 25, 2020**(30) **Foreign Application Priority Data**

Jan. 5, 2018 (CN) 201810009872.2

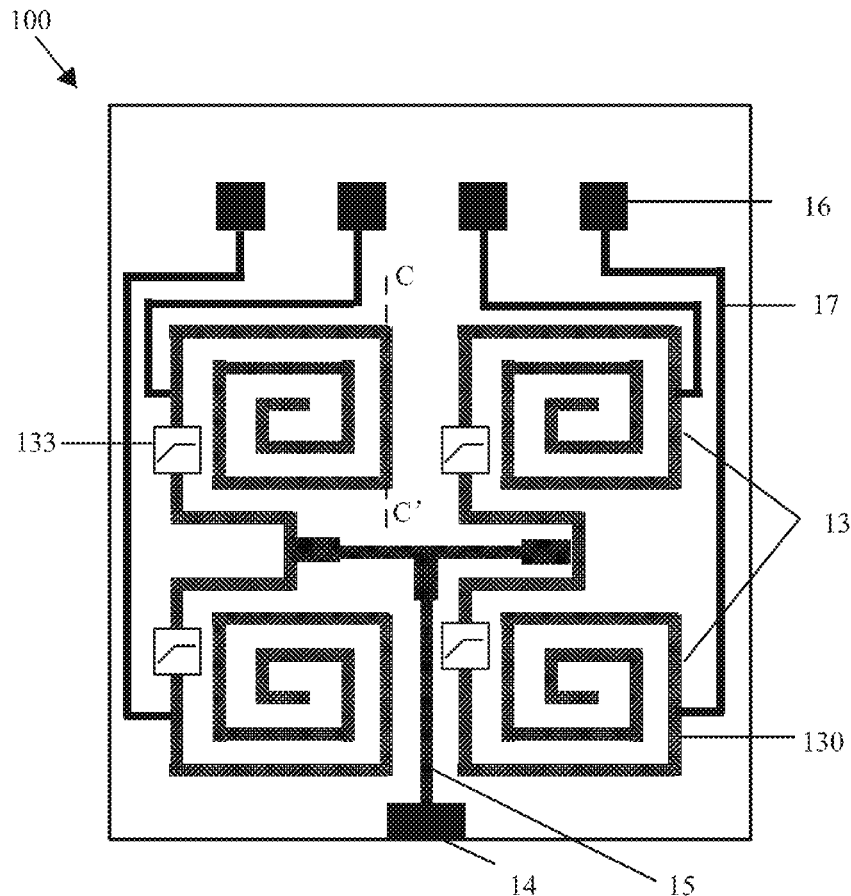




(12) **Patent Application Publication**
TU et al.

(43) **Pub. Date:** **Aug. 27, 2020**

CPC *H01Q 1/24* (2013.01); *H01Q 1/38*
(2013.01)

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/38 (2006.01)

A communication device includes a ground element, a dielectric substrate, and an antenna element. The dielectric substrate is disposed adjacent to an edge of the ground element. The antenna element is disposed on the dielectric substrate. The antenna element includes a feeding metal element, a shorting metal element, a first radiation metal element, a second radiation metal element, and an inductive element. The feeding metal element has a feeding point. The shorting metal element is coupled to the ground element. The first radiation metal element is coupled to the shorting metal element, and is disposed adjacent to the feeding metal element. The second radiation metal element is coupled through the inductive element to the feeding metal element. The second radiation metal element is further coupled to the ground element.





US 20200280126A1

(19) **United States**(12) **Patent Application Publication**
Wakabayashi(10) **Pub. No.: US 2020/0280126 A1**(43) **Pub. Date: Sep. 3, 2020**(54) **COMMUNICATION DEVICE****Publication Classification**(71) Applicant: **Sony Interactive Entertainment Inc.,**
Tokyo (JP)(72) Inventor: **Minoru Wakabayashi,** Tokyo (JP)(73) Assignee: **Sony Interactive Entertainment Inc.,**
Tokyo (JP)(21) Appl. No.: **16/765,211**(22) PCT Filed: **Nov. 30, 2018**(86) PCT No.: **PCT/JP2018/044238**

§ 371 (c)(1),

(2) Date: **May 19, 2020**(30) **Foreign Application Priority Data**


Nov. 30, 2017 (JP) 2017-230134

(51) **Int. Cl.****H01Q 1/52** (2006.01)**H01Q 9/42** (2006.01)**H01Q 1/24** (2006.01)(52) **U.S. Cl.**CPC **H01Q 1/52** (2013.01); **H01Q 1/24**
(2013.01); **H01Q 9/42** (2013.01)

(57)

ABSTRACT

A communication device includes a first antenna and a second antenna that perform wireless communication in frequency bands that at least partly overlap each other, in which each of the first antenna and the second antenna includes a body part that resonates in a frequency band that is a target of the wireless communication with the each of the first antenna and the second antenna, and a branch part that branches from the body part. Each of the branch part of the first antenna and the branch part of the second antenna includes a coupling part, the coupling part in the first antenna and the coupling part in the second antenna being disposed with an interval left to cause capacitive coupling.

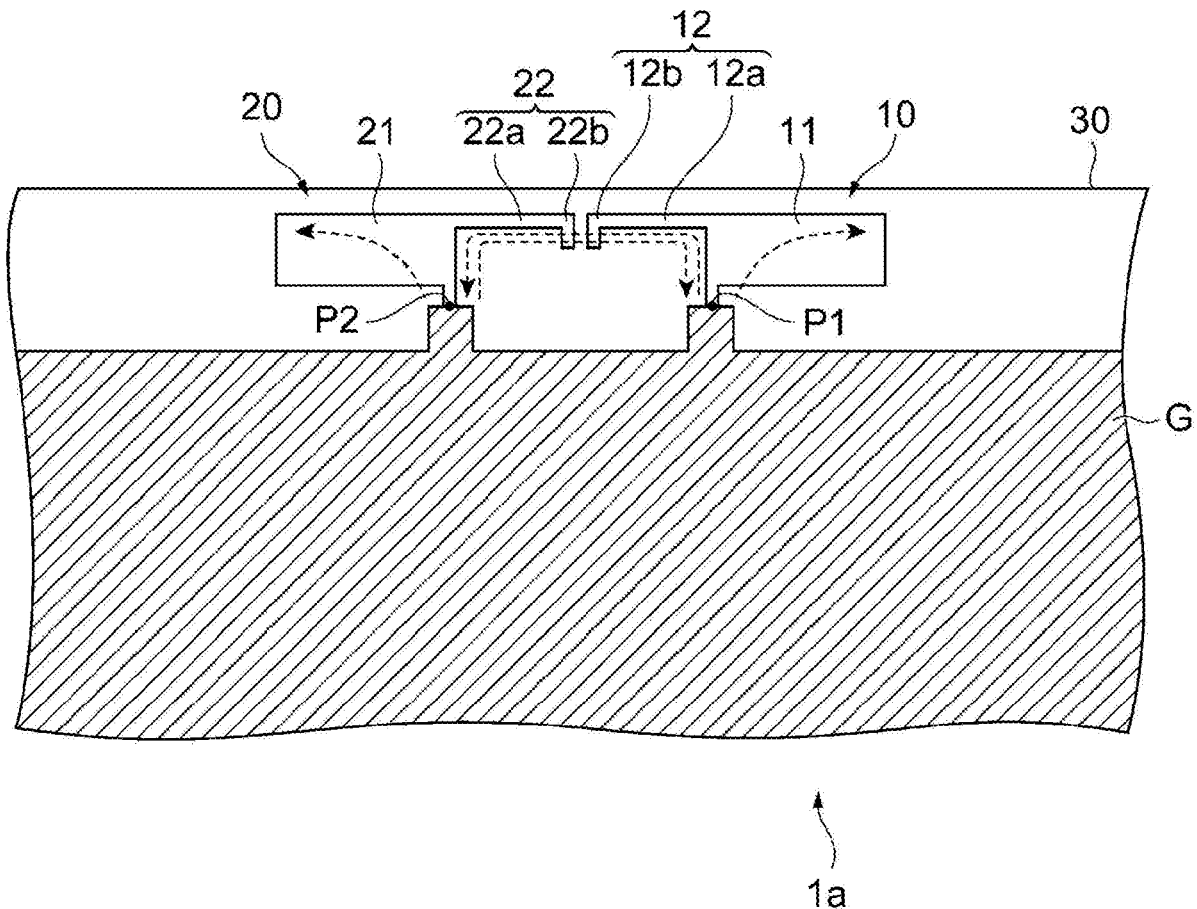



US 20200280132A1

(19) **United States**

(12) **Patent Application Publication**

Liu et al.

(10) **Pub. No.: US 2020/0280132 A1**

(43) **Pub. Date: Sep. 3, 2020**

(54) **PATCH ANTENNA UNIT AND ANTENNA**

(71) Applicant: **Huawei Technologies Co., Ltd.**,
Shenzhen (CN)

(72) Inventors: **Liangsheng Liu**, Shenzhen (CN);
Xinhong Li, Hsinchu (CN); **HuiLi Fu**,
Shenzhen (CN)

(21) Appl. No.: **16/872,920**

(22) Filed: **May 12, 2020**

Related U.S. Application Data

(63) Continuation of application No. 16/049,104, filed on
Jul. 30, 2018, which is a continuation of application
No. PCT/CN2016/109322, filed on Dec. 9, 2016.

Foreign Application Priority Data

Jan. 30, 2016 (CN) 201610071196.2

Publication Classification

(51) **Int. Cl.**
H01Q 9/04 (2006.01)
H01Q 1/22 (2006.01)

H01Q 21/06 (2006.01)

H01Q 23/00 (2006.01)

H01Q 21/00 (2006.01)

H01Q 1/48 (2006.01)


(52) **U.S. Cl.**

CPC **H01Q 9/0414** (2013.01); **H01Q 1/2283**
(2013.01); **H01Q 9/0457** (2013.01); **H01Q**
9/045 (2013.01); **H01Q 23/00** (2013.01);
H01Q 21/0075 (2013.01); **H01Q 1/48**
(2013.01); **H01Q 21/065** (2013.01)

(57)

ABSTRACT

A patch antenna unit includes a first support layer, a substrate, a second support layer, and an integrated circuit that are stacked. One radiation patch is attached to the first support layer, and one radiation patch is attached to the second support layer. A ground layer is disposed on the second support layer, a coupling slot is disposed on the ground layer, and a feeder corresponding to the coupling slot is disposed on the second support layer. The integrated circuit is connected to the first ground layer and the feeder. In the foregoing specific technical solution, a four-layer substrate is used for fabrication.

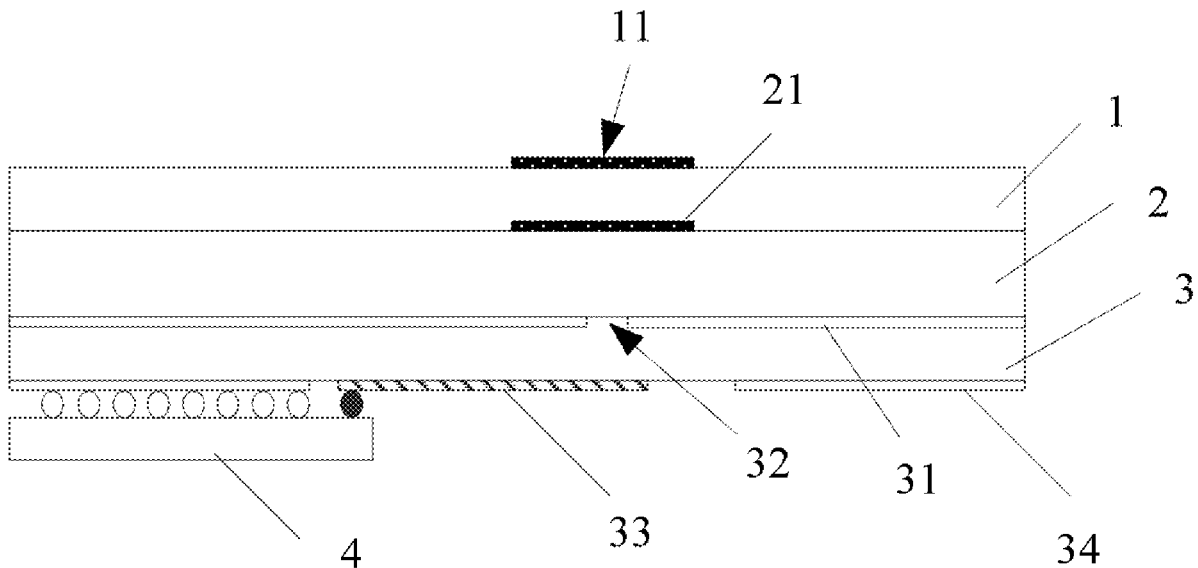



US 20200280133A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2020/0280133 A1**


Avser et al.

(43) **Pub. Date:****Sep. 3, 2020**(54) **ELECTRONIC DEVICES WITH DIELECTRIC RESONATOR ANTENNAS**(52) **U.S. Cl.**CPC **H01Q 9/0485** (2013.01); **H01Q 1/243** (2013.01); **H01Q 21/0075** (2013.01)(71) Applicant: **Apple Inc.**, Cupertino, CA (US)(72) Inventors: **Bilgehan Avser**, Mountain View, CA (US); **Harish Rajagopalan**, San Jose, CA (US); **Simone Paulotto**, Redwood City, CA (US); **Jennifer M. Edwards**, San Francisco, CA (US); **Hao Xu**, Cupertino, CA (US); **Rodney A. Gomez Angulo**, Santa Clara, CA (US); **Matthew D. Hill**, Cupertino, CA (US); **Mattia Pascolini**, San Francisco, CA (US)

(57)

ABSTRACT

An electronic device may be provided with a phased antenna array and a display cover layer. The phased antenna array may include a dielectric resonator antenna. The dielectric resonator antenna may include a dielectric resonating element embedded in a lower permittivity dielectric substrate. The substrate and the resonating element may be mounted to a flexible printed circuit. A slot may be formed in ground traces on the flexible printed circuit and aligned with the resonating element. The slot may excite resonant modes of the resonating element. The resonating element may convey corresponding radio-frequency signals through the cover layer. A dielectric matching layer may be interposed between the resonating element and the cover layer. If desired, the slot may radiate additional radio-frequency signals and the matching layer may have a tapered shape. Dielectric resonator antennas for covering different polarizations and frequencies may be interleaved across the array.

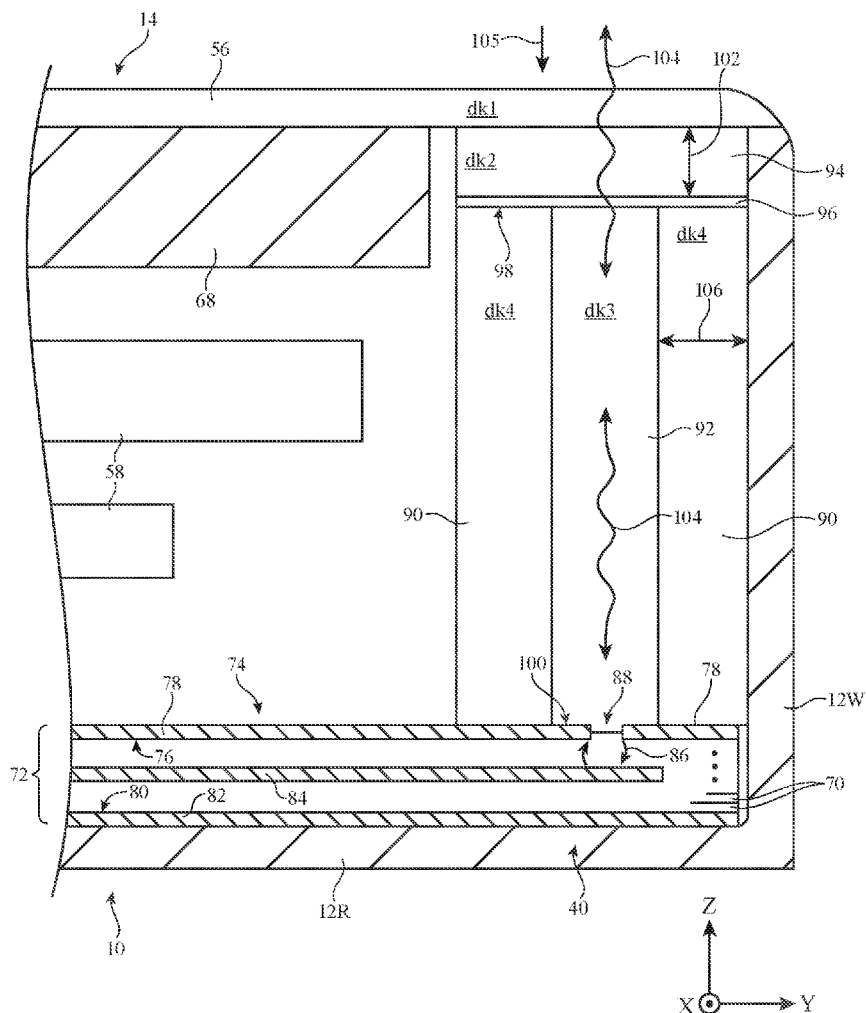(21) Appl. No.: **16/289,433**(22) Filed: **Feb. 28, 2019****Publication Classification**(51) **Int. Cl.****H01Q 9/04** (2006.01)**H01Q 21/00** (2006.01)**H01Q 1/24** (2006.01)



US 20200287274A1

(19) **United States**

(12) **Patent Application Publication**
ZHANG

(10) **Pub. No.: US 2020/0287274 A1**

(43) **Pub. Date: Sep. 10, 2020**

(54) **ANTENNA FOR DEVICE AND FOLDABLE DEVICE**

Publication Classification

(71) Applicant: **ZTE CORPORATION**, Shenzhen, Guangdong (CN)

(72) Inventor: **Yan ZHANG**, Shenzhen, Guangdong (CN)

(21) Appl. No.: **16/645,508**

(22) PCT Filed: **Sep. 12, 2018**

(86) PCT No.: **PCT/CN2018/105223**

§ 371 (c)(1),

(2) Date: **Mar. 9, 2020**

(30) **Foreign Application Priority Data**

Sep. 12, 2017 (CN) 201710817200.X

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 1/44 (2006.01)

H01Q 1/50 (2006.01)

H04M 1/02 (2006.01)

(52) **U.S. Cl.**


CPC **H01Q 1/243** (2013.01); **H04M 1/0214**

(2013.01); **H01Q 1/50** (2013.01); **H01Q 1/44**

(2013.01)

(57) **ABSTRACT**

The present disclosure provides an antenna for an electronic device, and a foldable device. The electronic device includes a body provided with a mainboard, and a first screen. The antenna includes: a feed point disposed at a side where the body is located; a first antenna connected to the feed point and extending from the side where the body is located to a side where the first screen is located; a second antenna disposed at the side where the body is located; a rotating shaft connected between the body and the first screen; and a switch provided between the rotating shaft and the first antenna.

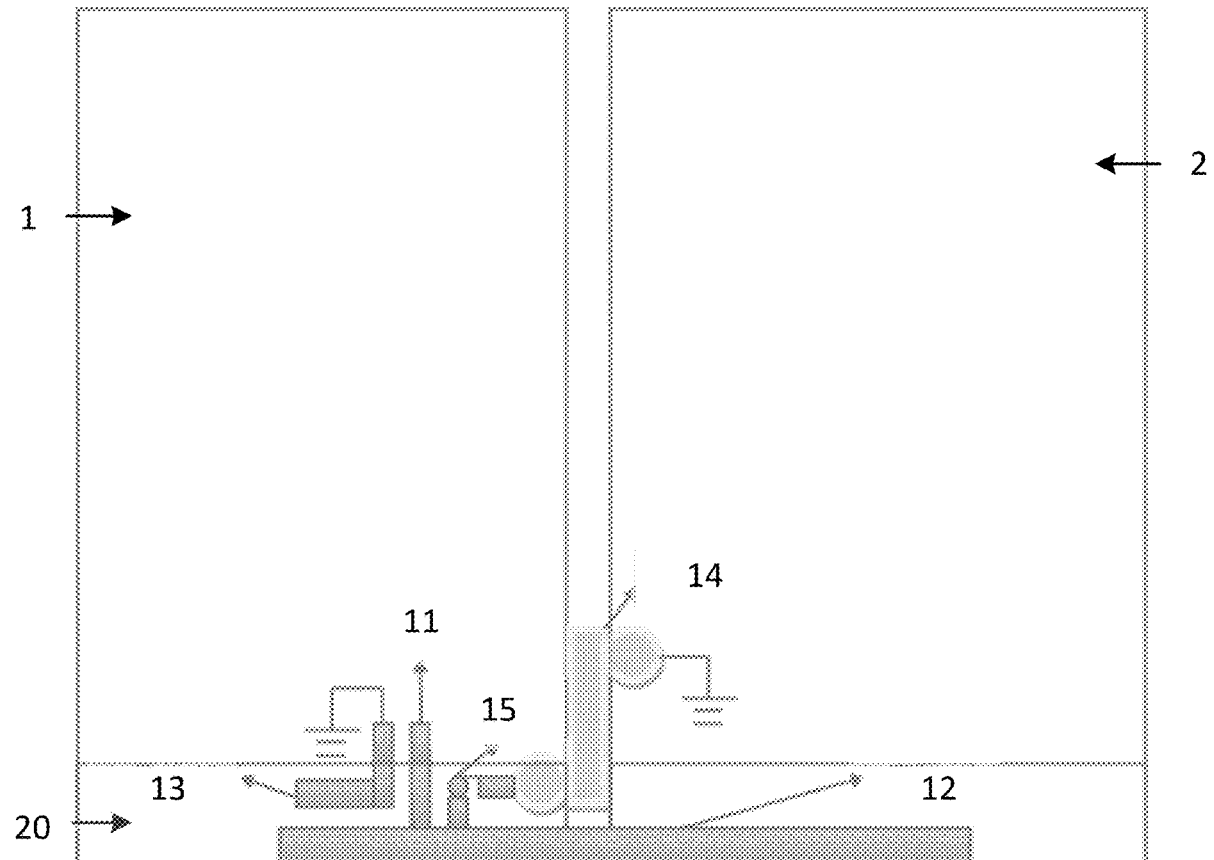



US 20200287288A1

(19) **United States**(12) **Patent Application Publication**
CHENG(10) **Pub. No.: US 2020/0287288 A1**(43) **Pub. Date: Sep. 10, 2020**(54) **ANTENNA STRUCTURE****H01Q 1/48** (2006.01)**H01Q 1/24** (2006.01)(71) Applicant: **Wistron NeWeb Corp.**, Hsinchu (TW)(52) **U.S. Cl.**(72) Inventor: **Chia-Shang CHENG**, Hsinchu (TW)CPC **H01Q 9/18** (2013.01); **H01Q 1/243**
(2013.01); **H01Q 1/48** (2013.01); **H01Q 1/38**
(2013.01)(21) Appl. No.: **16/426,221**(22) Filed: **May 30, 2019**


(57)


ABSTRACT(30) **Foreign Application Priority Data**

Mar. 7, 2019 (TW) 108107545


Publication Classification(51) **Int. Cl.****H01Q 9/18** (2006.01)**H01Q 1/38** (2006.01)

An antenna structure includes a dipole antenna element and a floating metal element. The floating metal element is disposed adjacent to the dipole antenna element. The vertical projection of the dipole antenna element at least partially overlaps the floating metal element. The floating metal element is configured for fine-tuning the radiation pattern of the antenna structure and to increase the operation bandwidth of the antenna structure.

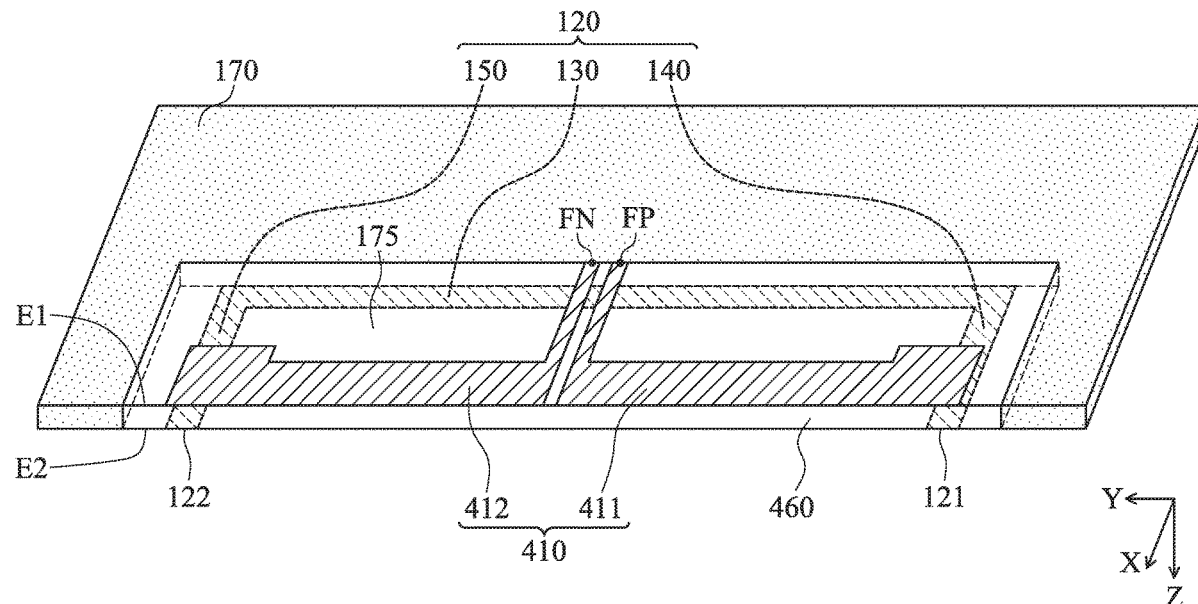400



(43) **Pub. Date:** **Sep. 10, 2020**

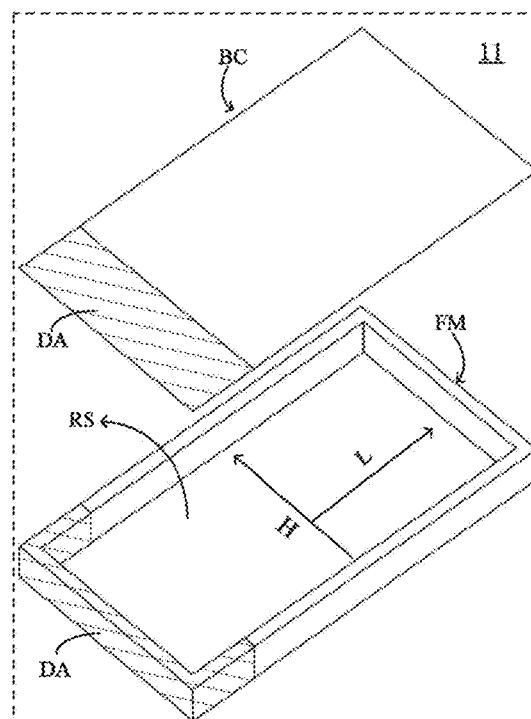



US 20200287581A1

(19) **United States**(12) **Patent Application Publication**
PARK et al.(10) **Pub. No.: US 2020/0287581 A1**(43) **Pub. Date: Sep. 10, 2020**(54) **SMALL ANTENNA APPARATUS AND
METHOD FOR CONTROLLING THE SAME**(71) Applicant: **Samsung Electronics Co., Ltd.,**
Suwon-si (KR)(72) Inventors: **Jungsik PARK**, Bucheon-si (KR);
Sooung CHUN, Suwon-si (KR)(21) Appl. No.: **16/884,487**(22) Filed: **May 27, 2020****Related U.S. Application Data**(63) Continuation of application No. 16/155,248, filed on
Oct. 9, 2018, now Pat. No. 10,680,671, which is a
continuation of application No. 15/082,280, filed on
Mar. 28, 2016, now Pat. No. 10,128,883, which is a
continuation of application No. 13/727,205, filed on
Dec. 26, 2012, now Pat. No. 9,306,288.**Foreign Application Priority Data**


Jan. 13, 2012 (KR) 10-2012-0004448

Publication Classification(51) **Int. Cl.****H04B 1/18** (2006.01)**H01Q 1/24** (2006.01)**H01Q 9/14** (2006.01)**H01Q 9/42** (2006.01)**H01Q 9/16** (2006.01)**H04W 88/02** (2006.01)**H01Q 1/48** (2006.01)(52) **U.S. Cl.**CPC **H04B 1/18** (2013.01); **H01Q 1/243**(2013.01); **H01Q 9/145** (2013.01); **H04B****1/0458** (2013.01); **H01Q 9/16** (2013.01);**H04W 88/02** (2013.01); **H01Q 1/48** (2013.01);**H01Q 9/42** (2013.01)

(57)

ABSTRACT

An antenna apparatus for a mobile terminal is provided. The antenna apparatus includes an antenna pattern, a first electric circuit and a second electric circuit respectively connected between both ends of the antenna pattern and a system ground, and a third electric circuit disposed between the antenna pattern and a feeding line, wherein the first electric circuit and the second electric circuit extend electrical wavelengths of the antenna pattern and the third electric circuit increases input impedance matching.

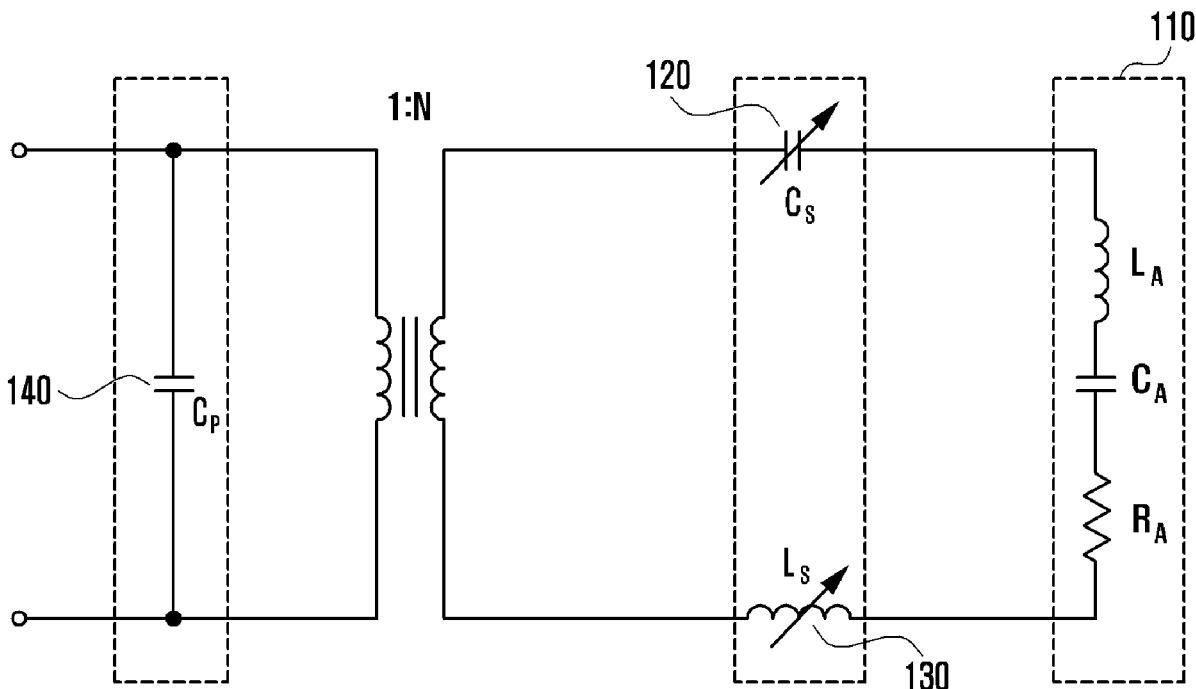



US 20200295445A1

(19) **United States**(12) **Patent Application Publication**
TSENG et al.(10) **Pub. No.: US 2020/0295445 A1**(43) **Pub. Date: Sep. 17, 2020**(54) **MOBILE DEVICE****Publication Classification**(71) Applicant: **Quanta Computer Inc.**, Taoyuan City (TW)(72) Inventors: **Yi-Ling TSENG**, Taoyuan City (TW);
Chung-Hung LO, Taoyuan City (TW);
Chin-Lung TSAI, Taoyuan City (TW);
Ching-Hai CHIANG, Taoyuan City (TW);
Kuan-Hsien LEE, Taoyuan City (TW);
Ying-Cong DENG, Taoyuan City (TW);
Chung-Ting HUNG, Taoyuan City (TW)(51) **Int. Cl.****H01Q 1/36** (2006.01)**H01Q 9/28** (2006.01)**H01Q 1/22** (2006.01)(52) **U.S. Cl.**CPC **H01Q 1/36** (2013.01); **H01Q 1/2283** (2013.01); **H01Q 9/285** (2013.01)


(57)

ABSTRACT

A mobile device includes a metal mechanism element, a dielectric substrate, and a feeding radiation element. The metal mechanism element has an open slot. The open slot substantially has an L-shape. The dielectric substrate is adjacent to the metal mechanism element. The feeding radiation element has a feeding point. The feeding radiation element is disposed on the dielectric substrate. The feeding radiation element at least partially extends along the open slot. An antenna structure is formed by the feeding radiation element and the open slot of the metal mechanism element. The antenna structure covers a first frequency band, a second frequency band, and a third frequency band.

(21) Appl. No.: **16/550,755**(22) Filed: **Aug. 26, 2019**(30) **Foreign Application Priority Data**

Mar. 15, 2019 (TW) 108108755

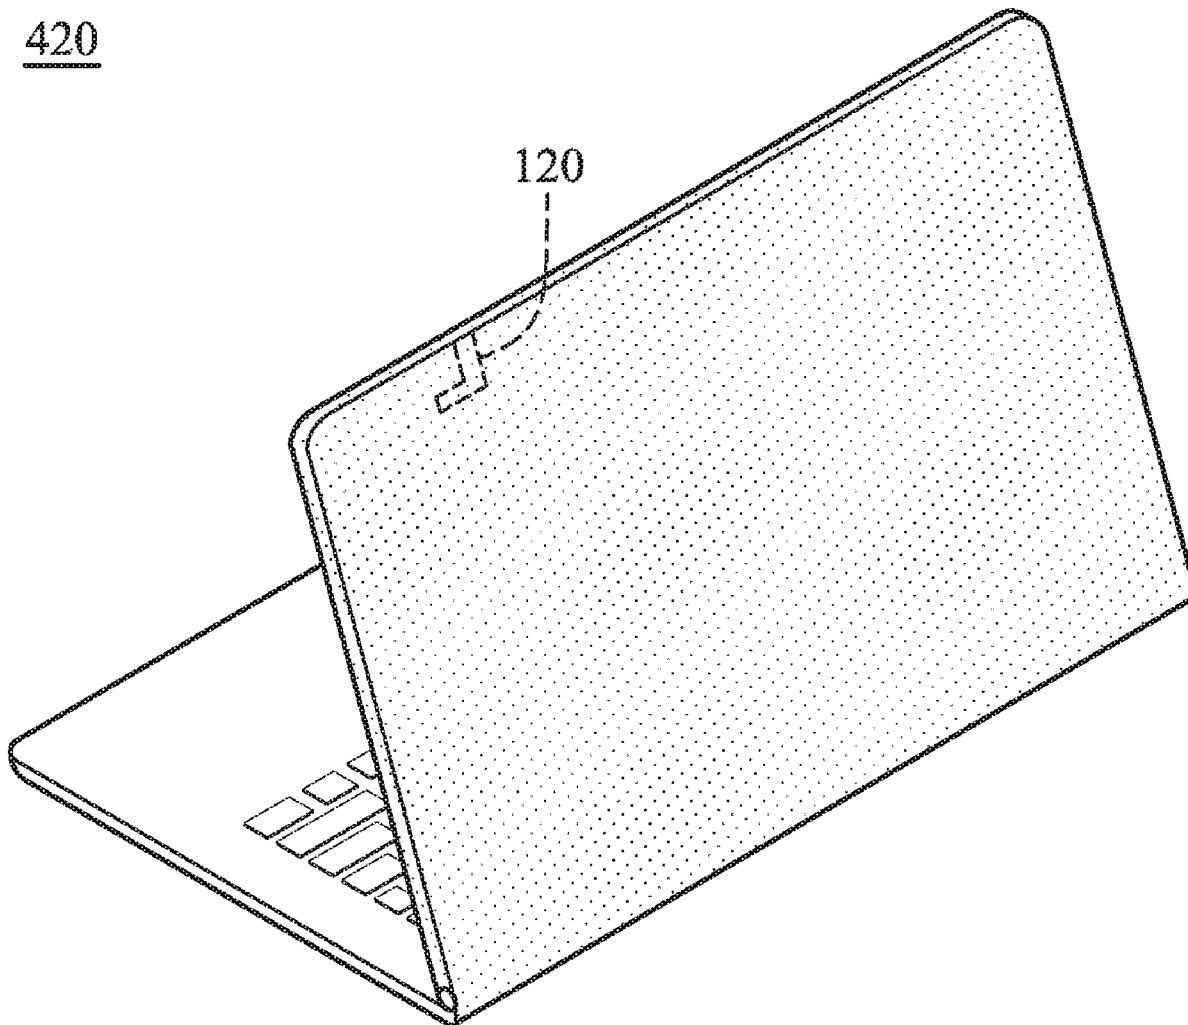420



US 20200295449A1

(19) **United States**(12) **Patent Application Publication**
HAMABE(10) **Pub. No.: US 2020/0295449 A1**(43) **Pub. Date: Sep. 17, 2020**(54) **ANTENNA DEVICE****Publication Classification**(71) Applicant: **Panasonic Intellectual Property Management Co., Ltd.**, Osaka (JP)(72) Inventor: **Taichi HAMABE**, Kanagawa (JP)(21) Appl. No.: **16/885,988**(22) Filed: **May 28, 2020**(51) **Int. Cl.****H01Q 1/38** (2006.01)**H01Q 1/48** (2006.01)**H01Q 1/24** (2006.01)**H01Q 5/378** (2006.01)**H01Q 9/04** (2006.01)(52) **U.S. Cl.**CPC **H01Q 1/38** (2013.01); **H01Q 1/48**(2013.01); **H01Q 9/045** (2013.01); **H01Q****5/378** (2015.01); **H01Q 1/24** (2013.01)**Related U.S. Application Data**

(63) Continuation of application No. PCT/JP2018/043676, filed on Nov. 28, 2018.


Foreign Application Priority Data

Nov. 30, 2017 (JP) 2017-231213

(57)

ABSTRACT

An antenna device of the present disclosure includes a substrate having an artificial magnetic conductor, a plurality of antenna conductors disposed on the substrate, and a parasitic conductor disposed on the substrate. The parasitic conductor is apart from and adjacent to the plurality of antenna conductors.

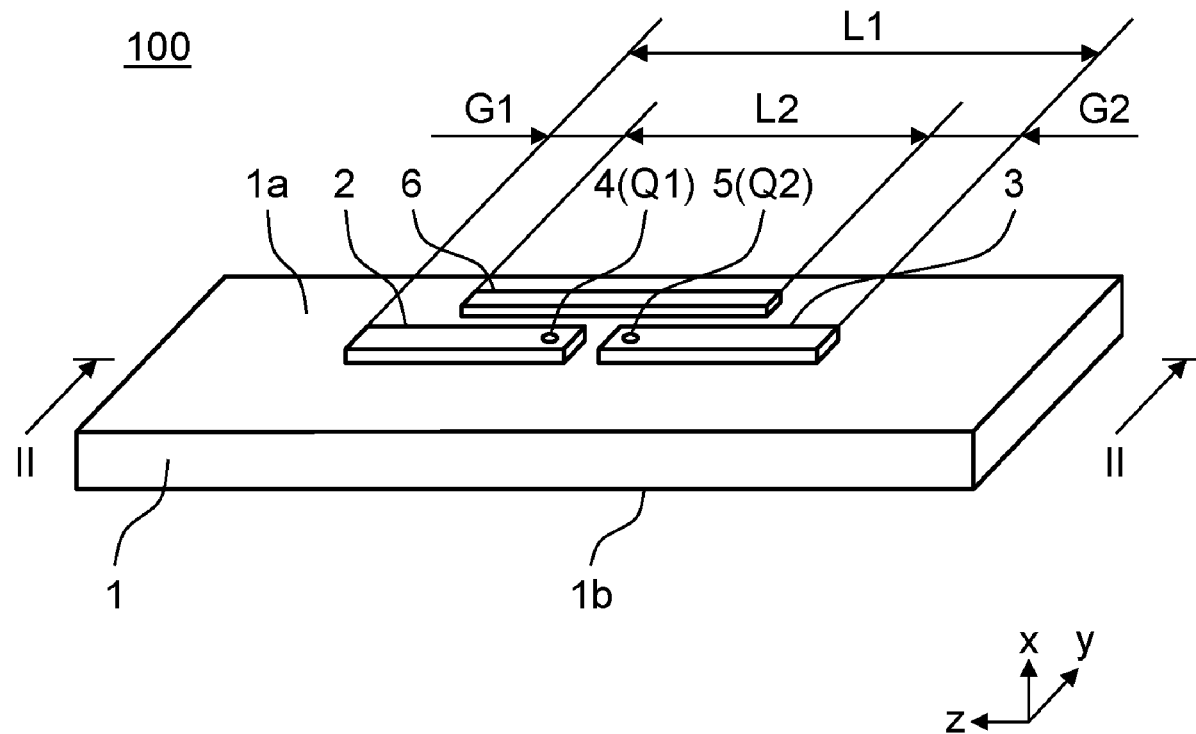



US 20200295463A1

(19) **United States**(12) **Patent Application Publication**
YAMADA et al.(10) **Pub. No.: US 2020/0295463 A1**(43) **Pub. Date: Sep. 17, 2020**(54) **ANTENNA ELEMENT, ANTENNA MODULE,
AND COMMUNICATION DEVICE****Publication Classification**(71) Applicant: **Murata Manufacturing Co., Ltd.**,
Kyoto (JP)(72) Inventors: **Yoshiki YAMADA**, Kyoto (JP); **Kaoru
SUDO**, Kyoto (JP)(51) **Int. Cl.****H01Q 9/04** (2006.01)**H01Q 5/35** (2006.01)**H01Q 3/26** (2006.01)(52) **U.S. Cl.**CPC **H01Q 9/0407** (2013.01); **H01Q 3/26**
(2013.01); **H01Q 5/35** (2015.01)(21) Appl. No.: **16/890,302**(22) Filed: **Jun. 2, 2020****Related U.S. Application Data**(63) Continuation of application No. PCT/JP2019/
032248, filed on Aug. 19, 2019.(30) **Foreign Application Priority Data**

Aug. 20, 2018 (JP) 2018-153806

ABSTRACT

A patch antenna includes a ground conductor pattern, feeding conductor patterns (11, 12), and a feed line (15). The feeding conductor patterns (11, 12) are disposed on the same side with respect to the ground conductor pattern and are of different sizes. The feeding conductor pattern (11) has feed points (111, 112) for direct feeding through the feed line. The feeding conductor pattern (12) has a feed point (121) for direct feeding through the feed line and a feed point (122) for capacitive feeding through the feed line. The feed points (111, 112) are opposite to each other with respect to a center point of the feeding conductor pattern (11). The feed points (121, 122) are opposite to each other with respect to a center point of the feeding conductor pattern (12).

