



US011876279B2

(12) **United States Patent
Harper**

(10) **Patent No.: US 11,876,279 B2**
(45) **Date of Patent: Jan. 16, 2024**

(54) **HYBRID CAVITY MODE ANTENNA**

(56)

References Cited

(71) Applicant: **Microsoft Technology Licensing, LLC**,
Redmond, WA (US)

(72) Inventor: **Marc Harper**, Snohomish, WA (US)

(73) Assignee: **Microsoft Technology Licensing, LLC**,
Redmond, WA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 558 days.

U.S. PATENT DOCUMENTS

7,511,670	B2	3/2009	Rao et al.
8,880,132	B2	11/2014	Kwon et al.
9,673,511	B2	6/2017	Lee et al.
9,917,346	B2	3/2018	Ramachandran et al.
10,374,289	B2	8/2019	Hu et al.
10,511,082	B2	12/2019	Perez et al.
10,944,153	B1 *	3/2021	Yarga
2013/0278480	A1	10/2013	McMillin et al.

(Continued)

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **16/887,209**

CN 108270076 A 7/2018

(22) Filed: **May 29, 2020**

OTHER PUBLICATIONS

(65) **Prior Publication Data**

US 2021/0265735 A1 Aug. 26, 2021

Antenna Theory: A Review, Balanis, Proc. IEEE vol. 80 No Jan. 1,
1992 (Year: 1992).*

(Continued)

Primary Examiner — Graham P Smith

Assistant Examiner — Amal Patel

(74) *Attorney, Agent, or Firm* — Holzer Patel Drennan

(57)

ABSTRACT

A communication device includes a metal chassis, a printed circuit board positioned within the metal chassis, and a hybrid cavity mode antenna. The hybrid cavity mode antenna includes a conductive wall defining at least a portion of a cavity, wherein the cavity is further defined by one or more surfaces of the metal chassis and the printed circuit board, and an electrically-fed antenna configured to radiate a first radiofrequency signal in a first frequency range. The electrically-fed antenna is electrically driven from the printed circuit board of the communication device. The electrically-fed antenna is positioned within the cavity to drive the cavity to radiate a second radiofrequency signal in a second frequency range.

Related U.S. Application Data

(60) Provisional application No. 62/981,129, filed on Feb.
25, 2020.

(51) **Int. Cl.**

H01Q 13/18 (2006.01)

H01Q 9/40 (2006.01)

H01Q 7/00 (2006.01)

H05K 1/02 (2006.01)

(52) **U.S. Cl.**


CPC **H01Q 13/18** (2013.01); **H01Q 7/00**
(2013.01); **H01Q 9/40** (2013.01); **H05K**
1/0243 (2013.01)

(58) **Field of Classification Search**

CPC H01Q 7/00; H01Q 9/40; H01Q 13/18;
H05K 1/0243

See application file for complete search history.

24 Claims, 6 Drawing Sheets

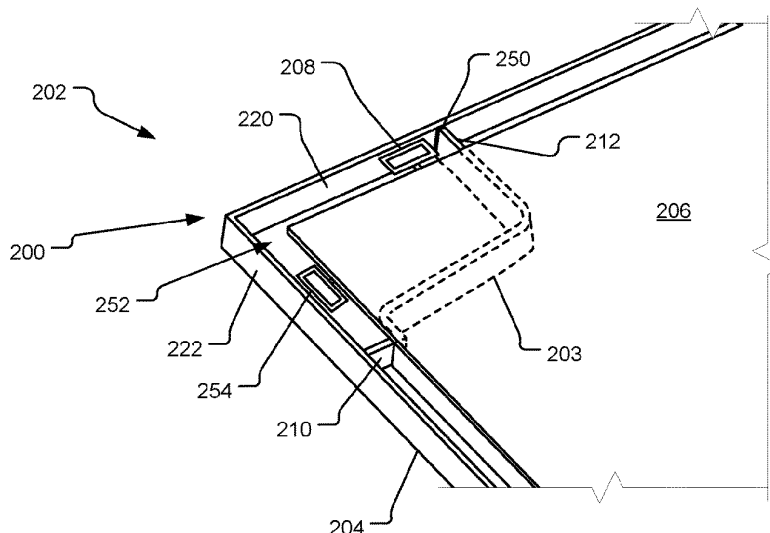



US011876285B2

(12) **United States Patent**
Chang et al.

(10) **Patent No.:** **US 11,876,285 B2**
(45) **Date of Patent:** **Jan. 16, 2024**

(54) **ANTENNA APPARATUS AND TERMINAL**

(71) Applicant: **Huawei Technologies Co., Ltd.**,
Shenzhen (CN)

(72) Inventors: **Le Chang**, Shenzhen (CN); **Kunpeng Wei**, Shenzhen (CN)

(73) Assignee: **HUAWEI TECHNOLOGIES CO. LTD.**, Shenzhen (CN)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 374 days.

(21) Appl. No.: **17/418,515**

(22) PCT Filed: **Dec. 27, 2018**

(86) PCT No.: **PCT/CN2018/124495**

§ 371 (c)(1),

(2) Date: **Jun. 25, 2021**

(87) PCT Pub. No.: **WO2020/133111**

PCT Pub. Date: **Jul. 2, 2020**

(65) **Prior Publication Data**

US 2022/0123456 A1 Apr. 21, 2022

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 5/40 (2015.01)

H01Q 13/10 (2006.01)

H01Q 21/24 (2006.01)

H01Q 21/28 (2006.01)

H01Q 1/38 (2006.01)

(52) **U.S. Cl.**

CPC **H01Q 1/243** (2013.01); **H01Q 5/40** (2015.01); **H01Q 13/10** (2013.01); **H01Q 21/24** (2013.01); **H01Q 21/28** (2013.01); **H01Q 1/38** (2013.01)

(58) **Field of Classification Search**

CPC H01Q 1/243; H01Q 13/10; H01Q 1/38;
H01Q 21/28; H01Q 5/40; H01Q 21/24;
H01Q 9/40

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2015/0048982 A1* 2/2015 Wang H01Q 13/106
343/751

2015/0303568 A1 10/2015 Yarga et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 104103888 A 10/2014

CN 204481122 U 7/2015

(Continued)

OTHER PUBLICATIONS

Ban, Y., et al., "4G/5G Multiple Antennas for Future Multi-Mode Smartphone Applications," Jun. 21, 2016, 8 pages.

(Continued)


Primary Examiner — Joseph J Lauture

(74) *Attorney, Agent, or Firm* — Conley Rose, P.C.

(57) **ABSTRACT**

A terminal comprises a printed circuit board (PCB), a PCB floor, and a rear cover. The metal frame is disposed at edges of the PCB floor. The PCB floor is disposed between the PCB and the rear cover, and the PCB floor is used to ground electronic components. The antenna apparatus may include a split antenna formed by a split provided on the metal frame, and a slot antenna formed by a slot connecting to the split. The slot may be connected to the split at a middle position on one side of the slot, and the slot may be provided on the metal frame of the terminal or on a PCB floor of the terminal.

20 Claims, 16 Drawing Sheets

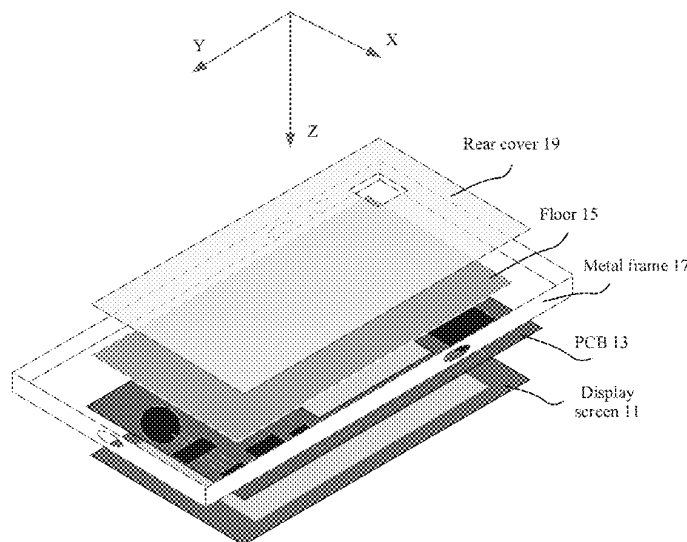



(10) **Patent No.:** US 11,881,614 B2
(45) **Date of Patent:** Jan. 23, 2024

H01Q 1/50; H01Q 5/10; H01Q 5/307;
H01Q 5/314; H01Q 1/46; H01Q 1/00;
H04M 1/0274; H04M 1/0249; H04M
1/0277

See application file for complete search history.

(56) **References Cited**

2010/0039329	A1	2/2010	Chen et al.
2012/0274538	A1	11/2012	Tsou et al.

FOREIGN PATENT DOCUMENTS

CN	102956953	A	3/2013
CN	103296385	A	9/2013

(Continued)

OTHER PUBLICATIONS

Intellectual property India, Office Action Issued in Application No. 201947047177, dated Dec. 6, 2021, (5p).

(Continued)

Primary Examiner — Hai V Tran


Assistant Examiner — Bamidele A Immanuel

(74) *Attorney, Agent, or Firm* — Arch & Lake LLP

(57) **ABSTRACT**

A mobile terminal and an antenna radiation method of the mobile terminal are provided. The mobile terminal includes a frame employed as an antenna, the frame having a feed point; an antenna bracket positioned within the frame; a first metal sheet positioned on the antenna bracket, and coupled to the feed point; and a second metal sheet positioned on the antenna bracket, a gap being positioned between the second metal sheet and the first metal sheet, the second metal sheet being coupled to the first metal sheet via the gap for feeding.

18 Claims, 3 Drawing Sheets

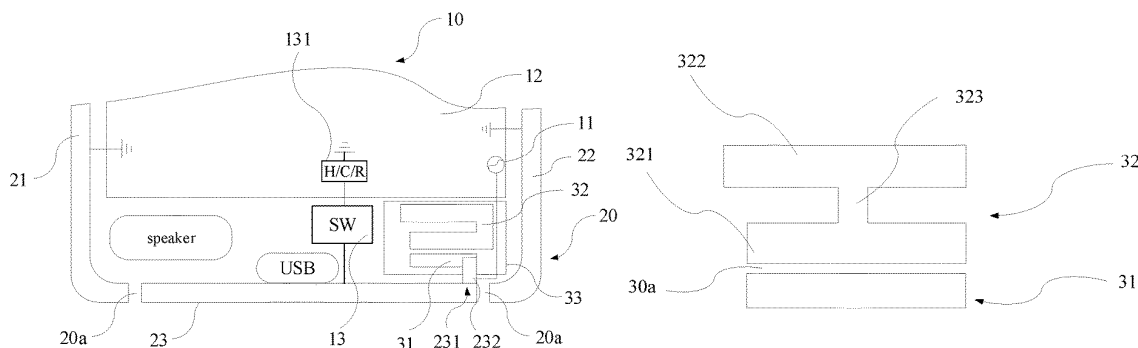



US011881630B2

(12) **United States Patent**
Khripkov et al.

(10) **Patent No.:** **US 11,881,630 B2**
(45) **Date of Patent:** **Jan. 23, 2024**

(54) **BEAM STEERING ANTENNA STRUCTURE
AND ELECTRONIC DEVICE COMPRISING
SAID STRUCTURE**

(71) Applicant: **Huawei Technologies Co., Ltd.**,
Shenzhen (CN)

(72) Inventors: **Alexander Khripkov**, Helsinki (FI);
Janne Ilvonen, Helsinki (FI); **Ruiyuan
Tian**, Helsinki (FI); **Jari Kristian Van
Wongerghem**, Munich (DE); **Jian Ou**,
Munich (DE); **Dongxing Tu**, Shenzhen
(CN); **Zlatoljub Milosavljevic**, Helsinki
(FI); **Hongting Luo**, Shanghai (CN)

(73) Assignee: **HUAWEI TECHNOLOGIES CO.,
LTD.**, Shenzhen (CN)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 333 days.

(21) Appl. No.: **17/420,612**

(22) PCT Filed: **Jan. 3, 2019**

(86) PCT No.: **PCT/EP2019/050095**

§ 371 (c)(1),

(2) Date: **Jul. 2, 2021**

(87) PCT Pub. No.: **WO2020/141018**

PCT Pub. Date: **Jul. 9, 2020**

(65) **Prior Publication Data**

US 2022/0085497 A1 Mar. 17, 2022

(51) **Int. Cl.**
H01Q 1/00 (2006.01)
H01Q 3/26 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **H01Q 3/26** (2013.01); **H04M 1/0266**
(2013.01); **H01Q 1/288** (2013.01); **H01Q 3/00**
(2013.01); **H01Q 3/24** (2013.01)

(58) **Field of Classification Search**

CPC .. **H01Q 3/26**; **H01Q 3/24**; **H01Q 3/00**; **H01Q**
1/241; **H01Q 1/288**; **H01Q 1/0266**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,667,290 B2 5/2017 Ouyang et al.

9,905,922 B2 2/2018 Lee et al.

(Continued)

FOREIGN PATENT DOCUMENTS

WO 2016174699 A1 11/2016


Primary Examiner — Joseph J Lauture

(74) Attorney, Agent, or Firm — Conley Rose, P.C.

(57) **ABSTRACT**

A beam steering antenna structure comprises a stacked antenna module and a first conductive component. The antenna module comprises a first substrate and a second substrate arranged superjacent such that main planes of the substrates extend in parallel. The first substrate comprises a first antenna array transmitting and receiving a first radiation beam. The second substrate comprises a second antenna array transmitting and receiving a second radiation beam. The first conductive component extends adjacent to the antenna module and is at least partially separated from the antenna module in a first direction perpendicular to the main plane of the conductive component. The antenna module is coupled to the conductive component by means of at least one of a galvanic, capacitive, or inductive coupling. At least one of the first and the second radiation beams is at least partially steered away from the other one by the first conductive component.

20 Claims, 4 Drawing Sheets

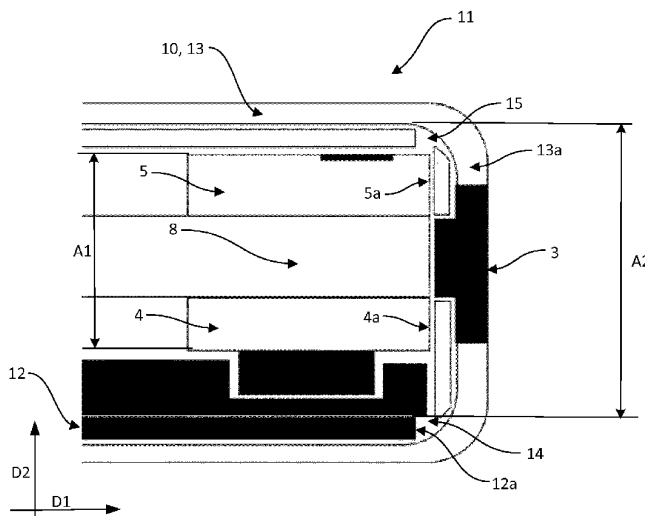



US011881636B2

(12) **United States Patent**
Reitner et al.

(10) **Patent No.:** **US 11,881,636 B2**
(45) **Date of Patent:** **Jan. 23, 2024**

(54) **PRINTED CIRCUIT BOARD ANTENNA**

(71) Applicant: **BSH Hausgeraete GmbH**, Munich
(DE)

(72) Inventors: **Josef Reitner**, Donaustauf (DE);
Ludwig Stoeckl, Undorf (DE)

(73) Assignee: **BSH Hausgeraete GmbH**, Munich
(DE)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 296 days.

(21) Appl. No.: **17/441,548**

(22) PCT Filed: **Apr. 2, 2020**

(86) PCT No.: **PCT/EP2020/059388**

§ 371 (c)(1),

(2) Date: **Sep. 21, 2021**

(87) PCT Pub. No.: **WO2020/212153**

PCT Pub. Date: **Oct. 22, 2020**

(65) **Prior Publication Data**

US 2022/0181777 A1 Jun. 9, 2022

(30) **Foreign Application Priority Data**

Apr. 17, 2019 (DE) 102019205556.7

(51) **Int. Cl.**

H01Q 5/357 (2015.01)

H01Q 1/38 (2006.01)

(52) **U.S. Cl.**

CPC **H01Q 5/357** (2015.01); **H01Q 1/38**
(2013.01)

(58) **Field of Classification Search**

CPC H05B 6/6444; H05B 6/70; H05B 6/72;
H01Q 1/2291; H01Q 1/38; H01Q 1/48;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,300,908 B1 10/2001 Jecko et al.
7,196,664 B2 3/2007 Asai

(Continued)

FOREIGN PATENT DOCUMENTS

CN 1299525 A 6/2001
CN 1624976 A 6/2005

(Continued)


Primary Examiner — Monica C King

(74) *Attorney, Agent, or Firm* — Laurence A. Greenberg;
Werner H. Stemer; Ralph E. Locher

(57) **ABSTRACT**

A printed circuit board antenna contains an electrically conductive antenna structure on an outer layer of a printed circuit board, the antenna structure has a first resonance frequency. The printed circuit board antenna additionally contains an electrically conductive feed line to the antenna structure and an electrically conductive reference region on the outer layer. The reference region completely encloses the antenna structure with the exception of an insulating feed recess for the feed line and an insulating web recess. The web recess is arranged on the antenna structure face facing away from the feed line, and the reference region has a reference region web on the antenna structure face facing away from the feed line. The reference region web forms a resonator which is capacitively coupled to the antenna structure and has a second resonance frequency.

20 Claims, 5 Drawing Sheets

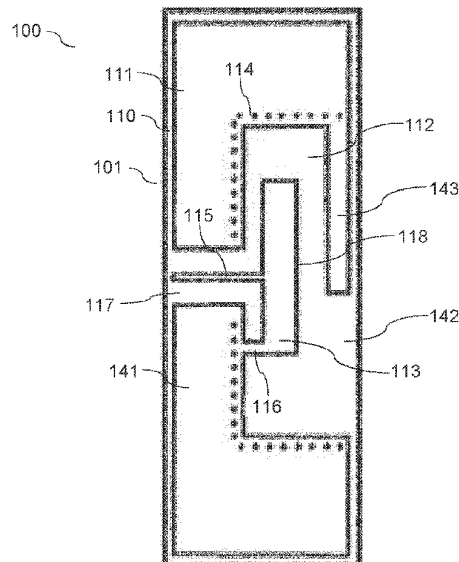



US011881638B2

(12) **United States Patent**
Canete Cabeza et al.

(10) **Patent No.:** **US 11,881,638 B2**
(45) **Date of Patent:** **Jan. 23, 2024**

(54) **ULTRA-LOW-PROFILE LOW FREQUENCY ANTENNA**

(71) Applicant: **PREMO, SA**, Campanillas (ES)

(72) Inventors: **Claudio Canete Cabeza**, Benalmadena (ES); **Francisco Ezequiel Navarro Perez**, Barcelona (ES); **Jorge Rodriguez**, Malaga (ES); **Sergio Cobos Reyes**, Malaga (ES); **Antonio Rojas Cuevas**, Malaga (ES)

(73) Assignee: **PREMO, SA**, Campanillas (ES)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 262 days.

(21) Appl. No.: **17/606,348**

(22) PCT Filed: **Feb. 20, 2020**

(86) PCT No.: **PCT/EP2020/054502**

§ 371 (c)(1),

(2) Date: **Oct. 25, 2021**

(87) PCT Pub. No.: **WO2020/216494**

PCT Pub. Date: **Oct. 29, 2020**

(65) **Prior Publication Data**

US 2022/0224011 A1 Jul. 14, 2022

(30) **Foreign Application Priority Data**

Apr. 24, 2019 (EP) 19382311

(51) **Int. Cl.**

H01Q 7/06 (2006.01)

H01Q 1/40 (2006.01)

H01Q 1/24 (2006.01)

(52) **U.S. Cl.**

CPC **H01Q 7/06** (2013.01); **H01Q 1/40** (2013.01); **H01Q 1/243** (2013.01)

(58) **Field of Classification Search**

CPC H01Q 7/06; H01Q 1/40; H01Q 1/243; H01Q 1/3241; H01Q 1/14; H01Q 1/2225;

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,042,411 B2 5/2006 Yagi et al.
2003/0222829 A1* 12/2003 Kitahara H01Q 7/08
343/788

(Continued)

FOREIGN PATENT DOCUMENTS

EP 2911244 A1 8/2015
EP 3033803 B1 5/2017

(Continued)

OTHER PUBLICATIONS

International Search Report and Written Opinion for PCT/EP2020/054502, 10 pages, dated Apr. 21, 2020.


Primary Examiner — David E Lotter

(74) *Attorney, Agent, or Firm* — Lucas & Mercanti, LLP

(57) **ABSTRACT**

An ultra-low-profile low frequency antenna including a magnetic core having coil winding channels in three intersecting axial directions orthogonal to each other, defining X-axis (X), Y-axis (Y) and Z-axis (Z), receiving respective X-coil (DX), Y-coil (DY), and Z-coil (DZ). A Z-coil winding channel surrounds the magnetic core around the Z-axis (Z), providing partial grooves confined between two parallel surfaces. The thickness of the magnetic core in the Z-axis (Z) is less than 1.2 mm. Each partial groove has a width in the Z-axis (Z) equal or less than 0.4 mm and its depth in a radial direction perpendicular to the Z-axis (Z) is at least two times of its width. The Z-coil (DZ) is wound within said groove and extends radially from $\frac{1}{3}$ to $\frac{2}{3}$ of the groove's depth. The outer edge of the Z-coil is at the entrance of the groove.

12 Claims, 6 Drawing Sheets

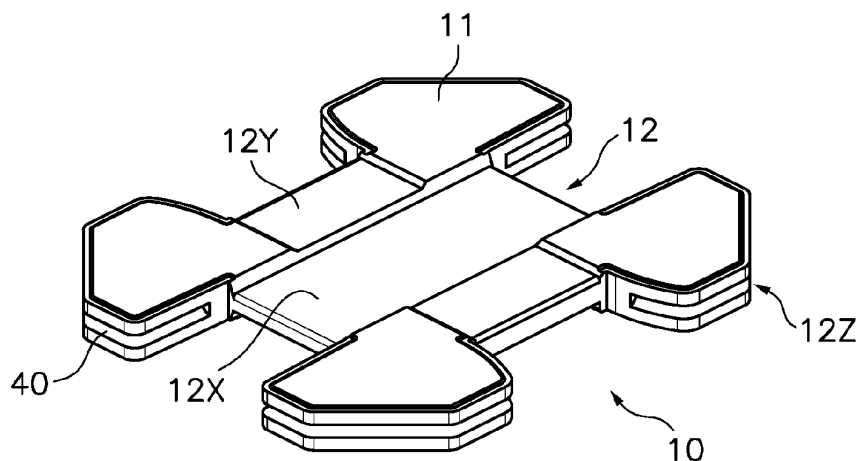



US011881640B2

(12) **United States Patent**
Sudo et al.

(10) **Patent No.:** **US 11,881,640 B2**
(45) **Date of Patent:** **Jan. 23, 2024**

(54) **ANTENNA ELEMENT, ANTENNA MODULE,
AND COMMUNICATION DEVICE**

(71) Applicant: **Murata Manufacturing Co., Ltd.,**
Kyoto (JP)

(72) Inventors: **Kaoru Sudo**, Kyoto (JP); **Hirotsugu**
Mori, Kyoto (JP); **Kengo Onaka**,
Kyoto (JP)

(73) Assignee: **MURATA MANUFACTURING CO.,**
LTD., Kyoto (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 451 days.

(21) Appl. No.: **17/169,726**

(22) Filed: **Feb. 8, 2021**

(65) **Prior Publication Data**
US 2021/0167506 A1 Jun. 3, 2021

Related U.S. Application Data

(63) Continuation of application No.
PCT/JP2019/030419, filed on Aug. 2, 2019.

(30) **Foreign Application Priority Data**

Aug. 9, 2018 (JP) 2018-150512

(51) **Int. Cl.**
H01Q 9/04 (2006.01)
H01Q 1/38 (2006.01)
H01Q 11/14 (2006.01)

(52) **U.S. Cl.**
CPC **H01Q 9/0407** (2013.01); **H01Q 1/38**
(2013.01); **H01Q 11/14** (2013.01)

(58) **Field of Classification Search**
CPC H01Q 9/0407; H01Q 1/38; H01Q 11/14
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2007/0273588 A1 * 11/2007 Kim H01Q 9/0407
343/700 MS

2008/0204324 A1 8/2008 Okamura et al.
(Continued)

FOREIGN PATENT DOCUMENTS

JP H09-064636 A 3/1997
JP 2003-332830 A 11/2003
(Continued)

OTHER PUBLICATIONS

International Search Report for PCT/JP2019/030419 dated Oct. 1,
2019.

Written Opinion for PCT/JP2019/030419 dated Oct. 1, 2019.



Primary Examiner — Dieu Hien T Duong

(74) *Attorney, Agent, or Firm* — Pearne & Gordon LLP

(57) **ABSTRACT**

An antenna element includes a dielectric substrate, a first ground electrode, a second ground electrode, a via conductor, and a radiation electrode. The dielectric substrate includes a first portion shaped like a flat plate and a second portion thinner than the first portion. The first ground electrode is arranged in the first portion. The second ground electrode is arranged in the second portion. The via conductor couples the first ground electrode and the second ground electrode. A distance between the radiation electrode and the first ground electrode in a first thickness direction is more than a distance between the radiation electrode and the second ground electrode in a second thickness direction. Part of the radiation electrode lies opposite to the first ground electrode without lying opposite to the second ground electrode.

9 Claims, 13 Drawing Sheets

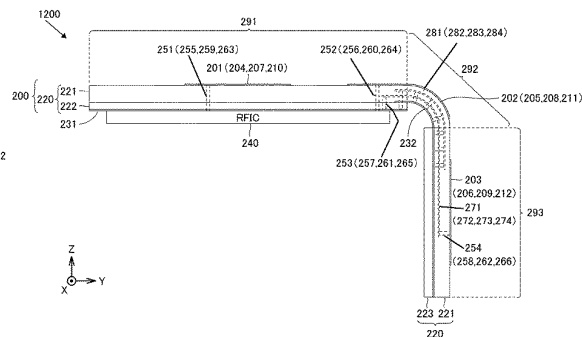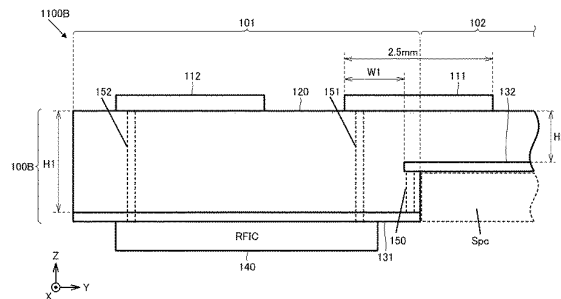



US011888239B2

(12) **United States Patent**
Hsu et al.

(10) **Patent No.:** **US 11,888,239 B2**
(45) **Date of Patent:** **Jan. 30, 2024**

(54) **ANTENNA APPARATUS AND ELECTRONIC DEVICE**

(71) Applicant: **Huawei Technologies Co., Ltd.**,
Shenzhen (CN)

(72) Inventors: **Chih-Wei Hsu**, Taipei (CN); **Dong Yu**,
Shanghai (CN); **Hangfei Tang**,
Shanghai (CN); **Zhiyuan Xie**, Shanghai
(CN)

(73) Assignee: **HUAWEI TECHNOLOGIES CO., LTD.**,
Shenzhen (CN)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 334 days.

(21) Appl. No.: **17/432,826**

(22) PCT Filed: **Feb. 7, 2020**

(86) PCT No.: **PCT/CN2020/074486**
§ 371 (c)(1),
(2) Date: **Aug. 20, 2021**

(87) PCT Pub. No.: **WO2020/168926**
PCT Pub. Date: **Aug. 27, 2020**

(65) **Prior Publication Data**
US 2022/0123469 A1 Apr. 21, 2022

(30) **Foreign Application Priority Data**
Feb. 22, 2019 (CN) 201910136437.0

(51) **Int. Cl.**
H01Q 5/392 (2015.01)
H01Q 1/24 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01Q 5/392** (2015.01); **H01Q 1/243**
(2013.01); **H01Q 1/36** (2013.01); **H01Q 1/44**
(2013.01);
(Continued)

(58) **Field of Classification Search**

CPC H01Q 1/243; H01Q 9/42; H01Q 1/22;
H01Q 5/328; H01Q 13/10; H01Q 1/24;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,060,167 B2 * 11/2011 Saitou H01Q 23/00
455/575.3
9,864,410 B2 * 1/2018 La G06F 1/1652
(Continued)

FOREIGN PATENT DOCUMENTS

CN 102800931 A 11/2012
CN 107465433 A 12/2017
(Continued)

OTHER PUBLICATIONS

Yan Yan et al, The Development of Wearable Technologies, vol. 34,
No. 6, Dec. 2015, 10 pages.


Primary Examiner — Vibol Tan

(74) *Attorney, Agent, or Firm* — Conley Rose, P.C.

(57) **ABSTRACT**

An antenna apparatus used in an electronic device having a flexible display that can be bent at a rotating shaft and that includes a primary screen and a secondary screen respectively configured on two sides of the rotating shaft. The antenna apparatus includes a first metal strip disposed on the primary screen frame close to one end of the rotating shaft, and a second metal strip disposed on the secondary screen frame close to the same end of the rotating shaft. The first metal strip is implemented as a plurality of antennas through dual-feed design. When the flexible display is in a folded state, the second metal strip is coupled to the first metal strip to generate radiation and is used as a parasitic antenna of the first metal strip.

20 Claims, 19 Drawing Sheets

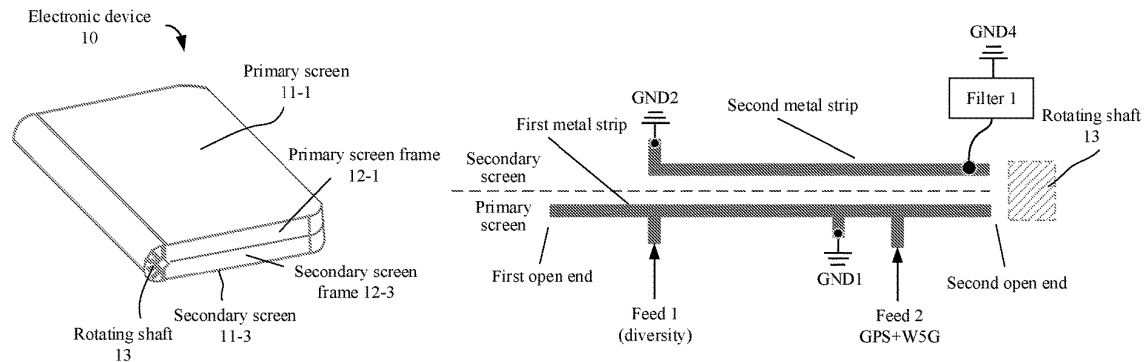



US011899492B2

(12) **United States Patent**
Lin et al.

(10) **Patent No.:** **US 11,899,492 B2**
(45) **Date of Patent:** **Feb. 13, 2024**

(54) **ELECTRONIC DEVICE**

(56) **References Cited**

(71) Applicant: **GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD.**, Dongguan (CN)

U.S. PATENT DOCUMENTS

10,079,425 B2 * 9/2018 Chun H01Q 1/22
10,879,589 B2 * 12/2020 Lim H01Q 5/342
(Continued)

(72) Inventors: **Shijie Lin**, Dongguan (CN); **Liang Gu**, Dongguan (CN)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD.**, Dongguan (CN)

CN 106095188 A 11/2016
CN 107887696 A 4/2018
(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 448 days.

OTHER PUBLICATIONS

Notification to Grant Patent dated Aug. 23, 2021 for Chinese Application No. 201811654714.9.

(21) Appl. No.: **17/355,626**

(Continued)

(22) Filed: **Jun. 23, 2021**

(65) **Prior Publication Data**

US 2021/0318720 A1 Oct. 14, 2021

Primary Examiner — Khai M Nguyen

(74) *Attorney, Agent, or Firm* — Sheppard, Mullin, Richter & Hampton LLP

Related U.S. Application Data

(63) Continuation of application No. PCT/CN2019/125936, filed on Dec. 17, 2019.

(57) **ABSTRACT**

(30) **Foreign Application Priority Data**

Dec. 29, 2018 (CN) 201811654714.9


The present disclosure relates to an electronic device including a rotation shaft, a first body and a second body which are foldable or unfoldable in relation to each other around the rotation shaft. The first body has a first end surface facing away from the rotation shaft and a second end surface connected between the first end surface and the rotation shaft. A first metal member is provided on the first body, includes a first and second parts connected in such a manner that the first metal member has a bent form, and constitutes a radiator of a first antenna set. The first part is arranged on the first end surface. The second part is arranged on the second end surface. A second metal member is provided on the second body, is grounded via a first switch component configured to adjust an electrical length of the second metal member.

(51) **Int. Cl.**
G06F 1/16 (2006.01)
H01Q 5/328 (2015.01)
(Continued)

(52) **U.S. Cl.**
CPC **G06F 1/1616** (2013.01); **G06F 1/1686** (2013.01); **H01Q 1/22** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC G06F 1/1616; G06F 1/1686; H01Q 1/243; H01Q 1/36; H01Q 5/328; H01Q 5/335;
(Continued)

19 Claims, 9 Drawing Sheets

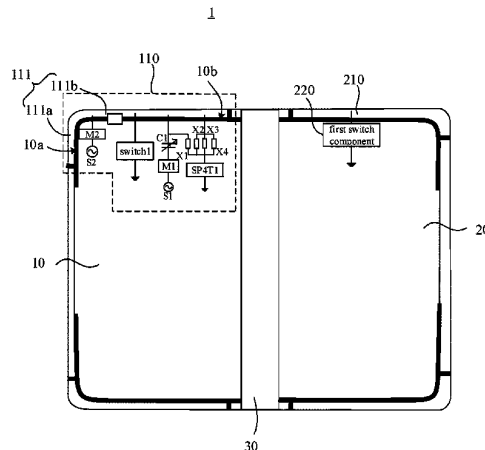



US011901641B2

(12) **United States Patent**
Vazquez et al.

(10) **Patent No.:** **US 11,901,641 B2**
(45) **Date of Patent:** **Feb. 13, 2024**

(54) **ELECTRONIC DEVICES WITH MULTIPLE
LOW BAND ANTENNAS**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)
(72) Inventors: **Enrique Ayala Vazquez**, Watsonville, CA (US); **Xu Han**, Santa Clara, CA (US); **Hongfei Hu**, Cupertino, CA (US); **Ming Chen**, Cupertino, CA (US); **Jingni Zhong**, Santa Clara, CA (US); **Erdinc Irci**, Sunnyvale, CA (US); **Salih Yarga**, Sunnyvale, CA (US); **Mohsen Salehi**, San Jose, CA (US); **Carlo Di Nallo**, Belmont, CA (US); **Ming-Ju Tsai**, Sunnyvale, CA (US); **Mattia Pascolini**, San Francisco, CA (US)

6,501,415	B1	12/2002	Viana et al.
7,471,175	B2	12/2008	Voss
8,711,040	B2	4/2014	Barbieri et al.
9,203,139	B2	12/2015	Zhu et al.
9,350,069	B2	5/2016	Pascolini et al.
10,476,167	B2	11/2019	Ayala Vazquez et al.
10,561,842	B2	2/2020	Yeh et al.
11,205,834	B2	12/2021	Ayala Vazquez et al.
11,322,840	B2	5/2022	Wang et al.
2022/0069468	A1 *	3/2022	Hsu H01Q 5/35
2022/0247070	A1 *	8/2022	Lee H04M 1/0214

* cited by examiner

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

Primary Examiner — David E Lotter

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 57 days.

(74) *Attorney, Agent, or Firm* — Treyz Law Group, P.C.;
Michael H. Lyons

(21) Appl. No.: **17/694,486**

(57) **ABSTRACT**

(22) Filed: **Mar. 14, 2022**

(65) **Prior Publication Data**

US 2023/0291124 A1 Sep. 14, 2023

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 21/28 (2006.01)
H01Q 1/38 (2006.01)


(52) **U.S. Cl.**
CPC **H01Q 21/28** (2013.01); **H01Q 1/241** (2013.01); **H01Q 1/38** (2013.01)

(58) **Field of Classification Search**
CPC H01Q 21/28; H01Q 1/241; H01Q 1/38;
H01Q 1/243; H01Q 13/10; H01Q 5/328;
H01Q 1/521

See application file for complete search history.

An electronic device may include first and second antennas formed from respective first and second segments of a housing. The first antenna may have a first feed coupled to the first segment by a first switch and coupled to the first segment by a first conductive trace. The second antenna may have a second feed coupled to the second segment by a second switch and coupled to the second segment by a second conductive trace. The first segment may be separated from the second segment by a single gap, a data connector may pass through the second segment, and the antennas may selectively cover a low band. Alternatively, the first segment may be separated from the second segment by a third segment and two gaps, the data connector may pass through the third segment, and the first and second antennas may concurrently cover the low band.

20 Claims, 9 Drawing Sheets

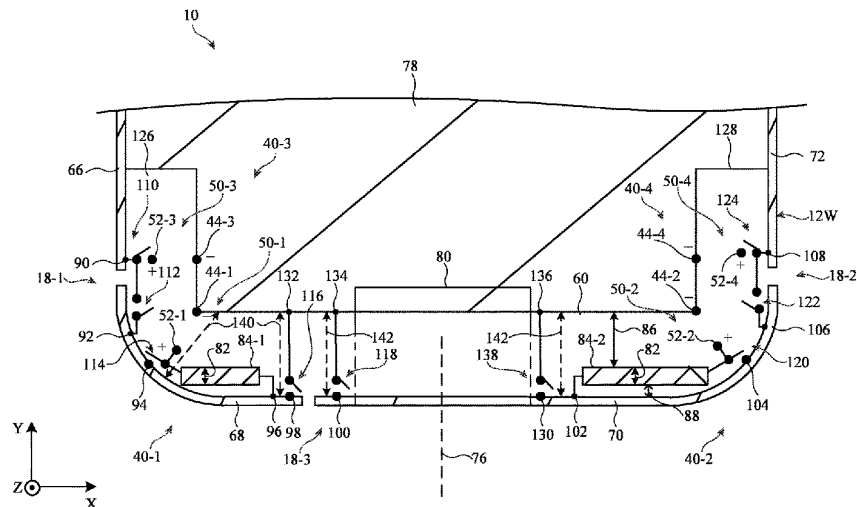



US011901647B2

(12) **United States Patent**
Hiraoka et al.

(10) **Patent No.:** **US 11,901,647 B2**
(45) **Date of Patent:** **Feb. 13, 2024**

(54) **ANTENNA DEVICE**

(71) Applicant: **Sony Group Corporation**, Tokyo (JP)

(72) Inventors: **Yoshiaki Hiraoka**, Tokyo (JP);
Yuichiro Suzuki, Tokyo (JP);
Takayoshi Ito, Tokyo (JP); **Tomihiko Omuro**, Tokyo (JP); **Toru Ozone**, Tokyo (JP); **Jin Sato**, Tokyo (JP)

(73) Assignee: **SONY GROUP CORPORATION**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 369 days.

(21) Appl. No.: **17/298,949**

(22) PCT Filed: **Dec. 13, 2018**

(86) PCT No.: **PCT/JP2018/045876**

§ 371 (c)(1),

(2) Date: **Jun. 2, 2021**

(87) PCT Pub. No.: **WO2020/121481**

PCT Pub. Date: **Jun. 18, 2020**

(65) **Prior Publication Data**

US 2022/0069467 A1 Mar. 3, 2022

(51) **Int. Cl.**
H01Q 5/35 (2015.01)
H01Q 9/42 (2006.01)

(Continued)

(52) **U.S. Cl.**
CPC **H01Q 5/35** (2015.01); **H01Q 1/22** (2013.01); **H01Q 1/2291** (2013.01); **H01Q 1/24** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC H01Q 5/35; H01Q 1/2291; H01Q 1/243; H01Q 9/42; H01Q 13/10; H01Q 1/48; H01Q 1/22; H01Q 1/24

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2015/0116169 A1* 4/2015 Ying H01Q 1/243
343/729
2015/0207228 A1* 7/2015 Oh H01Q 1/243
343/702

(Continued)

FOREIGN PATENT DOCUMENTS

JP 2005-142739 A 6/2005
JP 2011-23853 A 2/2011

(Continued)

OTHER PUBLICATIONS

International Search Report and Written Opinion dated Jan. 29, 2019, received for PCT Application PCT/JP2018/045876, Filed on Dec. 13, 2018, 9 pages including English Translation.


Primary Examiner — Hai V Tran

(74) *Attorney, Agent, or Firm* — XSENSUS LLP

(57) **ABSTRACT**

To optimize space efficiency in mounting a plurality of antennas compatible with different frequencies. According to the present disclosure, provided is an antenna device including a first antenna that operates at a first frequency, and a second antenna that is provided adjacent to the first antenna, operates at a second frequency lower than the first frequency, and has a ground potential connected to a grounding wire provided at the first antenna.

18 Claims, 6 Drawing Sheets

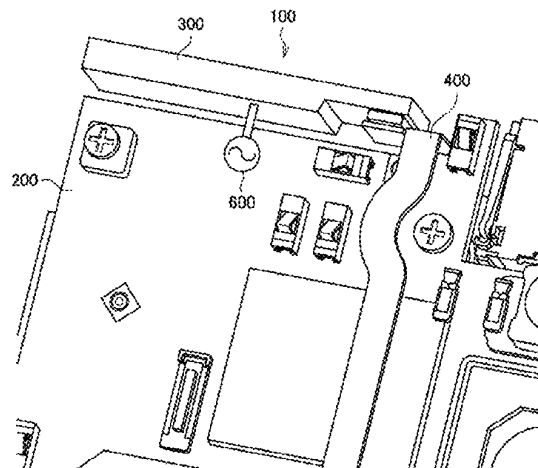



US011901652B2

(12) **United States Patent**
Wu et al.

(10) **Patent No.:** **US 11,901,652 B2**
(45) **Date of Patent:** **Feb. 13, 2024**

(54) **ANTENNA WITH MULTIPLE FREQUENCY RANGES AND ELECTRONIC DEVICE**

(71) Applicants: **Futaijing Precision Electronics (Yantai) Co., Ltd.**, Yantai (CN); **HON HAI PRECISION INDUSTRY CO., LTD.**, New Taipei (TW)

(72) Inventors: **Ching-Ling Wu**, New Taipei (TW); **Hsiang-Neng Wen**, New Taipei (TW); **Jia-Hung Hsiao**, New Taipei (TW); **Chih-Wei Liao**, New Taipei (TW); **Yung-Yu Tai**, New Taipei (TW)

(73) Assignees: **Futaijing Precision Electronics (Yantai) Co., Ltd.**, Yantai (CN); **HON HAI PRECISION INDUSTRY CO., LTD.**, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 92 days.

(21) Appl. No.: **17/708,172**

(22) Filed: **Mar. 30, 2022**

(65) **Prior Publication Data**
US 2023/0275353 A1 Aug. 31, 2023

(30) **Foreign Application Priority Data**
Feb. 25, 2022 (CN) 202210179676.6

(51) **Int. Cl.**
H01Q 1/52 (2006.01)
H01Q 9/42 (2006.01)
H01Q 5/45 (2015.01)

(52) **U.S. Cl.**
CPC **H01Q 9/42** (2013.01); **H01Q 1/521** (2013.01); **H01Q 5/45** (2015.01)

(58) **Field of Classification Search**
CPC H01Q 1/52; H01Q 1/521; H01Q 1/523; H01Q 5/40; H01Q 5/42; H01Q 5/45; H01Q 5/47; H01Q 5/48; H01Q 5/49
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

10,347,977	B1 *	7/2019	Kim		H01Q 9/30
2013/0099980	A1	4/2013	Hayashi		
2017/0271759	A1 *	9/2017	Liu		H01Q 9/42
2021/0151887	A1 *	5/2021	Wang		H01Q 1/521

FOREIGN PATENT DOCUMENTS

CN	106058491	A	10/2016
CN	107706529	A	2/2018
TW	201635643	A	10/2016

* cited by examiner

Primary Examiner — Daniel Munoz

(74) *Attorney, Agent, or Firm* — ScienBiziP, P.C.

(57) **ABSTRACT**

An antenna with multi frequency ranges for communication in more bandwidths includes a dielectric substrate, a first subantenna, a second subantenna, a third subantenna, and first, second, and third isolators. The first to third subantennas are connected to the dielectric substrate and connect with signal sources. The first to third isolators are connected to the dielectric substrate and arranged to be between the first to third subantennas, to improve signal isolation between the subantennas. The application also provides an electronic device with the antenna having multiple frequency ranges. The antenna and the electronic device with the antenna enjoys reduced cross-interference between signals of the first subantenna, the second subantenna, and the third subantenna. The disclosure also provides an electronic device with the antenna.

17 Claims, 4 Drawing Sheets

