



US007864116B2

(12) **United States Patent**
Kurashima et al.

(10) **Patent No.:** **US 7,864,116 B2**
(45) **Date of Patent:** **Jan. 4, 2011**

(54) **MOUNTING STRUCTURE OF ANTENNA
DEVICE**

(75) Inventors: **Shigemi Kurashima**, Shinagawa (JP);
Masahiro Yanagi, Shinagawa (JP);
Takashi Yuba, Shinagawa (JP); **Satoshi**
Sakurai, Shinagawa (JP); **Takashi**
Arita, Shinagawa (JP)

(73) Assignee: **Fujitsu Component Limited**, Tokyo
(JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 88 days.

(21) Appl. No.: **12/081,685**

(22) Filed: **Apr. 18, 2008**

(65) **Prior Publication Data**

US 2009/0115683 A1 May 7, 2009

(30) **Foreign Application Priority Data**

Nov. 5, 2007 (JP) 2007-286944

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/878,**
343/700 MS, 702, 749, 846, 858

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,642,892	B2 *	11/2003	Masaki et al.	343/702
2005/0024274	A1 *	2/2005	Byun et al.	343/702
2006/0097925	A1 *	5/2006	Lee	343/700 MS
2008/0316115	A1 *	12/2008	Hill et al.	343/702
2009/0213012	A1 *	8/2009	Jiang et al.	343/700 MS

FOREIGN PATENT DOCUMENTS

JP	2000-196327	7/2000
----	-------------	--------

OTHER PUBLICATIONS

Takuya, Taniguchi et al., "An Omnidirectional and Low-VSWR Antenna for the FCC-Approved UWB Frequency Band", General Conference of the Institute of Electronics, Information, and Communication Engineers in 2003, 3 pages.

* cited by examiner

Primary Examiner—Jacob Y Choi


Assistant Examiner—Kyana R Robinson

(74) *Attorney, Agent, or Firm*—Staas & Halsey LLP

(57) **ABSTRACT**

A mounting structure of an antenna device for mounting the antenna device composed of a ground part and an element part on an electronic apparatus is disclosed. The ground part is mounted on the electronic apparatus so as to be substantially overlapped with a conductive part of the electronic apparatus.

6 Claims, 9 Drawing Sheets

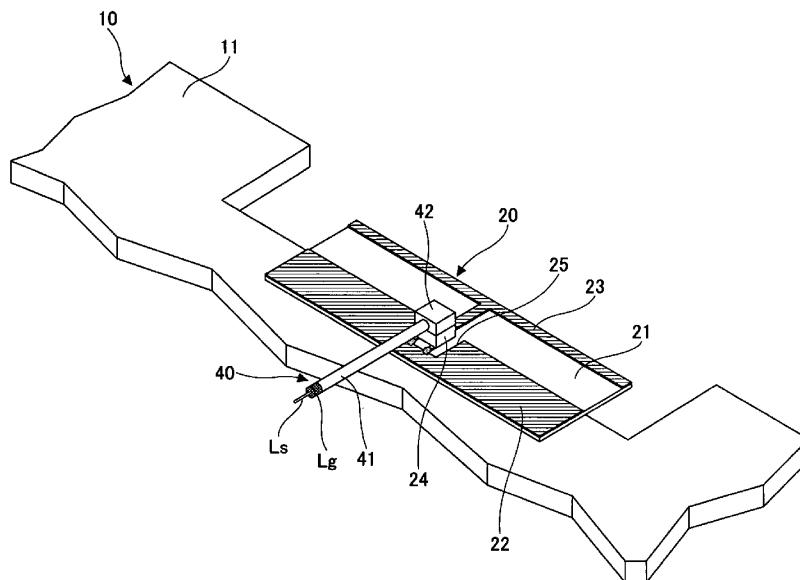

Acrobat 文件



US007864120B2

(12) **United States Patent**
Dou et al.

(10) **Patent No.:** **US 7,864,120 B2**
(45) **Date of Patent:** **Jan. 4, 2011**

(54) **HIGH ISOLATION ANTENNA DESIGN FOR REDUCING FREQUENCY COEXISTENCE INTERFERENCE**

(75) Inventors: **Weiping Dou**, San Jose, CA (US); **Avi Kopelman**, Sunnyvale, CA (US)

(73) Assignee: **Palm, Inc.**, Sunnyvale, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 617 days.

(21) Appl. No.: **11/756,455**

(22) Filed: **May 31, 2007**

(65) **Prior Publication Data**

US 2008/0297419 A1 Dec. 4, 2008

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702**

(58) **Field of Classification Search** 343/702, 343/821, 729, 876, 893
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,204,817 B1 * 3/2001 Edvardsson 343/702
6,831,616 B1 12/2004 Vice
6,909,401 B2 6/2005 Rutfors
7,202,757 B2 4/2007 De Flaviis
7,352,332 B1 * 4/2008 Betts-LaCroix et al. 343/729

7,511,673 B2 * 3/2009 Man et al. 343/702
2004/0110481 A1 6/2004 Navsariwala
2005/0116869 A1 6/2005 Siegler et al.
2005/0176390 A1 8/2005 Navsariwala
2005/0200425 A1 9/2005 McKay
2006/0044195 A1 3/2006 Arkko
2006/0205343 A1 9/2006 Runyon et al.
2006/0270377 A1 * 11/2006 Bhatti et al. 455/333
2007/0200773 A1 * 8/2007 Dou et al. 343/702
2008/0055163 A1 * 3/2008 Man et al. 343/702
2008/0076366 A1 * 3/2008 Rofougaran 455/168.1
2008/0165065 A1 * 7/2008 Hill et al. 343/702
2008/0198082 A1 * 8/2008 Soler Castany et al. 343/770
2008/0261540 A1 * 10/2008 Rohani et al. 455/77

* cited by examiner


Primary Examiner—Huedung Mancuso

(74) Attorney, Agent, or Firm—Kacvinsky Daisak PLLC

(57) **ABSTRACT**

Various embodiments are directed to high isolation antenna design for reducing frequency coexistence interference. In one embodiment, a computing device may comprise a printed circuit board including a first internal antenna and a second internal antenna operating in a common frequency band. At least one of the first internal antenna and the second internal antenna may comprise a balanced antenna coupled to an unbalancing element to suppress surface current on the printed circuit board and reduce frequency coexistence interference between the first internal antenna and the second internal antenna. Other embodiments are described and claimed.

21 Claims, 3 Drawing Sheets

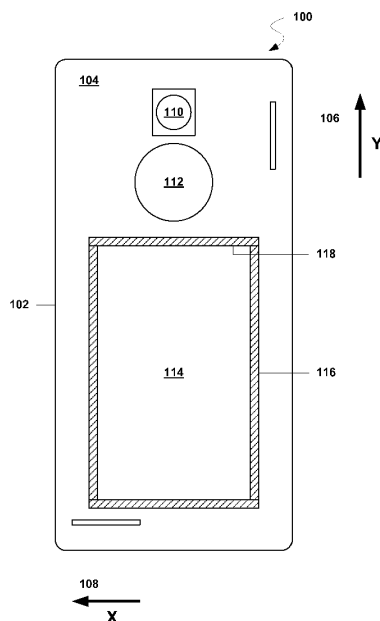

Acrobat 文件



US007864121B2

(12) **United States Patent**
Suprunov et al.

(10) **Patent No.:** **US 7,864,121 B2**
(45) **Date of Patent:** **Jan. 4, 2011**

(54) **MIMO SELF-EXPANDABLE ANTENNA STRUCTURE**

(75) Inventors: **Peter Suprunov**, East Brunswick, NJ (US); **Victor Abramsky**, Edison, NJ (US)

(73) Assignee: **QUALCOMM Incorporated**, San Diego, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 587 days.

(21) Appl. No.: **11/774,504**

(22) Filed: **Jul. 6, 2007**

(65) **Prior Publication Data**

US 2009/0009421 A1 Jan. 8, 2009

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/881**

(58) **Field of Classification Search** **343/702, 343/880, 881**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,521,290 A * 7/1970 Hossein et al. 343/915

4,947,825 A * 8/1990 Moriarty 126/685
6,833,817 B2 12/2004 Olsen
7,076,263 B2 7/2006 Medvedev et al.
2004/0113850 A1 * 6/2004 Olsen 343/702

FOREIGN PATENT DOCUMENTS

JP 60223208 11/1985
WO 03017420 2/2003

OTHER PUBLICATIONS

Partial International Search Report-PCT/US2008/068608, International Searching Authority-European Patent Office-Oct. 16, 2008.
International Search Report-PCT/US08068608, International Search Authority-European Patent Office-Feb. 19, 2009.
Written Opinion-PCT/US08/068608, International Search Authority-European Patent Office-Feb. 19, 2009.

* cited by examiner


Primary Examiner—Tho G Phan

(74) *Attorney, Agent, or Firm*—Jiayu Xu

(57) **ABSTRACT**

Systems and methodologies are described that provide a low cost, compact and easily manufacturable multiple-input, multiple-output antenna structure suitable for portable radio equipment. Multiple antenna elements are printed on a folded flexible material. The flexible material expands when the antenna structure is deployed for operation and collapses when stowed.

46 Claims, 21 Drawing Sheets

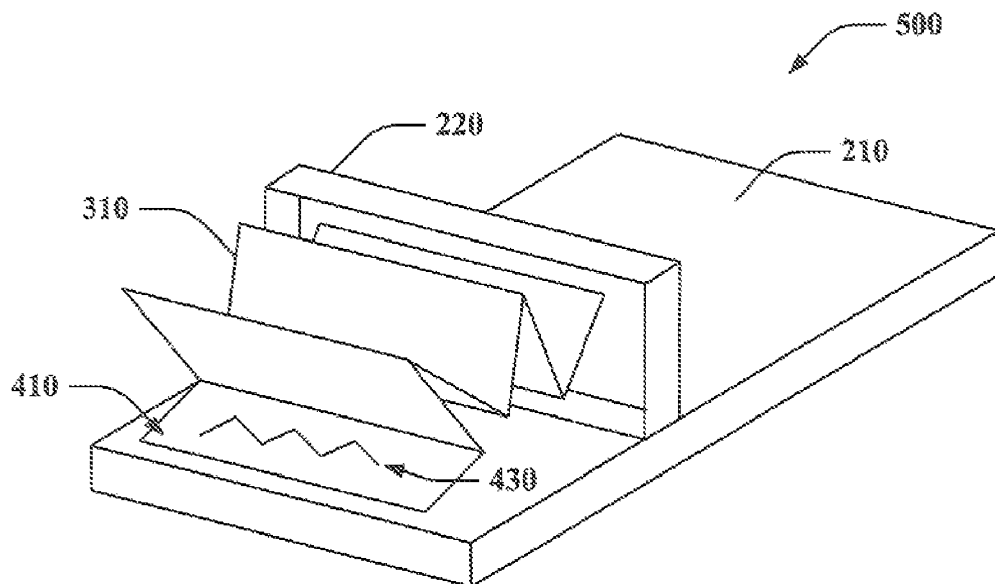

Acrobat 文件



US007864123B2

(12) **United States Patent**
Hill et al.

(10) **Patent No.:** **US 7,864,123 B2**
(45) **Date of Patent:** **Jan. 4, 2011**

(54) **HYBRID SLOT ANTENNAS FOR HANDHELD ELECTRONIC DEVICES**

2008/0231521 A1 9/2008 Anguera Pros et al.
2010/0007564 A1 1/2010 Hill et al.

(75) Inventors: **Robert J. Hill**, Salinas, CA (US); **Juan Zavala**, Watsonville, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 334 days.

FOREIGN PATENT DOCUMENTS

EP	0 851 530	7/1998
EP	1 351 334 A	10/2003
EP	1 401 050 A	3/2004

(21) Appl. No.: **11/897,033**

(22) Filed: **Aug. 28, 2007**

(Continued)

(65) **Prior Publication Data**

US 2009/0058735 A1 Mar. 5, 2009

OTHER PUBLICATIONS

Hill et al. U.S. Appl. No. 11/650,187, filed Jan. 4, 2007.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/767**

(58) **Field of Classification Search** **343/702, 343/700 MS, 767**

See application file for complete search history.

(Continued)

Primary Examiner—Douglas W Owens

Assistant Examiner—Dieu Hien T Duong

(74) *Attorney, Agent, or Firm*—Treyz Law Group; G. Victor Treyz; David C. Kellogg

(56) **References Cited**


U.S. PATENT DOCUMENTS

6,424,300 B1	7/2002	Sanford
6,670,923 B1	12/2003	Kadambi et al.
6,741,214 B1	5/2004	Kadambi et al.
6,747,601 B2	6/2004	Boyle
6,856,294 B2	2/2005	Kadambi et al.
6,980,154 B2	12/2005	Vance et al.
7,027,838 B2	4/2006	Zhou et al.
7,116,276 B2	10/2006	Lee
7,119,747 B2	10/2006	Lin et al.
7,123,208 B2	10/2006	Baliarda et al.
7,612,725 B2	11/2009	Hill et al.
2001/0052877 A1 *	12/2001	Honda et al. 343/702
2003/0107518 A1	6/2003	Li et al.
2004/0017318 A1	1/2004	Annabi et al.
2004/0145521 A1	7/2004	Hebron et al.
2006/0055606 A1	3/2006	Boyle
2007/0030200 A1 *	2/2007	Heng et al. 343/700 MS

(57) **ABSTRACT**

Handheld electronic devices are provided that contain wireless communications circuitry. The wireless communications circuitry may include an antenna. The antenna may be formed from a ground plane having a dielectric-filled slot that defines a slot antenna structure and having a planar-inverted-F (PIFA) resonating element located above the opening. The slot antenna structure and the PIFA resonating element may both contribute to the performance of the antenna, so that the antenna exhibits the performance of a hybrid PIFA-slot antenna. The PIFA resonating element may contain multiple antenna resonating element branches. The branches may be configured to operate in different communications bands than the slot antenna structure.

22 Claims, 16 Drawing Sheets

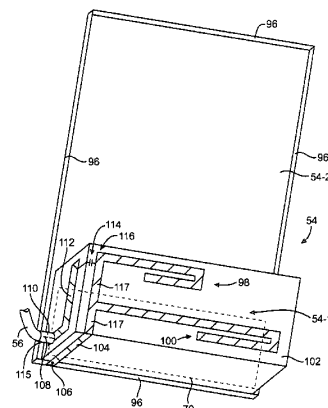

Acrobat 文件



US007864124B2

(12) **United States Patent**
Hong et al.

(10) **Patent No.:** **US 7,864,124 B2**
(45) **Date of Patent:** **Jan. 4, 2011**

(54) **MULTI-BAND ANTENNA FOR MOBILE PHONE**

(75) Inventors: **Suk-Chan Hong**, Gumi-si (KR);
Jae-Kyu Lee, Gumi-si (KR); **Jun-Chul Kang**, Gumi-si (KR)

(73) Assignee: **Samsung Electronics Co., Ltd** (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 197 days.

(21) Appl. No.: **12/136,929**

(22) Filed: **Jun. 11, 2008**

(65) **Prior Publication Data**

US 2009/0009407 A1 Jan. 8, 2009

(30) **Foreign Application Priority Data**

Jun. 11, 2007 (KR) 10-2007-0056677

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/850**

(58) **Field of Classification Search** **343/700 MS, 343/702, 850, 853, 860**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,084,831 B2 *	8/2006	Takagi et al.	343/860
7,161,543 B2 *	1/2007	Cheng et al.	343/702
7,433,725 B2 *	10/2008	Lin et al.	455/575.7
7,495,620 B2 *	2/2009	Wang et al.	343/702
7,554,495 B2 *	6/2009	Enoshima et al.	343/702
2008/0143607 A1 *	6/2008	Jung et al.	343/700 MS
2009/0040109 A1 *	2/2009	Iguchi et al.	343/700 MS

* cited by examiner


Primary Examiner—Hoang V Nguyen

(74) *Attorney, Agent, or Firm*—The Farrell Law Firm, LLP

(57) **ABSTRACT**

A mobile phone includes a multi-band antenna which is mutually connected in a dependent manner for operation according to a signal transmitted to and received from the mobile phone; and a resonance unit for generating resonance for multiple frequency bands as ends of the multi-band antenna are spaced apart at a predetermined interval, to improve mute performance, reduce SAR, and prevent a reduction in call performance due to an influence of a user's body and hand when holding the mobile phone to make a call.

6 Claims, 8 Drawing Sheets

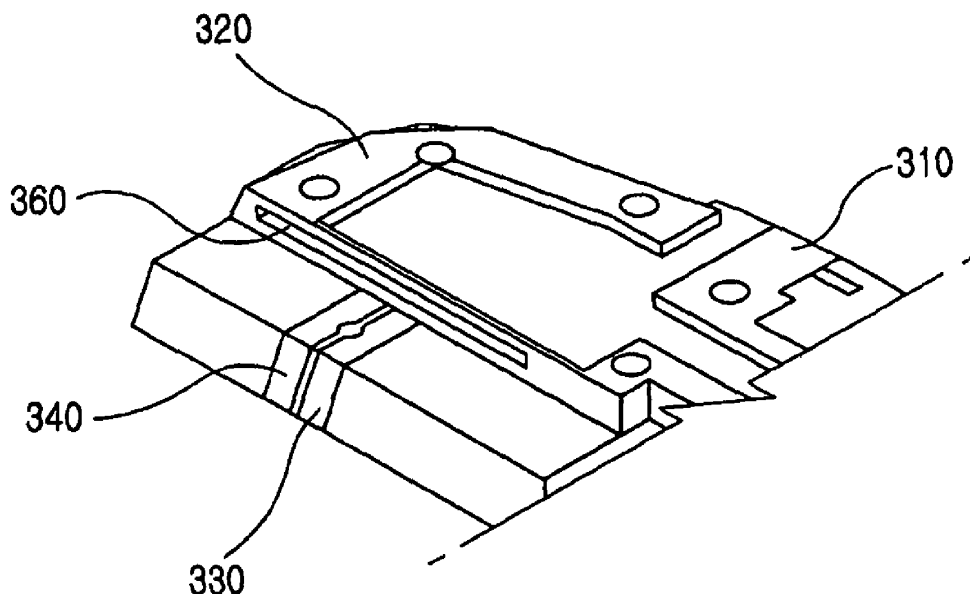

Acrobat 文件



US007868827B2

(12) **United States Patent**
Dijkstra

(10) **Patent No.:** **US 7,868,827 B2**
(45) **Date of Patent:** **Jan. 11, 2011**

(54) **COUPLING FOR PATCH ANTENNAS**

(75) Inventor: **Patrick Walter Joseph Dijkstra**, TJ
Driebruggen (NL)

(73) Assignee: **Stiching Noble House**, AC Lisse (NL)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 771 days.

(21) Appl. No.: **10/582,573**

(22) PCT Filed: **Dec. 10, 2004**

(86) PCT No.: **PCT/NL2004/000860**

§ 371 (c)(1),
(2), (4) Date: **Feb. 21, 2007**

(87) PCT Pub. No.: **WO2005/057728**

PCT Pub. Date: **Jun. 23, 2005**

(65) **Prior Publication Data**

US 2007/0290925 A1 Dec. 20, 2007

(30) **Foreign Application Priority Data**

Dec. 12, 2003 (NL) 1025002

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702**

(58) **Field of Classification Search** **343/700 MS, 343/702**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,483,678 A 1/1996 Abe

5,585,806 A * 12/1996 Ogino et al. 343/700 MS
5,903,239 A 5/1999 Takahashi et al.
6,320,543 B1 11/2001 Ohata et al.
6,486,834 B2 * 11/2002 Tsai 343/702
2005/0285794 A1 * 12/2005 Tang et al. 343/700 MS

FOREIGN PATENT DOCUMENTS

EP 0 978 729 A2 2/2000

OTHER PUBLICATIONS

Seki et al. "A Three-Dimensional Active Antenna for a High-Speed Wireless Communication Application" IEEE MTT-S Digest (1997) p. 975-978.

* cited by examiner


Primary Examiner—HoangAnh T Le

(74) Attorney, Agent, or Firm—Merchant & Gould P.C.

(57) **ABSTRACT**

Device comprising a patch antenna, and coupling means for connecting the antenna to an electronic component, wherein the patch antenna is arranged on one side of an antenna plate, and the electronic component can be mounted on the other side of the antenna plate, wherein the coupling means comprise a metal passage through the antenna plate. This passage thus ensures the transmission of signals between the antenna and the electronic component. Such a passage is mechanically very robust and not susceptible to ageing, whereby this passage is suitable for automotive applications. This passage is generally not ideal, since it does not have the same characteristic impedance as the antenna and the electronic component, but the dimensions of the passage can be kept sufficiently small so that no disruption is encountered from this impedance mismatch.

15 Claims, 2 Drawing Sheets



Acrobat 文件



US007868831B2

(12) **United States Patent**
Hung et al.

(10) **Patent No.:** **US 7,868,831 B2**
(45) **Date of Patent:** **Jan. 11, 2011**

(54) **COMPLEX ANTENNA**

(75) Inventors: **Chen-Ta Hung**, Tu-cheng (TW);
Lung-Sheng Tai, Tu-cheng (TW);
Wen-Fong Su, Tu-cheng (TW)

(73) Assignee: **Hon Hai Precision Ind. Co., Ltd.**,
Taipei Hsien (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 378 days.

(21) Appl. No.: **12/150,382**

(22) Filed: **Apr. 28, 2008**

(65) **Prior Publication Data**

US 2008/0266185 A1 Oct. 30, 2008

(30) **Foreign Application Priority Data**

Apr. 27, 2007 (CN) 2007 1 0022050

(51) **Int. Cl.**
H01Q 1/38 (2006.01)

(52) **U.S. Cl.** **343/700 MS; 343/702;**
343/846

(58) **Field of Classification Search** 343/700 MS,
343/702, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,450,076 B1 *	11/2008	Lin et al.	343/702
7,633,448 B2 *	12/2009	Su et al.	343/702
7,746,288 B2 *	6/2010	Wang et al.	343/846
2006/0262016 A1	11/2006	Hung	
2008/0007461 A1 *	1/2008	Su et al.	343/700 MS

* cited by examiner

Primary Examiner—Douglas W Owens

Assistant Examiner—Chuc D Tran


(74) *Attorney, Agent, or Firm*—Wei Te Chung; Andrew C.
Cheng; Ming Chieh Chang

(57) **ABSTRACT**

A complex antenna includes a first antenna and a second antenna having a grounding element and an installing element sharing with the first antenna. The first antenna working in a WLAN (Wireless Local Area Network) comprises a first connecting element, a first radiating element and a second radiating element extending from the first connecting element in opposite direction. The second antenna working in a WWAN (Wireless Wide Area Network) comprises a second connecting element and at least three radiating elements extending from the second connecting element in different directions.

20 Claims, 9 Drawing Sheets

100

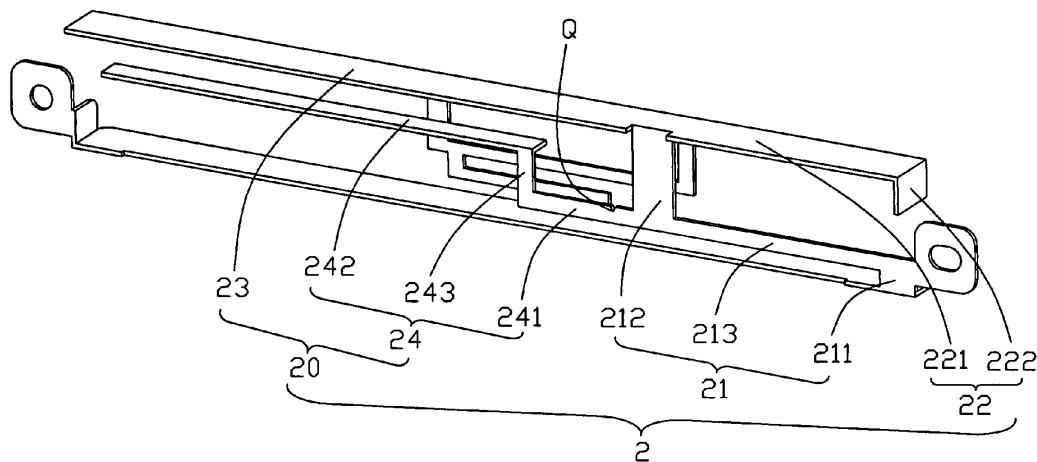

Acrobat 文件



US007868836B2

(12) **United States Patent**
Vendik et al.

(10) **Patent No.:** **US 7,868,836 B2**
(45) **Date of Patent:** **Jan. 11, 2011**

(54) **ANTENNA AND MOBILE TERMINAL**

(75) Inventors: **Orest Genrihovich Vendik**, St. Petersburg (RU); **Ivan Andreevich Pakhomov**, St. Petersburg (RU); **An Sun Hyun**, Seoul (KR); **Kang Jae Jung**, Seoul (KR); **Dong Ho Lee**, Seoul (KR)

(73) Assignee: **LG Electronics Inc.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 393 days.

(21) Appl. No.: **11/747,100**

(22) Filed: **May 10, 2007**

(65) **Prior Publication Data**
US 2008/0024381 A1 Jan. 31, 2008

Related U.S. Application Data

(60) Provisional application No. 60/820,476, filed on Jul. 26, 2006.

(30) **Foreign Application Priority Data**
Dec. 28, 2006 (KR) 10-2006-0135938

(51) **Int. Cl.**
H01Q 21/00 (2006.01)

(52) **U.S. Cl.** **343/726; 343/853; 343/816; 343/866**

(58) **Field of Classification Search** 343/725, 343/726, 853, 866, 816
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,198,826 A * 3/1993 Ito 343/726
5,465,099 A * 11/1995 Mitsui et al. 343/730
7,408,517 B1 * 8/2008 Poilasne et al. 343/742
7,456,798 B2 * 11/2008 Wong et al. 343/742

FOREIGN PATENT DOCUMENTS

JP 2002151948 A * 5/2002


* cited by examiner

Primary Examiner—Douglas W Owens
Assistant Examiner—Dieu Hien T Duong
(74) *Attorney, Agent, or Firm*—Lee, Hong, Degerman, Kang & Waimey

(57) **ABSTRACT**

An antenna for a mobile terminal includes a substrate, a dipole placed on the substrate, a loop placed on the substrate, and a matching circuit on the substrate. The matching circuit comprises at least one of a variable capacitor or a variable inductor. The radiation center of the loop substantially coincides with the radiation center of the dipole.

16 Claims, 19 Drawing Sheets

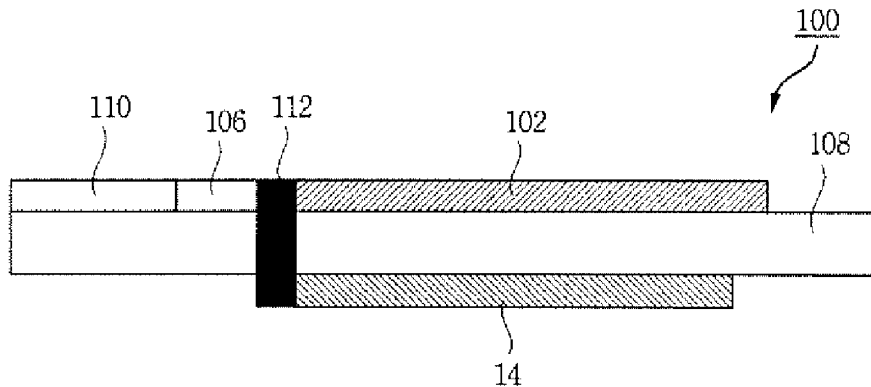

Acrobat 文件



US007868838B2

(12) **United States Patent**
Tai

(10) **Patent No.:** **US 7,868,838 B2**

(45) **Date of Patent:** **Jan. 11, 2011**

(54) **ULTRA WIDEBAND ANTENNA**

(56) **References Cited**

(75) Inventor: **Lung-Sheng Tai**, Tu-cheng (TW)

U.S. PATENT DOCUMENTS

(73) Assignee: **Hon Hai Precision Ind. Co., Ltd**, Taipei Hsien (TW)

6,861,986 B2 3/2005 Fang et al.
7,446,717 B2 * 11/2008 Hung et al. 343/702

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 181 days.

* cited by examiner

Primary Examiner—Michael C Wimer

(74) *Attorney, Agent, or Firm*—Wei Te Chung; Andrew C. Cheng; Ming Chieh Chang

(21) Appl. No.: **12/150,612**

(22) Filed: **Apr. 30, 2008**

(57) **ABSTRACT**

(65) **Prior Publication Data**

US 2008/0266186 A1 Oct. 30, 2008

(30) **Foreign Application Priority Data**

Apr. 30, 2007 (TW) 96115269 A

(51) **Int. Cl.**
H01Q 1/36 (2006.01)


(52) **U.S. Cl.** **343/729**; 343/767; 343/828;
343/830

(58) **Field of Classification Search** 343/700 MS,
343/702, 846, 729, 767, 825, 826, 829, 830
See application file for complete search history.

A wideband antenna includes a ground element comprising an upper first side, a first metal sheet a short arm connecting to the first side of the grounding element and a long arm separated from the first side, a second metal sheet electrically connecting to the first metal sheet, a third metal sheet perpendicular to the second metal sheet, and a slot between the first side of the ground element and the long arm of the first metal sheet; wherein said slot, said second metal sheet and said third metal sheet work together to form an ultra wide resonant frequency.

11 Claims, 5 Drawing Sheets

1

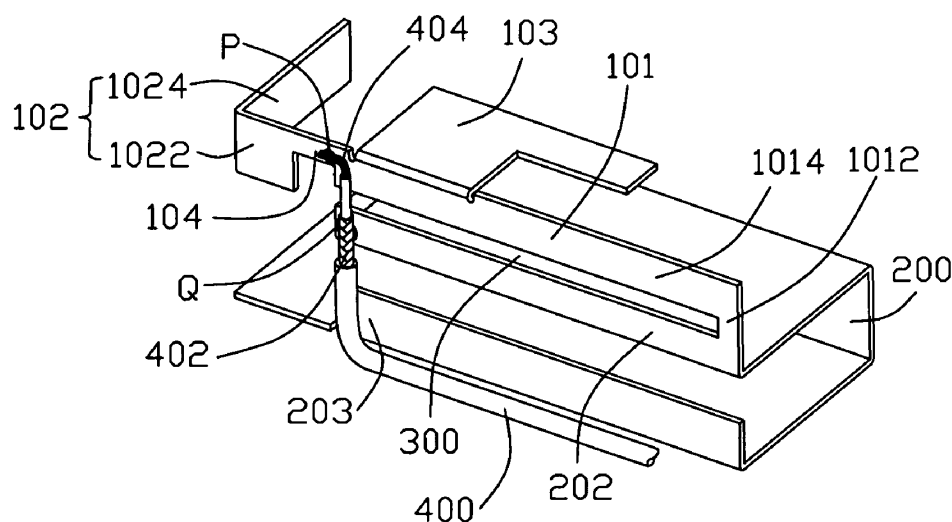

Acrobat 文件



US007868844B2

(12) **United States Patent**
Tsai et al.

(10) **Patent No.:** **US 7,868,844 B2**
(45) **Date of Patent:** **Jan. 11, 2011**

(54) **ULTRA-WIDE BANDWIDTH ANTENNA**

(56) **References Cited**

(75) Inventors: **Tiao Hsing Tsai**, Yungho (TW); **Chao Hsu Wu**, Tao Yuan Shien (TW); **Chi Yin Fang**, Pingtung (TW)

U.S. PATENT DOCUMENTS

(73) Assignee: **Quanta Computer Inc.** (TW)

6,861,990 B2 * 3/2005 Hung et al. 343/702
6,917,334 B2 * 7/2005 Chen 343/700 MS
7,106,256 B2 * 9/2006 Watanabe et al. 343/700 MS
2002/0149538 A1 * 10/2002 Tomomatsu et al. 343/895
2006/0097926 A1 * 5/2006 Fujii et al. 343/700 MS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 464 days.

* cited by examiner

Primary Examiner—Jacob Y Choi

Assistant Examiner—Robert Karacsony

(74) *Attorney, Agent, or Firm*—Banner & Witcoff, Ltd.

(21) Appl. No.: **11/946,662**

(22) Filed: **Nov. 28, 2007**

(57) **ABSTRACT**

(65) **Prior Publication Data**

US 2008/0316107 A1 Dec. 25, 2008

(30) **Foreign Application Priority Data**

Jun. 21, 2007 (TW) 96122265 A

(51) **Int. Cl.**

H01Q 1/48 (2006.01)

H01Q 1/24 (2006.01)

H01Q 1/38 (2006.01)


(52) **U.S. Cl.** **343/846**; 343/702; 343/700 MS

(58) **Field of Classification Search** 343/700 MS,
343/702, 846, 793, 795, 830

See application file for complete search history.

An ultra-wide bandwidth antenna includes a dielectric substrate, first and second conductive elements, and a third conductive element. The dielectric substrate has opposite first and second surfaces. The first conductive element is formed on the second surface of the dielectric substrate and has a feeding point. The second conductive element is formed on the second surface of the dielectric substrate, is spaced apart from the first conductive element, and has a grounding point. The third conductive element is formed on the first surface of the dielectric substrate, partially overlaps the first conductive element, and is coupled electrically to the second conductive element.

4 Claims, 7 Drawing Sheets

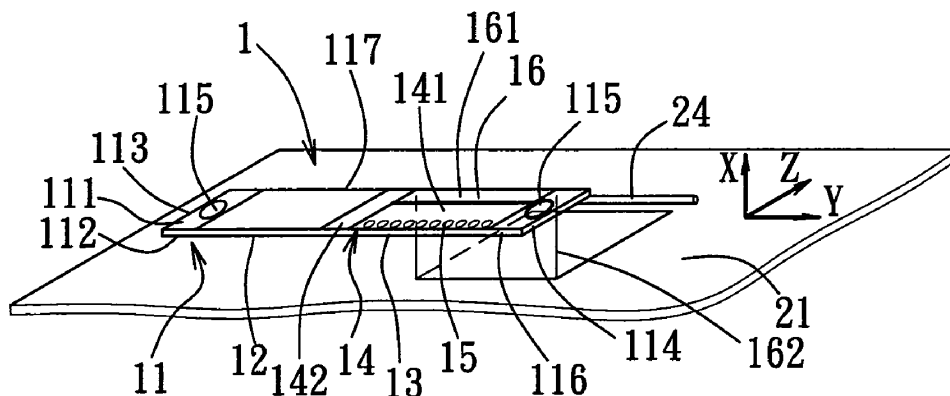

Acrobat 文件



US007869842B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 7,869,842 B2**
(45) **Date of Patent:** **Jan. 11, 2011**

(54) **FOLDER TYPE PORTABLE TERMINAL
WITH VARIABLE-TYPE GROUNDING UNIT**

2004/0142735 A1* 7/2004 Yi 455/575.3
2004/0185924 A1* 9/2004 Hwang et al. 455/575.3
2006/0092081 A1* 5/2006 Kanazawa 343/702

(75) Inventors: **Jae-Ho Kim**, Suwon-si (KR); **Hun-Jong Jeong**, Suwon-si (KR)

(73) Assignee: **Samsung Electronics Co., Ltd** (KR)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1132 days.

KR 10-2003-0027512 4/2003
KR 10-2004-0063235 7/2004

(21) Appl. No.: **11/489,343**

* cited by examiner

(22) Filed: **Jul. 19, 2006**

Primary Examiner—Kamran Afshar

(65) **Prior Publication Data**

US 2007/0021158 A1 Jan. 25, 2007

(74) Attorney, Agent, or Firm—The Farrell Law Firm, LLP

(30) **Foreign Application Priority Data**

Jul. 20, 2005 (KR) 10-2005-0065541

(51) **Int. Cl.**
H04M 1/00 (2006.01)

(52) **U.S. Cl.** **455/575.3**; 455/550.1; 455/575.1

(58) **Field of Classification Search** 455/550.1,
455/575.1–575.7, 556.2; 343/702
See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

2001/0034242 A1* 10/2001 Takagi 455/575.3


(57) **ABSTRACT**

The present invention relates to a folder or hinge type portable terminal having a grounding unit. A main body has a main board. A folder opens and closes at an angle from the main body. At least one component of a hinge module is formed of a metallic material, and opens and closes the folder at an angle from the main body. A connecting means selectively contacts a grounding portion of the main board to the material components of the hinge module in response to the opening and closing operation of the folder, to provide optimal antenna radiation characteristic irrespective of the opening and closing operation of the folder.

24 Claims, 9 Drawing Sheets

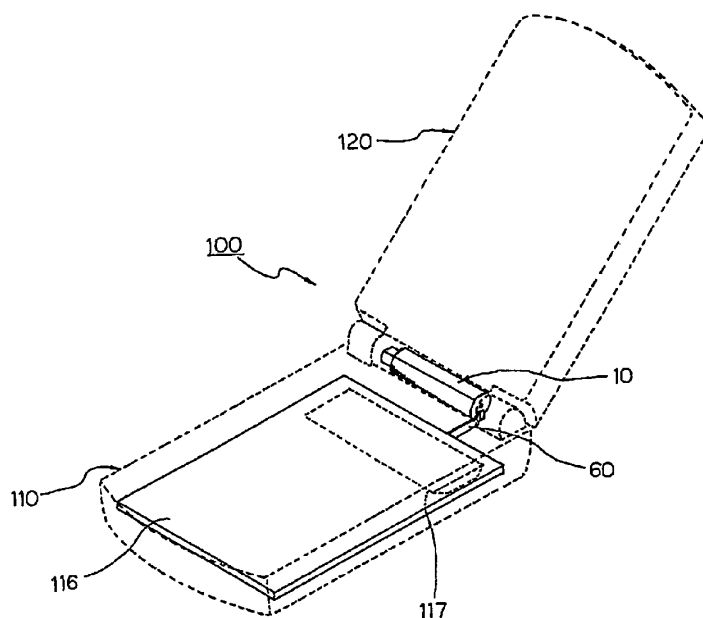

Acrobat 文件



(10) **Patent No.:** US 7,872,605 B2
(45) **Date of Patent:** Jan. 18, 2011

- (56)
- References Cited**

- U.S. PATENT DOCUMENTS

- | | | | |
|-----------|----|---------|---------------|
| 4,141,014 | A | 2/1979 | Sletten |
| 5,268,696 | A | 12/1993 | Buck et al. |
| 5,777,581 | A | 7/1998 | Lilly et al. |
| 5,903,822 | A | 5/1999 | Sekine et al. |
| 6,002,367 | A | 12/1999 | Engblom |
| 6,239,762 | B1 | 5/2001 | Lier |
| 6,307,519 | B1 | 10/2001 | Livingston |

- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 662 days.

- (21) Appl. No.: 11/884,991

- (22) PCT Filed: **Mar. 15, 2006**

- (86) PCT No.: **PCT/EP2006/060766**

- § 371 (c)(1),
(2), (4) Date: **Sep. 20, 2007**

- (87) PCT Pub. No.: **WO2006/097496**

- PCT Pub. Date:
- Sep. 21, 2006**

- (65) **Prior Publication Data**

- US 2008/0316118 A1 Dec. 25, 2008

- (30) **Foreign Application Priority Data**

- Mar. 15, 2005 (EP) 05005540

- (51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 13/10 (2006.01)
H01Q 1/48 (2006.01)

- (52) **U.S. Cl.** **343/700 MS; 343/767;**
343/846

- (58) **Field of Classification Search** 343/702,
343/700 MS. 767, 846

See application file for complete search history.

- (Continued)
- FOREIGN PATENT DOCUMENTS

- CA 2416437 A1 1/2002

- (Continued)

- ## OTHER PUBLICATIONS

- Yang, F. Patch antenna with switchable slots (PASS): REconfigurable design for wireless communications, IEEE Antennas and Propagation Society International Symposium, 2002.



- (Continued)

- Primary Examiner—Shih-Chao Chen
(74) Attorney, Agent, or Firm—Winstead PC

- (57) **ABSTRACT**

A wireless device includes a ground plane with at least two portions. On each of the at least two portions at least one connecting means is provided. The two connecting means are connected with an electric component for connecting the at least two portions of the ground plane. The ground plane is partially covered with an insulating material and the connecting means are given by a part of the ground plane which is not covered by any insulating material.

- 42 Claims, 6 Drawing Sheets**

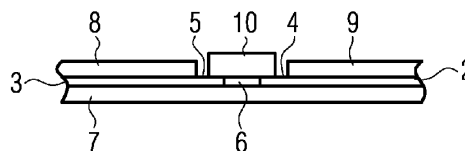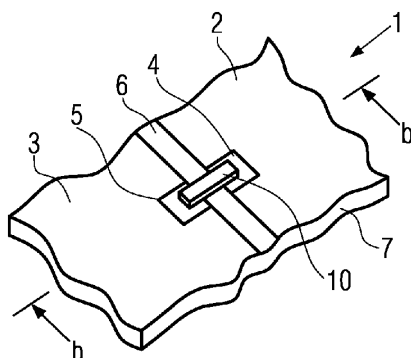

Acrobat 文件



US007872607B2

(12) **United States Patent**
Mohammadian et al.

(10) **Patent No.:** **US 7,872,607 B2**
(45) **Date of Patent:** **Jan. 18, 2011**

(54) **DIVERSE SPECTRUM ANTENNA FOR
HANDSETS AND OTHER DEVICES**

(75) Inventors: **Alireza Hormoz Mohammadian**, San
Diego, CA (US); **Samir S. Soliman**, San
Diego, CA (US)

(73) Assignee: **QUALCOMM, Incorporated**, San
Diego, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 957 days.

(21) Appl. No.: **11/413,369**

(22) Filed: **Apr. 28, 2006**

(65) **Prior Publication Data**

US 2007/0176834 A1 Aug. 2, 2007

Related U.S. Application Data

(60) Provisional application No. 60/762,770, filed on Jan.
27, 2006.

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 13/10 (2006.01)

(52) **U.S. Cl.** **343/702**; 343/767; 343/846

(58) **Field of Classification Search** 343/700 MS,
343/702, 846, 767, 770

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,111,544 A 8/2000 Dakeya et al.
6,822,611 B1 * 11/2004 Kontogeorgakis et al. ... 343/702
6,882,324 B1 * 4/2005 Chen 343/790
6,957,080 B2 * 10/2005 Guetre et al. 455/552.1
7,061,434 B2 * 6/2006 Aoyama et al. 343/702
7,176,838 B1 * 2/2007 Kinezos 343/700 MS

2003/0058176 A1 3/2003 Keilen et al.

2003/0222827 A1 12/2003 Sung

2004/0108967 A1 6/2004 Fujimura et al.

2007/0069959 A1 * 3/2007 Wu 343/700 MS

FOREIGN PATENT DOCUMENTS

EP 1414108 4/2004

EP 1585193 10/2005

JP 05304413 11/1993

JP 200276736 3/2002

JP 2002290142 A 10/2002

JP 2002374122 A 12/2002

JP 2003332818 A 11/2003

WO 2006000631 1/2006

OTHER PUBLICATIONS

"A CPW-FED U Type Monopole Antenna For UWB Applications"
Antennas and Propagation Society International Symposium, 2005
IEEE vol. 2A, Jul. 3-8, 2005 pp. 512-515 vol. 2A Full Texts.

(Continued)


Primary Examiner—Hoang V Nguyen

(74) *Attorney, Agent, or Firm*—Jae Hee Choi; Ramin
Mobarhan

(57) **ABSTRACT**

A system, apparatus and method for a diverse spectrum
antenna is disclosed. The diverse spectrum antenna may com-
prise a circuit board having a ground plane and a chip antenna
including a notch, wherein the chip antenna is mounted on the
circuit board at a selected distance from the ground plane.

27 Claims, 6 Drawing Sheets

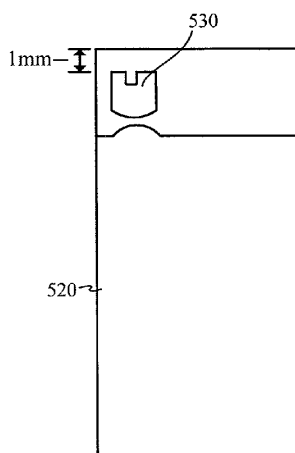

Acrobat 文件



US007872612B2

(12) **United States Patent**
Otsuka et al.

(10) **Patent No.:** **US 7,872,612 B2**

(45) **Date of Patent:** **Jan. 18, 2011**

(54) **ANTENNA APPARATUS UTILIZING
APERTURE OF TRANSMISSION LINE**

(75) Inventors: **Kanji Otsuka**, 2-1074-38, Kohan,
Higashiyamato-shi, Tokyo 207-0002
(JP); **Tamotsu Usami**, 2-38-4,
Nishi-machi, Kokubunji-shi, Tokyo
185-0035 (JP); **Yutaka Akiyama**,
120-12, Katakura-machi, Hachioji-shi,
Tokyo 192-0914 (JP); **Chihiro Ueda**,
2-6-8, Higashi-ikou, Adachi-ku, Tokyo
121-0801 (JP)

(73) Assignees: **Kanji Otsuka**, Tokyo (JP); **Tamotsu
Usami**, Tokyo (JP); **Yutaka Akiyama**,
Tokyo (JP); **Renesas Electronics
Corporation**, Tokyo (JP); **Kabushiki
Kaisha Toshiba**, Tokyo (JP); **Fujitsu
Microelectronics Limited**, Tokyo (JP);
Fuji Xerox Co., Ltd., Tokyo (JP);
Ibiden Co., Ltd., Gifu (JP); **Kyocera
Corporation**, Kyoto (JP); **Chihiro
Ueda**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 32 days.

(21) Appl. No.: **12/155,247**

(22) Filed: **May 30, 2008**

(65) **Prior Publication Data**

US 2008/0316136 A1 Dec. 25, 2008

(30) **Foreign Application Priority Data**

May 30, 2007 (JP) 2007-143565

(51) **Int. Cl.**
H01Q 9/28 (2006.01)

(52) **U.S. Cl.** **343/807; 343/772**

(58) **Field of Classification Search** **343/850,**
343/767, 786, 777, 807

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,667,205 A * 5/1987 Gehin 343/783

(Continued)

FOREIGN PATENT DOCUMENTS

GB	2 265 759 A	10/1993
JP	47-032713 A	3/1972
JP	2003-224462	8/2003
JP	2004-007657	1/2004
JP	2004-254155	9/2004
JP	2005-051496	2/2005
JP	2005-244733	9/2005

OTHER PUBLICATIONS

Otsuka, K., et al., "Stacked Pair Line", Journal of Japan Institute of
Electronics Packaging (JIEP), Nov. 2001, pp. 556-561, vol. 4 No. 7.
(In Japanese and its English translation).

(Continued)

Primary Examiner—Jacob Y Choi


Assistant Examiner—Kyana R Robinson

(74) Attorney, Agent, or Firm—McDermott Will & Emery
LLP

(57) **ABSTRACT**

An antenna apparatus utilizing an aperture of transmission
line, which is connected to a first transmission line having a
predetermined characteristic impedance, includes a tapered
line portion, and an aperture portion. The tapered line portion
is connected to one end of the transmission line, and the
tapered line portion includes a second transmission line
including a pair of line conductors. The tapered line portion
keeps a predetermined characteristic impedance constant and
expands at least one of a width of the transmission line and an
interval in a tapered shape at a predetermined taper angle. The
aperture portion has a radiation aperture connected to one end
of the tapered line portion. A size of one side of the aperture
end plane of the aperture portion is set to be equal to or higher
than a quarter wavelength of the minimum operating fre-
quency of the antenna apparatus.

10 Claims, 28 Drawing Sheets

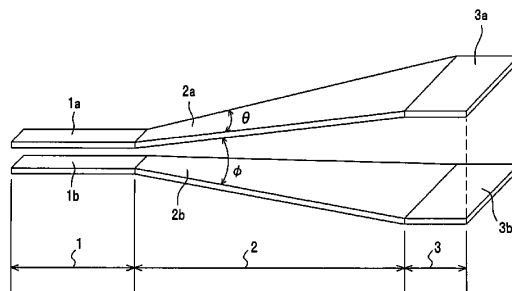

Acrobat 文件



US007876272B2

(12) **United States Patent**
Dou et al.

(10) **Patent No.:** **US 7,876,272 B2**
(45) **Date of Patent:** **Jan. 25, 2011**

(54) **ANTENNA DESIGN FOR AN ATTACHED ACCESSORY**

(75) Inventors: **Weiping Dou**, San Jose, CA (US); **Avi Kopelman**, Sunnyvale, CA (US); **Yomi Matsuoka**, Cupertino, CA (US); **Mark Babella**, Salida, CA (US)

(73) Assignee: **Palm, Inc.**, Sunnyvale, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 752 days.

(21) Appl. No.: **11/831,280**

(22) Filed: **Jul. 31, 2007**

(65) **Prior Publication Data**

US 2010/0026589 A1 Feb. 4, 2010

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/906**

(58) **Field of Classification Search** **343/702, 343/700 MS, 906**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,208,300 B1 * 3/2001 Johnson 343/702

7,208,916 B1 4/2007 Boatwright et al.
7,623,078 B2 * 11/2009 Wang 343/702
7,642,966 B2 * 1/2010 Vance 343/700 MS
2007/0120752 A1 * 5/2007 Takasu 343/702
2008/0143610 A1 * 6/2008 Wang et al. 343/702
2008/0252536 A1 * 10/2008 Anguera et al. 343/702

* cited by examiner


Primary Examiner—HoangAnh T Le

(74) *Attorney, Agent, or Firm*—Kacvinsky Daisak PLLC

(57) **ABSTRACT**

Various embodiments are directed to antenna designs that may improve the performance of a mobile computing device. Some embodiments are directed to a mobile computing device assembly comprising accessory incorporating a supplemental antenna designed to be adjacent to at least one internal antenna of a mobile computing device when the accessory is attached to the mobile computing device. The supplemental antenna and the internal antenna may cooperatively form an antenna system for the mobile computing device resulting in improved performance. In various implementations, the use of the supplemental antenna in conjunction with the internal antenna may enhance antenna performance and/or increase antenna efficiency. Other embodiments are described and claimed.

21 Claims, 3 Drawing Sheets

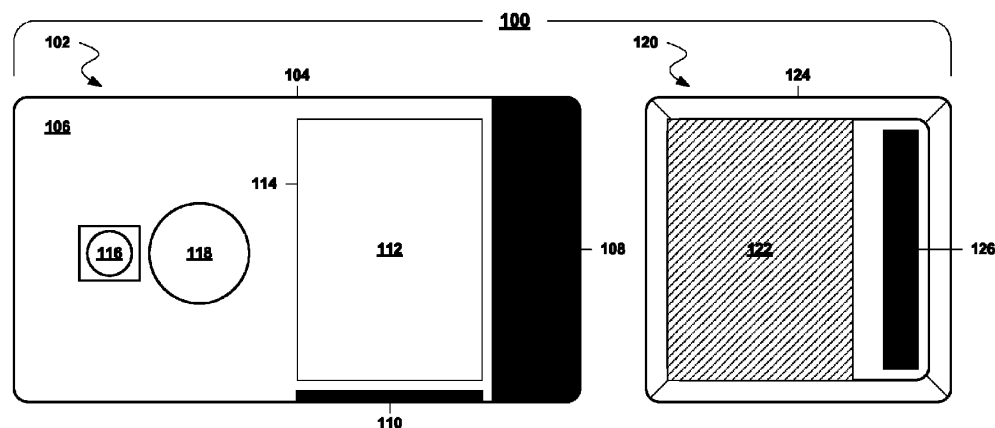

Acrobat 文件



US007876274B2

(12) **United States Patent**
Hobson et al.

(10) **Patent No.:** **US 7,876,274 B2**
(45) **Date of Patent:** **Jan. 25, 2011**

(54) **WIRELESS HANDHELD ELECTRONIC DEVICE**

(75) Inventors: **Phillip M. Hobson**, Menlo Park, CA (US); **Stephen P. Zadesky**, Portola Valley, CA (US); **Erik L. Wang**, Redwood City, CA (US); **Tang Yew Tan**, San Francisco, CA (US); **Richard Hung Minh Dinh**, San Jose, CA (US); **Adam D. Mittleman**, San Francisco, CA (US); **Kenneth A. Jenks**, Cupertino, CA (US); **Robert J. Hill**, Salinas, CA (US); **Robert W. Schlub**, Campbell, CA (US)

4,980,694 A 12/1990 Hines
5,021,010 A 6/1991 Wright
5,041,838 A 8/1991 Liimatainen et al.
5,048,118 A 9/1991 Brooks et al.
5,561,437 A 10/1996 Phillips et al.
5,754,143 A 5/1998 Warnagiris et al.

(Continued)

OTHER PUBLICATIONS

U.S. Appl. No. 60/883,587, filed Jan. 5, 2007, Hobson et al.

(Continued)

Primary Examiner—Michael C Wimer

(74) *Attorney, Agent, or Firm*—Treyz Law Group; G. Victor Treyz; David C. Kellogg

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 224 days.

(21) Appl. No.: **12/142,552**

(22) Filed: **Jun. 19, 2008**

(65) **Prior Publication Data**

US 2008/0316121 A1 Dec. 25, 2008

Related U.S. Application Data

(60) Provisional application No. 60/936,796, filed on Jun. 21, 2007.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.** **343/702; 343/767; 455/575.7**

(58) **Field of Classification Search** **343/702, 343/741, 846, 905, 906, 767; 455/575.7**
See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

4,894,663 A 1/1990 Urbish et al.

(57) **ABSTRACT**

A handheld electronic device may be provided that contains a conductive housing and other conductive elements. The conductive elements may form an antenna ground plane. One or more antennas for the handheld electronic device may be formed from the ground plane and one or more associated antenna resonating elements. Transceiver circuitry may be connected to the resonating elements by transmission lines such as coaxial cables. Ferrules may be crimped to the coaxial cables. A bracket with extending members may be crimped over the ferrules to ground the coaxial cables to the housing and other conductive elements in the ground plane. The ground plane may contain an antenna slot. A dock connector and flex circuit may overlap the slot in a way that does not affect the resonant frequency of the slot. Electrical components may be isolated from the antenna using isolation elements such as inductors and resistors.

17 Claims, 38 Drawing Sheets

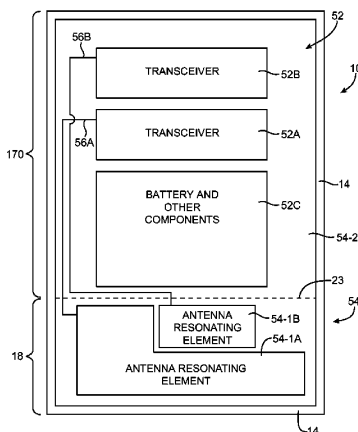

Acrobat 文件



US007876279B2

(12) **United States Patent**
Ma

(10) **Patent No.:** **US 7,876,279 B2**
(45) **Date of Patent:** **Jan. 25, 2011**

(54) **ANTENNA**

(75) Inventor: **Guozhong Ma**, Farnborough (GB)

(73) Assignee: **Nokia Corporation**, Espoo (FI)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 851 days.

(21) Appl. No.: **11/628,914**

(22) PCT Filed: **Jun. 27, 2005**

(86) PCT No.: **PCT/IB2005/001961**

§ 371 (c)(1),

(2), (4) Date: **Jul. 23, 2007**

(87) PCT Pub. No.: **WO2006/006061**

PCT Pub. Date: **Jan. 19, 2006**

(65) **Prior Publication Data**

US 2008/0042916 A1 Feb. 21, 2008

(30) **Foreign Application Priority Data**

Jun. 30, 2004 (GB) 0414575.1

(51) **Int. Cl.**

H01Q 13/10 (2006.01)

(52) **U.S. Cl.** 343/767

(58) **Field of Classification Search** 343/767,
343/700 MS, 702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,557,293 A 9/1996 McCoy et al. 343/867

6,133,879 A	10/2000	Grangeat et al.	343/700 MS
6,727,854 B2 *	4/2004	Fang et al.	343/700 MS
6,734,826 B1	5/2004	Dai et al.	343/700 MS
6,989,785 B2 *	1/2006	Sievenpiper et al.	342/175
7,071,877 B2 *	7/2006	Okado	343/700 MS
7,102,572 B2 *	9/2006	Okado	343/700 MS
7,605,769 B2 *	10/2009	Lee et al.	343/770
7,679,565 B2 *	3/2010	Sorvala	343/700 MS
2003/0103015 A1	6/2003	Oh et al.	343/867
2004/0090372 A1	5/2004	Nallo et al.	343/700 MS
2004/0100410 A1	5/2004	Tsai et al.	343/702
2004/0246179 A1	12/2004	Chen et al.	343/700 MS
2007/0040745 A1 *	2/2007	Chen et al.	343/700 MS
2009/0135007 A1 *	5/2009	Donovan et al.	340/540
2009/0256763 A1 *	10/2009	Chi et al.	343/741

FOREIGN PATENT DOCUMENTS

JP 2003101326 A 9/2001

* cited by examiner


Primary Examiner—Huedung Mancuso

(74) Attorney, Agent, or Firm—Harrington & Smith

(57) **ABSTRACT**

An antenna having a plurality of resonant frequencies and including a feed point; a ground point; and an antenna track extending between the feed point and the ground point and including, in series, a first small loop, a large loop and a second small loop. In one embodiment, the extension of the antenna track through the first U-shaped small loop displaces the antenna track in a first direction, then the extension of the antenna track through the large U-shaped loop displaces the antenna track in a second direction opposite to the first direction and the extension of the antenna track through the second U-shaped small loop displaces the antenna track in the first direction. A bridge element may be used.

23 Claims, 3 Drawing Sheets

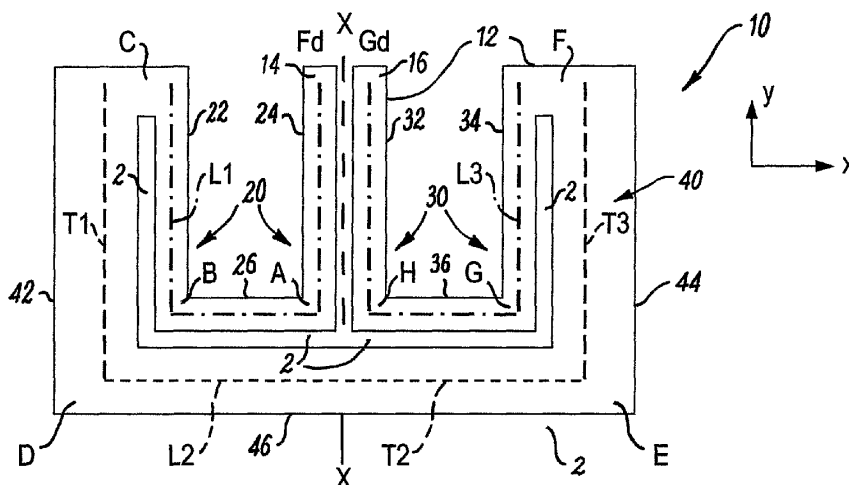

Acrobat 文件