



US009325059B2

(12) **United States Patent**
Wong et al.

(10) **Patent No.:** **US 9,325,059 B2**
(45) **Date of Patent:** ***Apr. 26, 2016**

(54) **COMMUNICATION DEVICE AND ANTENNA
STRUCTURE THEREOF**

(75) Inventors: **Kin-Lu Wong**, New Taipei (TW);
Po-Wei Lin, New Taipei (TW)

(73) Assignee: **ACER INCORPORATED**, Xizhi Dist.,
New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 167 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **13/409,128**

(22) Filed: **Mar. 1, 2012**

(65) **Prior Publication Data**

US 2013/0099979 A1 Apr. 25, 2013

(30) **Foreign Application Priority Data**

Oct. 20, 2011 (TW) 100138154 A

(51) **Int. Cl.**

H01Q 1/38 (2006.01)

H01Q 1/24 (2006.01)

H01Q 9/42 (2006.01)

H01Q 13/10 (2006.01)

H01Q 5/40 (2015.01)

(52) **U.S. Cl.**

CPC **H01Q 1/38** (2013.01); **H01Q 1/243**
(2013.01); **H01Q 5/40** (2015.01); **H01Q 9/42**
(2013.01); **H01Q 13/10** (2013.01)

(58) **Field of Classification Search**

USPC 343/700 MS, 702, 767, 833, 834, 846
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,835,063 A	11/1998	Brachat	
8,599,084 B2 *	12/2013	Wong et al.	343/749
2010/0188294 A1 *	7/2010	Chung et al.	343/700 MS
2011/0181480 A1	7/2011	Hsieh	
2011/0193754 A1 *	8/2011	Schlub et al.	343/702
2011/0193758 A1 *	8/2011	Liu et al.	343/767

FOREIGN PATENT DOCUMENTS

CN 2819498 Y 9/2006

(Continued)

OTHER PUBLICATIONS

Kin-Lu Wong et al., "Simple Printed Monopole Slot Antenna for
WWAN Mobile Handset", 2011 IEEE International Workshop on
Antenna Technology (iWAT), p. 186-189, Mar. 2011.


Primary Examiner — Graham Smith

(74) *Attorney, Agent, or Firm* — Winston Hsu; Scott Margo

(57) **ABSTRACT**

A communication device has an antenna structure including a
substrate, a ground element, an open slot and a radiating metal
portion. The ground element is disposed on a first surface of
the substrate. The open slot is formed on the ground element
and substantially parallel with an edge of the ground element,
wherein the open slot at least generates a first resonant mode,
and a distance between the open slot and the edge of the
ground element is shorter than 0.05 wavelength of a center
frequency of the first resonant mode. The radiating metal
portion is disposed on a second surface of the substrate,
wherein the open slot at least partially covers the radiating
metal portion, the radiating metal portion at least generates a
second resonant mode, and a feed point of the radiating metal
portion is electrically coupled to a signal source on the sub-
strate.

9 Claims, 6 Drawing Sheets

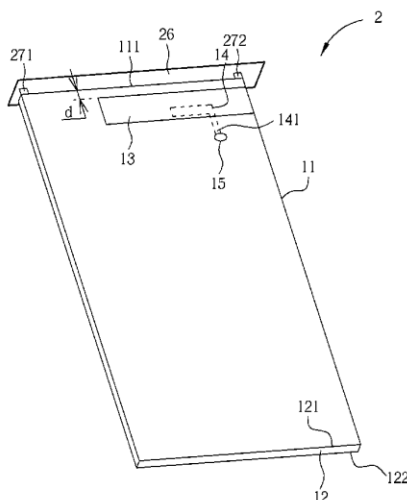



US009325064B2

(12) **United States Patent**
Kodama et al.

(10) **Patent No.:** **US 9,325,064 B2**
(45) **Date of Patent:** **Apr. 26, 2016**

(54) **MOBILE TERMINAL**

(75) Inventors: **Kenichiro Kodama**, Saitama (JP); **Aiko Yoshida**, Kanagawa (JP); **Akihiro Bungo**, Tokyo (JP)

(73) Assignees: **Sony Corporation**, Tokyo (JP); **Sony Mobile Communications Inc.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 635 days.

(21) Appl. No.: **13/544,418**

(22) Filed: **Jul. 9, 2012**

(65) **Prior Publication Data**

US 2013/0176189 A1 Jul. 11, 2013

Related U.S. Application Data

(60) Provisional application No. 61/524,916, filed on Aug. 18, 2011.

(51) **Int. Cl.**
H01Q 3/24 (2006.01)
H01Q 1/24 (2006.01)
H01Q 1/52 (2006.01)
H01Q 21/28 (2006.01)
H01Q 21/00 (2006.01)

(52) **U.S. Cl.**
CPC **H01Q 3/24** (2013.01); **H01Q 1/243** (2013.01); **H01Q 1/52** (2013.01); **H01Q 1/521** (2013.01); **H01Q 21/0006** (2013.01); **H01Q 21/28** (2013.01)

(58) **Field of Classification Search**
CPC H01Q 1/243; H01Q 1/52; H01Q 3/24
USPC 343/702, 876
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,295,462 B1 9/2001 Kudoh
7,046,201 B2 * 5/2006 Okada 343/700 MS

(Continued)

FOREIGN PATENT DOCUMENTS

EP 2 157 660 A1 2/2010
JP 2008-017047 1/2008

(Continued)

OTHER PUBLICATIONS

Extended European Search Report issued Apr. 17, 2013, in Patent Application No. 12177866.6.

(Continued)



Primary Examiner — Dieu H Duong

(74) *Attorney, Agent, or Firm* — Oblon, McClelland, Maier & Neustadt, L.L.P.

(57) **ABSTRACT**

A mobile terminal that includes a first antenna element disposed in proximity to a first side of the mobile terminal, a second antenna element disposed in proximity to a second side of the mobile terminal, and a third antenna element disposed in proximity to a third side of the mobile terminal. The mobile terminal further including a switching mechanism that switches between a first connection mode in which the first and second antenna elements are feed elements and the third antenna element is a parasitic element, and a second connection mode in which the first and third antenna elements are feed elements, and a control unit that controls the switching mechanism to switch between the first connection mode and the second connection mode in accordance with a predetermined condition.

20 Claims, 12 Drawing Sheets

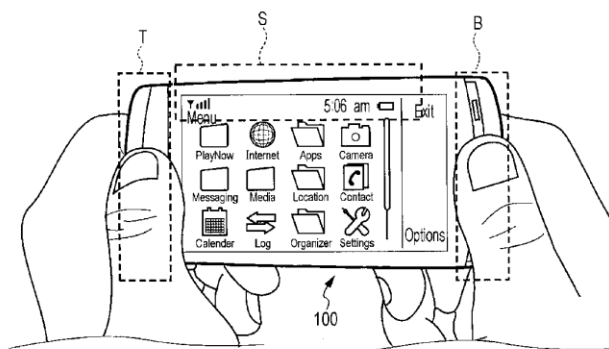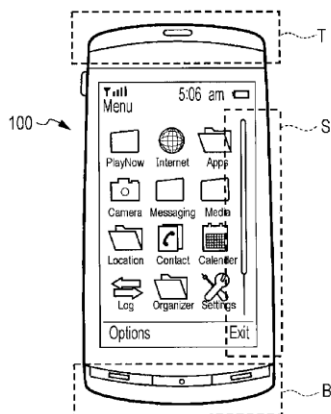



US009325066B2

(12) **United States Patent**
Wong et al.

(10) **Patent No.:** **US 9,325,066 B2**

(45) **Date of Patent:** **Apr. 26, 2016**

(54) **COMMUNICATION DEVICE AND METHOD
FOR DESIGNING ANTENNA ELEMENT
THEREOF**

(71) Applicants: **INDUSTRIAL TECHNOLOGY
RESEARCH INSTITUTE**, Hsinchu
(TW); **NATIONAL SUN YAT-SEN
UNIVERSITY**, Kaohsiung (TW)

(72) Inventors: **Kin-Lu Wong**, Kaohsiung (TW);
Hsuan-Jui Chang, Taichung (TW);
Wei-Yu Li, Yilan (TW); **Chun-Yih Wu**,
Taipei (TW)

(73) Assignees: **INDUSTRIAL TECHNOLOGY
RESEARCH INSTITUTE**, Hsinchu
(TW); **NATIONAL SUN YAT-SEN
UNIVERSITY**, Kaohsiung (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 280 days.

(21) Appl. No.: **13/906,483**

(22) Filed: **May 31, 2013**

(65) **Prior Publication Data**
US 2014/0085159 A1 Mar. 27, 2014

(30) **Foreign Application Priority Data**
Sep. 27, 2012 (TW) 101135565 A

(51) **Int. Cl.**
H01Q 5/00 (2015.01)
H01Q 1/24 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01Q 5/0027** (2013.01); **H01Q 1/243**
(2013.01); **H01Q 5/328** (2015.01); **H01Q 5/378**
(2015.01); **H01Q 9/42** (2013.01); **Y10T**
29/49016 (2015.01)

(58) **Field of Classification Search**
CPC H01Q 5/0027; H01Q 5/378; H01Q 1/3781
USPC 343/700, 843; 235/492
See application file for complete search history.

(56) **References Cited**
U.S. PATENT DOCUMENTS
5,434,579 A 7/1995 Kagoshima et al.
5,574,410 A * 11/1996 Collins et al. 333/17.3
(Continued)


FOREIGN PATENT DOCUMENTS
CN 101953022 A 1/2011
CN 102195122 A 9/2011
(Continued)

OTHER PUBLICATIONS
U.S. Appl. No. 13/528,853.
(Continued)

Primary Examiner — Michael C Wimer
Assistant Examiner — Bamidele A Jegede
(74) *Attorney, Agent, or Firm* — McClure, Qualey &
Rodack, LLP

(57) **ABSTRACT**
A communication device including a ground plane and an
antenna element is provided. An edge of the ground plane is
embedded with a notch, which has at least a first edge and a
second edge. The antenna element, disposed at the notch, has
at least a first operating frequency band and a second operat-
ing frequency band. The antenna element includes a first
conductive portion and a second conductive portion. The first
conductive portion has a starting terminal, electrically
coupled to the first edge of the notch through a signal source,
as a feeding terminal of the antenna element. A capacitive
coupling portion is formed between an end terminal of the
first conductive portion and the ground plane. The second
conductive portion has a shorting terminal electrically
coupled or connected to the second edge of the notch.

14 Claims, 7 Drawing Sheets

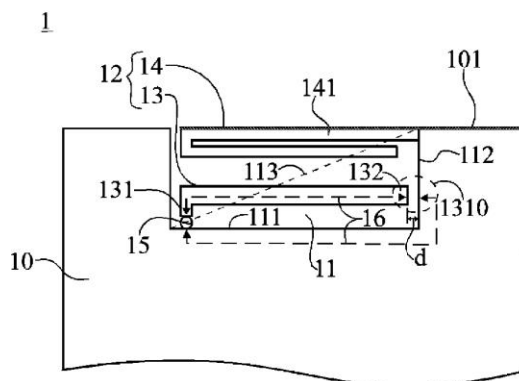



US009325067B2

(12) **United States Patent**
Ali et al.

(10) **Patent No.:** **US 9,325,067 B2**
(45) **Date of Patent:** **Apr. 26, 2016**

(54) **TUNABLE MULTIBAND MULTIPORT
ANTENNAS AND METHOD**

H01Q 5/314; H01Q 3/321; H01Q 3/328;
H01Q 3/335

See application file for complete search history.

(71) Applicant: **BlackBerry Limited**, Waterloo (CA)

(56) **References Cited**

(72) Inventors: **Shirook M. Ali**, Milton (CA); **Mark E. Pecan**, Waterloo (CA); **James Paul Warden**, Fort Worth, TX (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **BlackBerry Limited**, Waterloo, Ontario (CA)

6,476,769	B1	11/2002	Lehtola	
6,573,869	B2	6/2003	Moore	
7,671,804	B2 *	3/2010	Zhang et al.	343/700 MS
8,648,756	B1 *	2/2014	Desclos et al.	343/747
2003/0098812	A1	5/2003	Ying et al.	
2006/0178116	A1	8/2006	Qi et al.	
2008/0122712	A1	5/2008	Chen	
2013/0102357	A1 *	4/2013	Vance	455/550.1
2013/0203364	A1 *	8/2013	Darnell et al.	455/77
2014/0292602	A1 *	10/2014	Suzuki et al.	343/749

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 128 days.

(21) Appl. No.: **13/973,876**

FOREIGN PATENT DOCUMENTS

(22) Filed: **Aug. 22, 2013**

WO WO 2013076894 A1 * 5/2013

(65) **Prior Publication Data**

US 2015/0054699 A1 Feb. 26, 2015

OTHER PUBLICATIONS

(51) **Int. Cl.**

H01Q 1/36 (2006.01)
H01Q 5/00 (2015.01)
H01Q 5/35 (2015.01)
H01Q 9/14 (2006.01)
H01Q 9/42 (2006.01)
H01Q 5/321 (2015.01)
H01Q 5/335 (2015.01)
H01Q 1/24 (2006.01)

Extended European Search report mailed Dec. 19, 2014; in European patent application No. 14169917.3.

X. L. Sun, S. W. Cheung, and T. I. Yuk, "Frequency-tunable Antenna for Dual-band WLAN Applications", Progress in Electromagnetics Research Symposium Proceedings, KL, Malaysia, Mar. 27-30, 2012.

(Continued)

Primary Examiner — Amal Patel

(74) Attorney, Agent, or Firm — Fish & Richardson P.C.

(52) **U.S. Cl.**

CPC . **H01Q 5/35** (2015.01); **H01Q 1/36** (2013.01);
H01Q 5/321 (2015.01); **H01Q 5/335** (2015.01);
H01Q 9/145 (2013.01); **H01Q 9/42** (2013.01);
H01Q 1/241 (2013.01); **Y10T 29/49016**
(2015.01)


(57) **ABSTRACT**

An antenna, comprising a plurality of feed points and tuning elements for tuning a resonant frequency at each feed point independently of the others of the plurality of feed points. The tuning elements are placed on the configured radiating element such that for a given feed point its tuning element is placed on the configured radiating element where a current distribution of the other feed points is a minimum.

18 Claims, 9 Drawing Sheets

(58) **Field of Classification Search**

CPC H01Q 1/36; H01Q 1/241; H01Q 5/35;

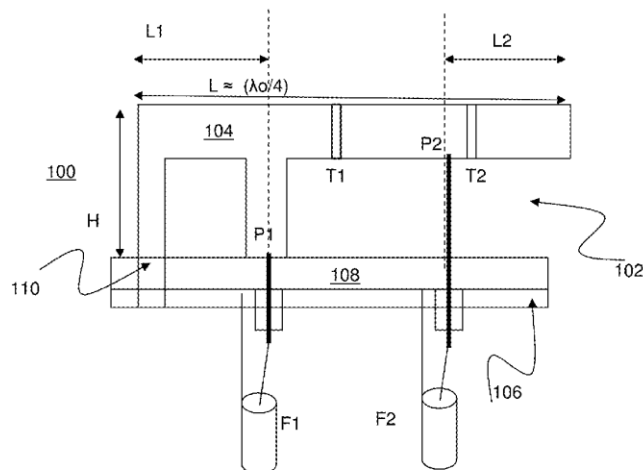



US009325068B2

(12) **United States Patent
Chang**

(10) **Patent No.:** US 9,325,068 B2
(45) **Date of Patent:** Apr. 26, 2016

(54) **BROADBAND ANTENNA DEVICE**

USPC 343/843, 702, 700 MS, 846
See application file for complete search history.

(71) Applicant: **Arcadyan Technology Corporation,**
Hsinchu (TW)

(56) **References Cited**

(72) Inventor: **Jin Su Chang,** Hsinchu (TW)

U.S. PATENT DOCUMENTS

(73) Assignee: **ARCADYAN TECHNOLOGY
CORPORATION,** Hsinchu (TW)

7,425,924 B2 * 9/2008 Chung H01Q 1/38
343/702
7,464,341 B2 * 12/2008 Day G06F 9/4443
715/781
8,547,283 B2 * 10/2013 Wong H01Q 1/243
343/700 MS
2009/0273521 A1 * 11/2009 Wong H01Q 1/38
343/700 MS
2009/0273530 A1 * 11/2009 Chi H01Q 1/243
343/741

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 339 days.

(21) Appl. No.: **13/948,623**

(22) Filed: **Jul. 23, 2013**

* cited by examiner

(65) **Prior Publication Data**

US 2014/0292607 A1 Oct. 2, 2014

Primary Examiner — Huedung Mancuso

(74) *Attorney, Agent, or Firm* — Gottlieb, Rackman &
Reisman, P.C.

(30) **Foreign Application Priority Data**

Mar. 28, 2013 (TW) 102111267 A

(57) **ABSTRACT**


(51) **Int. Cl.**
H01Q 11/00 (2006.01)
H01Q 5/371 (2015.01)

An antenna device is provided. The antenna device comprises
a first radiation portion and a second radiation portion. The
first radiation portion includes a first end and a second end.
The second radiation portion is connected to the first end at a
connecting part and includes a first arm and a second arm. The
first arm and the second arm have different lengths and extend
from the connecting part.

(52) **U.S. Cl.**
CPC **H01Q 5/371** (2015.01)

(58) **Field of Classification Search**
CPC H01Q 11/00; H01Q 1/24; H01Q 1/38

17 Claims, 4 Drawing Sheets

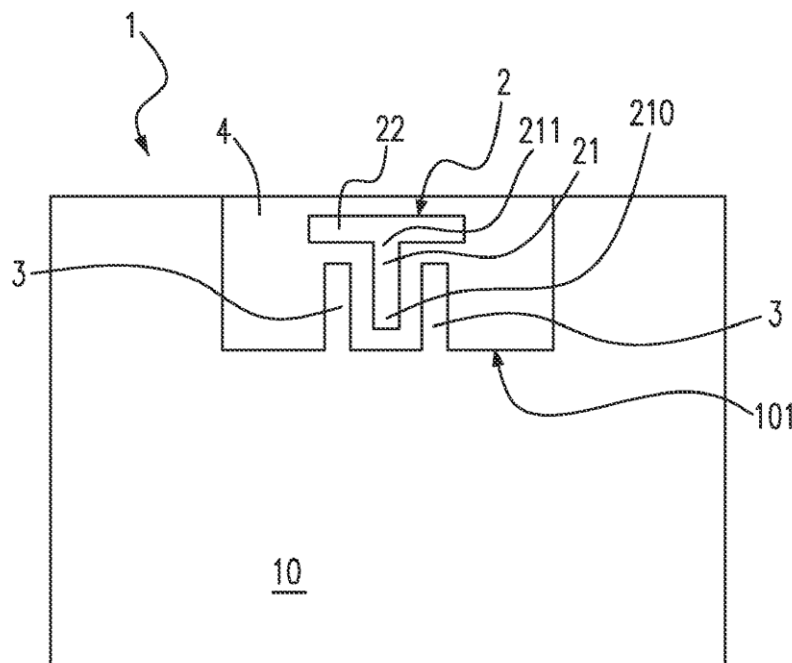



US009325070B1

(12) **United States Patent**
Obeidat et al.

(10) **Patent No.:** **US 9,325,070 B1**
(45) **Date of Patent:** **Apr. 26, 2016**

(54) **DUAL-LOOP-SLOT ANTENNA**

(56) **References Cited**

(71) Applicant: **AMAZON TECHNOLOGIES, INC.**,
Reno, NV (US)

U.S. PATENT DOCUMENTS

(72) Inventors: **Khaled Ahmad Obeidat**, Santa Clara,
CA (US); **Mark Corbridge**, Los Gatos,
CA (US); **Ming Zheng**, Cupertino, CA
(US); **Joseph Christopher Modro**, Palo
Alto, CA (US)

6,853,341	B1 *	2/2005	Hellgren		H01Q 1/3275 343/742
2006/0017635	A1 *	1/2006	Zheng		343/748
2007/0222699	A1 *	9/2007	Modro		H01Q 1/243 343/873
2009/0295567	A1 *	12/2009	Bellows		H01Q 1/2216 340/539.11
2010/0315303	A1 *	12/2010	Kearney		H01Q 1/36 343/767
2011/0063180	A1 *	3/2011	Su		H01Q 3/24 343/795

(73) Assignee: **Amazon Technologies, Inc.**, Reno, NV
(US)

* cited by examiner

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 283 days.

Primary Examiner — Dameon E Levi

Assistant Examiner — Collin Dawkins

(74) *Attorney, Agent, or Firm* — Lowenstein Sandler LLP

(21) Appl. No.: **13/925,467**

(57) **ABSTRACT**

(22) Filed: **Jun. 24, 2013**


(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 9/04 (2006.01)

(52) **U.S. Cl.**
CPC **H01Q 9/0407** (2013.01)

(58) **Field of Classification Search**
CPC H01Q 1/243; H01Q 13/10; H01Q 13/106
USPC 343/702, 767
See application file for complete search history.

Antenna structures and methods of operating the same of a dual-loop-slot antenna of an electronic device are described. One dual-loop-slot antenna includes a first loop antenna coupled to a radio frequency (RF) feed and a ground plane, a second loop coupled to the RF feed and the ground plane. At least a portion of the second loop antenna is formed by the first loop antenna. The dual-loop-slot antenna also includes a slot antenna formed at least in part by a portion of at least one of the first loop antenna or the second loop antenna.

20 Claims, 10 Drawing Sheets

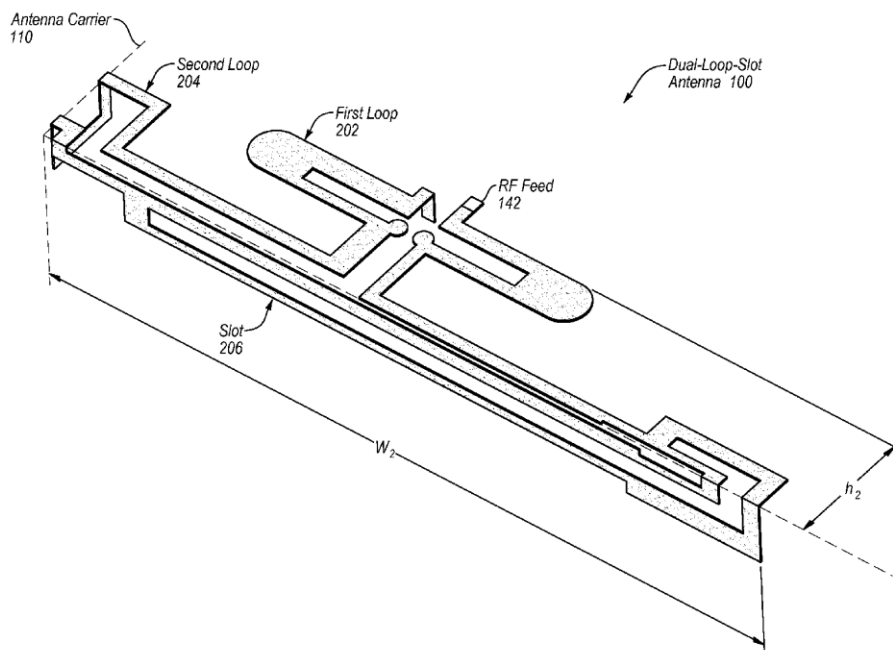



US009325072B2

(12) **United States Patent**
Oh et al.

(10) **Patent No.:** **US 9,325,072 B2**
(45) **Date of Patent:** **Apr. 26, 2016**

(54) **TOUCH SCREEN PANEL ANTENNA OF
MOBILE TERMINAL**

(75) Inventors: **Kyung Jin Oh**, Hwaseong-si (KR); **Oh
Hyuck Kwon**, Suwon-si (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 1197 days.

(21) Appl. No.: **12/977,620**

(22) Filed: **Dec. 23, 2010**

(65) **Prior Publication Data**

US 2011/0156967 A1 Jun. 30, 2011

(30) **Foreign Application Priority Data**

Dec. 28, 2009 (KR) 10-2009-0131636

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 9/40 (2006.01)
H01Q 9/42 (2006.01)

(52) **U.S. Cl.**
CPC ... **H01Q 9/40** (2013.01); **H01Q 9/42** (2013.01)

(58) **Field of Classification Search**

CPC H01Q 1/38

USPC 343/702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,661,408 B2 * 12/2003 Chen 345/173
8,279,188 B2 10/2012 Kusuda et al.

FOREIGN PATENT DOCUMENTS

KR 10-2007-0016731 A 2/2007

KR 10-2009-0107025 A 10/2009

* cited by examiner


Primary Examiner — Graham Smith

(74) *Attorney, Agent, or Firm* — Jefferson IP Law, LLP

(57) **ABSTRACT**

A touch screen panel (TSP) antenna of a mobile terminal is provided. The TSP antenna includes an ITO film stacked in a TSP, an upper electrode line, a lower electrode line, a left electrode line, and a right electrode line formed at an upper or lower surface of the ITO film, an external surface, and an antenna pattern formed in at least one of an upper surface, a lower surface, a left surface, and a right surface of the external surface.

11 Claims, 6 Drawing Sheets

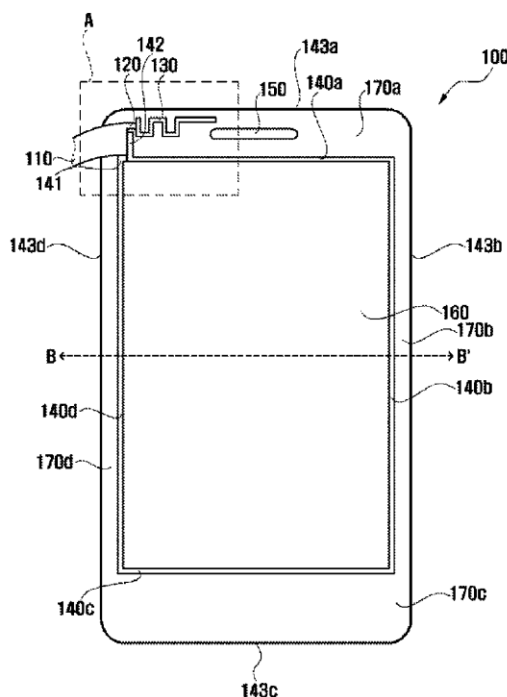



US009325076B2

(12) **United States Patent**
Bishop et al.

(10) **Patent No.:** **US 9,325,076 B2**
(45) **Date of Patent:** **Apr. 26, 2016**

(54) **ANTENNA FOR WIRELESS DEVICE**

(75) Inventors: **Bruce Foster Bishop**, Aptos, CA (US);
Yong Kwon Park, Capitola, CA (US);
Junwon Kim, Capitola, CA (US)

(73) Assignee: **Tyco Electronics Corporation**, Berwyn, PA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 485 days.

2002/0130734 A1 * 9/2002 Liang H01P 1/2039
333/134
2004/0066251 A1 4/2004 Eleftheriades et al.
2005/0001769 A1 1/2005 Qi et al.
2007/0176827 A1 8/2007 Itoh et al.
2009/0128446 A1 5/2009 Gummalla et al.
2009/0135087 A1 5/2009 Gummalla et al.
2009/0245146 A1 10/2009 Gummalla et al.
2010/0060544 A1 * 3/2010 Penev H01Q 1/38
343/876
2010/0073254 A1 3/2010 Lee et al.

(Continued)

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **13/445,602**

CN 101436713 A 5/2009
CN 101447602 A 6/2009

(22) Filed: **Apr. 12, 2012**

OTHER PUBLICATIONS

(65) **Prior Publication Data**

US 2013/0271330 A1 Oct. 17, 2013

Extended European Search Report for European Application No. 13163154.1, mailed Jun. 6, 2013.

(Continued)

(51) **Int. Cl.**
H01Q 9/00 (2006.01)
H01Q 15/00 (2006.01)

Primary Examiner — Hoang V Nguyen
Assistant Examiner — Hai Tran

(52) **U.S. Cl.**
CPC **H01Q 15/0086** (2013.01)

(58) **Field of Classification Search**
USPC 343/702, 700 MS, 745, 909
See application file for complete search history.

(57) **ABSTRACT**


An antenna for a wireless device includes a low band left-handed (LBLH) mode element and a low band right-handed (LBRH) mode element both operable in a low frequency bandwidth and a high band left-handed (HBLH) mode element and a high band right-handed (HBRH) mode element both operable in a high frequency bandwidth. The LBLH mode element is capacitively coupled to a feed of the antenna and is inductively coupled to a ground of the antenna. The LBRH mode element is electrically coupled to the feed of the antenna. The HBLH mode element is capacitively coupled to the feed of the antenna and is inductively coupled to the ground of the antenna. The HBRH mode element is electrically coupled to the feed of the antenna. At least one tuning element is operatively coupled to at least one of the mode elements.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,362,789 B1 3/2002 Trumbull et al.
6,414,637 B2 7/2002 Keilen
6,515,627 B2 2/2003 Lopez et al.
7,253,780 B2 8/2007 Sievenpiper
7,592,957 B2 9/2009 Achour et al.
7,764,232 B2 * 7/2010 Achour H01Q 21/065
343/700 MS
7,847,739 B2 12/2010 Achour et al.
7,855,696 B2 12/2010 Gummalla et al.
7,911,386 B1 3/2011 Itoh et al.
8,063,839 B2 11/2011 Ansari et al.
8,299,967 B2 10/2012 Xu et al.

23 Claims, 9 Drawing Sheets

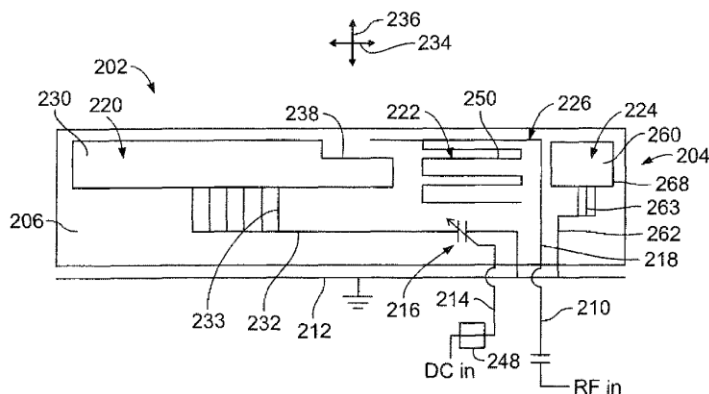



US009325080B2

(12) **United States Patent**
Ouyang et al.

(10) **Patent No.:** **US 9,325,080 B2**
(45) **Date of Patent:** **Apr. 26, 2016**

(54) **ELECTRONIC DEVICE WITH SHARED ANTENNA STRUCTURES AND BALUN**

USPC 343/702, 700 MS, 745, 767
See application file for complete search history.

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)

(72) Inventors: **Yuehui Ouyang**, Sunnyvale, CA (US);
Dean F. Darnell, Durham, NC (US);
Enrique Ayala Vazquez, Watsonville, CA (US);
Erica J. Tong, Pacifica, CA (US);
Hongfei Hu, Santa Clara, CA (US);
Matthew A. Mow, Los Altos, CA (US);
Mattia Pascolini, San Mateo, CA (US);
Ming-Ju Tsai, Cupertino, CA (US);
Nanbo Jin, Sunnyvale, CA (US);
Robert W. Schlub, Cupertino, CA (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,936,583 A * 8/1999 Sekine H01Q 1/245
343/702
6,600,450 B1 * 7/2003 Efanov H01Q 1/243
343/700 MS

(Continued)

FOREIGN PATENT DOCUMENTS

EP 2498336 9/2012
EP 2528165 11/2012

(Continued)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 131 days.

(21) Appl. No.: **14/195,130**

(22) Filed: **Mar. 3, 2014**

(65) **Prior Publication Data**

US 2015/0249292 A1 Sep. 3, 2015

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 21/30 (2006.01)

H01Q 1/48 (2006.01)

H01Q 9/42 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **H01Q 21/30** (2013.01); **H01Q 1/243**
(2013.01); **H01Q 1/48** (2013.01); **H01Q 5/35**
(2015.01); **H01Q 5/371** (2015.01); **H01Q 9/42**
(2013.01)

(58) **Field of Classification Search**

CPC H01Q 1/243; H01Q 9/0421; H01Q 21/30;
H01Q 5/335; H01Q 5/371; H01Q 5/50;
H01Q 1/2283; H01Q 21/29


Primary Examiner — Linh Nguyen

(74) *Attorney, Agent, or Firm* — Treyz Law Group, P.C.; G. Victor Treyz; Michael H. Lyons

(57) **ABSTRACT**

An electronic device may be provided with shared antenna structures that can be used to form both a near-field-communications antenna such as a loop antenna and a non-near-field communications antenna such as an inverted-F antenna. The antenna structures may include conductive structures such as metal traces on printed circuits or other dielectric substrates, internal metal housing structures, or other conductive electronic device housing structures. A main resonating element arm may be separated from an antenna ground by an opening. A non-near-field communications antenna return path and antenna feed path may span the opening. A balun may have first and second electromagnetically coupled inductors. The second inductor may have terminals coupled across differential signal terminals in a near-field communications transceiver. The first inductor may form part of the near-field communications loop antenna.

21 Claims, 9 Drawing Sheets

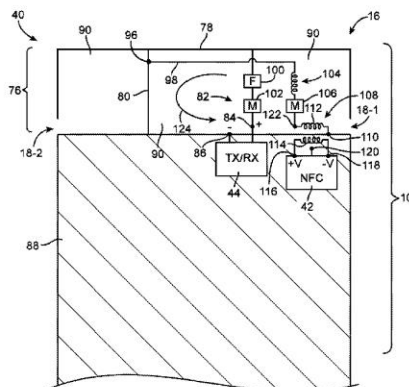



US009325354B2

(12) **United States Patent**
Manteghi

(10) **Patent No.:** **US 9,325,354 B2**
(45) **Date of Patent:** **Apr. 26, 2016**

(54) **WIDEBAND FREQUENCY SHIFT
MODULATION USING TRANSIENT STATE
OF ANTENNA**

(71) Applicant: **VIRGINIA TECH INTELLECTUAL
PROPERTIES, INC.**, Blacksburg, VA
(US)

(72) Inventor: **Majid Manteghi**, Santa Clara, CA (US)

(73) Assignee: **Intel Corporation**, Santa Clara, CA
(US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/547,772**

(22) Filed: **Nov. 19, 2014**

(65) **Prior Publication Data**

US 2015/0139278 A1 May 21, 2015

Related U.S. Application Data

(60) Provisional application No. 61/906,652, filed on Nov.
20, 2013.

(51) **Int. Cl.**
H04B 1/00 (2006.01)
H04B 1/04 (2006.01)
H01Q 3/44 (2006.01)
H01Q 5/00 (2015.01)
H01Q 9/04 (2006.01)
H01Q 5/25 (2015.01)

(52) **U.S. Cl.**
CPC .. **H04B 1/04** (2013.01); **H01Q 3/44** (2013.01);
H01Q 5/00 (2013.01); **H01Q 5/25** (2015.01);
H01Q 9/0421 (2013.01)

(58) **Field of Classification Search**

CPC H04B 1/707; H04B 1/04; H01Q 5/00;
H01Q 3/44

USPC 375/146
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,317,027 B1 * 11/2001 Watkins 340/10.1
2006/0132360 A1 * 6/2006 Caimi et al. 343/700 MS
2009/0010360 A1 * 1/2009 Murdoch 375/302
2009/0174501 A1 * 7/2009 Parsche et al. 333/174
2011/0205026 A1 * 8/2011 Bateman 340/10.1

OTHER PUBLICATIONS

Manteghi, Majid, "A Switch-Band Antenna for Software-Defined
Radio Applications", IEEE Antennas and Wireless Propagation Let-
ters, vol. 8, 2009, 3 pages.

Manteghi, Majid, "A Tunable Planar Inverted-f Antenna for Digital
Video Broadcast-Handheld Applications", Microwave and Optical
Technology Letters, vol. 54, Issue 11, pp. 2635-2638, Nov. 2012, 2
ppages.

Manteghi, Majid, "Antenna Miniaturization Beyond the Fundamen-
tal Limits Using Impedance Modulation", Antennas and Propagation
Society International Symposium, APSURSI '09. IEEE, 2009, 1
page.

(Continued)


Primary Examiner — Erin File

(74) *Attorney, Agent, or Firm* — Forefront IP Lawgroup,
PLLC

(57) **ABSTRACT**

Described herein are architectures, platforms and methods
for implementing modulating a radiating signal of a high Q
antenna in order to transmit from one frequency to one or
more different frequencies which may be in the same narrow
band frequency spectrum or in a wide band frequency spec-
trum.

1 Claim, 6 Drawing Sheets

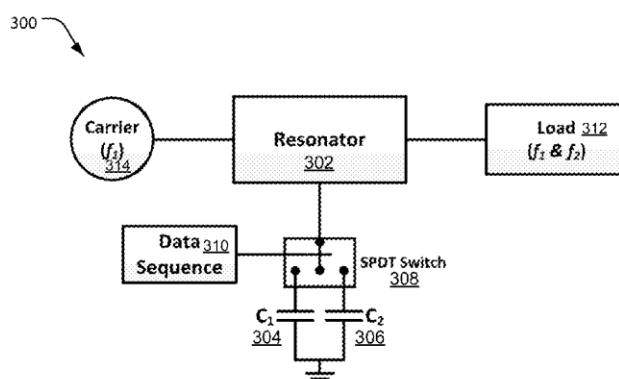



US009331379B2

(12) **United States Patent**
Chiu et al.

(10) **Patent No.:** **US 9,331,379 B2**

(45) **Date of Patent:** ***May 3, 2016**

(54) **MOBILE DEVICE AND MANUFACTURING METHOD THEREOF**

(75) Inventors: **Chien-Pin Chiu**, Taoyuan County (TW);
Hsiao-Wei Wu, Taoyuan County (TW);
Tiao-Hsing Tsai, Taoyuan County (TW);
Ying-Chih Wang, Taoyuan County (TW)

(73) Assignee: **HTC Corporation**, Taoyuan (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 115 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **13/442,644**

(22) Filed: **Apr. 9, 2012**

(65) **Prior Publication Data**

US 2013/0207846 A1 Aug. 15, 2013

Related U.S. Application Data

(63) Continuation-in-part of application No. 13/396,122, filed on Feb. 14, 2012.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/38 (2006.01)
H01Q 1/06 (2006.01)
H01Q 13/10 (2006.01)
H01Q 9/42 (2006.01)
H01Q 5/371 (2015.01)

(52) **U.S. Cl.**
CPC **H01Q 1/243** (2013.01); **H01Q 5/371** (2015.01); **H01Q 9/42** (2013.01); **Y10T 29/49016** (2015.01)

(58) **Field of Classification Search**

CPC H01Q 21/30; H01Q 5/0058; H01Q 5/357; H01Q 5/371; H01Q 1/243

USPC 343/700 MS, 721
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,781,546 B2	8/2004	Wang et al.	
7,546,114 B1	6/2009	Glaze, Jr.	
2004/0017319 A1 *	1/2004	Wang et al.	343/702
2007/0241971 A1 *	10/2007	Tsujimura et al.	343/702
2008/0074329 A1 *	3/2008	Caballero et al.	343/702
2008/0278265 A1 *	11/2008	Koizumi et al.	333/219
2008/0316117 A1	12/2008	Hill et al.	
2009/0153411 A1 *	6/2009	Chiang et al.	343/702
2009/0179803 A1 *	7/2009	Tsai et al.	343/700 MS

(Continued)

FOREIGN PATENT DOCUMENTS

CN	1260606 A	7/2000
CN	1828995 A	9/2006

(Continued)

Primary Examiner — Dameon E Levi


Assistant Examiner — Ricardo Magallanes

(74) *Attorney, Agent, or Firm* — Birch, Stewart, Kolasch & Birch, LLP

(57) **ABSTRACT**

A mobile device includes a substrate, a ground element, and a radiation branch. The ground element includes a ground branch, wherein an edge of the ground element has a notch extending into the interior of the ground element so as to form a slot region, and the ground branch partially surrounds the slot region. The radiation branch is substantially inside the slot region, and is coupled to the ground branch of the ground element. The ground branch and the radiation branch form an antenna structure.

10 Claims, 9 Drawing Sheets

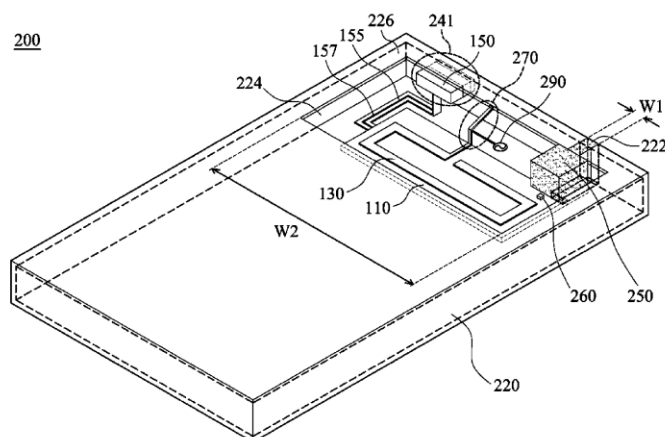



US009331380B2

(12) **United States Patent**
Hsu et al.

(10) **Patent No.:** **US 9,331,380 B2**

(45) **Date of Patent:** **May 3, 2016**

(54) **TUNABLE ANTENNA AND WIRELESS COMMUNICATION DEVICE EMPLOYING SAME**

(71) Applicant: **Chiun Mai Communication Systems, Inc.**, New Taipei (TW)

(72) Inventors: **Cho-Kang Hsu**, New Taipei (TW);
Tze-Hsuan Chang, New Taipei (TW)

(73) Assignee: **Chiun Mai Communication Systems, Inc.**, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 237 days.

(21) Appl. No.: **14/068,240**

(22) Filed: **Oct. 31, 2013**

(65) **Prior Publication Data**

US 2014/0313084 A1 Oct. 23, 2014

(30) **Foreign Application Priority Data**

Apr. 23, 2013 (TW) 102114282 A

(51) **Int. Cl.**
H01Q 1/38 (2006.01)
H01Q 1/24 (2006.01)
H01Q 5/371 (2015.01)
H01Q 5/378 (2015.01)

(52) **U.S. Cl.**
CPC **H01Q 1/243** (2013.01); **H01Q 5/371** (2015.01); **H01Q 5/378** (2015.01)

(58) **Field of Classification Search**

CPC H01Q 1/243; H01Q 5/371; H01Q 5/378

USPC 343/700 MS, 702

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,329,959 B1 * 12/2001 Varadan H01Q 1/364

343/700 MS

2010/0123631 A1 * 5/2010 Chang H01Q 1/243

343/700 MS

2012/0242555 A1 * 9/2012 Hsieh H01Q 1/243

343/833

* cited by examiner


Primary Examiner — Dieu H Duong

(74) *Attorney, Agent, or Firm* — Novak Druce Connolly Bove + Quigg LLP

(57) **ABSTRACT**

A tunable antenna including a dielectric substrate, a main antenna, and a resonating antenna is disclosed. The dielectric substrate is made of dielectric constant-tunable material. The main antenna is positioned on the dielectric substrate, the main antenna includes a feeding arm and a first grounding arm. The main antenna generates a low-frequency mode and at least one high-frequency mode. The resonating antenna is positioned on the dielectric substrate. The resonating antenna resonates with the main antenna to generate another high-frequency mode. The central frequencies of the low-frequency mode and the high-frequency modes of the tunable antenna are adjusted by adjusting a dielectric constant of the dielectric substrate.

16 Claims, 2 Drawing Sheets

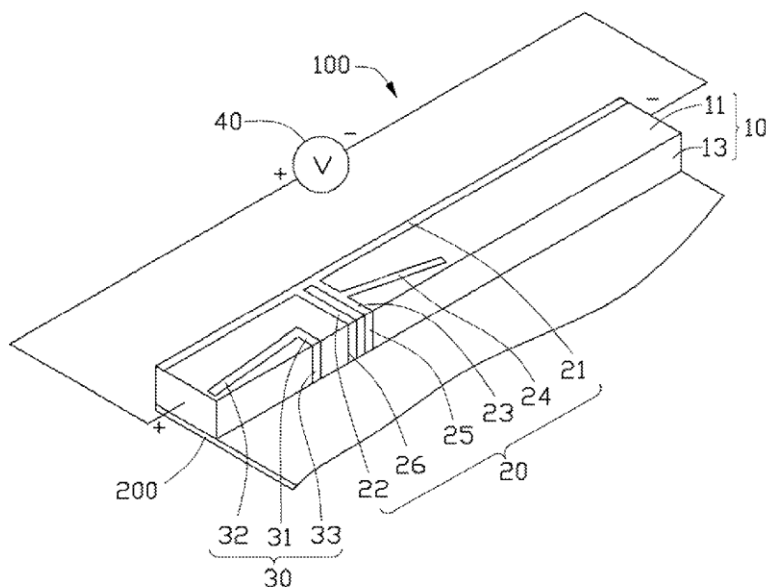



US009331383B2

(12) **United States Patent**
Du et al.

(10) **Patent No.:** **US 9,331,383 B2**
(45) **Date of Patent:** **May 3, 2016**

(54) **ANTENNA STRUCTURE AND THE
MANUFACTURING METHOD THEREFOR**

- (71) Applicant: **ARCADYAN TECHNOLOGY
CORPORATION**, Hsinchu (TW)
- (72) Inventors: **Jian-Jhih Du**, Hsinchu (TW);
Chih-Yung Huang, Hsinchu (TW);
Kuo-Chang Lo, Hsinchu (TW)
- (73) Assignee: **ARCADYAN TECHNOLOGY
CORPORATION**, Hsinchu (TW)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 328 days.

(21) Appl. No.: **13/950,727**

(22) Filed: **Jul. 25, 2013**

(65) **Prior Publication Data**

US 2014/0285380 A1 Sep. 25, 2014

(30) **Foreign Application Priority Data**

Mar. 21, 2013 (TW) 102110130 A

(51) **Int. Cl.**

H01Q 1/38 (2006.01)
H01P 11/00 (2006.01)
H01Q 1/24 (2006.01)
H01Q 9/40 (2006.01)
H01Q 9/42 (2006.01)

(52) **U.S. Cl.**

CPC **H01Q 1/38** (2013.01); **H01P 11/001**
(2013.01); **H01Q 1/243** (2013.01); **H01Q 9/40**
(2013.01); **H01Q 9/42** (2013.01); **Y10T**
29/49016 (2015.01)

(58) **Field of Classification Search**

CPC H01Q 1/38; H01Q 1/243; H01Q 1/40;
H01Q 1/42; H01P 11/001

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

- 6,700,543 B2 * 3/2004 Konishi H01Q 1/38
343/700 MS
6,788,257 B2 * 9/2004 Fang H01Q 9/0421
343/700 MS
8,063,827 B2 * 11/2011 Hotta H01Q 1/243
343/700 MS
8,223,076 B2 * 7/2012 Huang H01Q 1/38
343/700 MS
2001/0050651 A1 * 12/2001 Grangeat H01Q 13/106
343/767
2010/0220030 A1 * 9/2010 Shimoda H01Q 1/243
343/860
2010/0245198 A1 * 9/2010 Wilson H01Q 1/243
343/767
2014/0002309 A1 * 1/2014 Huang H01Q 1/38
343/700 MS
2014/0009359 A1 * 1/2014 Huang H01Q 1/38
343/846
2014/0145909 A1 * 5/2014 Chen H01Q 9/0407
343/893
2014/0168028 A1 * 6/2014 Yanagi H01Q 1/38
343/848

FOREIGN PATENT DOCUMENTS

CN 1886883 12/2006
CN 101719598 6/2010
TW I368355 7/2012

* cited by examiner


Primary Examiner — Trinh Dinh

(74) *Attorney, Agent, or Firm* — Allen, Dyer, Doppelt,
Milbrath & Gilchrist, P.A.

(57) **ABSTRACT**

An antenna structure is provided. The antenna structure includes a radiating portion having an approximately quadrangular body, wherein the quadrangular body has a first side, a second side opposite to the first side, a third side, and a fourth side opposite to the third side; and a ground portion surrounding an entire length of the first side, an entire length of the fourth side, and at most a half of a length of the second side.

8 Claims, 5 Drawing Sheets

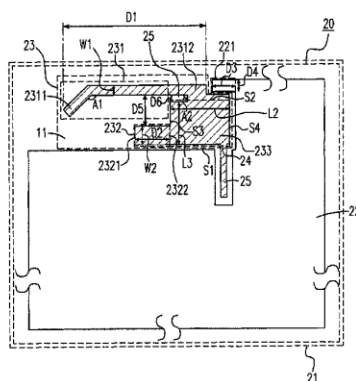



US009331387B2

(12) **United States Patent**
Chen et al.

(10) **Patent No.:** **US 9,331,387 B2**
(45) **Date of Patent:** ***May 3, 2016**

(54) **WIDEBAND ANTENNA**

(71) Applicant: **MediaTek Inc.**, Hsin-Chu (TW)

(72) Inventors: **Wei Yu Chen**, New Taipei (TW);
Shih-Wei Hsieh, Taipei (TW)

(73) Assignee: **MEDIATEK INC.**, Hsin-Chu (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 267 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **14/079,287**

(22) Filed: **Nov. 13, 2013**

(65) **Prior Publication Data**

US 2014/0062796 A1 Mar. 6, 2014

Related U.S. Application Data

(63) Continuation-in-part of application No. 13/290,406, filed on Nov. 7, 2011, now Pat. No. 8,610,628.

(51) **Int. Cl.**

H01Q 1/38 (2006.01)

H01Q 5/01 (2006.01)

H01Q 1/24 (2006.01)

H01Q 5/378 (2015.01)

(52) **U.S. Cl.**

CPC **H01Q 5/01** (2013.01); **H01Q 1/243** (2013.01); **H01Q 5/378** (2015.01)

(58) **Field of Classification Search**

CPC H01Q 1/38; H01Q 1/243

USPC 343/702, 700 MS

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,952,187 B2 * 10/2005 Annamaa H01Q 1/242
343/700 MS

6,963,310 B2 11/2005 Horita et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CN 101944656 1/2011

CN 102055061 5/2011

(Continued)

OTHER PUBLICATIONS

Chang, C.H., et al.; "Coupled-Fed Planar M8-PIFA for Internal Mobile Phone Antenna;" Microwave and Optical Technology Letters; vol. 51; No. 6; Apr. 2009; pp. 1091-1096.

(Continued)

Primary Examiner — Hoanganh Le


(74) *Attorney, Agent, or Firm* — McClure, Qualey & Rodack, LLP

(57)

ABSTRACT

A wideband antenna includes a first substrate, a second substrate, a ground plane, an exciting element, a connection element, a first branch, a second branch, and a coupling branch. The ground plane is disposed on the first substrate. The exciting element is disposed on the second substrate and has a feed point coupled to a signal source. The connection element is disposed on the second substrate and coupled to the ground plane. The first branch is disposed on the second substrate and coupled to the connection element. The second branch is disposed on the second substrate and coupled to the connection element. The coupling element is disposed on the second substrate and coupled to the connection element. The distance between the coupling element and the second branch is smaller than 5 mm.

20 Claims, 13 Drawing Sheets

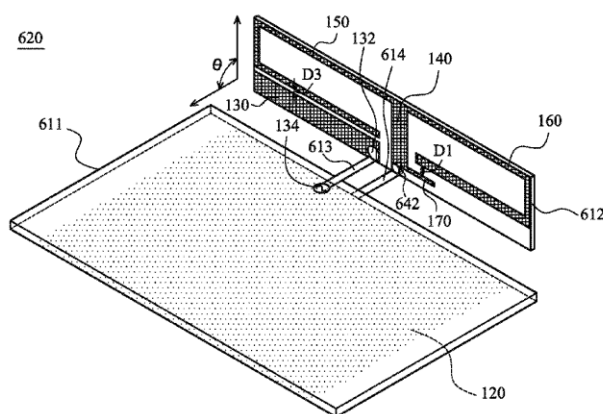



US009331397B2

(12) **United States Patent**
Jin et al.

(10) **Patent No.:** **US 9,331,397 B2**

(45) **Date of Patent:** **May 3, 2016**

(54) **TUNABLE ANTENNA WITH SLOT-BASED
PARASITIC ELEMENT**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)

6,317,094 B1 11/2001 Wu et al.
6,762,729 B2 7/2004 Egashira

(Continued)

(72) Inventors: **Nanbo Jin**, Sunnyvale, CA (US);
Yuehui Ouyang, Sunnyvale, CA (US);
Yijun Zhou, Sunnyvale, CA (US);
Enrique Ayala Vazquez, Watsonville,
CA (US); **Anand Lakshmanan**, San
Jose, CA (US); **Robert W. Schlub**,
Cupertino, CA (US); **Mattia Pascolini**,
Campbell, CA (US); **Matthew A. Mow**,
Los Altos, CA (US)

FOREIGN PATENT DOCUMENTS

CN 102110873 6/2011
CN 102683861 9/2012

(Continued)

OTHER PUBLICATIONS

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

Darnell et al., U.S. Appl. No. 13/368,855, filed Feb. 8, 2012.

(Continued)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 191 days.

Primary Examiner — Dameon E Levi

Assistant Examiner — Walter Davis

(74) *Attorney, Agent, or Firm* — Treyz Law Group, P.C.; G.
Victor Treyz; Michael H. Lyons

(21) Appl. No.: **13/846,471**

(57) **ABSTRACT**

(22) Filed: **Mar. 18, 2013**

Electronic devices may be provided that contain wireless communications circuitry. The wireless communications circuitry may include radio-frequency transceiver circuitry and antenna structures. The antenna structures may form a dual arm inverted-F antenna. The antenna may have a resonating element formed from portions of a peripheral conductive electronic device housing member and may have an antenna ground that is separated from the antenna resonating element by a gap. A short circuit path may bridge the gap. An antenna feed may be coupled across the gap in parallel with the short circuit path. Low band tuning may be provided using an adjustable inductor that bridges the gap. The antenna may have a slot-based parasitic antenna resonating element with a slot formed between portions of the peripheral conductive electronic device housing member and the antenna ground. An adjustable capacitor may bridge the slot to provide high band tuning.

(65) **Prior Publication Data**

US 2014/0266922 A1 Sep. 18, 2014

(51) **Int. Cl.**

H01Q 21/28 (2006.01)

H01Q 1/24 (2006.01)

H01Q 9/06 (2006.01)

H01Q 5/10 (2015.01)


(52) **U.S. Cl.**

CPC **H01Q 21/28** (2013.01); **H01Q 1/24**
(2013.01); **H01Q 1/243** (2013.01); **H01Q 5/10**
(2015.01); **H01Q 9/06** (2013.01)

(58) **Field of Classification Search**

USPC 343/702
See application file for complete search history.

25 Claims, 8 Drawing Sheets

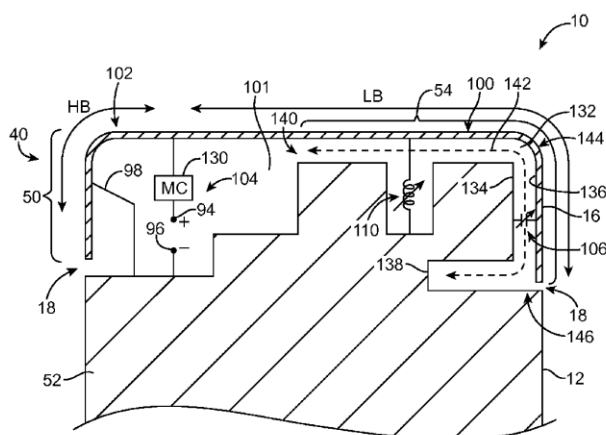



US009337527B2

(12) **United States Patent**
Yu et al.

(10) **Patent No.:** **US 9,337,527 B2**

(45) **Date of Patent:** **May 10, 2016**

(54) **MOBILE TELECOMMUNICATION
TERMINAL**

USPC 343/702
See application file for complete search history.

(75) Inventors: **Wei Yu**, Waterloo (CA); **Wen Li**,
Waterloo (CA)

(56) **References Cited**

(73) Assignee: **Wen Li**, Waterloo, Ontario (CA)

U.S. PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 900 days.

2005/0043055	A1 *	2/2005	Vance	455/550.1
2006/0017624	A1 *	1/2006	Nagano et al.	343/702
2007/0164910	A1 *	7/2007	Qi et al.	343/702
2007/0241972	A1 *	10/2007	Grossman et al.	343/702
2007/0257853	A1 *	11/2007	Gevorgian et al.	343/787
2011/0304512	A1 *	12/2011	Friederich et al.	343/702

* cited by examiner

(21) Appl. No.: **12/736,339**

(22) PCT Filed: **Mar. 31, 2008**

Primary Examiner — Dameon E Levi

Assistant Examiner — Collin Dawkins

(86) PCT No.: **PCT/CN2008/000642**

(74) *Attorney, Agent, or Firm* — Steptoe & Johnson LLP

§ 371 (c)(1),

(2), (4) Date: **Sep. 30, 2010**

(57) **ABSTRACT**

(87) PCT Pub. No.: **WO2009/121205**

PCT Pub. Date: **Oct. 8, 2009**

A mobile communication terminal comprises a shell, and a backfire antenna which includes a main board disposed in the shell and having a transmitting circuit and a receiving circuit on the main board; a main antenna element coupled to the transmitting circuit and the receiving circuit on the main board; and a backfire resonator located at a side of the shell deviated from a user's head, and coupled to the main board and the main antenna element, in which the backfire resonator is fed by the main board from a position on the main board deviated from a center of the main board. The mobile communication terminal according to embodiment of the present disclosure may cause most electromagnetic waves to radiate towards a direction deviated from the user, thus reducing radiation and harm thereof to the user, strengthening the signal received by the base station, and improving the communication quality.

(65) **Prior Publication Data**

US 2011/0018779 A1 Jan. 27, 2011

(51) **Int. Cl.**

H01Q 1/24 (2006.01)

H01Q 9/42 (2006.01)

H01Q 21/28 (2006.01)


(52) **U.S. Cl.**

CPC **H01Q 1/243** (2013.01); **H01Q 1/245**
(2013.01); **H01Q 9/42** (2013.01); **H01Q 21/28**
(2013.01)

(58) **Field of Classification Search**

CPC H01Q 1/243; H01Q 1/38; H01Q 9/0421

8 Claims, 11 Drawing Sheets

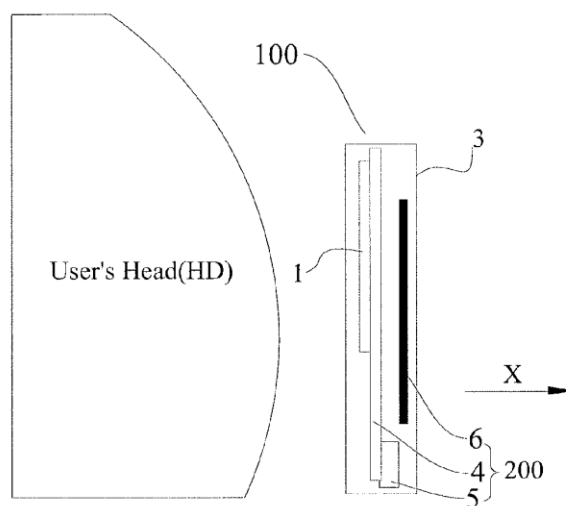



US009337528B2

(12) **United States Patent**
Hammond

(10) **Patent No.:** **US 9,337,528 B2**

(45) **Date of Patent:** **May 10, 2016**

(54) **MOBILE WIRELESS COMMUNICATIONS
DEVICE INCLUDING ELECTRICALLY
CONDUCTIVE PORTABLE HOUSING
SECTIONS DEFINING AN ANTENNA**

(75) Inventor: **Robert Ralph Bryan Hammond**,
Ottawa (CA)

(73) Assignee: **BlackBerry Limited**, Waterloo (CA)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 310 days.

(21) Appl. No.: **13/360,197**

(22) Filed: **Jan. 27, 2012**

(65) **Prior Publication Data**

US 2013/0194138 A1 Aug. 1, 2013

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 13/10 (2006.01)
H01Q 1/00 (2006.01)
H01Q 1/44 (2006.01)

(52) **U.S. Cl.**
CPC **H01Q 1/243** (2013.01); **H01Q 1/44**
(2013.01); **H01Q 13/10** (2013.01)

(58) **Field of Classification Search**
CPC H01Q 1/24; H01Q 1/243; H01Q 5/0058;
H01Q 1/44
USPC 343/702
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,286,090 B1 * 10/2007 Rowell 343/702
7,592,963 B2 9/2009 Cheng

7,619,577 B1 11/2009 Cheng
8,054,231 B2 11/2011 Ahn et al.
2004/0257283 A1 12/2004 Asano et al.
2008/0238780 A1 * 10/2008 Ponce De Leon et al. 343/700
MS
2009/0153423 A1 * 6/2009 Dinallo et al. 343/767
2010/0053002 A1 3/2010 Wojack et al.
2012/0009983 A1 * 1/2012 Mow et al. 455/575.7
2012/0206302 A1 * 8/2012 Ramachandran et al. 343/702
2012/0229347 A1 * 9/2012 Jin et al. 343/702

FOREIGN PATENT DOCUMENTS

EP 2146413 1/2010
EP 2405534 1/2012
EP 2410605 1/2012
WO 2011106899 9/2011

* cited by examiner

Primary Examiner — Dameon E Levi


Assistant Examiner — Ricardo Magallanes

(74) *Attorney, Agent, or Firm* — Jenna L. Wilson; Dimock
Stratton LLP

(57) **ABSTRACT**

A mobile wireless communications device may include a portable housing including electrically conductive sections defining a perimeter of the portable housing and configured to function as an antenna. One of the electrically conductive sections may include a base, a first electrically conductive arm extending from the base, and a second electrically conductive arm having a proximal portion parallel and spaced apart from the first electrically conductive arm. A printed circuit board (PCB) may be carried by the portable housing. The mobile wireless communications device may also include wireless transceiver circuitry carried by the PCB and coupled to the antenna.

20 Claims, 6 Drawing Sheets

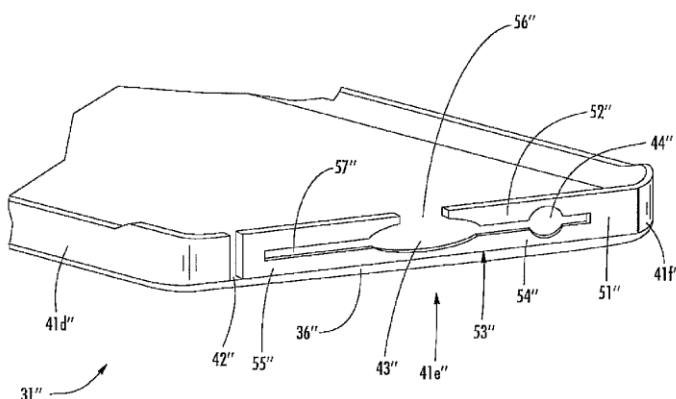



US009337529B2

(12) **United States Patent**
Cui

(10) **Patent No.:** **US 9,337,529 B2**
(45) **Date of Patent:** **May 10, 2016**

(54) **PORTABLE TERMINAL**

(56) **References Cited**

(71) Applicants: **Beijing Lenovo Software Ltd.**, Haidian District, Beijing (CN); **Lenovo (Beijing) Co., Ltd.**, Beijing (CN)

U.S. PATENT DOCUMENTS

2004/0164907 A1 * 8/2004 Killen H01Q 9/0457
343/700 MS
2008/0001836 A1 * 1/2008 Guthrie H01Q 13/10
343/767
2009/0153410 A1 * 6/2009 Chiang H01Q 13/08
343/702
2014/0266950 A1 * 9/2014 Cicero H01Q 1/28
343/789
2015/0145740 A1 * 5/2015 Fratti H01Q 1/40
343/767

(72) Inventor: **Bin Cui**, Beijing (CN)

(73) Assignees: **BEIJING LENOVO SOFTWARE LTD.**, Haidian District, Beijing (CN);
LENOVO (BEIJING) CO., LTD.,
Haidian District, Beijing (CN)

FOREIGN PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 229 days.

CN 102227036 A 10/2011
CN 102255134 A 11/2011
CN 102368575 A 3/2012
CN 102593578 A 7/2012
CN 202308322 U 7/2012
JP 2001-016019 A 1/2001

OTHER PUBLICATIONS

(21) Appl. No.: **14/090,325**

(22) Filed: **Nov. 26, 2013**

Chinese First Office Action with English Translation for related Application No. 201210492560.4 dated Jun. 24, 2015, 10 pages.
Second Office Action dated Jan. 29, 2016 out of corresponding Chinese priority Application No. CN 201210492560.4 (7 pages including English translation).

(65) **Prior Publication Data**

US 2014/0145886 A1 May 29, 2014

* cited by examiner

(30) **Foreign Application Priority Data**

Nov. 27, 2012 (CN) 2012 1 0492560

Primary Examiner — Tan Ho

(74) *Attorney, Agent, or Firm* — Brinks Gilson & Lione; G. Peter Nichols

(51) **Int. Cl.**
H01Q 1/24 (2006.01)


(57) **ABSTRACT**

(52) **U.S. Cl.**
CPC **H01Q 1/243** (2013.01)

A portable terminal is described where the portable terminal includes a first frame body and a second frame body. The first frame body is used for an antenna unit of the portable terminal and a gap is set in a first partial area of the first frame body with the first partial area with a gap being set is covered by the second frame body.

(58) **Field of Classification Search**
USPC 343/702, 767, 770
See application file for complete search history.

13 Claims, 3 Drawing Sheets

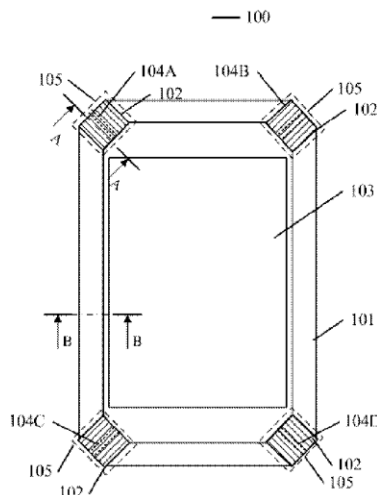



US009337532B2

(12) **United States Patent**
Vanjani et al.

(10) **Patent No.:** **US 9,337,532 B2**
(45) **Date of Patent:** **May 10, 2016**

(54) **MULTI LAYER 3D ANTENNA CARRIER
ARRANGEMENT FOR ELECTRONIC
DEVICES**

(71) Applicant: **Futurewei Technologies, Inc.**, Plano,
TX (US)
(72) Inventors: **Kiran Vanjani**, San Diego, CA (US);
Jorge Fabrega Sanchez, San Diego, CA
(US); **Hui Vicki Tan**, San Diego, CA
(US)

(73) Assignee: **Futurewei Technologies, Inc.**, Plano,
TX (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 510 days.

(21) Appl. No.: **13/622,134**

(22) Filed: **Sep. 18, 2012**

(65) **Prior Publication Data**

US 2014/0078017 A1 Mar. 20, 2014

(51) **Int. Cl.**
H01Q 1/12 (2006.01)
H01Q 1/38 (2006.01)
H01Q 1/24 (2006.01)
H01Q 5/371 (2015.01)
H01Q 9/04 (2006.01)

(52) **U.S. Cl.**
CPC **H01Q 1/38** (2013.01); **H01Q 1/243**
(2013.01); **H01Q 5/371** (2015.01); **H01Q**
9/0414 (2013.01); **H01Q 9/0471** (2013.01)

(58) **Field of Classification Search**
USPC 343/700 MS, 702, 878
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,040,806 A * 3/2000 Kushihi et al. 343/853
6,147,650 A * 11/2000 Kawahata et al. 343/700 MS
6,992,627 B1 * 1/2006 Honda et al. 343/700 MS
2002/0175864 A1 * 11/2002 Fang et al. 343/702
2005/0099344 A1 5/2005 Okubo et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CN 101572340 A 11/2009
CN 101573831 A 11/2009

(Continued)

OTHER PUBLICATIONS

Foreign Communication From a Counterpart Application, PCT
Application No. PCT/CN2013/083784, International Search Report
dated Dec. 26, 2013, 6 pages.

(Continued)


Primary Examiner — Tan Ho

(74) *Attorney, Agent, or Firm* — Conley Rose, P.C.; Grant
Rodolph; Adam J. Stegge

(57) **ABSTRACT**

An antenna comprising a plurality of carrier blocks, wherein
each carrier block is coupled to at least one other carrier
block, and a plurality of radiators, wherein each radiator is
connected to at least one carrier block. Further, an antenna
comprising a plurality of carrier blocks, wherein each carrier
block is coupled with at least one other carrier block, and a
radiator connected to at least two of the plurality of carrier
blocks.

35 Claims, 24 Drawing Sheets

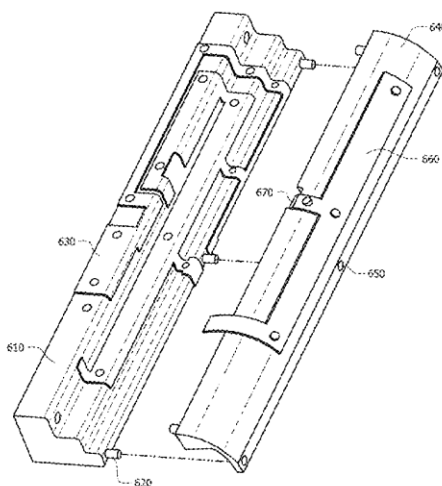



US009337537B2

(12) **United States Patent**
Hu et al.

(10) **Patent No.:** **US 9,337,537 B2**
(45) **Date of Patent:** **May 10, 2016**

(54) **ANTENNA WITH TUNABLE HIGH BAND
PARASITIC ELEMENT**

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)

(72) Inventors: **Hongfei Hu**, Santa Clara, CA (US);
Mattia Pascolini, San Mateo, CA (US);
Enrique Ayala Vazquez, Watsonville,
CA (US); **Matthew A. Mow**, Los Altos,
CA (US); **Dean F. Darnell**, San Jose, CA
(US); **Ming-Ju Tsai**, Cupertino, CA
(US); **Robert W. Schlub**, Cupertino, CA
(US); **Nanbo Jin**, Sunnyvale, CA (US);
Yuehui Ouyang, Sunnyvale, CA (US);
Liang Han, Sunnyvale, CA (US); **David
Pratt**, Gilroy, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 428 days.

(21) Appl. No.: **13/890,013**

(22) Filed: **May 8, 2013**

(65) **Prior Publication Data**

US 2014/0333496 A1 Nov. 13, 2014

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 5/00 (2015.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01Q 5/0024** (2013.01); **H01Q 1/243**
(2013.01); **H01Q 5/30** (2015.01); **H01Q 5/321**
(2015.01); **H01Q 5/378** (2015.01); **H01Q**
9/0421 (2013.01)

(58) **Field of Classification Search**
USPC 343/700 MS, 702, 745, 833
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,265,720 B1 * 9/2007 Ponce De Leon H01Q 1/243
343/700 MS

7,345,634 B2 3/2008 Ozkar et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CN 102684722 9/2012
CN 202444051 9/2012

(Continued)

OTHER PUBLICATIONS

Jin et al., U.S. Appl. No. 13/846,471, filed Mar. 18, 2013.

(Continued)


Primary Examiner — Tan Ho

(74) *Attorney, Agent, or Firm* — Treyz Law Group, P.C.; G.
Victor Treyz; Michael H. Lyons

(57) **ABSTRACT**

Electronic devices may be provided that include radio-frequency transceiver circuitry and antennas. An antenna may be formed from an antenna resonating element and an antenna ground. The antenna resonating element may have a shorter portion that resonates at higher communications band frequencies and a longer portion that resonates at lower communications band frequencies. The resonating element may be formed from a peripheral conductive electronic device housing structure that is separated from the antenna ground by an opening. A parasitic monopole antenna resonating element or parasitic loop antenna resonating element may be located in the opening. Antenna tuning in the higher communications band may be implemented using an adjustable inductor in the parasitic element. Antenna tuning in the lower communications band may be implemented using an adjustable inductor that couples the antenna resonating element to the antenna ground.

17 Claims, 9 Drawing Sheets

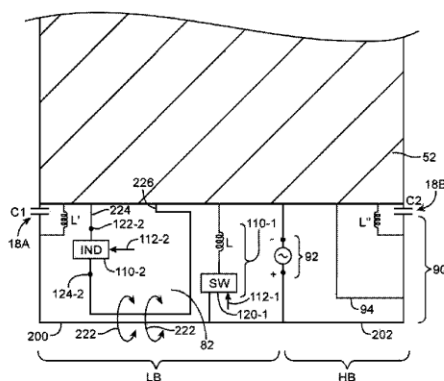



US009337539B1

(12) **United States Patent**
Ananthanarayanan et al.

(10) **Patent No.:** **US 9,337,539 B1**
(45) **Date of Patent:** **May 10, 2016**

(54) **COMBINED ANTENNA ELEMENT WITH
MULTIPLE MATCHED FEEDS FOR
MULTIPLE COMPONENT CARRIER
AGGREGATION**

(71) Applicant: **Amazon Technologies, Inc.**, Seattle, WA
(US)

(72) Inventors: **Peruvemba Ranganathan Sai**
Ananthanarayanan, Sunnyvale, CA
(US); **In Chul Hyun**, San Jose, CA (US)

(73) Assignee: **Amazon Technologies, Inc.**, Seattle, WA
(US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/562,605**

(22) Filed: **Dec. 5, 2014**

(51) **Int. Cl.**
H01Q 21/30 (2006.01)
H01Q 5/335 (2015.01)
H01Q 21/00 (2006.01)
H04B 1/40 (2015.01)

(52) **U.S. Cl.**
CPC **H01Q 5/335** (2015.01); **H01Q 21/0006**
(2013.01); **H01Q 21/30** (2013.01); **H04B 1/40**
(2013.01)

(58) **Field of Classification Search**

CPC H01Q 21/30; H04B 1/40
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,761,061 B2 * 7/2010 Rofougaran et al. 455/80
8,543,176 B1 * 9/2013 Daniel et al. 455/575.7
2008/0084345 A1 * 4/2008 Rougas et al. 342/14
2011/0149886 A1 * 6/2011 Xu et al. 370/329

* cited by examiner


Primary Examiner — David Bilodeau

(74) *Attorney, Agent, or Firm* — Lowenstein Sandler LLP

(57) **ABSTRACT**

Antenna structures and methods of operating the same of an electronic device are described. One apparatus includes an antenna element and three matching circuits coupled to the antenna element. The first RF module is operable to cause the antenna element to radiate or receive electromagnetic energy in a first frequency range. The second RF module is operable to cause the antenna element to radiate or receive electromagnetic energy in a second frequency range and a third frequency range. The impedance matching circuits are operable to match an impedance of the antenna element to an impedance of the first RF module to radiate or receive in the first frequency ranges and to match impedances of the antenna element to impedances of the second RF module to radiate or receive the electromagnetic energy in the second and third frequency ranges.

20 Claims, 12 Drawing Sheets

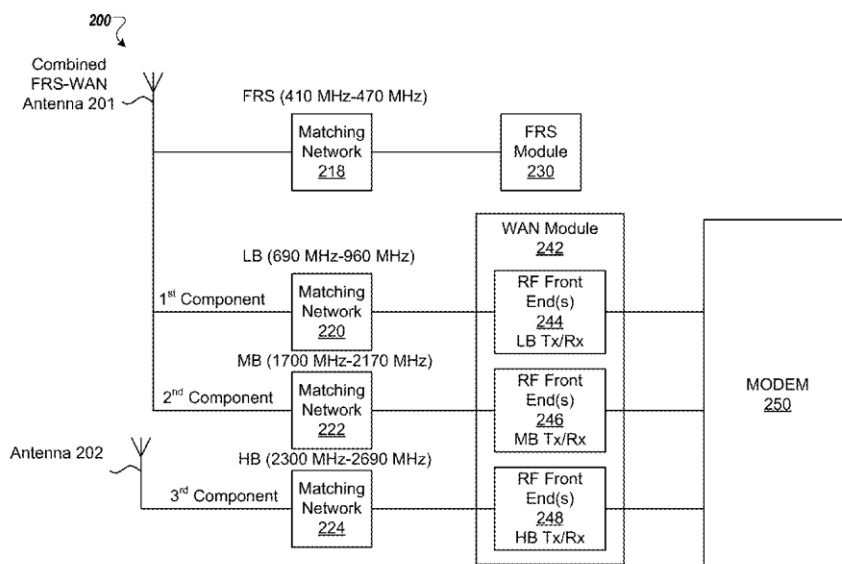



US009337543B2

(12) **United States Patent**
Jung et al.

(10) **Patent No.:** **US 9,337,543 B2**
(45) **Date of Patent:** **May 10, 2016**

(54) **ANTENNA DEVICE AND MOBILE
TERMINAL HAVING THE SAME**

(71) Applicant: **LG ELECTRONICS INC.**, Seoul (KR)

(72) Inventors: **Byungwoon Jung**, Seoul (KR); **Jaewoo Lee**, Seoul (KR); **Daeyong Kwak**, Seoul (KR); **Hanphil Rhyu**, Seoul (KR); **Sungjung Rho**, Seoul (KR)

(73) Assignee: **LG Electronics Inc.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 247 days.

(21) Appl. No.: **13/922,276**

(22) Filed: **Jun. 20, 2013**

(65) **Prior Publication Data**

US 2013/0342411 A1 Dec. 26, 2013

(30) **Foreign Application Priority Data**

Jun. 21, 2012 (KR) 10-2012-0066744
Nov. 22, 2012 (KR) 10-2012-0133296

(51) **Int. Cl.**
H01Q 13/10 (2006.01)
H01Q 1/24 (2006.01)
H01Q 21/28 (2006.01)
H01Q 5/307 (2015.01)

(52) **U.S. Cl.**
CPC **H01Q 13/106** (2013.01); **H01Q 1/243** (2013.01); **H01Q 5/307** (2015.01); **H01Q 13/10** (2013.01); **H01Q 21/28** (2013.01)

(58) **Field of Classification Search**
CPC H01Q 13/10; H01Q 13/085; H01Q 1/38; H01Q 9/0407
USPC 343/767, 702, 867
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2008/0198088	A1 *	8/2008	Lin	H01Q 1/243	343/850
2008/0284670	A1	11/2008	Kanno et al.		
2008/0309563	A1 *	12/2008	Wang	H01Q 1/243	343/702
2008/0316115	A1	12/2008	Hill et al.		
2009/0273524	A1	11/2009	Furuya et al.		
2010/0176997	A1 *	7/2010	Ikegaya	H01Q 5/364	343/702
2010/0214181	A1	8/2010	Ryou et al.		
2011/0001673	A1	1/2011	You et al.		

(Continued)

FOREIGN PATENT DOCUMENTS

CN	201238074	Y	5/2009
CN	101675556	A	3/2010

(Continued)

Primary Examiner — Dameon E Levi


Assistant Examiner — Collin Dawkins

(74) *Attorney, Agent, or Firm* — Birch, Stewart, Kolasch & Birch, LLP

(57) **ABSTRACT**

A mobile terminal comprises: a terminal body having an upper part and a lower part; and an antenna device disposed on the upper part or the lower part of the terminal body, and configured to transmit and receive radio signals, wherein the antenna device comprises: a first member and a second member which form a slot of which one side is open; a feeding portion having one end connected to one of the first member and the second member such that the antenna device resonates in a first frequency band, and forming an electric field in the slot; and a feeding extension portion extending from the feeding portion such that the antenna device resonates in a second frequency band.

17 Claims, 17 Drawing Sheets

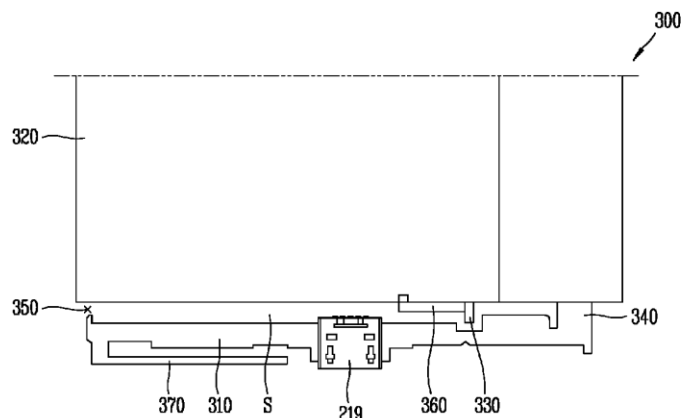



US009337547B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 9,337,547 B2**

(45) **Date of Patent:** **May 10, 2016**

(54) **INTERNAL ANTENNA HAVING WIDEBAND CHARACTERISTIC**

(71) Applicant: **LS Mtron Ltd.**, Anyang-si (KR)

(72) Inventors: **Tae-Hyung Kim**, Gunpo-Si (KR); **Ki-Hyun Kong**, Gunpo-Si (KR); **Suk-Ki Koo**, Gwangmyeong-Si (KR); **Byung-Je Lee**, Seoul (KR); **Hyun-Ho Wi**, Seoul (KR); **Byeong-Kwan Kim**, Seoul (KR)

(73) Assignee: **LS MTRON LTD.**, Anyang-Si, Gyeonggi-Do (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 273 days.

(21) Appl. No.: **13/951,749**

(22) Filed: **Jul. 26, 2013**

(65) **Prior Publication Data**

US 2014/0028519 A1 Jan. 30, 2014

(30) **Foreign Application Priority Data**

Jul. 27, 2012 (KR) 10-2012-0082510

(51) **Int. Cl.**

H01Q 1/24 (2006.01)
H01Q 21/00 (2006.01)
H01Q 1/38 (2006.01)
H01Q 1/52 (2006.01)
H01Q 9/42 (2006.01)
H01Q 21/28 (2006.01)
H01Q 5/25 (2015.01)
H01Q 5/371 (2015.01)
H01Q 5/378 (2015.01)
H01Q 5/40 (2015.01)

(52) **U.S. Cl.**

CPC **H01Q 21/0075** (2013.01); **H01Q 1/243**

(2013.01); **H01Q 1/38** (2013.01); **H01Q 1/521** (2013.01); **H01Q 5/25** (2015.01); **H01Q 5/371** (2015.01); **H01Q 5/378** (2015.01); **H01Q 5/40** (2015.01); **H01Q 9/42** (2013.01); **H01Q 21/28** (2013.01)

(58) **Field of Classification Search**

CPC H01Q 21/0075; H01Q 1/243; H01Q 1/38

USPC 343/702, 700 MS, 844, 846

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,147,650 A * 11/2000 Kawahata et al. 343/700 MS
6,281,848 B1 * 8/2001 Nagumo et al. 343/700 MS
6,320,545 B1 * 11/2001 Nagumo et al. 343/700 MS
6,323,811 B1 * 11/2001 Tsubaki et al. 343/700 MS
8,952,859 B2 * 2/2015 Tan 343/803

(Continued)

FOREIGN PATENT DOCUMENTS

CN 200994001 Y 12/2007
CN 102544729 A 7/2012

(Continued)


Primary Examiner — Hoanganh Le

(74) *Attorney, Agent, or Firm* — LRK Patent Law Firm

(57) **ABSTRACT**

An internal antenna having a wideband characteristic includes a printed circuit board, a first antenna unit fed with electricity from a feeding unit of the printed circuit board, and a second antenna unit spaced apart from the first antenna unit by a predetermined distance and indirectly fed with electricity by means of coupling to the first antenna unit, wherein the second antenna unit is indirectly fed with electricity with a phase difference from the first antenna unit due to an electric distance from a feeding point of the first antenna unit.

13 Claims, 10 Drawing Sheets

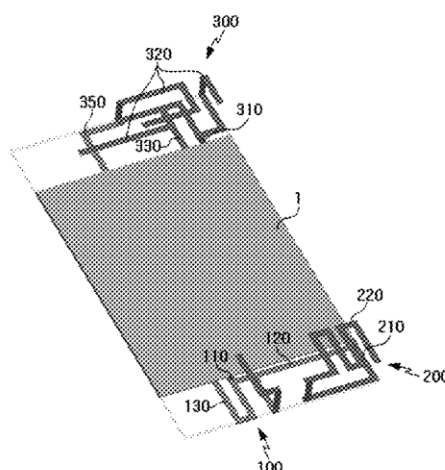



US009337990B2

(12) **United States Patent**
Narahashi et al.

(10) **Patent No.:** **US 9,337,990 B2**

(45) **Date of Patent:** **May 10, 2016**

(54) **FRONT-END CIRCUIT AND IMPEDANCE
ADJUSTMENT METHOD**

(71) Applicant: **NTT DOCOMO, INC.**, Tokyo (JP)

(72) Inventors: **Shoichi Narahashi**, Tokyo (JP); **Hiroshi Okazaki**, Tokyo (JP); **Kunihiro Kawai**, Tokyo (JP); **Yuta Takagi**, Tokyo (JP); **Takayuki Furuta**, Tokyo (JP)

(73) Assignee: **NTT DOCOMO, INC.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 25 days.

(21) Appl. No.: **14/359,240**

(22) PCT Filed: **Jul. 9, 2013**

(86) PCT No.: **PCT/JP2013/068703**

§ 371 (c)(1),

(2) Date: **May 19, 2014**

(87) PCT Pub. No.: **WO2014/010575**

PCT Pub. Date: **Jan. 16, 2014**

(65) **Prior Publication Data**

US 2014/0321312 A1 Oct. 30, 2014

(30) **Foreign Application Priority Data**

Jul. 11, 2012 (JP) 2012-155246

(51) **Int. Cl.**

H04L 5/14 (2006.01)

H04B 1/525 (2015.01)

(Continued)

(52) **U.S. Cl.**

CPC **H04L 5/1461** (2013.01); **H04B 1/006**
(2013.01); **H04B 1/525** (2013.01); **H04W 24/08**
(2013.01)

(58) **Field of Classification Search**

CPC **H04B 1/525**; **H04B 1/006**; **H04W 24/08**;
H04L 5/1461

USPC **370/242-252**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,518,469 B2 * 4/2009 Kemmochi H04B 1/0057

2004/0127182 A1 * 7/2004 Hayashi H01P 1/15
455/193.1

(Continued)

FOREIGN PATENT DOCUMENTS

JP 2011 182271 9/2011

OTHER PUBLICATIONS

Extended European Search Report issued May 13, 2015 in Patent Application No. 13817551.8.

(Continued)

Primary Examiner — Bob Phunkulh


Assistant Examiner — Kyaw Z Soe

(74) Attorney, Agent, or Firm — Oblon, McClelland, Maier & Neustadt, L.L.P.

(57) **ABSTRACT**

A front-end circuit includes an RFIC, an antenna, N duplexers, N variable impedance adjustment circuits, a switch for selecting any two of the N variable impedance adjustment circuits, and a control unit which receives a control signal from the RFIC, where $2 \leq N$. The control unit executes switching operations of the N variable impedance adjustment circuits and the switch in accordance with control information. The control signal indicates to 1) control the switch to select two variable impedance adjustment circuits corresponding to a p-th frequency band and a q-th frequency band respectively, 2) control a variable impedance adjustment circuit corresponding to the p-th frequency band to increase input impedance in the q-th frequency band as viewed from the antenna side and 3) control a variable impedance adjustment circuit corresponding to the q-th frequency band to increase input impedance in the p-th frequency band as viewed from the side.

3 Claims, 9 Drawing Sheets

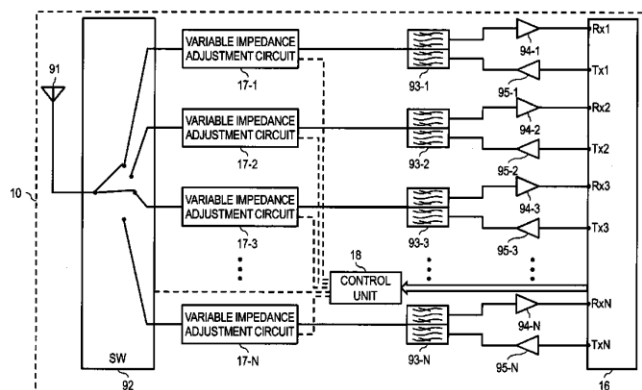



US009343801B2

(12) **United States Patent**
Chou et al.

(10) **Patent No.:** **US 9,343,801 B2**
(45) **Date of Patent:** **May 17, 2016**

(54) **ELECTRONIC DEVICE**

(56) **References Cited**

(71) Applicant: **Acer Incorporated**, New Taipei (TW)

U.S. PATENT DOCUMENTS

(72) Inventors: **Ming-Yu Chou**, New Taipei (TW);
Ching-Chi Lin, New Taipei (TW);
Kun-Sheng Chang, New Taipei (TW)

2011/0102272	A1 *	5/2011	Wong		H01Q 1/243 343/702
2012/0194390	A1 *	8/2012	Endo		H01Q 1/243 343/700 MS
2014/0361930	A1 *	12/2014	Liu		H01Q 1/243 343/700 MS
2015/0333390	A1 *	11/2015	Peng		H01Q 7/00 343/702
2015/0380820	A1 *	12/2015	Wu		H01Q 5/378 343/702

(73) Assignee: **Acer Incorporated**, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 74 days.

* cited by examiner

(21) Appl. No.: **14/501,047**

Primary Examiner — Tan Ho

(22) Filed: **Sep. 30, 2014**

(74) Attorney, Agent, or Firm — Jianq Chyun IP Office

(65) **Prior Publication Data**

US 2016/0028150 A1 Jan. 28, 2016

(30) **Foreign Application Priority Data**

Jul. 22, 2014 (TW) 103125085 A

(57) **ABSTRACT**


An electronic device having a radiation part and a metallic frame is provided. The radiation part is L-shaped, and includes a feeding branch and an open branch. The metallic frame includes a first metallic part and a second metallic part. The first metallic part is L-shaped, wherein a first side of the first metallic part is near the open branch of the radiation part, and a first gap exists therebetween. The second metallic part is L-shaped, wherein an open terminal of a first side of the second metallic part is aligned with an open terminal of the first side of the first metallic part, and a second gap exists therebetween. The radiation part and the metallic frame forms an antenna to transceive a plurality of radio frequency signals.

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/38 (2006.01)
H01Q 1/48 (2006.01)
H01Q 5/10 (2015.01)

(52) **U.S. Cl.**
CPC **H01Q 1/243** (2013.01); **H01Q 1/48** (2013.01); **H01Q 5/10** (2015.01)

(58) **Field of Classification Search**
USPC 343/700 MS, 702
See application file for complete search history.

6 Claims, 3 Drawing Sheets

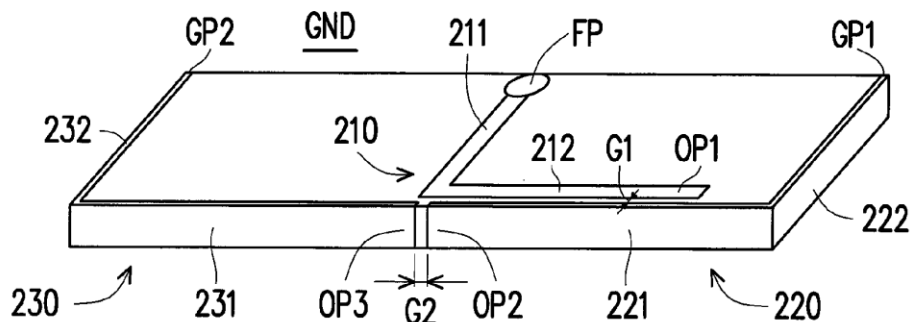



US009343802B2

(12) **United States Patent**
Su et al.

(10) **Patent No.:** **US 9,343,802 B2**
(45) **Date of Patent:** **May 17, 2016**

(54) **COMMUNICATION DEVICE AND ANTENNA THEREOF**

(71) Applicant: **KING SLIDE TECHNOLOGY CO., LTD.**, Kaohsiung (TW)

(72) Inventors: **Hsin-Cheng Su**, Kaohsiung (TW);
Chun-Ta Liu, Kaohsiung (TW);
Shu-Chen Lin, Kaohsiung (TW)

(73) Assignee: **KING SLIDE TECHNOLOGY CO., LTD.**, Kaohsiung Science Park, Lu Zhu Dist., Kaohsiung (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 98 days.

(21) Appl. No.: **14/515,494**

(22) Filed: **Oct. 15, 2014**

(65) **Prior Publication Data**

US 2016/0111771 A1 Apr. 21, 2016

(51) **Int. Cl.**
H01Q 1/24 (2006.01)

(52) **U.S. Cl.**
CPC **H01Q 1/243** (2013.01)

(58) **Field of Classification Search**
CPC **H01Q 1/243**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,678,569 B2 * 3/2010 Bukh A61K 39/29
435/235.1
8,688,176 B2 * 4/2014 Mareno H04M 1/026
361/807

9,203,141 B1 * 12/2015 Su H01Q 1/243
343/702
2004/0257283 A1 * 12/2004 Asano H01Q 1/243
343/702
2007/0030204 A1 * 2/2007 Heng H01Q 1/22
343/702
2011/0304223 A1 * 12/2011 Togashi H01Q 1/243
307/116
2012/0044114 A1 * 2/2012 Eom H01Q 1/243
343/702
2013/0135158 A1 5/2013 Faraone
2014/0087674 A1 3/2014 Teng
2014/0132457 A1 5/2014 Galeev
2015/0109170 A1 * 4/2015 Kang G06F 1/182
343/702

* cited by examiner



Primary Examiner — Trinh Dinh

(74) *Attorney, Agent, or Firm* — Winston Hsu; Scott Margo

(57) **ABSTRACT**

An antenna of a communication device includes a metal frame, a metal back cover and a printed circuit board. The printed circuit board includes a first circuit block and a second circuit block electrically connected to the first circuit block. A first conductor is connected between a first part of the metal frame and a signal terminal of the first circuit block. A second conductor is connected between a second part of the metal frame and a ground terminal of the first circuit block. A third conductor is connected to a third part of the metal frame. A fourth conductor is connected to a ground terminal of the second circuit block, and at least one coupling gap is defined between the third conductor and the fourth conductor. A signal terminal of the second circuit block is electrically connected to a fourth part of the metal frame.

5 Claims, 10 Drawing Sheets

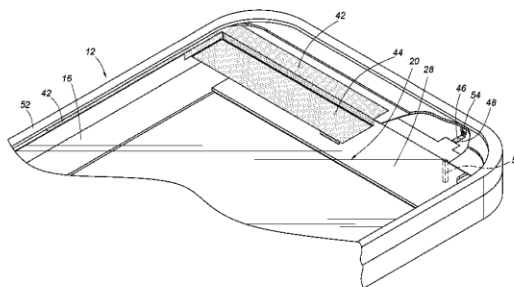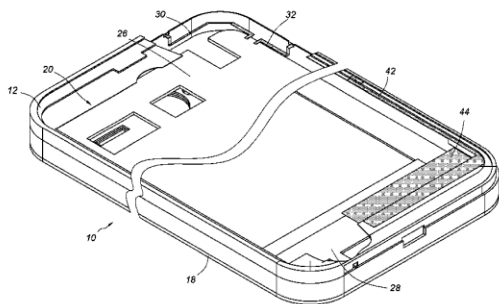



US009343804B2

(12) **United States Patent**
Oh et al.

(10) **Patent No.:** **US 9,343,804 B2**

(45) **Date of Patent:** **May 17, 2016**

(54) **ANTENNA APPARATUS FOR PORTABLE TERMINAL**

USPC 343/702, 872, 909
See application file for complete search history.

(71) Applicant: **Samsung Electronics Co., Ltd.**,
Gyeonggi-do (KR)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(72) Inventors: **Jun-Hwa Oh**, Seoul (KR); **Joon-Ho Byun**, Gyeonggi-do (KR); **Jae-Hee Kim**, Gyeonggi-do (KR); **Bum-Jin Cho**, Gyeonggi-do (KR); **Sang-Jin Eom**, Gyeonggi-do (KR)

6,396,444	B1 *	5/2002	Goward et al.	343/702
7,847,753	B2 *	12/2010	Ishibashi et al.	343/897
8,432,321	B2 *	4/2013	Arkko et al.	343/702
2003/0045324	A1	3/2003	Nagumo et al.	
2004/0200821	A1	10/2004	Voeltzel	
2007/0008227	A1	1/2007	Napoles et al.	
2008/0238801	A1	10/2008	Ragan	
2009/0069061	A1 *	3/2009	Laurent et al.	455/575.7
2009/0153410	A1 *	6/2009	Chiang et al.	343/702
2009/0153412	A1 *	6/2009	Chiang et al.	343/702
2010/0271285	A1	10/2010	Yun et al.	

(73) Assignee: **Samsung Electronics Co., Ltd.**,
Suwon-si, Gyeonggi-do (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 251 days.

(Continued)

FOREIGN PATENT DOCUMENTS

(21) Appl. No.: **13/790,695**

JP	11-307989	A	11/1999
KR	10-2004-0007081	A	1/2004
KR	10-2004-0047965	A	6/2004
KR	10-2006-0002951	A	1/2006

(22) Filed: **Mar. 8, 2013**

(65) **Prior Publication Data**

US 2013/0234910 A1 Sep. 12, 2013

(30) **Foreign Application Priority Data**

Mar. 12, 2012 (KR) 10-2012-0025126

(51) **Int. Cl.**
H01Q 1/24 (2006.01)
H01Q 1/42 (2006.01)
H01Q 1/44 (2006.01)
H01Q 5/378 (2015.01)

(52) **U.S. Cl.**
CPC **H01Q 1/42** (2013.01); **H01Q 1/243** (2013.01); **H01Q 1/44** (2013.01); **H01Q 5/378** (2015.01)

(58) **Field of Classification Search**
CPC H01Q 1/243; H01Q 1/42; H01Q 5/0062; H01Q 1/44

(Continued)


Primary Examiner — Hoanganh Le

(74) *Attorney, Agent, or Firm* — Cha & Reiter, LLC

(57) **ABSTRACT**

An antenna apparatus for a portable terminal is provided. The portable terminal includes a printed circuit board (PCB) having a ground surface and RF components to process a wireless signal received through at least one antenna element. A housing forms an external appearance of the portable terminal, and has a non-conductive member with a plurality of metal fragments attached thereto. At least one of the metal fragments is electrically connected to the ground surface. The metal fragments may enhance the texture and durability of the housing. Preferably, the shapes, sizes and distances separating the metal fragments are designed to minimally impact, or improve, the antenna performance provided by the at least one antenna element.

18 Claims, 18 Drawing Sheets

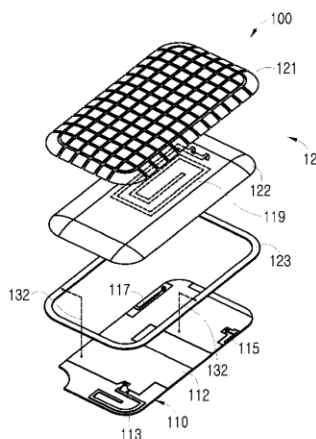



US009343812B2

(12) **United States Patent**
Wong et al.

(10) **Patent No.:** **US 9,343,812 B2**
(45) **Date of Patent:** **May 17, 2016**

(54) **COMMUNICATION DEVICE AND ANTENNA ELEMENT THEREIN**

(71) Applicant: **Acer Incorporated**, New Taipei (TW)

(72) Inventors: **Kin-Lu Wong**, New Taipei (TW);
Meng-Ting Chen, New Taipei (TW)

(73) Assignee: **ACER INCORPORATED**, New Taipei (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 287 days.

(21) Appl. No.: **14/060,869**

(22) Filed: **Oct. 23, 2013**

(65) **Prior Publication Data**
US 2015/0035712 A1 Feb. 5, 2015

(30) **Foreign Application Priority Data**

Jul. 30, 2013 (TW) 102127223 A

(51) **Int. Cl.**
H01Q 9/00 (2006.01)
H01Q 7/00 (2006.01)
H01Q 1/24 (2006.01)
H01Q 9/42 (2006.01)
H01Q 5/321 (2015.01)

(52) **U.S. Cl.**
CPC **H01Q 7/00** (2013.01); **H01Q 1/243** (2013.01); **H01Q 5/321** (2015.01); **H01Q 9/42** (2013.01)

(58) **Field of Classification Search**
CPC H01Q 7/00; H01Q 5/321; H01Q 9/42; H01Q 1/243
USPC 343/741, 749, 846, 702
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,764,236 B2 * 7/2010 Hill H01Q 1/243
343/702

(Continued)

FOREIGN PATENT DOCUMENTS

CN 103219582 7/2013
TW M426892 4/2012
TW 201246685 11/2012

OTHER PUBLICATIONS

Chinese language office action dated Aug. 13, 2015, issued in application No. TW 102127223.

Primary Examiner — Dameon E Levi

Assistant Examiner — Hasan Islam

(74) *Attorney, Agent, or Firm* — McClure, Qualey & Rodack, LLP

(57) **ABSTRACT**

A communication device includes a ground element and an antenna element. The antenna element includes a loop metal element and a branch metal element. The loop metal element is adjacent to an edge of the ground element. The loop metal element has a feeding end and a grounding end. The grounding end is coupled to the ground element. The feeding end is coupled through a capacitive element and a first inductive element to a signal source. A closed region is enclosed by the loop metal element and the edge of the ground element. The branch metal element is coupled through a second inductive element to a connection point on the loop metal element. The connection point is at the front-half portion of the loop metal element. The front-half portion includes the feeding end. The branch metal element substantially extends along an outer periphery of the loop metal element.

8 Claims, 5 Drawing Sheets

